

Practical no. 10

Name :- Danish Altaf Solkar

Enrolment no. :-24111590805

Class :- CO3K – B

Subject :- OOP

Aim :- WAP to implement default constructor that initializes num1 and num2 as 10 and 20 and prints the values of num1 and num2.

Program :-

```
#include<iostream.h>

#include<conio.h>

class Number{

public:

int n1, n2;

Number()

{

n1=10;

n2=20;

cout<<"\nValue of num1 :- "<<n1;

cout<<"\nValue of num2 :- "<<n2;

}

};

void main(){

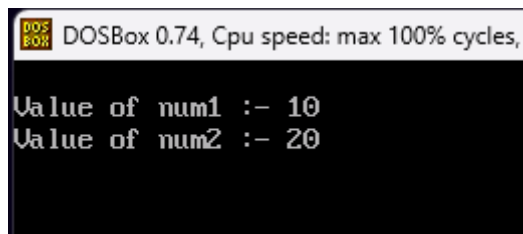
clrscr();

Number num;

getch();

}
```

OUTPUT:-

A screenshot of a DOSBox 0.74 window. The title bar reads "DOSBox 0.74, Cpu speed: max 100% cycles,". The terminal window has a black background with white text. It displays the output of the program: "Value of num1 :- 10" followed by "Value of num2 :- 20" on the next line.

```
DOSBox 0.74, Cpu speed: max 100% cycles,
Value of num1 :- 10
Value of num2 :- 20
```

Aim :- Define the class Student which contain member variables as rollno, name and course. WAP using constructor as “Computer Engineering” for course. Accept this data for objects of class and display the data.

Program :-

```
#include<iostream.h>

#include<conio.h>

#include<string.h>

class Student{

int rollno;

char name[50];

char course[30];

public:

Student(int r,char n[]){

rollno=r;

strcpy(name,n);

strcpy(course,"Computer Engineering");

}

void display(){

cout<<"\nName :- "<<name;

cout<<"\nRoll no. :- "<<rollno;

cout<<"\nCourse :- "<<course;

}

};

void main(){

clrscr();

int r;
```

```
char n[50];

cout<<"\nEnter your Name :- ";

cin>>n;

cout<<"\nEnter your Roll no. :- ";

cin>>r;

Student s1(r,n);

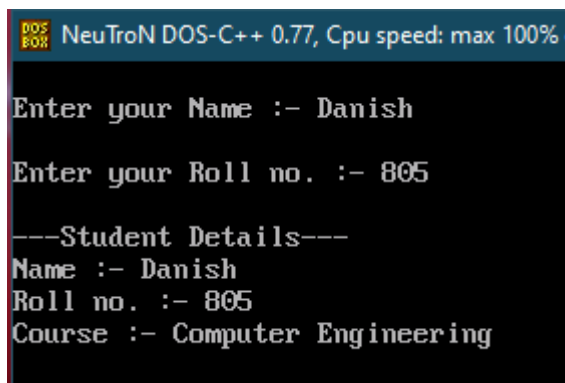
cout<<"\n---Student Details---";

s1.display();

getch();

}
```

OUTPUT:-

A screenshot of a DOS-based C++ IDE window titled "NeuTroN DOS-C++ 0.77, Cpu speed: max 100%". The window has a black background with white text. The output of the program is displayed as follows:

```
Enter your Name :- Danish
Enter your Roll no. :- 805
---Student Details---
Name :- Danish
Roll no. :- 805
Course :- Computer Engineering
```