

Practical no. 18

Name :- Danish Altaf Solkar

Enrolment no. :-24111590805

Class :- CO3K – B

Subject :- OOP

Aim :- Write a C++ programs to interchange the values of two int, float and char using function overloading.

Program :-

```
#include<iostream.h>

#include<conio.h>

void swap(int a,int b){

int temp;

cout<<"\nBefore swapping :- ";

cout<<"\n"<<a<<"\n"<<b;

temp=a;

a=b;

b=temp;

cout<<"\nAfter swapping :- ";

cout<<"\n"<<a<<"\n"<<b;

}

void swap(float a,float b){

float temp;

cout<<"\nBefore swapping :- ";

cout<<"\n"<<a<<"\n"<<b;

temp=a;

a=b;

b=temp;

cout<<"\nAfter swapping :- ";

cout<<"\n"<<a<<"\n"<<b;

}

void swap(char a,char b){
```

```

char temp;

cout<<"\nBefore swapping :- ";

cout<<"\n"<<a<<"\n"<<b;

temp=a;

a=b;

b=temp;

cout<<"\nAfter swapping :- ";

cout<<"\n"<<a<<"\n"<<b;

}

void main(){

clrscr();

swap(10, 20);

swap(1.2f, 3.4f);


swap('x', 'y');

getch();

}

```

Output :-

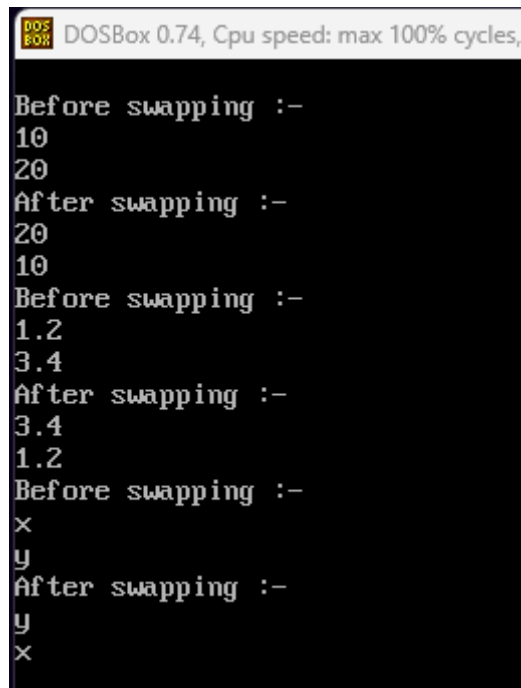

```

DOS
BOX DOSBox 0.74, Cpu speed: max 100% cycles,
Before swapping :-
10
20
After swapping :-
20
10
Before swapping :-
1.2
3.4
After swapping :-
3.4
1.2
Before swapping :-
x
y
After swapping :-
y
x


```

Aim :- Write a C++ programs that find the sum of two int and double number using function overloading.

Program :-

```
#include<iostream.h>
#include<conio.h>
void sum(int a,int b){
int result;
cout<<"\nValue of a :- "<<a;
cout<<"\nValue of b :- "<<b;
result=a+b;
cout<<"\nSum of integers :- "<<result;
}
void sum(double x,double y){
double result;
cout<<"\nValue of x :- "<<x;
cout<<"\nValue of y :- "<<y;
result=x+y;
cout<<"\nSum of doubles :- "<<result;
}
void main(){
clrscr();
sum(10,20);
sum(1.2345,6.7890);
getch();
}
```

Output :-

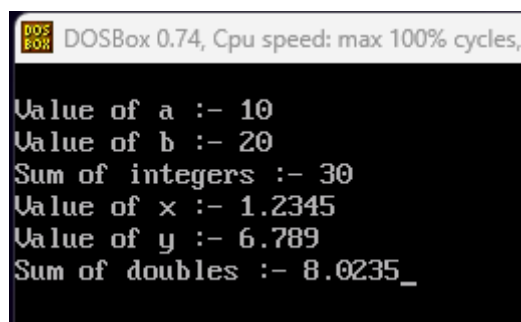

```
DOSBox 0.74, Cpu speed: max 100% cycles,
Value of a :- 10
Value of b :- 20
Sum of integers :- 30
Value of x :- 1.2345
Value of y :- 6.789
Sum of doubles :- 8.0235_
```