

Practical no. 2

Name :- Danish Altaf Solkar

Enrolment no. :-24111590805

Class :- CO3K – B

Subject :- OOP

Aim :- To display the message “Welcome to the world of C++” using manipulators.

Program :-

```
#include<iostream.h>

#include<conio.h>

void main()

{

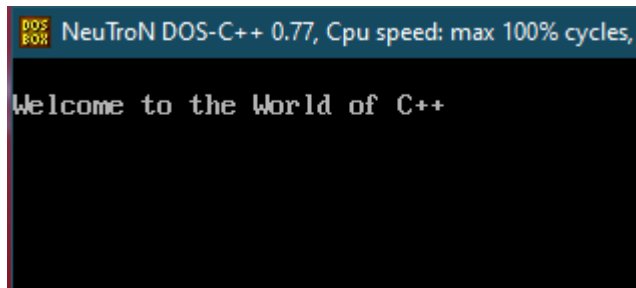
clrscr();

cout<<endl<<"Welcome to the World of C++";

getch();

}
```

OUTPUT:-

A screenshot of a DOS-based C++ environment. The title bar at the top reads "DOS FOR NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles,". The main window has a black background with the text "Welcome to the World of C++" displayed in a light blue, monospaced font.

Aim :- Show the use of function outside the class using scope resolution operator.

Program :-

```
#include<iostream.h>

#include<conio.h>

class Calculator

{

int num1,num2;

public:

void getNumbers();

void displaySum();

};

void Calculator::getNumbers()

{

cout<<"Enter value of no. 1 :- ";

cin>>num1;

cout<<"\nEnter value of no. 2 :- ";

cin>>num2;

}

void Calculator::displaySum()

{

int sum;

sum=num1+num2;

cout<<"\nSum :- "<<sum;

}
```

```
void main()
{
    Calculator cal;

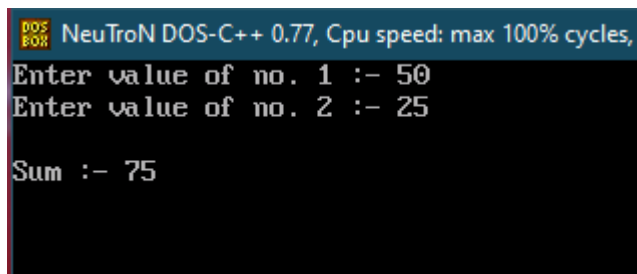
    clrscr();

    cal.getNumbers();

    cal.displaySum();

    getch();
}
```

OUTPUT:-

A screenshot of a DOS-based C++ environment. The title bar at the top reads "DOS 8086 NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles,". The main window has a black background with white text. The text displayed is: "Enter value of no. 1 :- 50", "Enter value of no. 2 :- 25", and "Sum :- 75".

```
DOS 8086 NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles,
Enter value of no. 1 :- 50
Enter value of no. 2 :- 25
Sum :- 75
```

Aim :- To access the global variable using scope resolution operator.

Program :-

```
#include<iostream.h>

#include<conio.h>

int num=100;

void main()

{

int num=50;

clrscr();

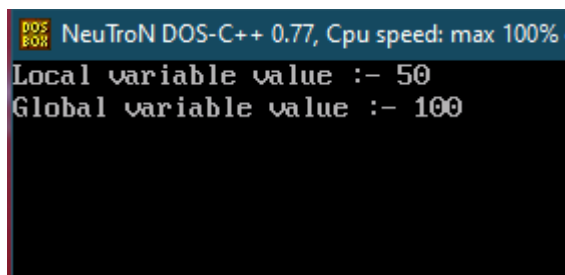
cout<<"Local variable value :- "<<num<<endl;

cout<<"Global variable value :- "<<::num<<endl;

getch();

}
```

OUTPUT:-

A screenshot of a DOS-based C++ compiler window titled "NeuTroN DOS-C++ 0.77, Cpu speed: max 100%". The window has a black background with white text. It displays the output of the program: "Local variable value :- 50" followed by "Global variable value :- 100". The text is aligned to the left and appears on two separate lines.

```
DOS FOR NeuTroN DOS-C++ 0.77, Cpu speed: max 100%
Local variable value :- 50
Global variable value :- 100
```

Aim :- Format the following statement using manipulators

(Rate=412345 period=35 year=2024)

Program :-

```
#include<iostream.h>

#include<conio.h>

void main()

{

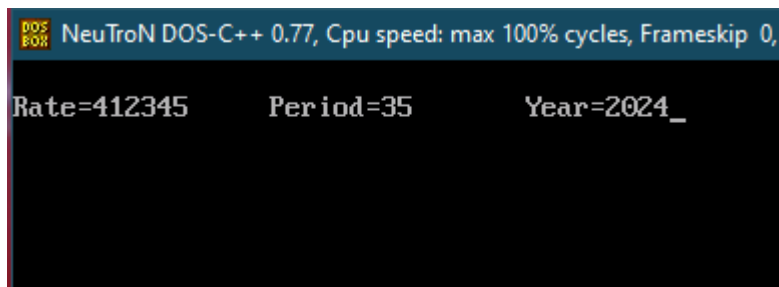
clrscr();

cout<<endl<<"Rate=412345\tPeriod=35\tYear=2024";

getch();

}
```

OUTPUT:-

A screenshot of a DOS-C++ environment. The title bar at the top reads "DOS FOR NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles, Frameskip 0,". The main window has a black background with white text. The output of the program is displayed as "Rate=412345", "Period=35", and "Year=2024_" on the same line, with horizontal tabs separating the values. The text is left-aligned and uses a monospaced font. The cursor is positioned at the end of the line, after the underscore following "2024".

```
DOS FOR NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles, Frameskip 0,
Rate=412345      Period=35      Year=2024_
```