

Practical no. 23

Name :- Danish Altaf Solkar

Enrolment no. :-24111590805

Class :- CO3K – B

Subject :- OOP

Aim :- Write a program which open a file read and write mode and display the content on output screen using open().

Program :-

```
#include <iostream.h>
#include <conio.h>
#include <fstream.h>

void main()
{
    clrscr();

    fstream file("sample.txt", ios::in | ios::out);

    if (!file)
    {
        cout << "File could not be opened!";

        getch();

        return;
    }

    char ch;

    cout << "Contents of file:\n";

    while (file.get(ch))

        cout << ch;

    file.clear();

    file.seekp(0, ios::end);

    cout << "\n\nEnter text to append (end with #):\n";


    while (cin.get(ch) && ch != '#')

        file.put(ch);

    file.close();
```

```
cout << "\n\nUpdated file content:\n";  
file.open("sample.txt", ios::in);  
while (file.get(ch))  
cout << ch;  
file.close();  
getch();  
}
```

Output :-

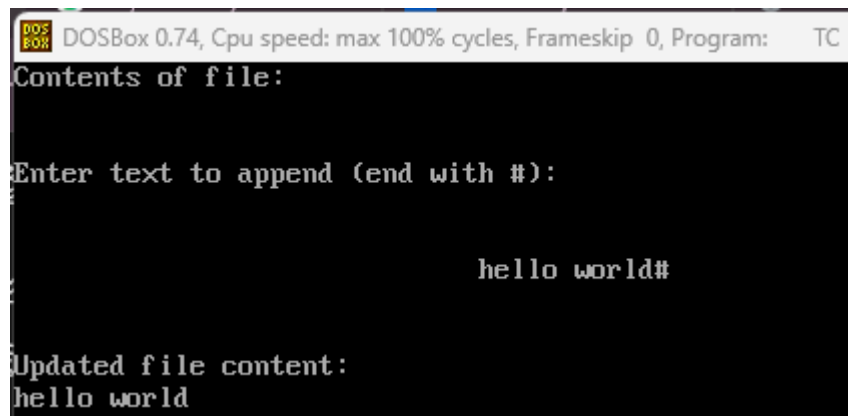

The screenshot shows a DOSBox 0.74 window with a title bar indicating 'Cpu speed: max 100% cycles, Frameskip 0, Program: TC'. The terminal output is as follows:

```
Contents of file:  
  
Enter text to append (end with #):  
  
                                hello world#  
  
Updated file content:  
hello world
```

Aim :- Write a program which open a file read and write mode and display the content on output screen using constructor.

Program :-

```
#include <iostream.h>

#include <fstream.h>

#include <conio.h>

class FileHandler

{

    fstream file;

public:

    FileHandler(const char *fname)

    {

        file.open(fname, ios::in | ios::out);

        if (!file)

        {

            cout << "File could not be opened!";

            return;

        }

        char ch;

        cout << "Contents of file:\n";

        while (file.get(ch))

            cout << ch;

        file.clear();

        file.seekp(0, ios::end);

        cout << "\n\nEnter text to append (end with #):\n";

        cin.get(ch);

        while (ch != '#')


        {

            file.put(ch);

            cin.get(ch);
```

```
}  
  
file.close();  
  
cout << "\n\nUpdated file content:\n";  
  
file.open(fname, ios::in);  
  
while (file.get(ch))  
  
cout << ch;  
  
file.close();  
  
}  
  
};  
  
void main()  
  
{  
  
clrscr();  
  
FileHandler f("sample.txt");  
  
getch();  
  
}
```

Output :-

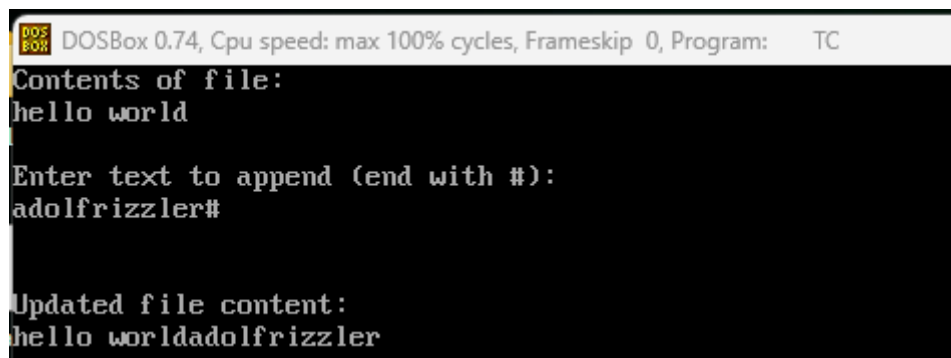A screenshot of a DOSBox 0.74 terminal window. The title bar shows 'DOS BOX' icon, 'DOSBox 0.74, Cpu speed: max 100% cycles, Frameskip 0, Program: TC'. The terminal output is as follows:
Contents of file:
hello world

Enter text to append (end with #):
adolfrizzler#

Updated file content:
hello worldadolfrizzler