

### Practical no. 5

Name :- Danish Altaf Solkar

Enrolment no. :-24111590805

Class :- CO3K – B

Subject :- OOP

Aim :- Write a C++ program to declare a class “staff” having data members name, basic salary, DA, HRA and calculate gross salary. Accept and display data for one staff.

Where DA=74.5% of basic

HRA=30% of basic

Gross salary=basic+HRA+DA

Program :-

```
#include<iostream.h>

#include<conio.h>

class Staff{

char name[20];

float basicSal, da, hra, grossSal;

public:

void accept();

void display();

};

void Staff::accept(){

cout<<"\nEnter your name :- ";

cin>>name;

cout<<"\nEnter your salary :- ";

cin>>basicSal;

}

void Staff::display(){

hra=basicSal*0.30;

da=basicSal*0.74;
```

```

grossSal=basicSal+hra+da;

cout<<"\nHRA :- "<<hra;

cout<<"\nDA :- "<<da;

cout<<"\nYour Gross Salary :- "<<grossSal;

}

void main(){

Staff s;

clrscr();

s.accept();


s.display();

getch();

}

```

### **OUTPUT:-**

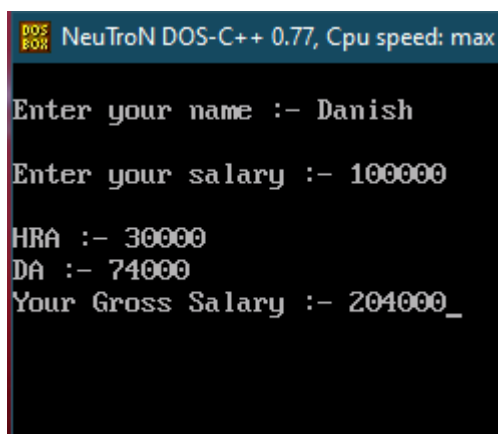

The screenshot shows a DOS-C++ environment window titled "NeuTroN DOS-C++ 0.77, Cpu speed: max". The output of the program is displayed in a monospaced font on a black background. The user has entered "Danish" for the name, "100000" for the salary, "30000" for HRA, and "74000" for DA. The program then calculates and displays the "Your Gross Salary :- 204000\_".

```

NeuTroN DOS-C++ 0.77, Cpu speed: max

Enter your name :- Danish

Enter your salary :- 100000

HRA :- 30000
DA :- 74000
Your Gross Salary :- 204000_

```

**Aim :- WAP to find area of circle such that the class circle must have three functions namely:-**

**Read()** to accept the radius from user

**Compute()** for calculating the area

**Display()** for displaying the result.

**Program :-**

```
#include<iostream.h>

#include<conio.h>

#define PI 3.14

class Circle{

float radius,area;

public:

void read();

void compute();

void display();

};

void Circle::read(){

cout<<"\nEnter radius of Circle :- ";

cin>>radius;

}

void Circle::compute(){

area=PI*radius*radius;

}

void Circle::display(){


cout<<"\nArea of Circle :- "<<area;

}

void main(){
```

```
Circle c;  
clrscr();  
c.read();  
c.compute();  
c.display();  
getch();  
}
```

### **OUTPUT:-**

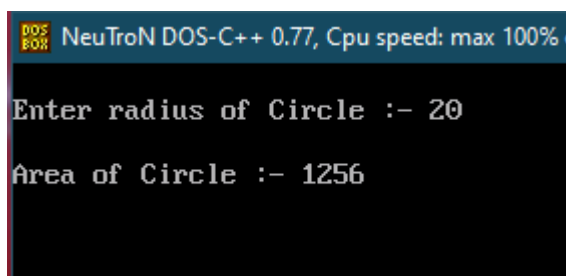

The screenshot shows a DOS-based C++ environment. The title bar reads "DOS FOR NeuTroN DOS-C++ 0.77, Cpu speed: max 100%". The main window displays the text "Enter radius of Circle :- 20" and "Area of Circle :- 1256".