



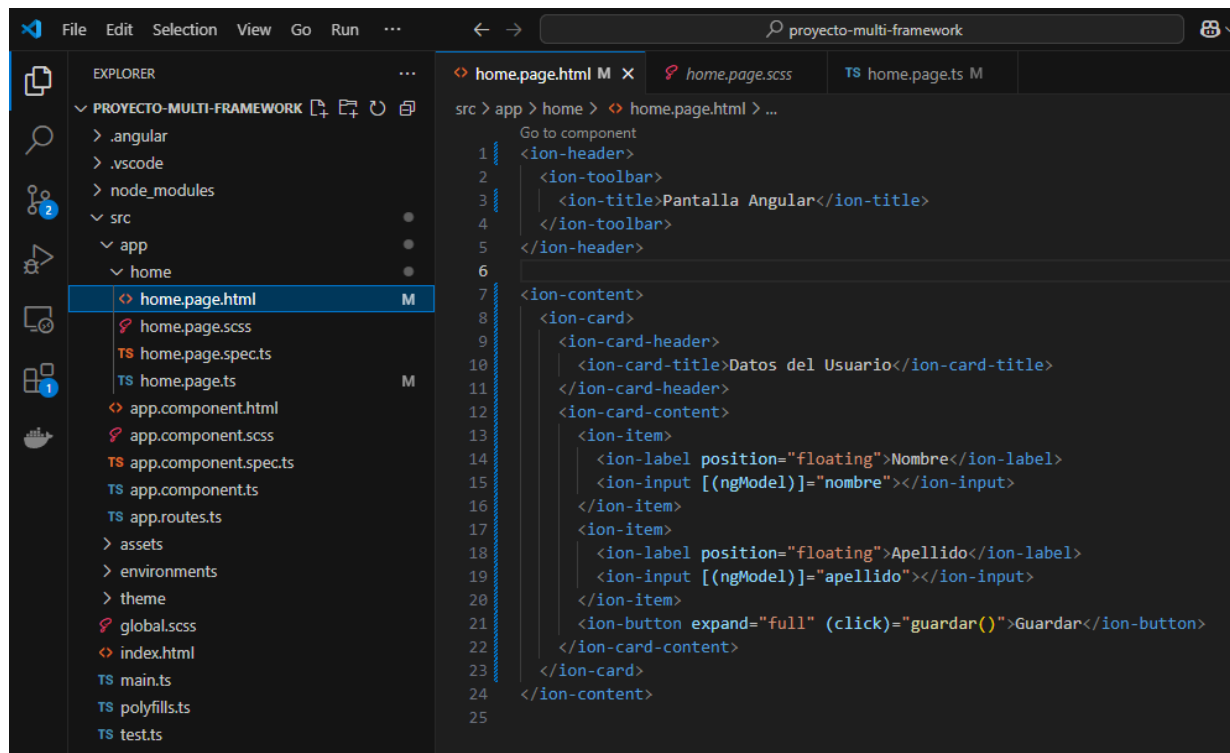

```
1 <ion-header>
2   <ion-toolbar>
3     <ion-title>Pantalla Angular</ion-title>
4   </ion-toolbar>
5 </ion-header>
6
7 <ion-content>
8   <ion-card>
9     <ion-card-header>
10      <ion-card-title>Datos del Usuario</ion-card-title>
11    </ion-card-header>
12    <ion-card-content>
13      <ion-item>
14        <ion-label position="floating">Nombre</ion-label>
15        <ion-input [(ngModel)]="nombre"></ion-input>
16      </ion-item>
17      <ion-item>
18        <ion-label position="floating">Apellido</ion-label>
19        <ion-input [(ngModel)]="apellido"></ion-input>
20      </ion-item>
21      <ion-button expand="full" (click)="guardar()">Guardar</ion-button>
22    </ion-card-content>
23  </ion-card>
24 </ion-content>
25
```

Lo que logramos con este código:


- ✓ Un **encabezado** con el título "Pantalla Angular".
- ✓ Una **tarjeta** con los campos de **nombre** y **apellido**.
- ✓ Un **botón** que llamará una función `guardar()`.

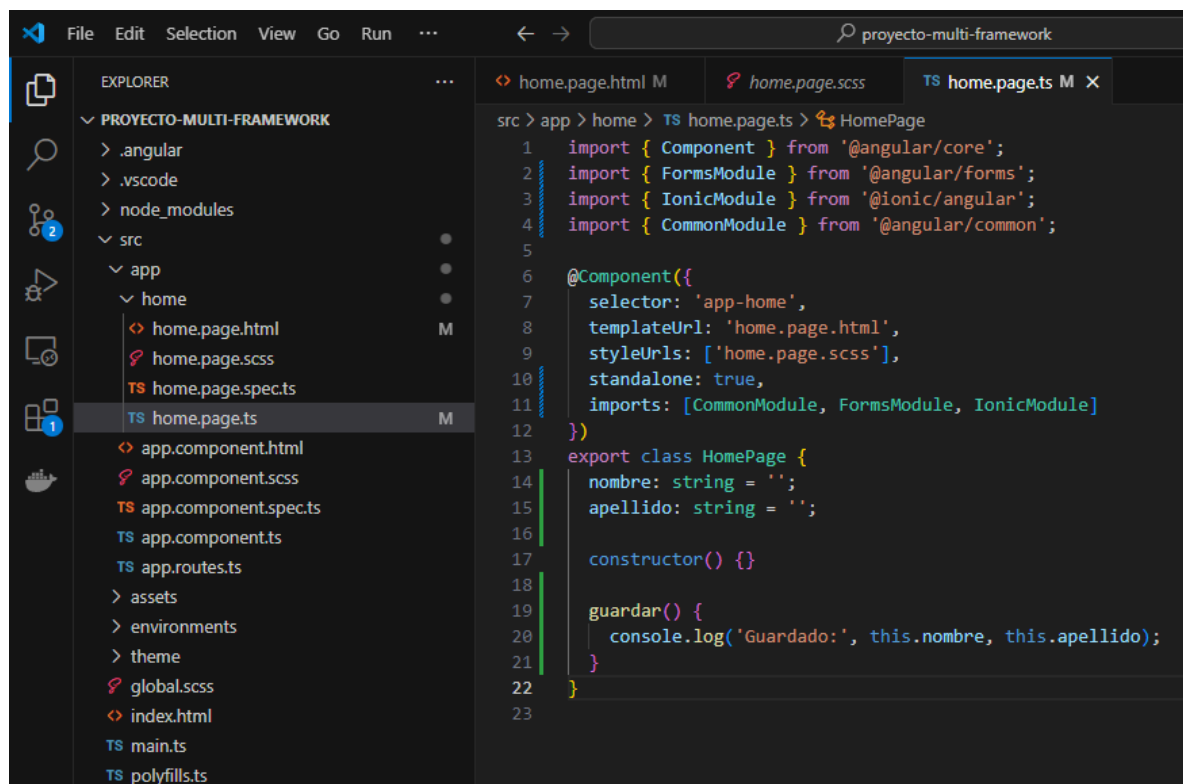

```
1 import { Component } from '@angular/core';
2 import { FormsModule } from '@angular/forms';
3 import { IonicModule } from '@ionic/angular';
4 import { CommonModule } from '@angular/common';
5
6 @Component({
7   selector: 'app-home',
8   templateUrl: 'home.page.html',
9   styleUrls: ['home.page.scss'],
10   standalone: true,
11   imports: [CommonModule, FormsModule, IonicModule]
12 })
13 export class HomePage {
14   nombre: string = '';
15   apellido: string = '';
16
17   constructor() {}
18
19   guardar() {
20     console.log('Guardado:', this.nombre, this.apellido);
21   }
22 }
23
```

Lo que hemos logrado aquí:

- ✓ Hemos declarado dos variables (**nombre** y **apellido**).
- ✓ La función **guardar()** imprime en la consola los valores introducidos por el usuario.
- ✓ Esta lógica se ejecuta cuando el usuario hace clic en el botón de **"Guardar"**.

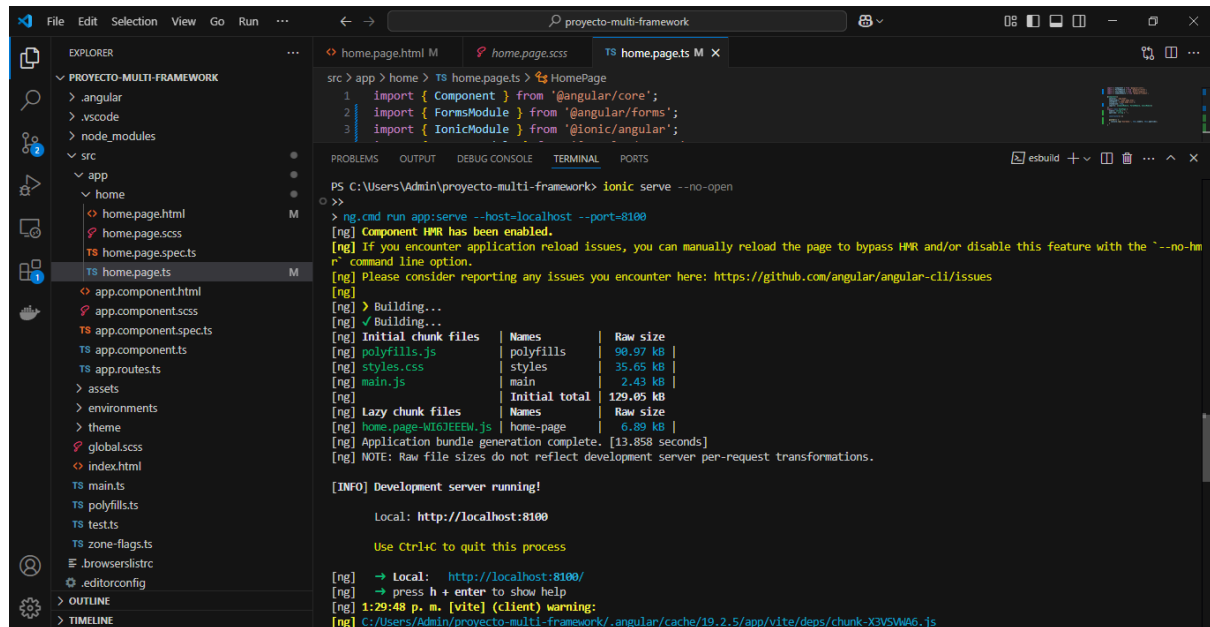

```
src > app > home > TS home.page.ts > HomePage
1 import { Component } from '@angular/core';
2 import { FormsModule } from '@angular/forms';
3 import { IonicModule } from '@ionic/angular';


[ng] Component HMR has been enabled.
[ng] If you encounter application reload issues, you can manually reload the page to bypass HMR and/or disable this feature with the '--no-hmr' command line option.
[ng] Please consider reporting any issues you encounter here: https://github.com/angular/angular-cli/issues
[ng] Building...
[ng] ✓ Building...
[ng] Initial chunk files | Names | Raw size
[ng] polyfills.js | polyfills | 90.97 kB |
[ng] styles.css | styles | 35.65 kB |
[ng] main.js | main | 2.43 kB |
[ng] Initial total | 129.05 kB
[ng] Lazy chunk files | Names | Raw size
[ng] home.page-MI6JEEEM.js | home-page | 6.89 kB |
[ng] Application bundle generation complete. [13.858 seconds]
[ng] NOTE: Raw file sizes do not reflect development server per-request transformations.

[INFO] Development server running!

Local: http://localhost:8100

Use Ctrl+C to quit this process

[ng] → Local: http://localhost:8100/
[ng] → press h + enter to show help
[ng] 1:29:48 p. m. [vite] (client) warning:
[ng] C:/Users/Admin/projecto-multi-framework/.angular/cache/19.2.5/app/vite/deps/chunk-X3VSWA6.js
```

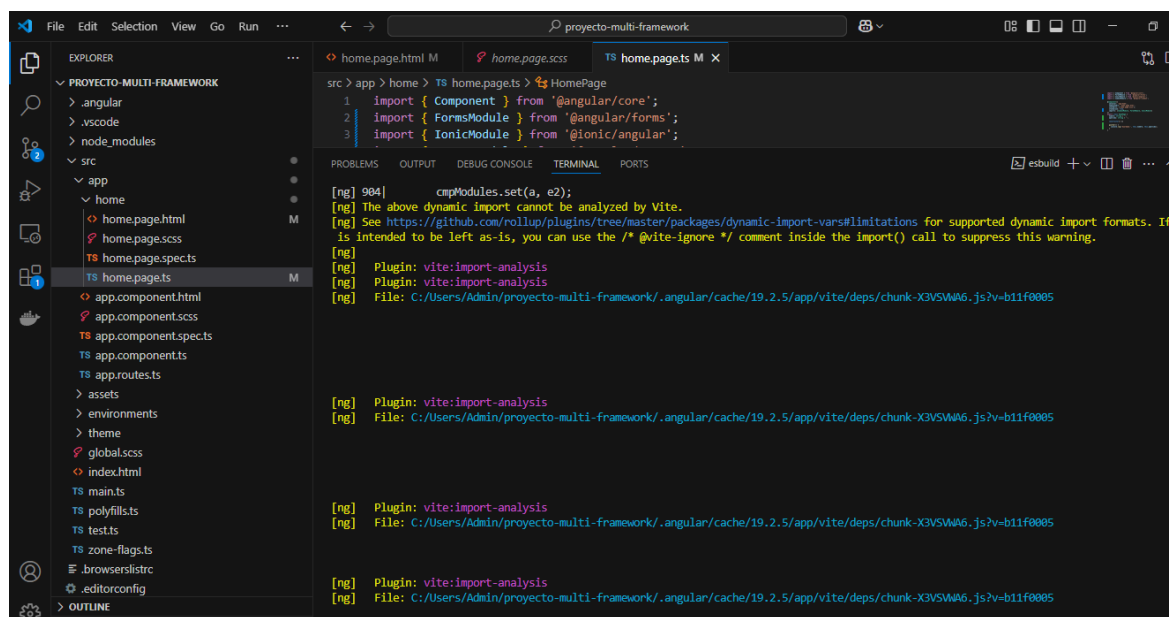

```
[ng] 904 | cmpModules.set(a, e2);
[ng] The above dynamic import cannot be analyzed by Vite.
[ng] See https://github.com/rollup/plugins/tree/master/packages/dynamic-import-vars#limitations for supported dynamic import formats. If
[ng] is intended to be left as-is, you can use the /* @vite-ignore */ comment inside the import() call to suppress this warning.
[ng] Plugin: vite:import-analysis
[ng] Plugin: vite:import-analysis
[ng] File: C:/Users/Admin/projecto-multi-framework/.angular/cache/19.2.5/app/vite/deps/chunk-X3VSWA6.js?v=b11f0005

[ng] Plugin: vite:import-analysis
[ng] File: C:/Users/Admin/projecto-multi-framework/.angular/cache/19.2.5/app/vite/deps/chunk-X3VSWA6.js?v=b11f0005

[ng] Plugin: vite:import-analysis
[ng] File: C:/Users/Admin/projecto-multi-framework/.angular/cache/19.2.5/app/vite/deps/chunk-X3VSWA6.js?v=b11f0005
```

ejecutamos y vemos que todo está bien y nos lleva a la página creada en angular.

← → ↻ http://localhost:8100/home

Google facebook hotmail youtube WhatsApp

Pantalla Angular

Datos del Usuario

Nombre

Danna


Apellido

Morales

GUARDAR

vemos que está bien ejecutada con los parámetros que le dimos.

Proyecto en React


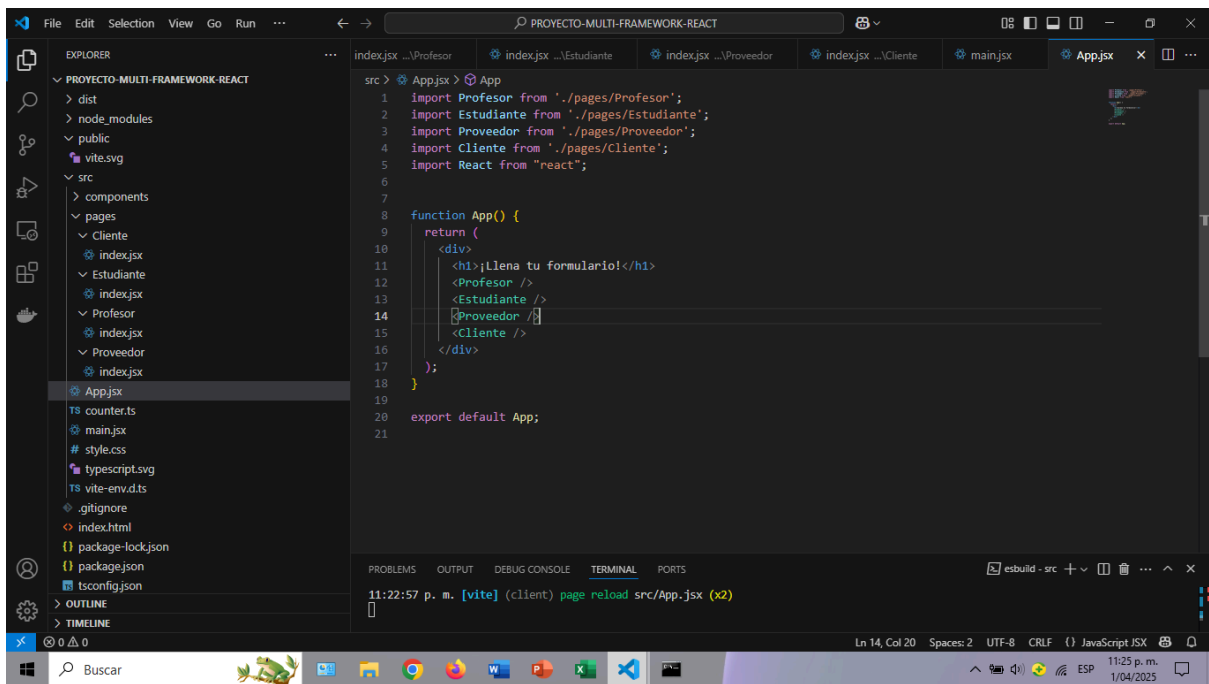


The screenshot shows a VS Code editor window for a project named "PROYECTO-MULTI-FRAMEWORK-REACT". The Explorer sidebar on the left displays the project structure, including folders like "src" and "pages", and files like "App.jsx", "index.jsx", "main.jsx", "style.css", "typescript.svg", "vite-env.d.ts", ".gitignore", "index.html", "package-lock.json", "package.json", and "tsconfig.json". The main editor area shows the content of "App.jsx", which imports components from the "pages" directory and renders them in a single view. The code is as follows:

```
src > App.jsx > App
1  import Profesor from './pages/Profesor';
2  import Estudiante from './pages/Estudiante';
3  import Proveedor from './pages/Proveedor';
4  import Cliente from './pages/Cliente';
5  import React from "react";
6
7
8  function App() {
9    return (
10     <div>
11       <h1>¡llena tu formulario!</h1>
12       <Profesor />
13       <Estudiante />
14       <Proveedor />
15       <Cliente />
16     </div>
17   );
18 }
19
20 export default App;
21
```

The bottom of the editor shows the "TERMINAL" panel with the following output:

```
11:22:57 p. m. [vite] (client) page reload src/App.jsx (x2)
```

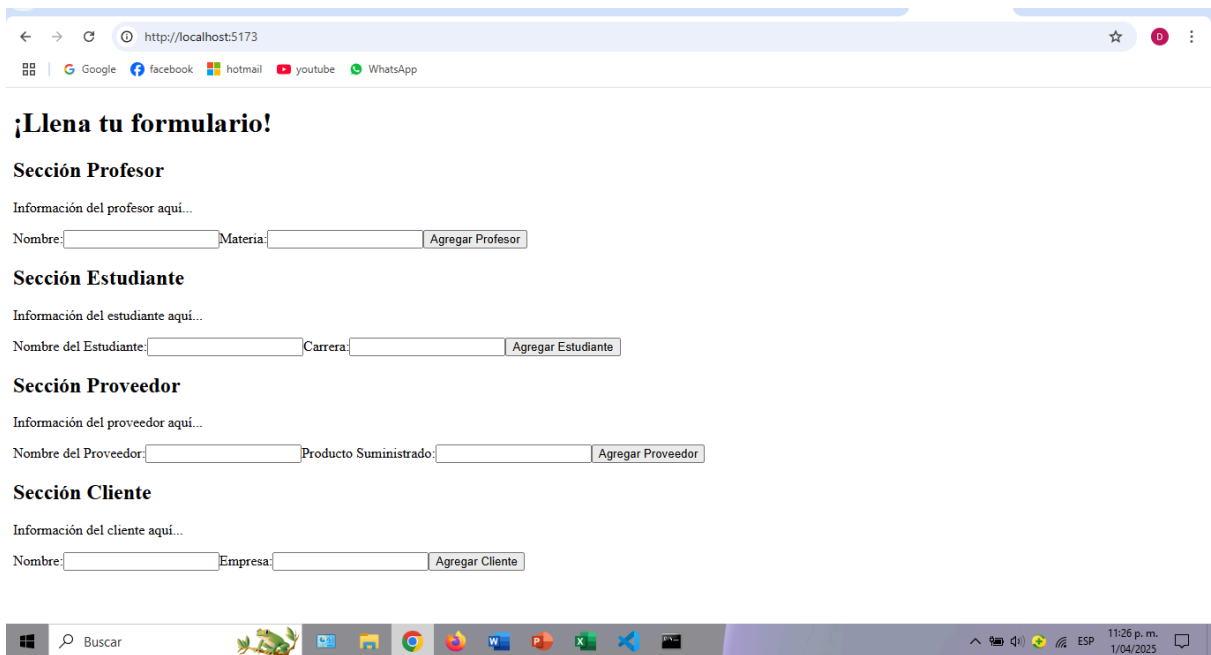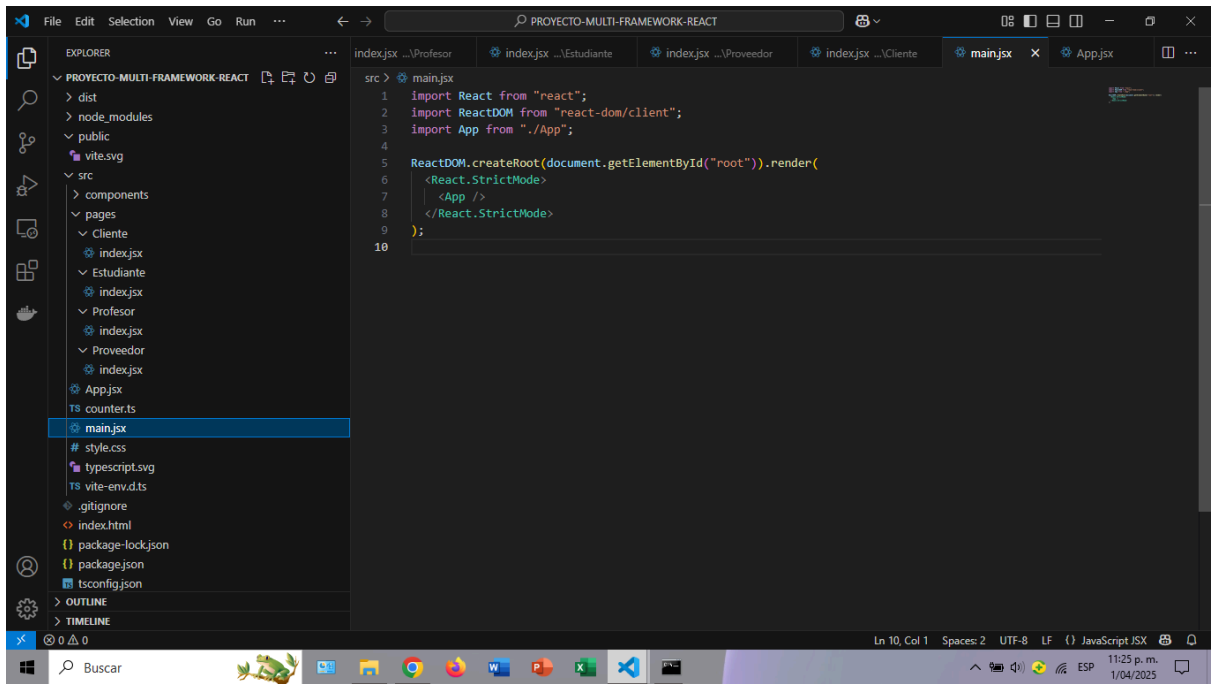

proyecto en Vue

```
src > tsconfig.json > ...
1  {
2    "compilerOptions": {
3      "target": "ESNext",
4      "module": "ESNext",
5      "moduleResolution": "Node",
6      "esModuleInterop": true,
7      "strict": true,
8      "jsx": "preserve",
9      "baseUrl": "./",
10     "paths": {
11       "@/*": ["src/*"]
12     }
13   }
14 }

PROBLEMS 2 OUTPUT DEBUG CONSOLE TERMINAL PORTS esbuild - src + - - - - ^ X

Mode          LastWriteTime          Length Name
----          -
d-----      2/04/2025  3:17 p. m.          views

PS C:\Users\Admin\value\src> npm run dev
>>

> value@0.0.1 dev
> vite

Re-optimizing dependencies because lockfile has changed

VITE v5.2.14  ready in 12821 ms

  → Local:   http://localhost:5173/
  → Network: use --host to expose
  → press h + enter to show help
```

