

Design pieces




in
progress


Filtered Lists

Component Enhancement


User Authentication

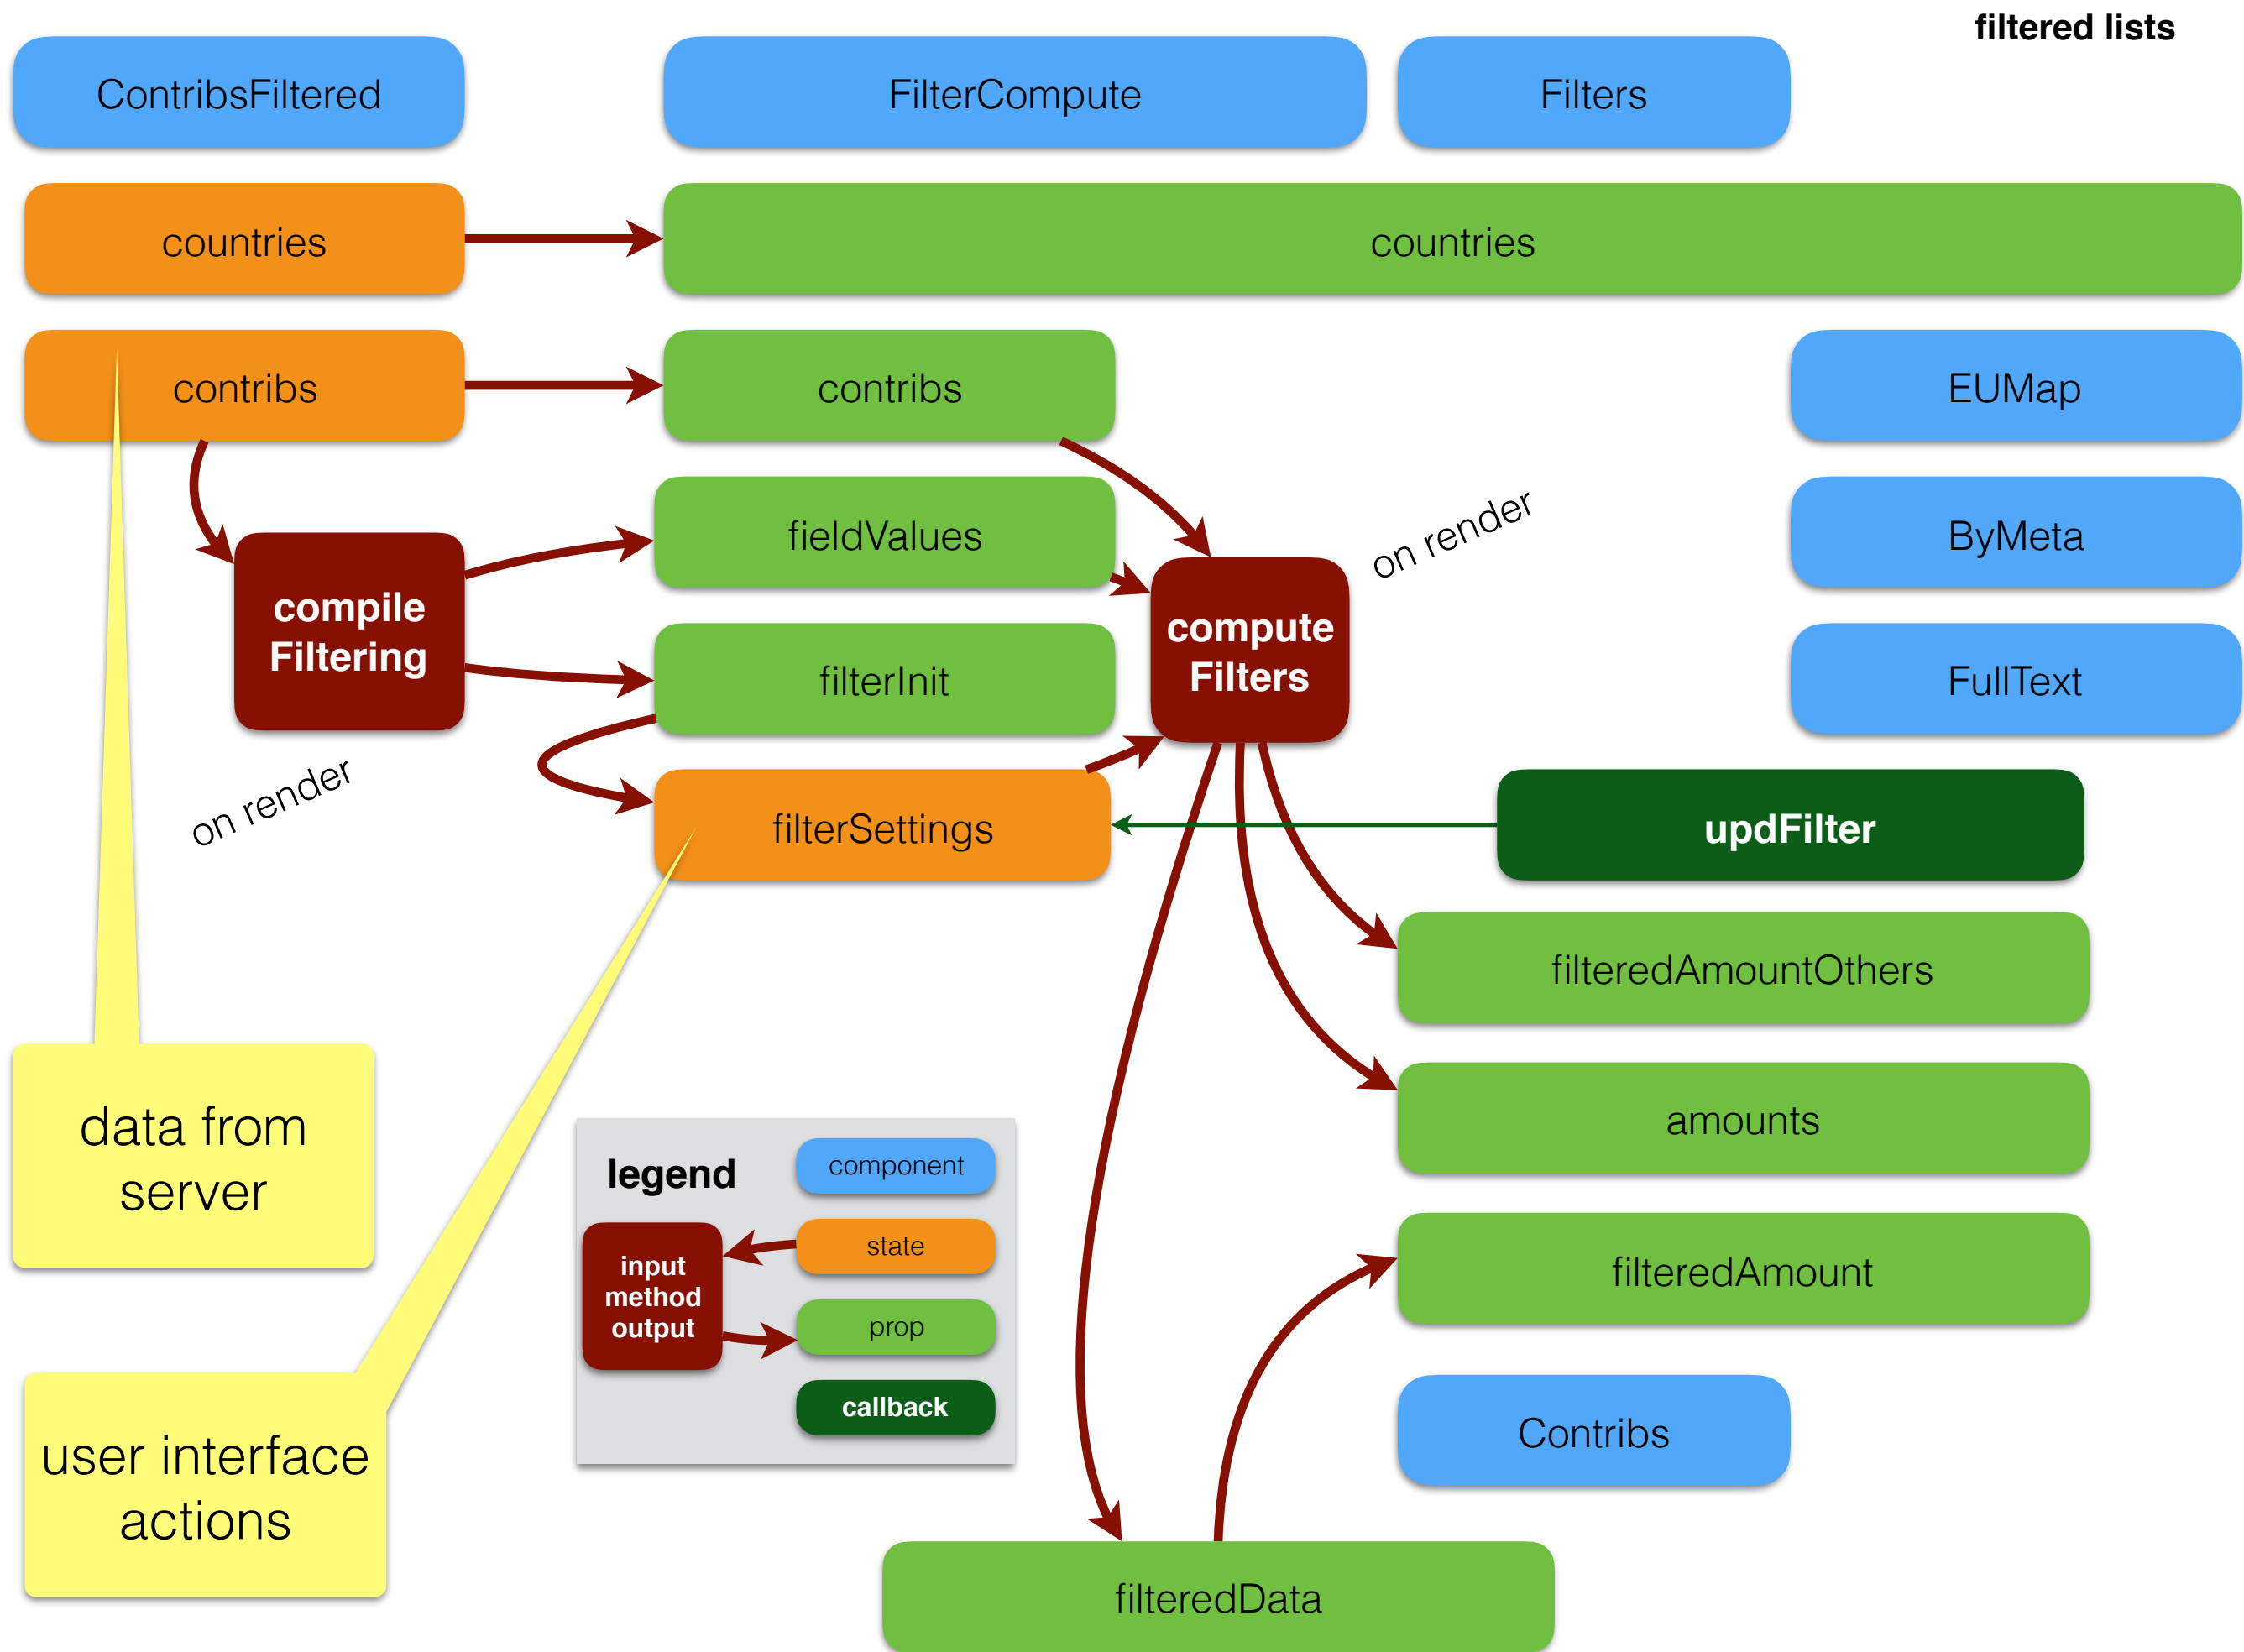

withContext enables a Component to receive an object *globals* that has been declared by *Provider*

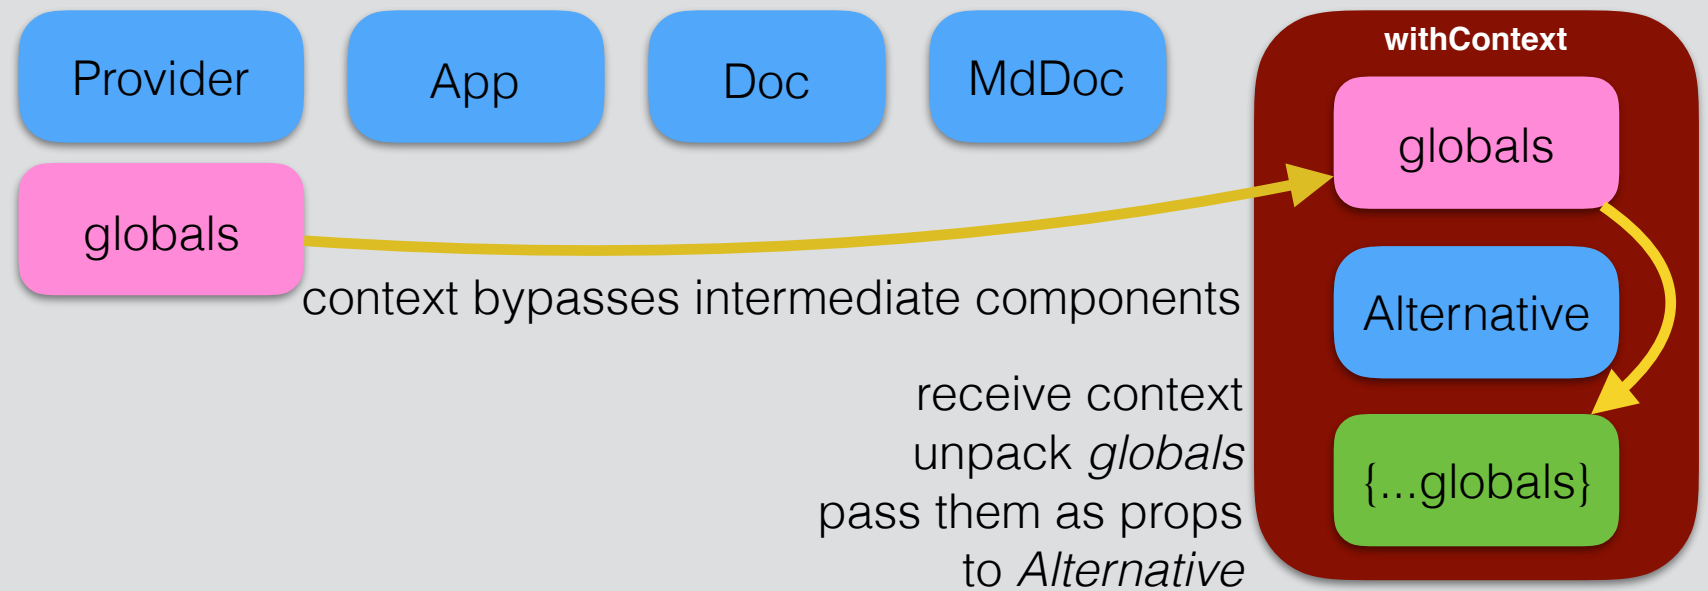

saveState enables a Component to save its state elsewhere, in a *Store*, when Component is being destroyed. When it is being resurrected, it receives the last saved state as initial state.

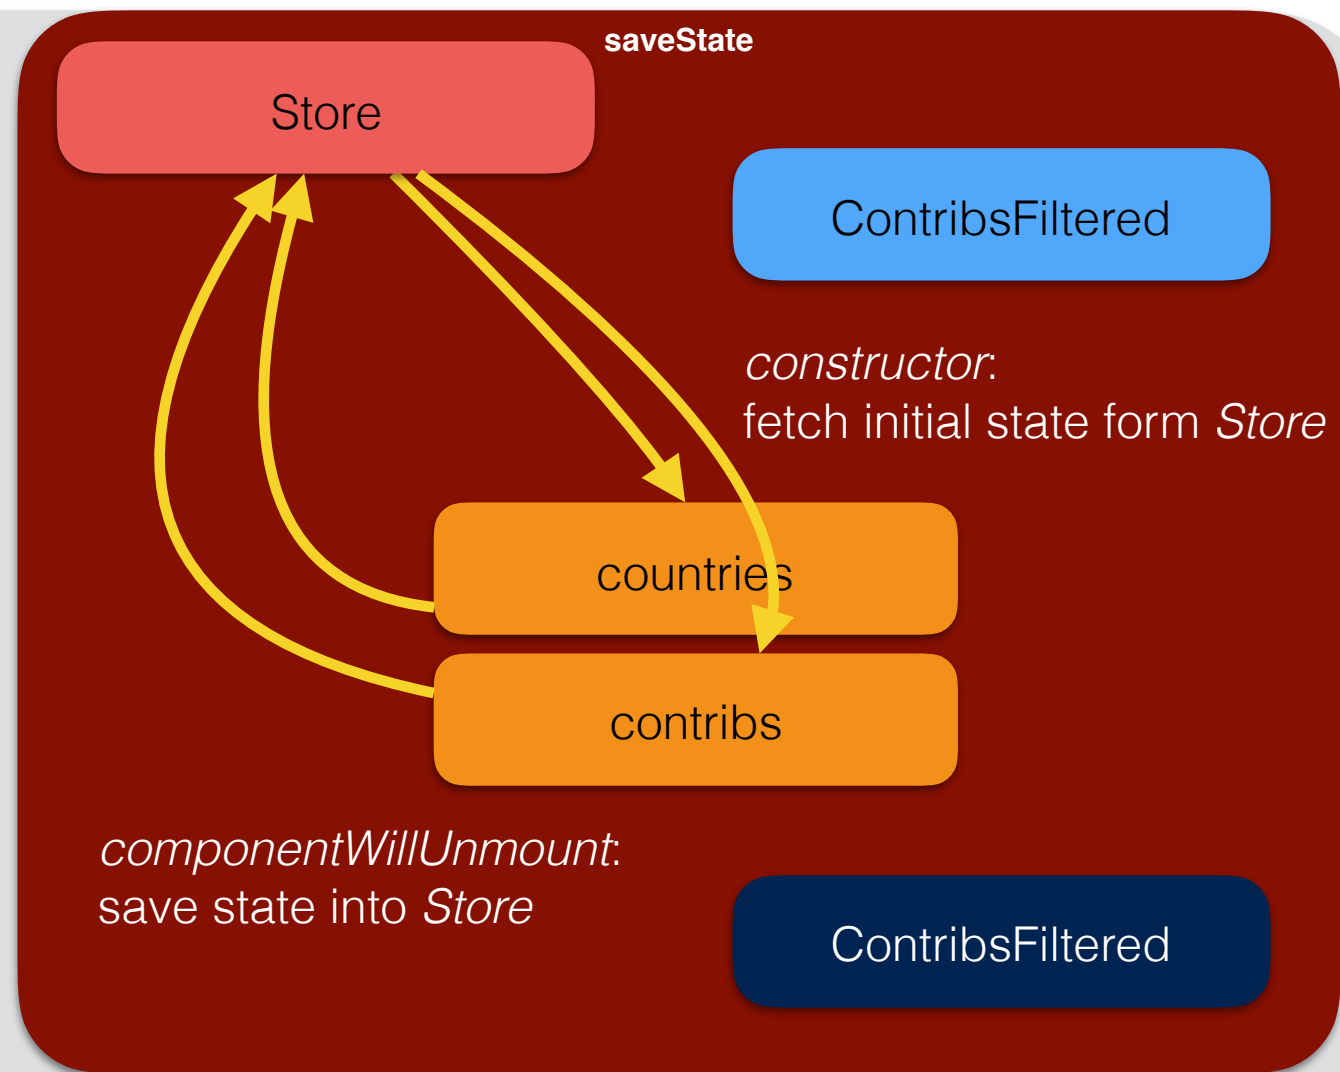

legend

component

context

prop

enhancer

non-reactobject

