Cross Channel Targeting

20250919

使用情境

UNIQLO廣告和再行銷流程

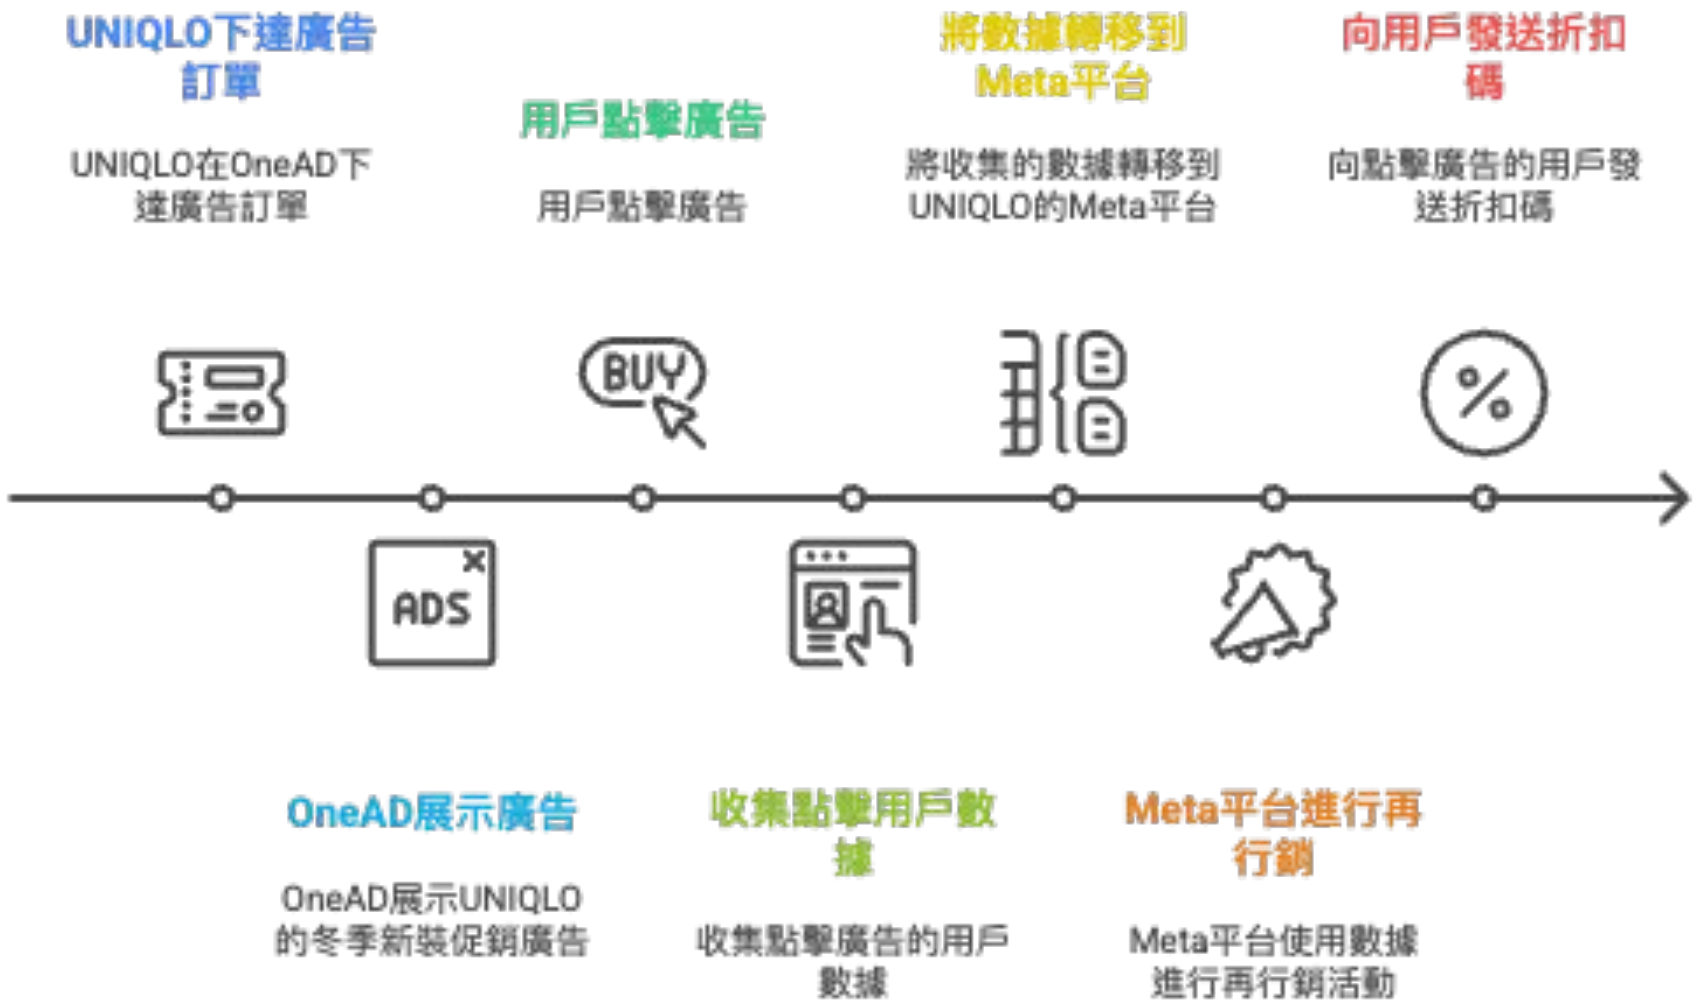

Made with Napkin

在SuperDSP如何達成

1

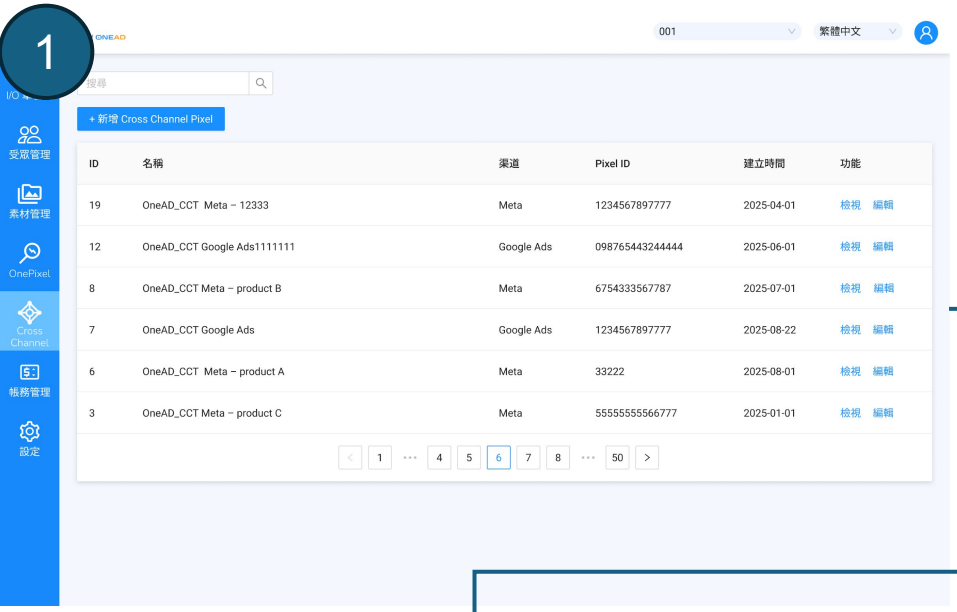

2

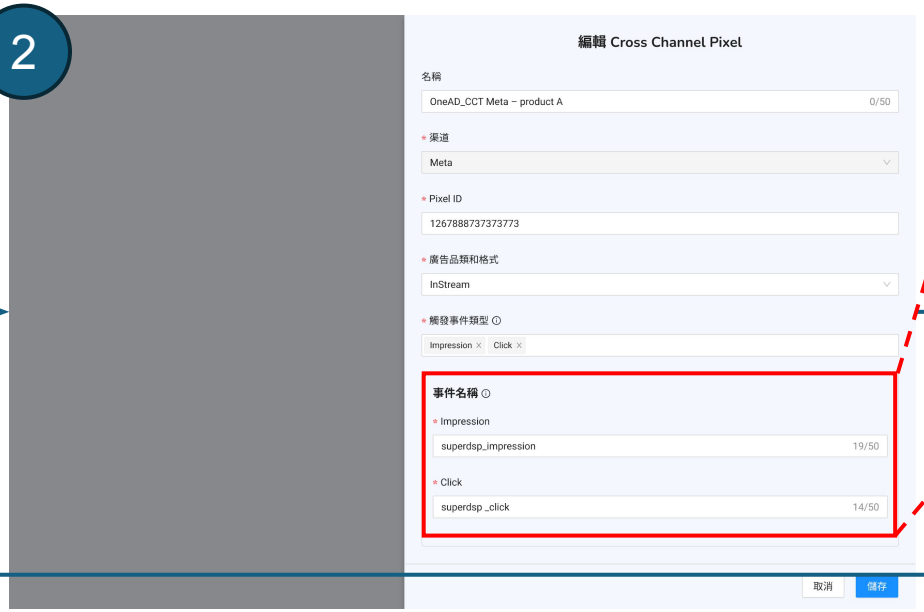

3

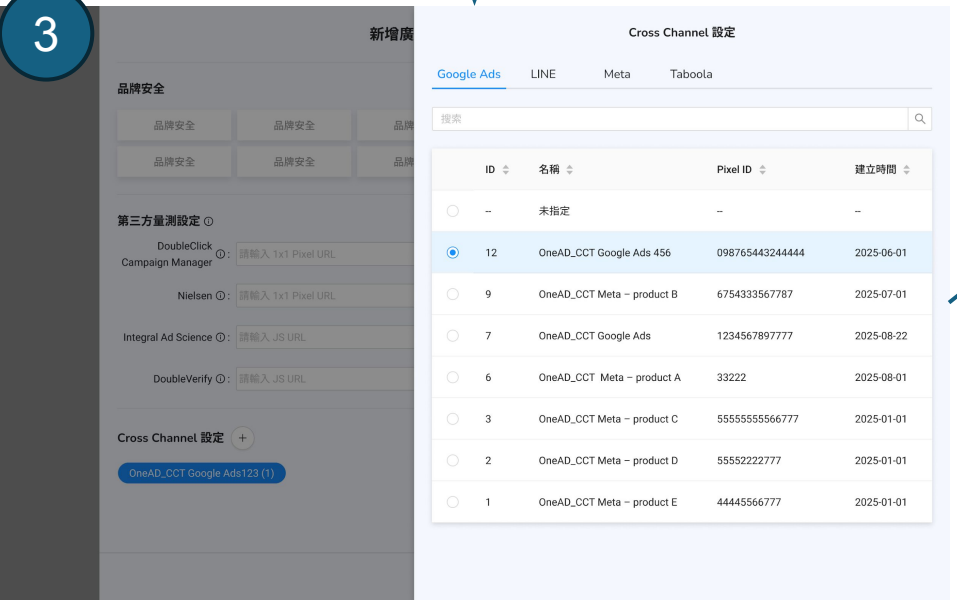

4

廣告投放in OneAD

廣告主的Meta平台-事件管理工具

5

事件	狀態	使用位置	整合工具	事件總數
superdsp_impression 沒有最新動態			瀏覽器	20 上次接收時間：16天前
superdsp_click 沒有最新動態			瀏覽器	20 上次接收時間：16天前

廣告主應用(場景: 廣告主的Meta平台)

1

2

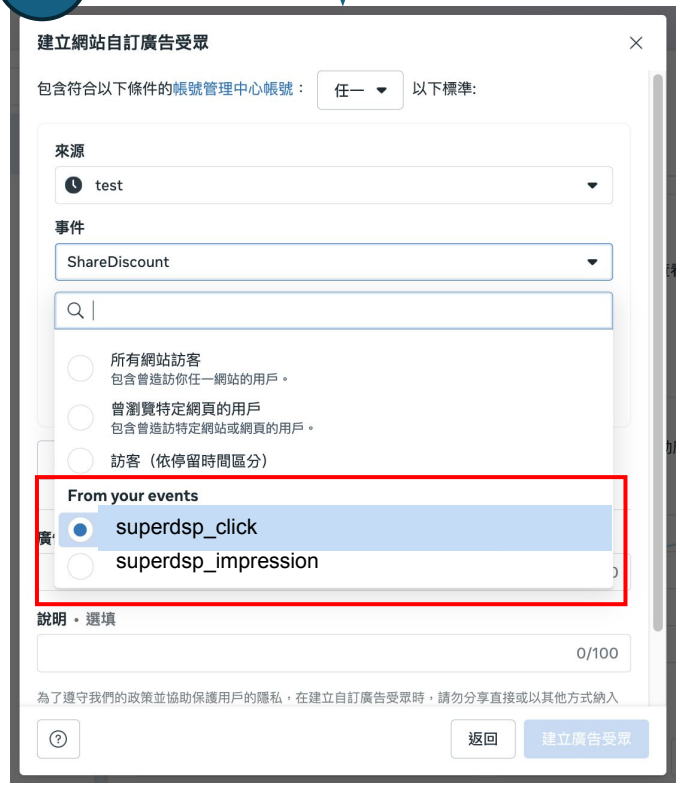

3

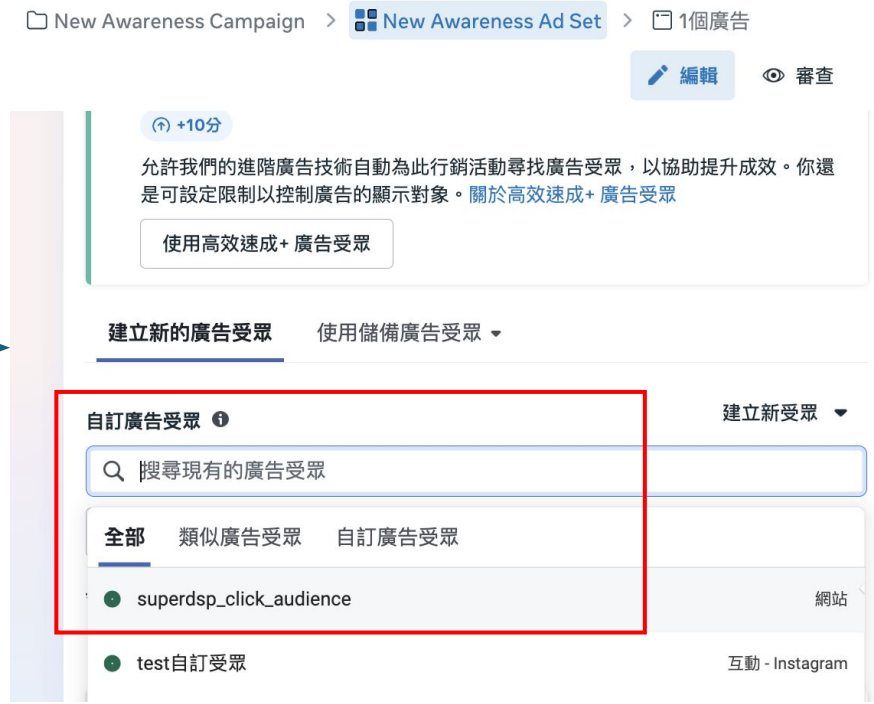

Agenda

- Cross Channel Page
- Create Cross Channel Pixel
- Edit Cross Channel Pixel
- View Cross Channel Pixel
- Cross Channel Pixel Association in Ad Group
- User/Platform Permission
- UI中英對照
- Figma Link

Cross Channel Page

“Cross Channel“ page

https://superdsp.onead.com.tw/cross-channel

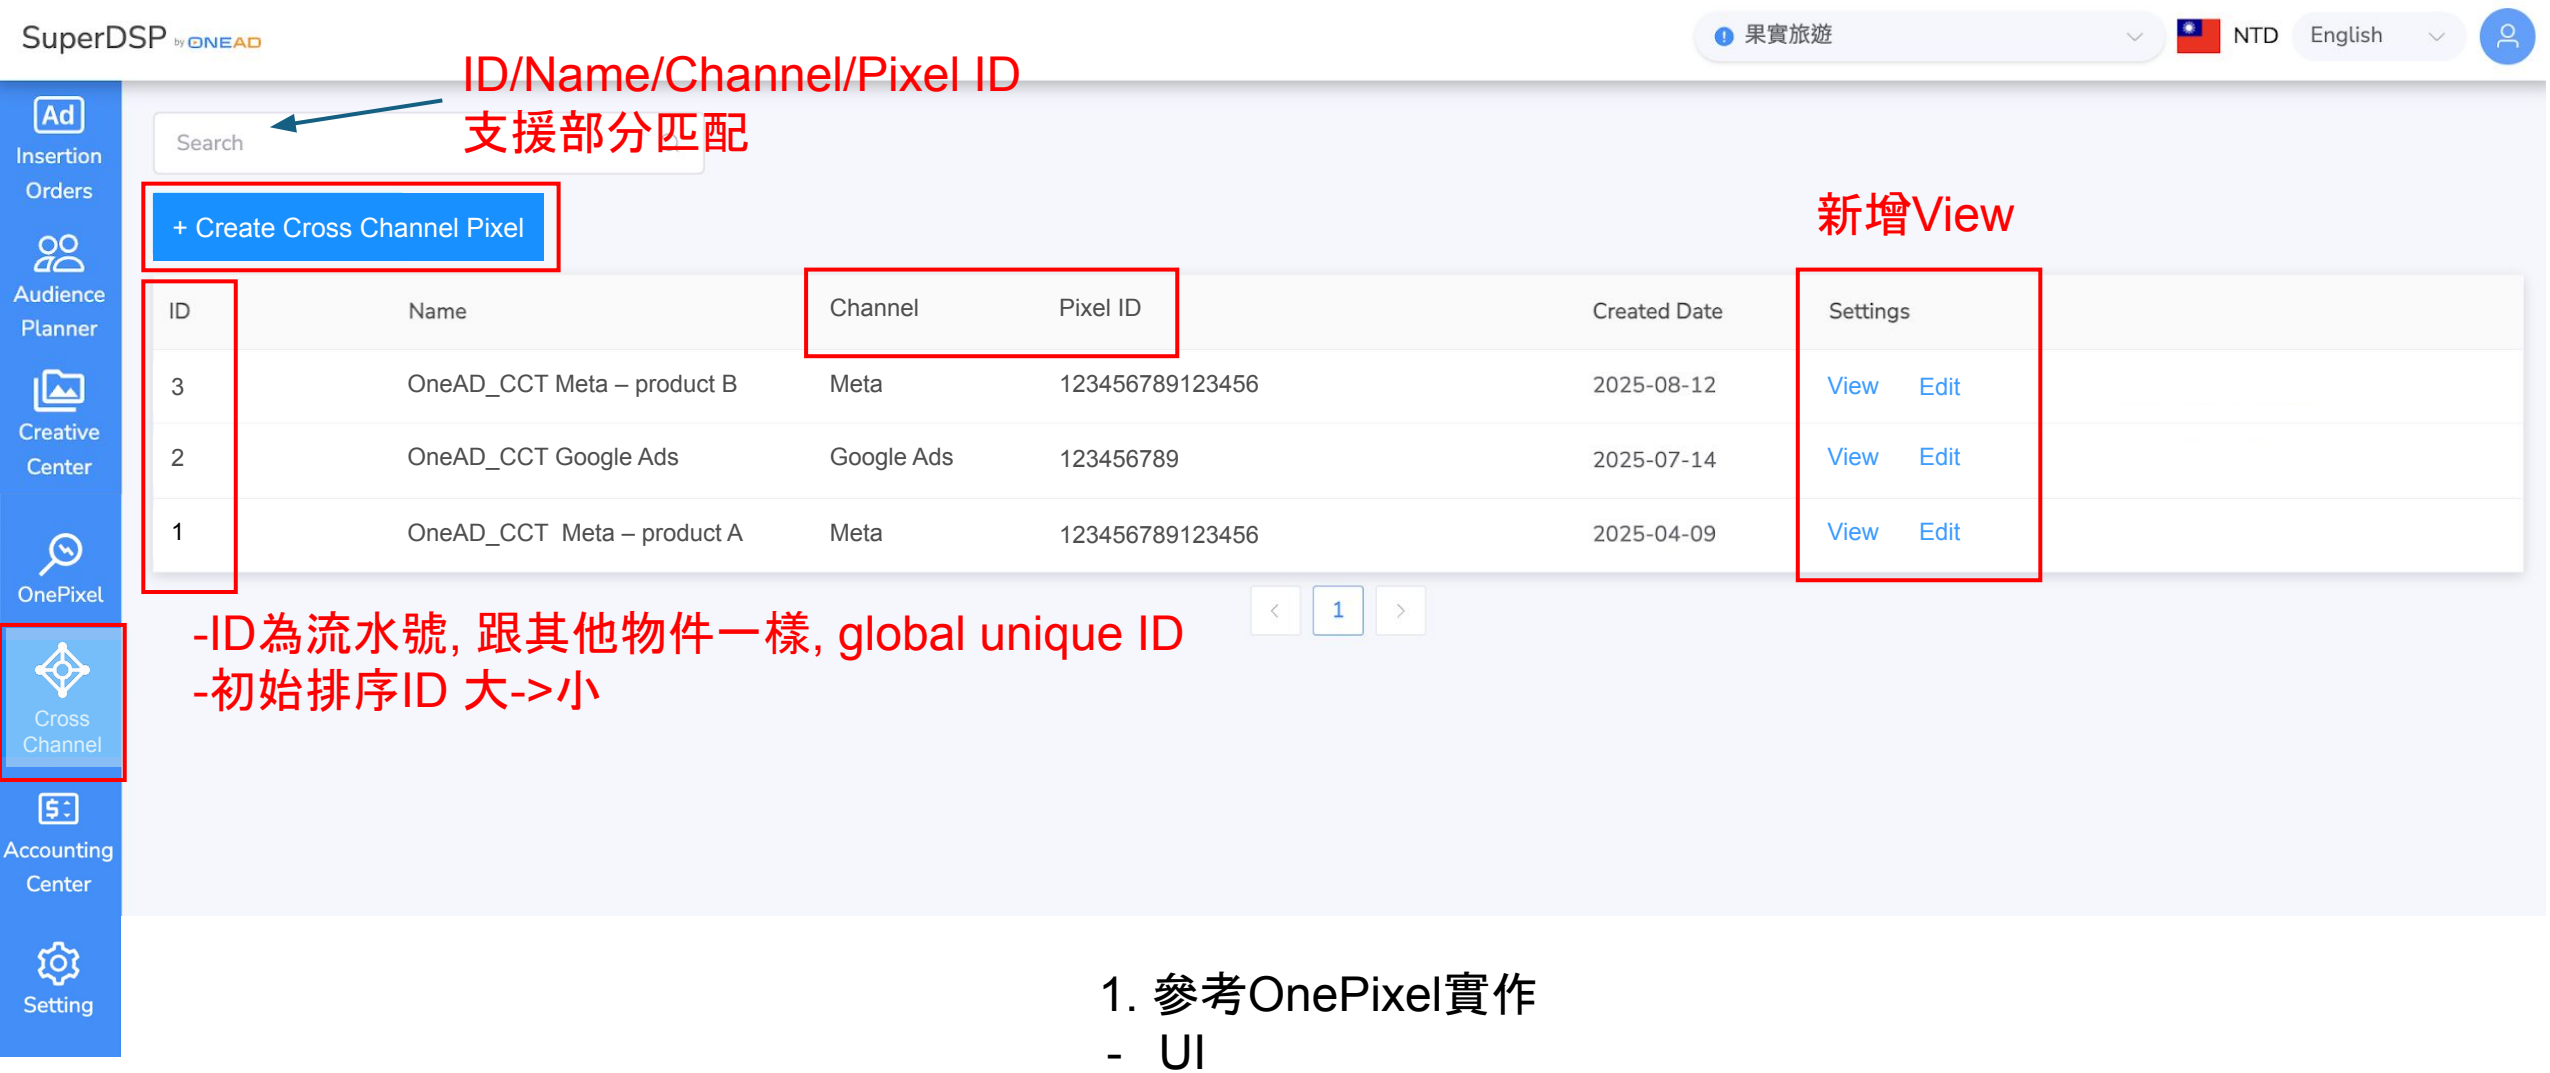

-ID為流水號, 跟其他物件一樣, global unique ID
-初始排序ID 大->小

1. 參考OnePixel實作
   - UI
   - 每個廣告主有自己的Cross Channel物件
2. 需要功能入口icon

Create Cross Channel Pixel

+ Create Cross Channel Pixel

Channel empty

Create Cross Channel Pixel

* Name

0 / 80

* Channel

Please select

* Pixel ID

Channel empty->
Disable “Pixel ID”

* Advertising Category & Format

Please select

Channel empty->
Disable “Advertising Category & Format”

* Trigger Event Type

Please select

Channel empty->
Disable “Trigger Event Type”

下拉式選單placeholder:
Please select

Cancel

Save

+ Create Cross Channel Pixel

Channel not empty

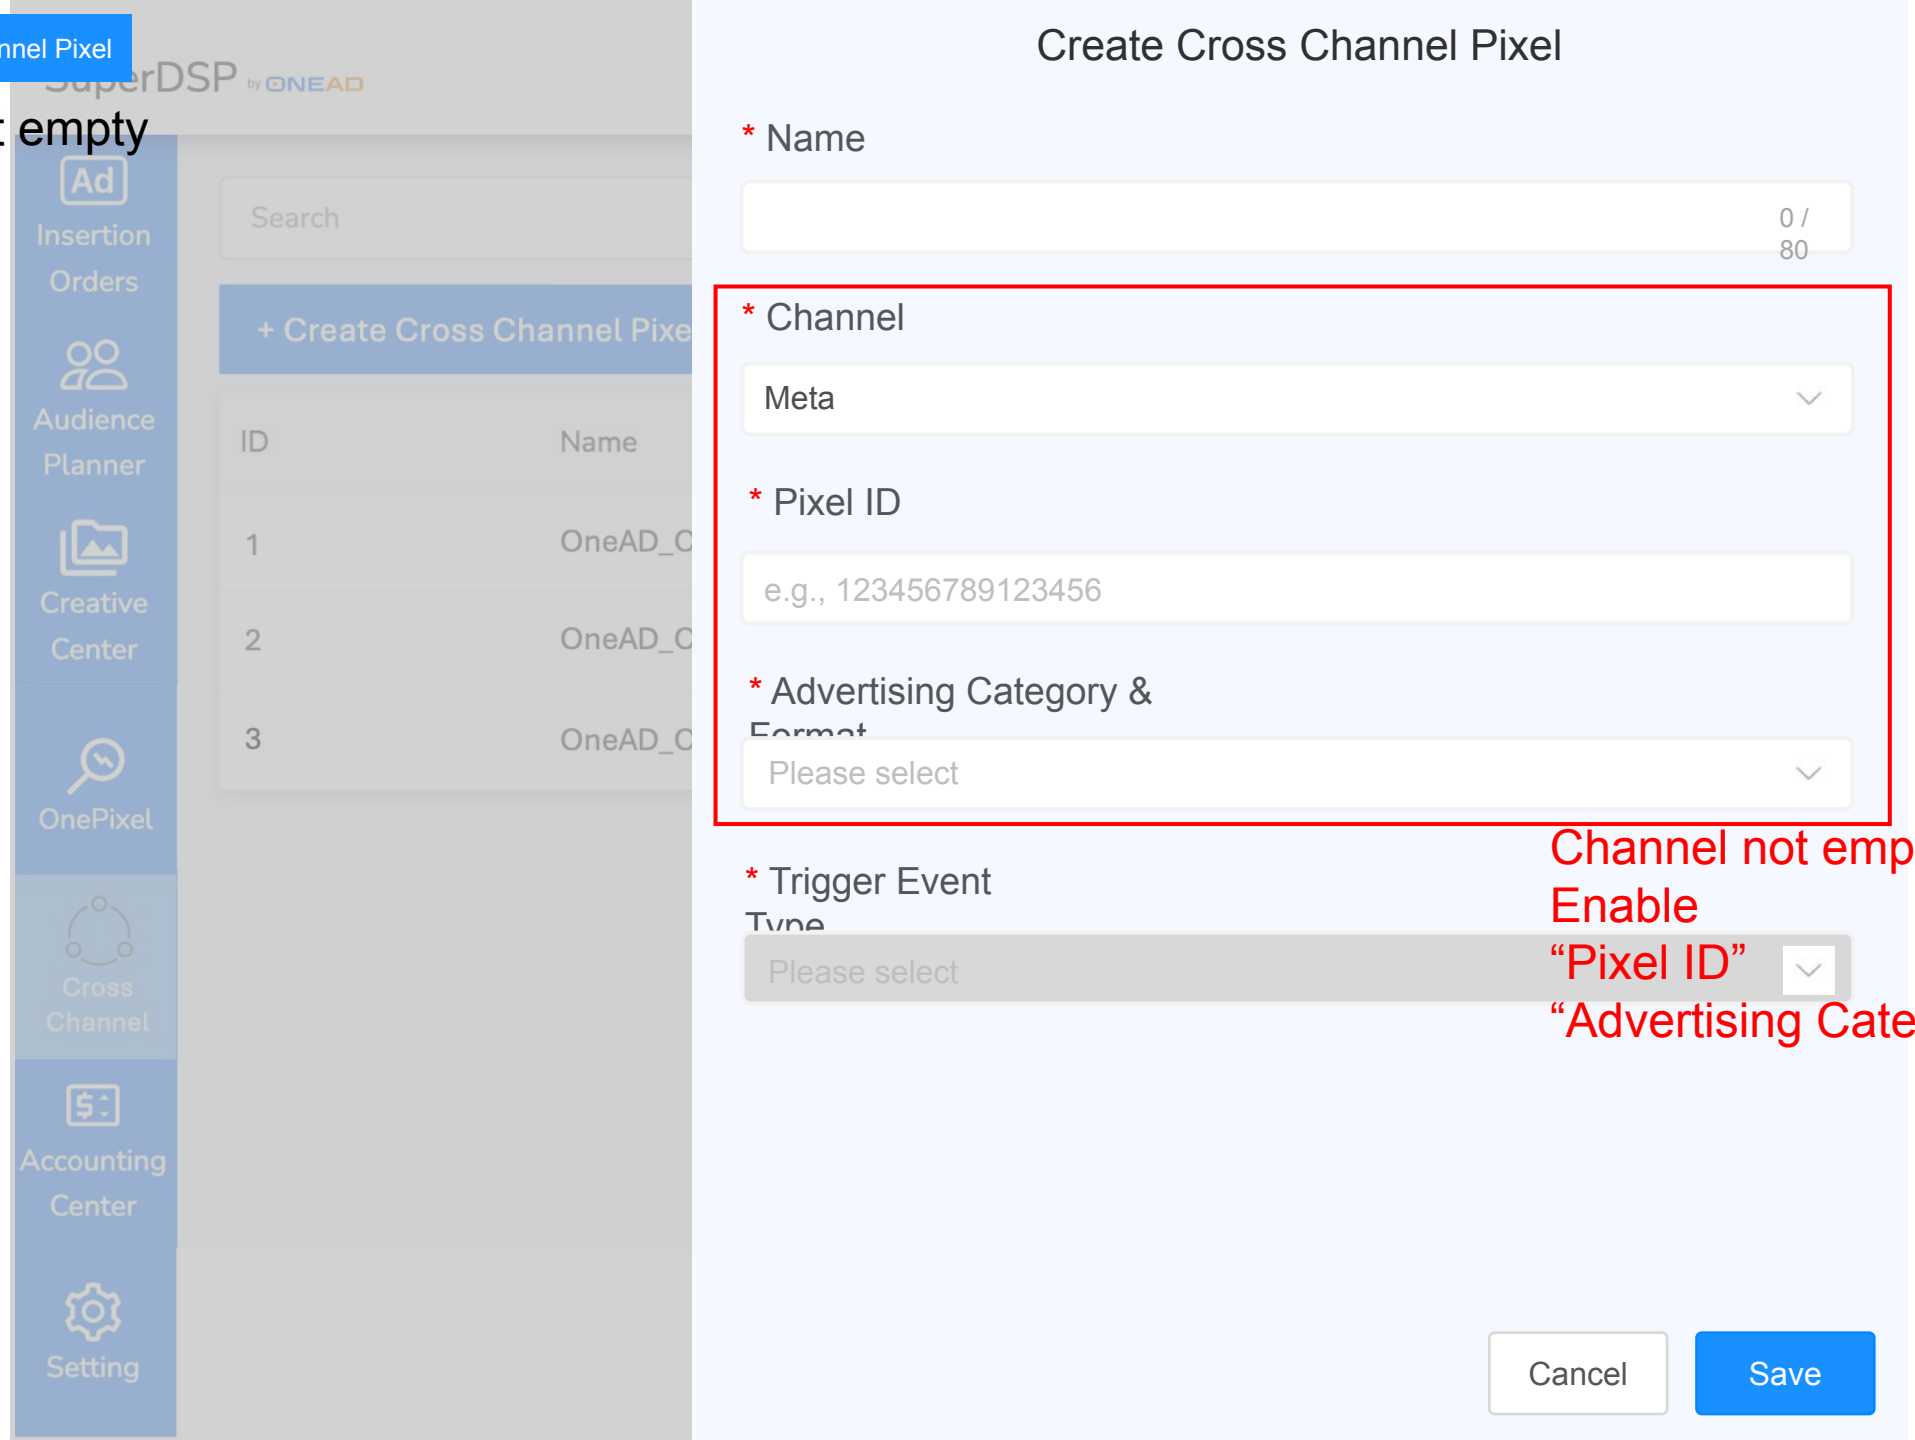

Channel not empty->
Enable
“Pixel ID”
“Advertising Category & Format"

+ Create Cross Channel Pixel

Advertising Category & Format not empty

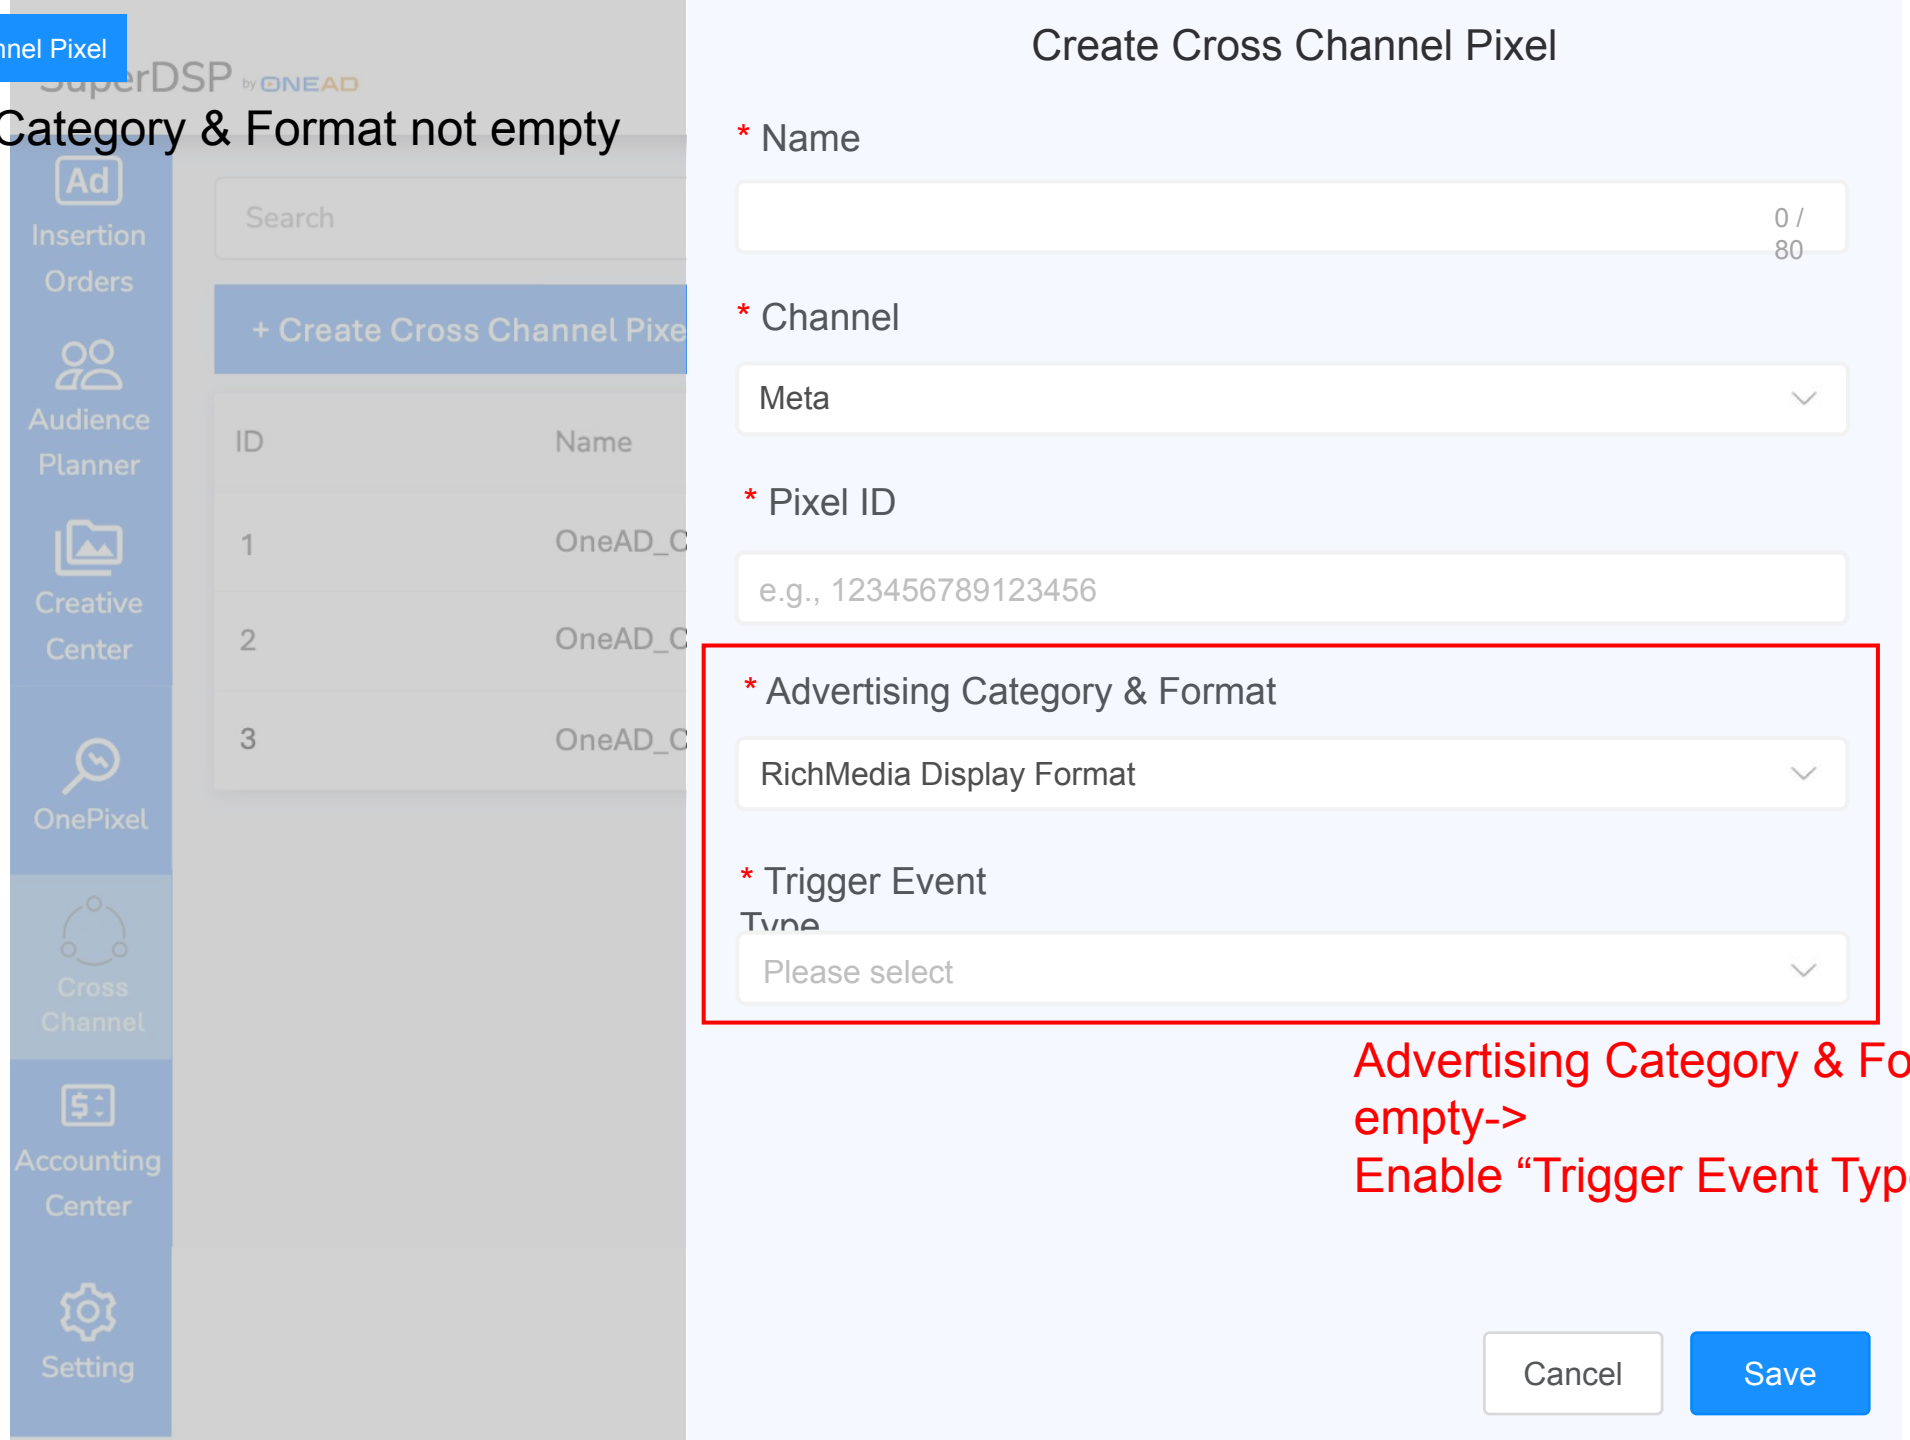

Advertising Category & Format not empty->
Enable “Trigger Event Type”

+ Create Cross Channel Pixel

Channel not empty
Advertising Category & Format not empty

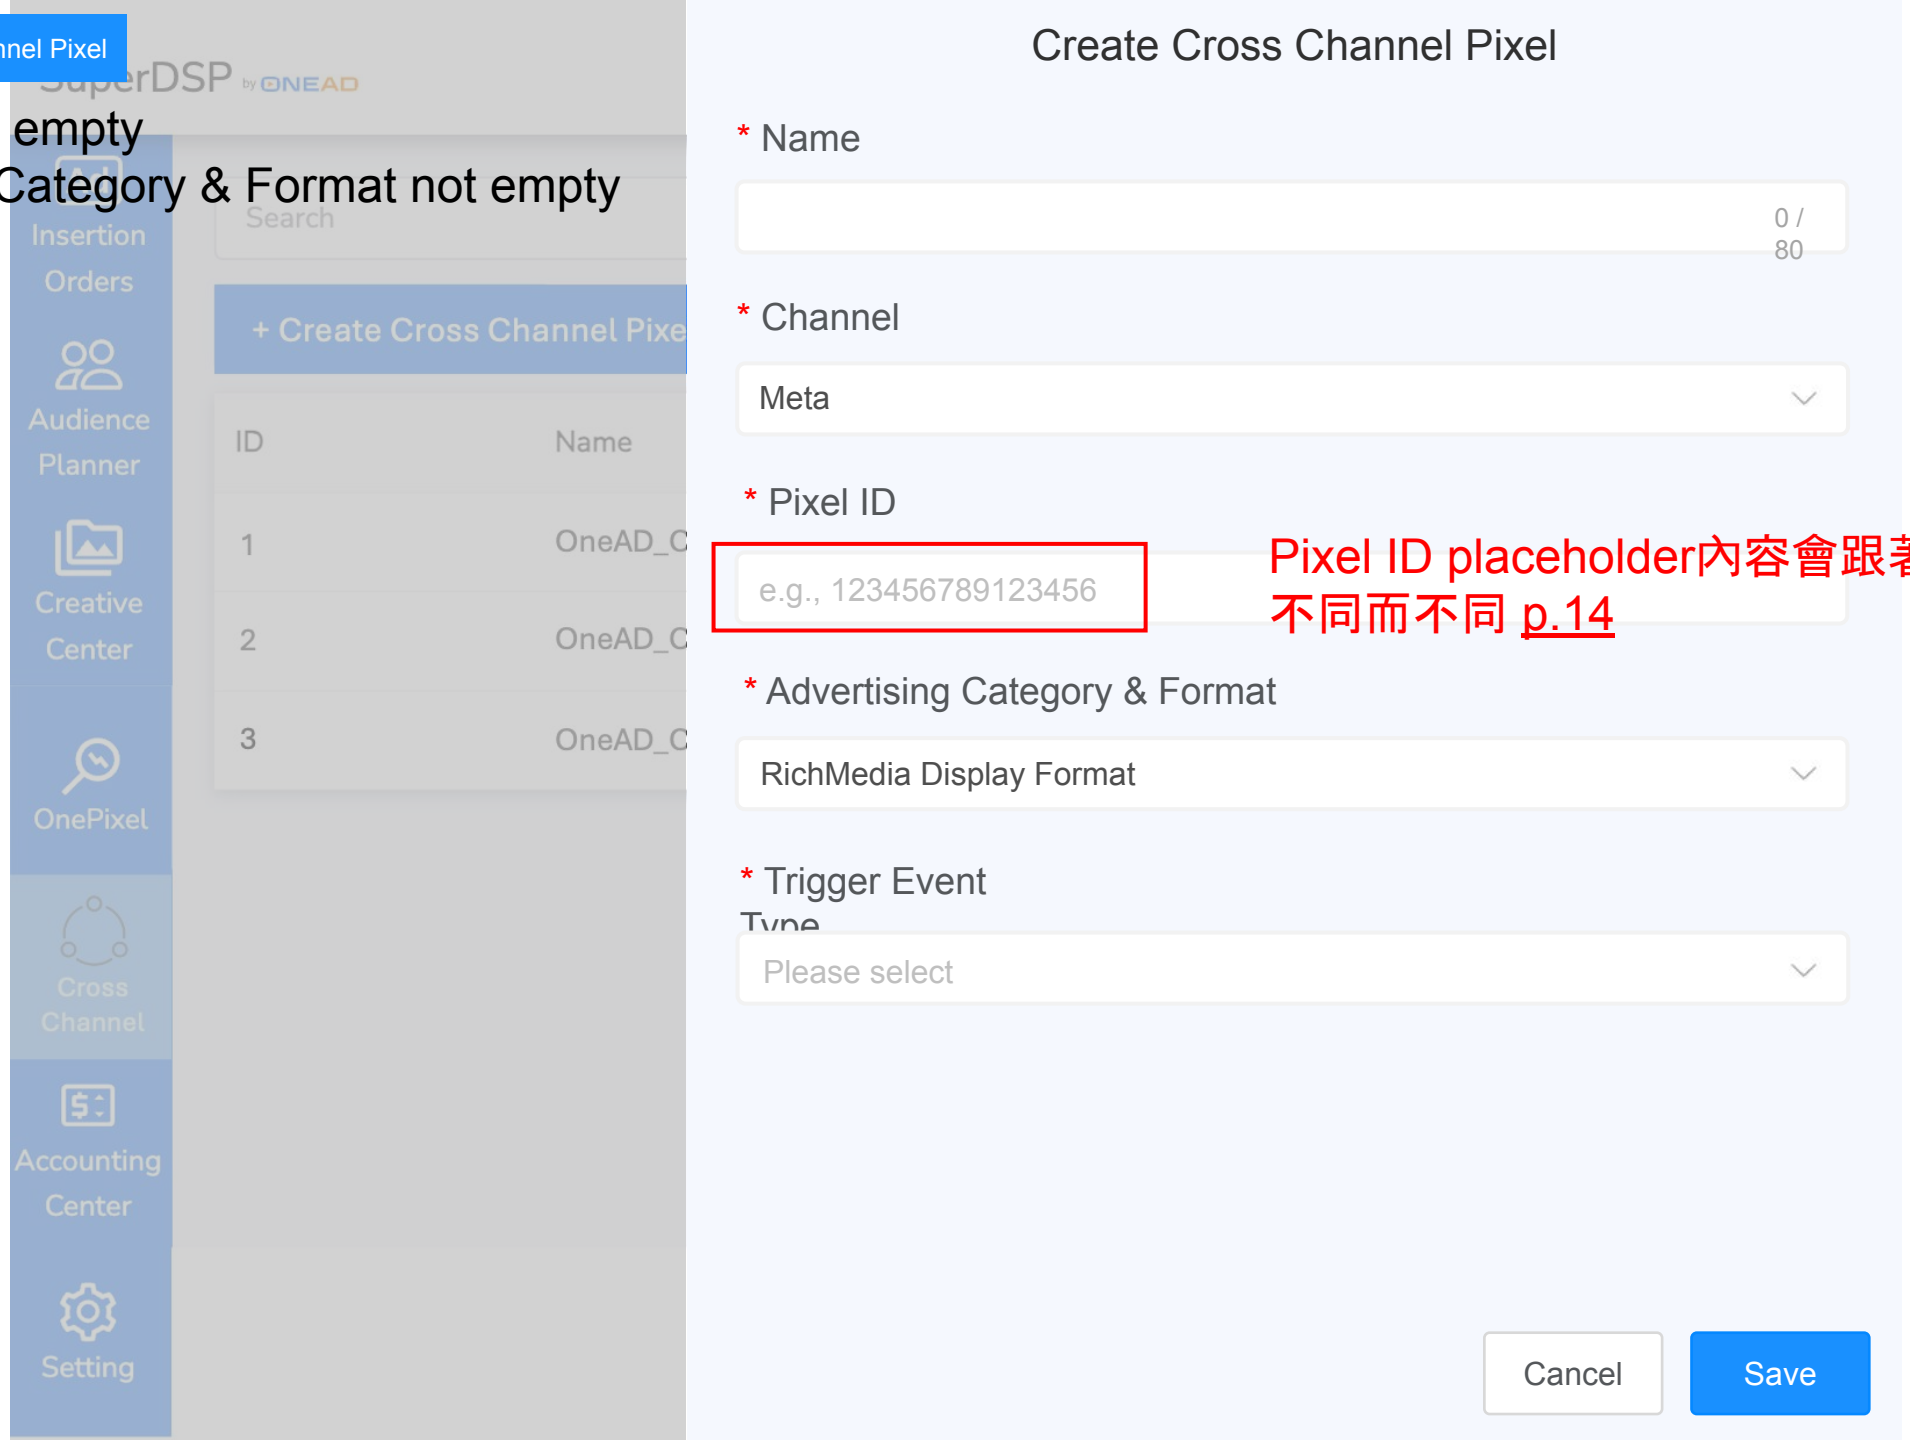

Pixel ID placeholder內容會跟著Channel不同而不同 p.14

+ Create Cross Channel Pixel

填資料

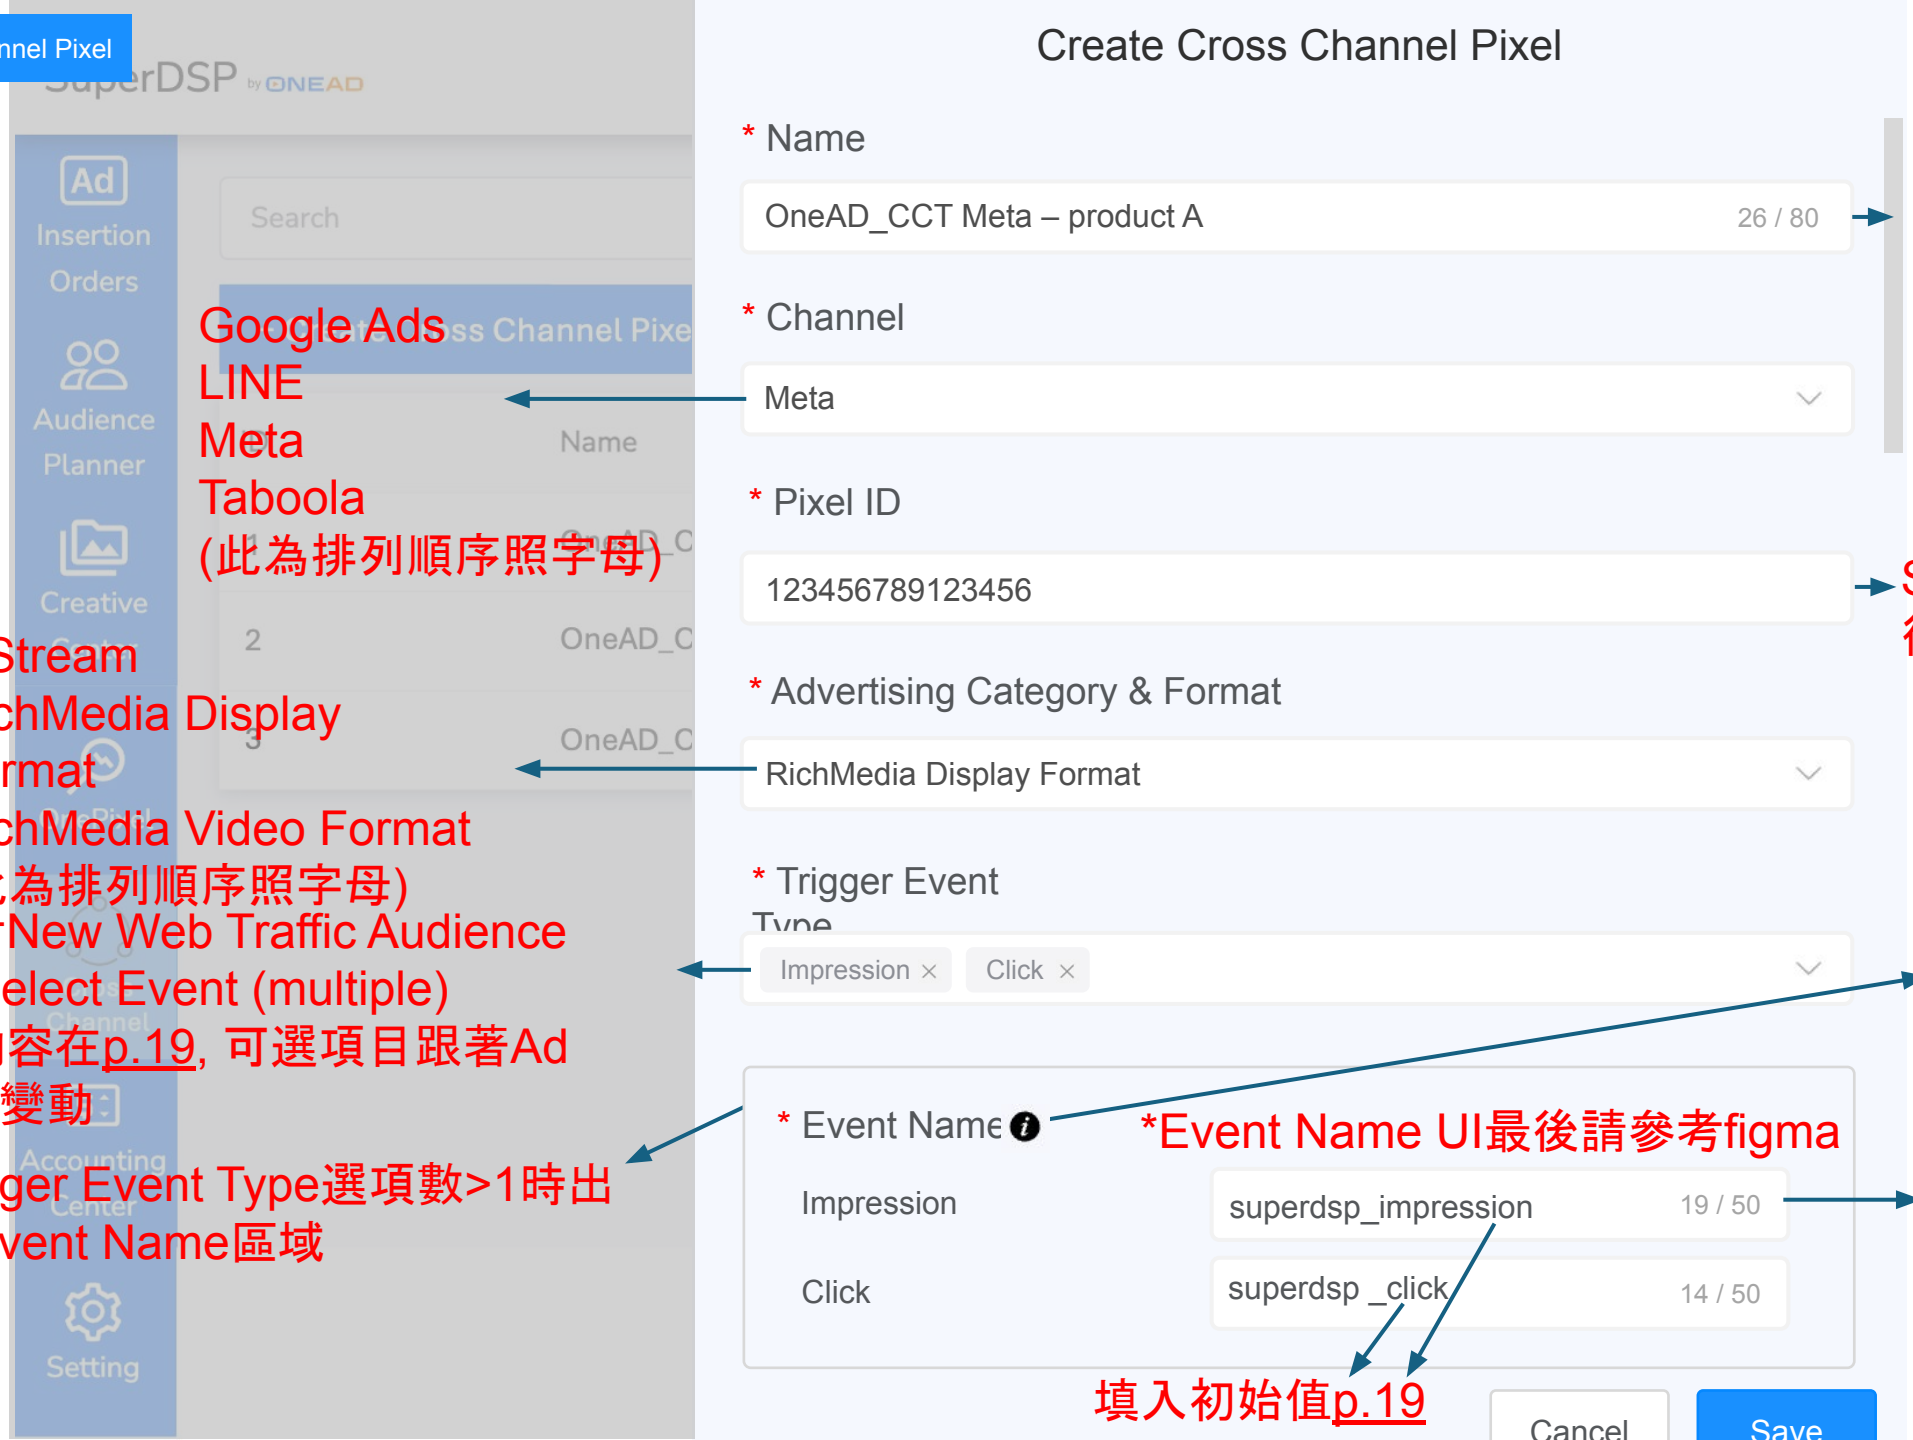

Google Ads
LINE
Meta
Taboola
(此為排列順序照字母)

字數, not 字元數

Save時自動刪掉前後空白

InStream
RichMedia Display Format
RichMedia Video Format
(此為排列順序照字母)

-UI參考New Web Traffic Audience Pack-Select Event (multiple)
-選項內容在p.19, 可選項目跟著Ad Format變動

提示訊息在p.16

Trigger Event Type選項數>1時出現Event Name區域

*Event Name UI最後請參考figma

以字數統計(目前editbox元件限制),由於非英數,非_的其他符號都會在Save時被擋住,所以最終字元數邏輯跟字數邏輯會一樣

填入初始值p.19

+ Create Cross Channel Pixel

填資料
Pixel ID placeholder

Channel	Pixel ID placeholder-英文	Pixel ID placeholder-中文
Google Ads	ID without prefix (e.g. AW-123456789: 123456789)	無前綴，範例：AW-123456789輸入123456789
LINE	e.g., 8ec2d412-1004-43df-b85b-bc6a974cf3f3	範例：8ec2d412-1004-43df-b85b-bc6a974cf3f3
Meta	e.g., 123456789123456	範例：123456789123456
Taboola	e.g., 1234567	範例：1234567

+ Create Cross Channel Pixel

必填warning

SuperDSP by ONEAD

Insertion Orders

Audience Planner

OnePixel

Cross Channel

Accounting Center

Setting

Search

+ Create Cross Channel Pixel

ID	Name
	OneAD_C
	OneAD_C
3	OneAD_C

New Insertion Order

* Insertion Order Name

Name is required

Create Cross Channel Pixel

* Name

0 / 80

Name is required

* Channel

Please select

Channel is required

* Pixel ID

Pixel ID is required

* Advertising Category & Format

Please select

Advertising Category & Format is required

* Trigger Event Type

Please select

Trigger Event Type is required

Cancel

Save

+ Create Cross Channel Pixel

Hint

Create Cross Channel Pixel

* Name

OneAD_CCT Meta – product A 26 / 80

* Channel

Meta

* Pixel ID

123456789123456

* Advertising Category & Format

RichMedia Display Format

* Trigger Event Type

Impression × Click ×

Event names must start with a letter. Use only letters, numbers, and underscores. Don't use spaces.

* Event Name

Impression	superdsp_impression	19 / 50
Click	superdsp _click	14 / 50

Cancel Save

+ Create Cross Channel Pixel

文字大小/顏色
UI參考

(1)

New Web Traffic Audience Pack

* Audience Pack Name

* OnePixel Name / ID

果實旅遊官網 400349985

* Select Event (multiple)

果實旅遊官網pv × 夏日活動頁 × 加入購物車 ×

* Data Retention Period

30

(2)

Create Event

Event Information

Event Name

event name

Create Cross Channel Pixel

* Name

OneAD_CCT Meta – product A 26 / 80

* Channel

Meta

* Pixel ID

123456789123456

* Advertising Category & Format

RichMedia Display Format

* Trigger Event Type

Impression × Click ×

* Event Name

Impression superdsp_impression 19 / 50

Click superdsp _click 14 / 50

Cancel Save

editbox

(3)

Create OnePixel

1 Create OnePixel — 2 Install Initialization Code — 3 Create Event

Name ※ It is recommended to name OnePixel after the website where OnePixel is embedded

official site, EC site, campaign site 0 / 80

(1) Audience Planner->New Audience Pack->Web Traffic Audience
(2) OnePixel->Settings-Create Event
(3) Create OnePixel

UI實作, ODM -> SuperDSP

新增第三方追蹤碼

類型

FB

Account ID*

12345678

自選觸發事件*

廣告曝光 × 影片或 Banner 點擊 ×

Create View 廣告版位展開

Event Name*

廣告曝光	onead_impression
影片或 Banner 點擊	onead_click

繼續新增 | 完成新增

需做key mapping with tracking_code.config.js (js需加key)

需做event id mapping with MTO

Create Cross Channel Pixel

* Name

0 / 80

* Channel

Meta

* Pixel ID

e.g., 123456789123456

* Trigger Event Type

Impression × Click ×

* Event Name

Impression	superdsp_impression	19 / 50
Click	superdsp_click	14 / 50

Cancel | Save

Trigger Event Type選項內容/Event default name

Event id看起來像是按照UI的順序遞增, 最後18是初始碼

UI按照此順序放

ODM-自選觸發事件	ODM看到的event id	SuperDSP-Trigger Event Type 選項-英文	SuperDSP-Trigger Event Type 選項-中文	SuperDSP default event name
廣告曝光	1	Impression	曝光	superdsp_impression
影片或Banner點擊	17	Click	點擊	superdsp_click
影片播放進度達25%時	7	Video played to 25%	影片播放進度: 25%	superdsp_q25
影片播放進度達50%時	8	Video played to 50%	影片播放進度: 50%	superdsp_q50
影片播放進度達75%時	9	Video played to 75%	影片播放進度: 75%	superdsp_q75
影片播放進度達100%時	10	Video played to 100%	影片播放進度: 100%	superdsp_q100

*與ODM行為一樣, 要產生對應platform的初始碼template

Event Name限制

Channel=Meta case

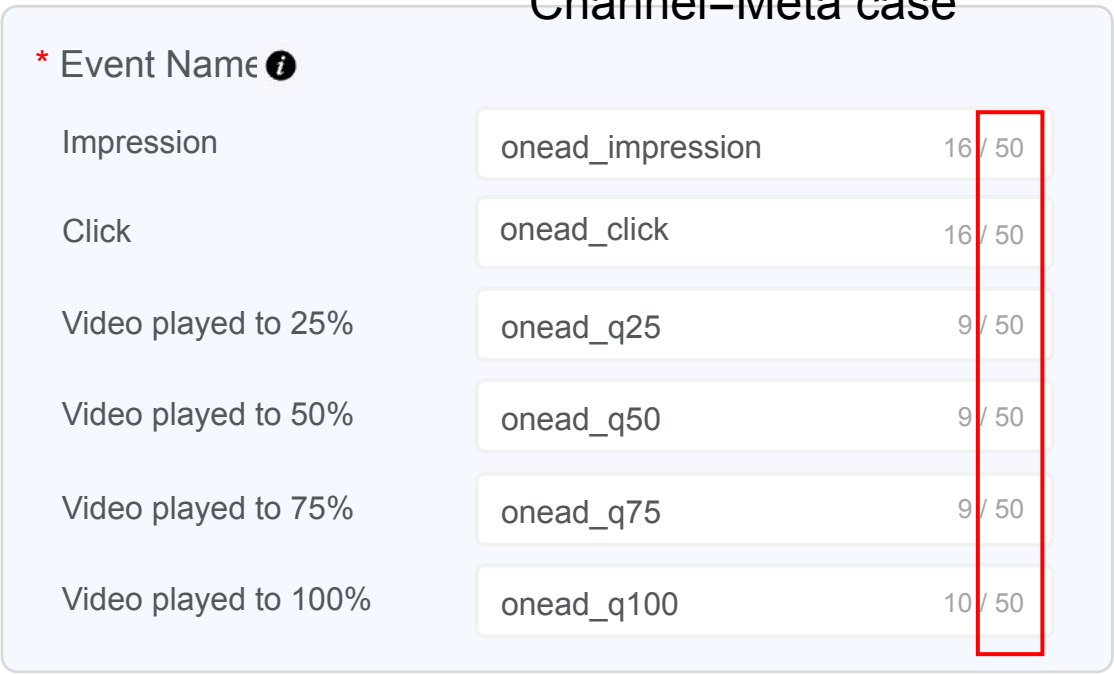

editbox輸入長度限制跟著Channel改變

Channel	事件名長度 max(字元數)	事件名輸入規則
Google Ads	40	全部統一規則 -Editbox邊輸入/Save判斷顯示warning: 1. 必填 2. 只能英數字 3. 符號只能有底線(_), 中間不能有空白 4. 只能英文字開頭 -Save時判斷不顯示warning直接系統處理: 5. 不允許前後空白(拿掉前後空白) 6. 拿掉後面可能的換行字元(拿掉換行字元)
LINE	20	
Meta	50	
Taboola	50	

Event Name限制

- **輸入超過事件名長度**

-參考的現行Editbox UI, 輸入字數到達上限就無法再輸入, 不用另外顯示warning

- **輸入不符合事件名輸入規則 ->Editbox邊輸入/Save**

-必填

□ xxx is required.

-符號只能有底線(_)
-中間不能有空白
-只能英文字開頭
-只能輸入英數 (由於改成可輸入非英數在之後做判斷, 所以這邊字數計算要使用byte數計算方式)

□ 有一個符合就顯示完整訊息

Event names must start with a letter. Use only letters, numbers, and underscores. Don't use spaces.

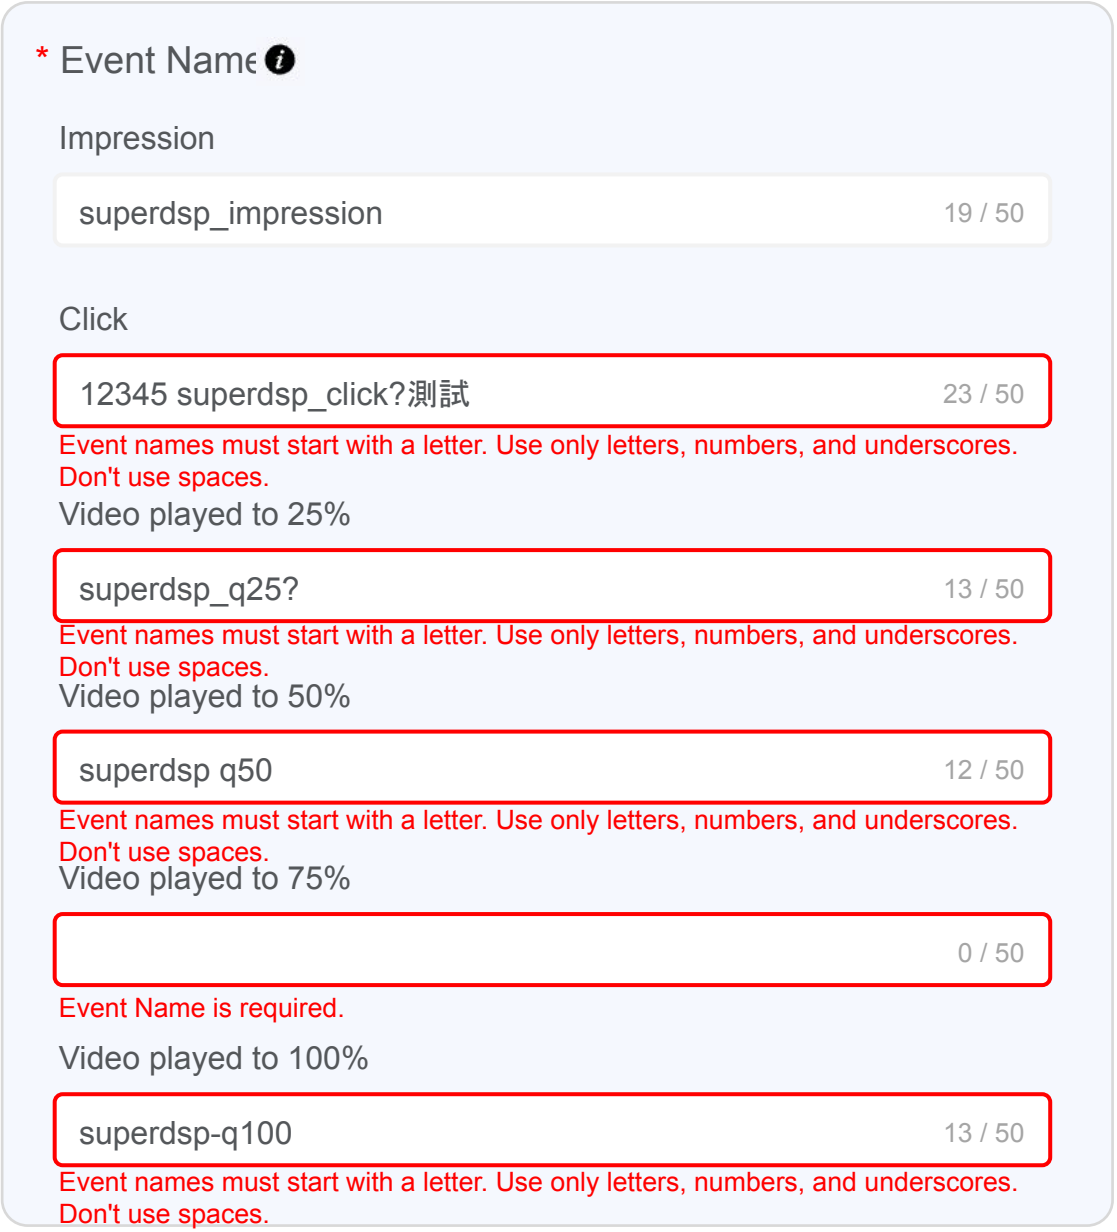

有非_的符號?
中間有空格
開頭不為英文
有非英數字

有非_的符號?

中間有空格

沒填值

有非_的符號-

Platform Mapping with tracking_code.config.js

SuperDSP Ad Format in Ad Group	SuperDSP Channel	ODM 類型(ODM UI看到的值就是key)
InStream	Google Ads	GA-AW(Instream)
InStream	LINE	LINE (instream)
InStream	Meta	FB(Instream)
InStream	Taboola	Taboola (instream)
RichMedia	Google Ads	GA-AW
RichMedia	LINE	LINE
RichMedia	Meta	FB
RichMedia	Taboola	Taboola

tracking_code.config.js		
platform	productCategory	channel
platform: "FB"	productCategory: "RichMedia"	channel: "Meta"
platform: "FB(Instream)"	productCategory: "InStream"	channel: "Meta"
platform: "GA-AW"	productCategory: "RichMedia"	channel: "Google Ads"
platform: "GA-AW(Instream)"	productCategory: "InStream"	channel: "Google Ads"
platform: "Taboola"	productCategory: "RichMedia"	channel: "Taboola"
platform: "Taboola (instream)"	productCategory: "InStream"	channel: "Taboola"
platform: "LINE"	productCategory: "RichMedia"	channel: "LINE"
platform: "LINE (instream)"	productCategory: "InStream"	channel: "LINE"

切換Channel行為以Meta->LINE為例

te Cross Channel Pixel

Name

OneAD_CCT Meta – product A 26 / 80

* Channel

Meta

* Pixel ID

123456789123456

* Advertising Category & Format

RichMedia Display Format

* Trigger Event Type

Impression × Click ×

* Event Name

使用者有更改default event name

Impression superdsp_impression_testpixe 29 / 50

Click superdsp _click_testpixel 24 / 50

Cancel Save

Create Cross Channel Pixel

* Name Name保留

OneAD_CCT Meta – product A 26 / 80

* Channel

LINE

* Pixel ID Pixel ID清空, 顯示LINE對應的placeholder

e.g., 8ec2d412-1004-43df-b85b-bc6a974cf3f3

Advertising Category & Format保留

* Advertising Category & Format

RichMedia Display Format

* Trigger Event Type

Impression × Click ×

由於新增Advertising Category & Format, 切換Channel時不用清空Trigger Event Type

* Event Name

Impression superdsp_impression_testpixe 29 / 50

Click superdsp _click_testpixel 24 / 50

Cancel Save

切換Advertising Category & Format行為

after才選的event維持初始event name

Advertising Category & Format previous	Advertising Category & Format after	Trigger Event Type	
InStream	RichMedia Display Format	-Trigger Event Type支援選項變少 -previous如果已選imp/click, 保留imp/click選項與event name -previous如果已選video相關event清空	A
InStream	RichMedia Video Format	-Trigger Event Type支援一樣 -保留previous已選的選項與event name	B
RichMedia Display Format	InStream	-Trigger Event Type支援選項變多 -previous如果已選imp/click, 保留imp/click選項與event name	C
RichMedia Display Format	RichMedia Video Format	-Trigger Event Type支援選項變多 -previous如果已選imp/click, 保留imp/click選項與event name	C
RichMedia Video Format	InStream	-Trigger Event Type支援一樣 -保留已選的選項與event name	B
RichMedia Video Format	RichMedia Display Format	-Trigger Event Type支援選項變少 -previous如果已選imp/click, 保留imp/click選項與event name -previous如果已選video相關event清空	A

切換Advertising Category & Format行為 A

* Pixel ID

123456789123456

* Advertising Category & Format

InStream

* Trigger Event Type

Impression × Click × Video played to 50% ×

* Event Name

使用者有更改default event name

Impression	superdsp_impression_testpixe	29 / 50
Click	superdsp_click_testpixel	24 / 50
Video played to 50%	superdsp_q50_testpixel	22 / 50

Cancel Save

Create Cross Channel Pixel

* Name

OneAD_CCT Meta – product A 26 / 80

* Channel

Meta

* Pixel ID

123456789123456

* Advertising Category & Format

RichMedia Display Format

* Trigger Event Type

Impression × Click ×

* Event Name

保留同樣支援的event跟event name

Impression	superdsp_impression_testpixe	29 / 50
Click	superdsp_click_testpixel	24 / 50

Video played to 50%清空

Cancel Save

切換Advertising Category & Format行為 B

* Name

OneAD_CCT Meta – product A 26 / 80

* Channel

Meta

* Pixel ID

123456789123456

* Advertising Category & Format

InStream

* Trigger Event Type

Impression × Click ×

* Event Name

Impression superdsp_impression_testpixe 29 / 50

Video played to 50% superdsp_q50_testpixel 22 / 50

Cancel Save

Create Cross Channel Pixel

* Name

OneAD_CCT Meta – product A 26 / 80

* Channel

Meta

* Pixel ID

123456789123456

* Advertising Category & Format

RichMedia Video Format

* Trigger Event Type

Impression × Click ×

* Event Name 保留同樣支援的event跟event name

Impression superdsp_impression_testpixe 29 / 50

Video played to 50% superdsp_q50_testpixel 22 / 50

Cancel Save

切換Advertising Category & Format行為 C

* Name

OneAD_CCT Meta – product A 26 / 80

* Channel

Meta

* Pixel ID

123456789123456

* Advertising Category & Format

RichMedia Display Format

* Trigger Event Type

Impression × Click ×

* Event Name

使用者有更改default event name

Impression	superdsp_impression_testpixe	29 / 50
Click	superdsp_click_testpixel	24 / 50

Cancel Save

Create Cross Channel Pixel

* Pixel ID

123456789123456

* Advertising Category & Format

RichMedia Video Format

* Trigger Event Type

Impression × Click × Video played to 50%×

* Event Name

保留同樣支援的event跟event name

Impression	superdsp_impression_testpixe	29 / 50
Click	superdsp_click_testpixel	24 / 50
Video played to 50%	superdsp_q50	24 / 50

切換後才選的event, 維持初始event name

Cancel Save

+ Create Cross Channel Pixel

After ”Save“->show loading->toast msg
參考Ad Group New/Edit

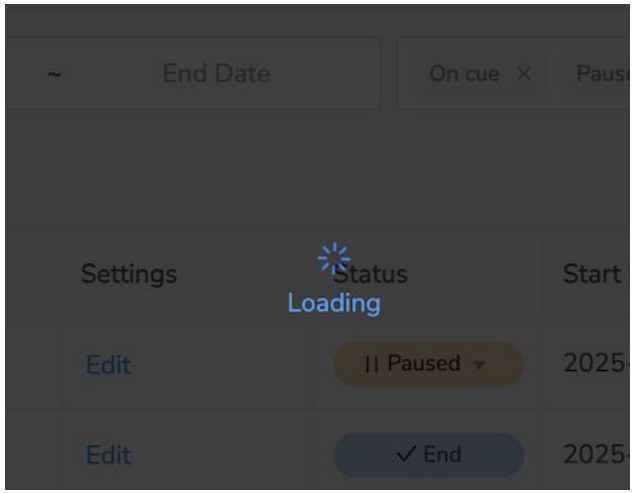



Edit Cross Channel Pixel

Settings

Edit

SuperDSP by ONEAD

Insertion Orders

Audience Planner

Creative Center

OnePixel

Cross

Accounting

Setting

Search

+ Create Cross Channel Pixe

ID	Name
1	OneAD_C
2	OneAD_C
3	OneAD_C

Edit Cross Channel Pixel

* Name

OneAD_CCT Meta – product A 26 / 80

* Channel

Meta

Channel disabled

* Pixel ID

123456789123456

* Advertising Category & Format

RichMedia Display Format

Advertising Category & Forma disabled

* Trigger Event Type

Impression × Click ×

* Event Name

Impression	superdsp_impression 19 / 50
Click	superdsp _click 14 / 50

Cancel Save

由於Channel與Advertising Category & Format成為ad group在選 CCT物件時的篩選條件, 避免已被選定的CCT物件因為編輯而進入奇怪狀態(例:消失在原本出現的清單裡), 所以編輯模式disable這兩個選項

View Cross Channel Pixel

Settings

View Cross Channel Pixel

檢視 Cross Channel Pixel

名稱	渠道
OneAD_CCT Meta – product A	Meta
Pixel ID	**廣告品類和格式**
123456789123456	RichMedia Display Format

觸發事件類型
Impression, Click, Video played to 25% Video played to 50% Video played to 75% Video played to 100%

事件	名稱
Impression	superdsp_impression
Click	superdsp _click
Video played to 25%	superdsp_q25
Video played to 50%	superdsp_q50
Video played to 75%	superdsp_q75
Video played to 100%	superdsp_q100

關 下載

欄位標題請改成粗體字

Cross Channel Pixel Association in Ad Group

Ad Group (RichMedia)

Third-party Measurement

DoubleClick Campaign Manager — 請輸入 1x1 Pixel URL

Nielsen — 請輸入 1x1 Pixel URL

Integral Ad Science — 請輸入 JS URL

DoubleVerify — 請輸入 JS URL

Cross Channel Targeting +

- 參考Add User -> Advertiser Permission Setting
- InStream/RichMedia才支援

Cancel | Save

* Roles

Advertiser Permission Setting +

Ad Group (InStream)

Ad group with any CCT settings?	Video creative delivered	App budget
no	Pure VAST	維持原分配機制
yes	VPAID	=0%, 預算重新分配到其他裝置比例

-InStream+CCT需以VPAID支援, 但VPAID不支援跑在APP環境
-目前決定不動態切換pure VAST/VPAID, 所以從UI限制

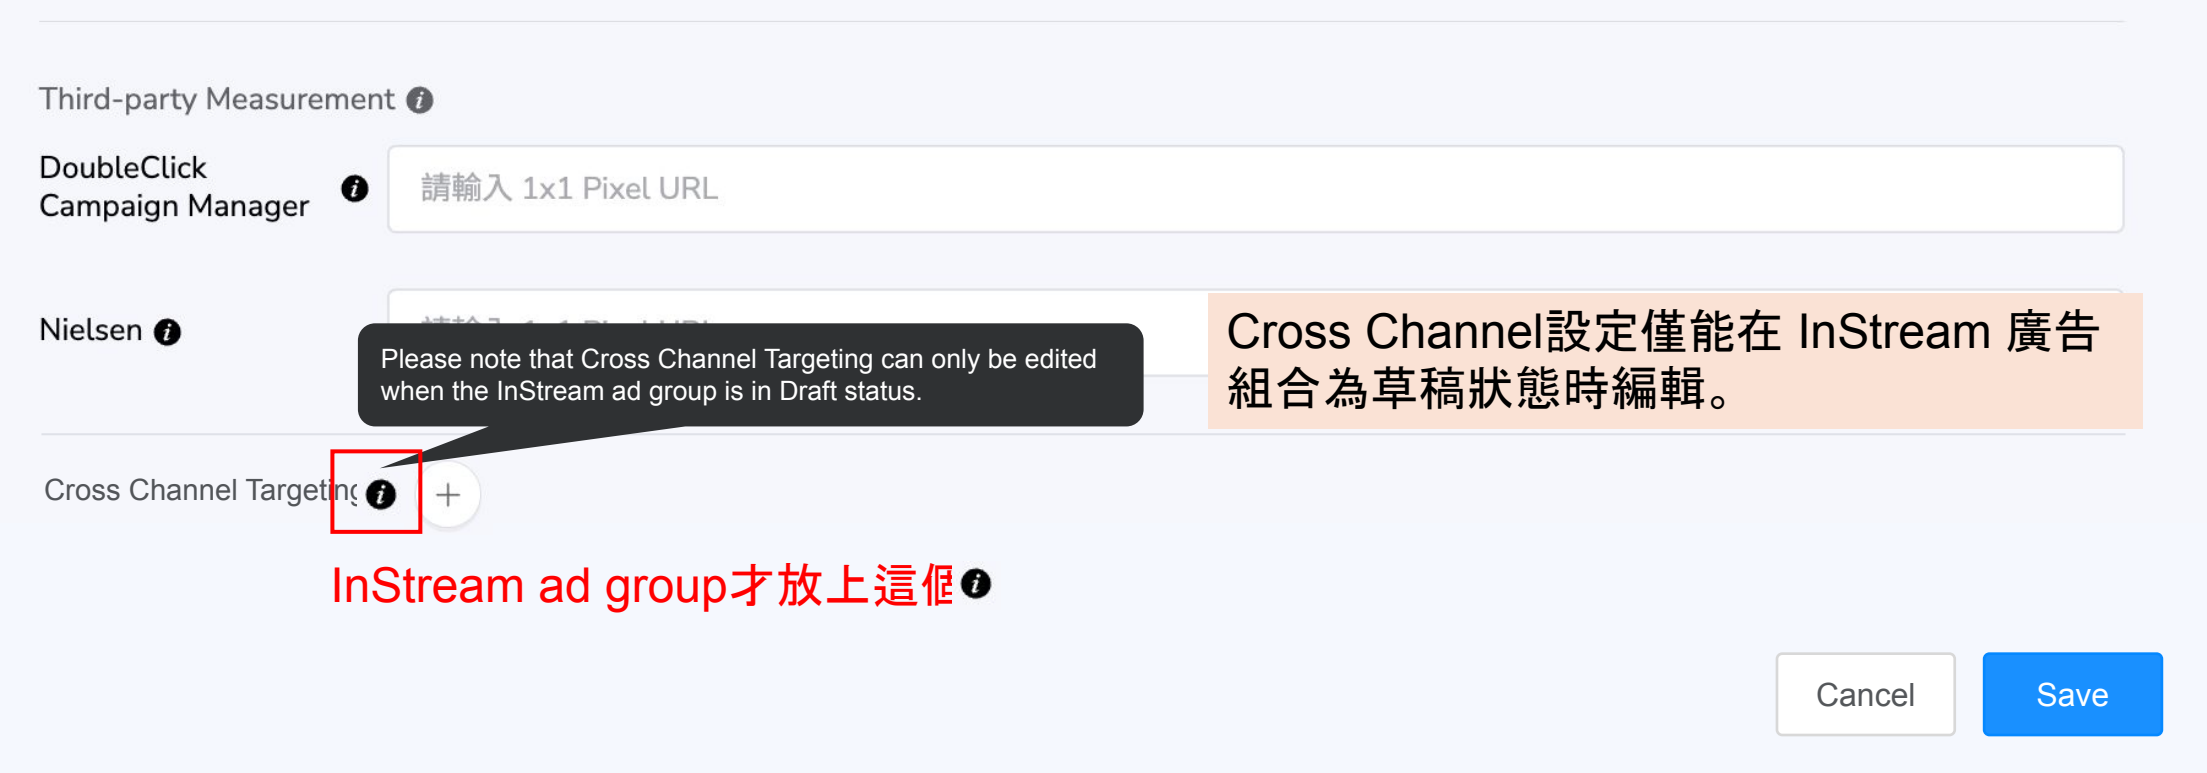

Cross Channel設定僅能在 InStream 廣告組合為草稿狀態時編輯。

InStream ad group才放上這個

Ad Group (InStream)
CCT UI handling

InStream+CCT

InStream ad group Enable CCT	Ad group status	UI
Yes	New/草稿	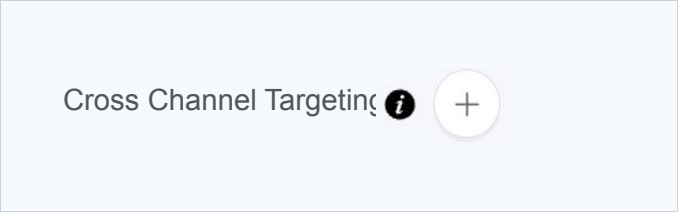
No	停用/上刊/審核中/結束/停刊/暫停	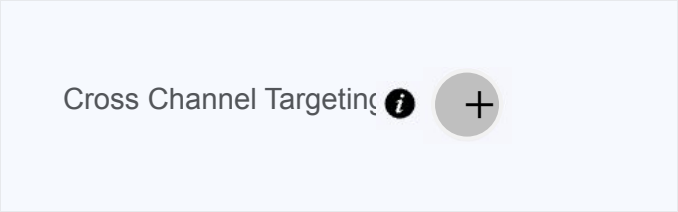

Ad Group

Cross Channel Targeting +

-UI參考Settings的tab view
-初始排序同步其他view, ID 大->小, 但None永遠在最上方
-沒有page view
-Filter by Advertising Category & Format

Advertising Category & Format	Ad Group Information
InStream	Ad Format=Instream Video
RichMedia Display Format	Advertising Category=RichMedia & Format選項in Display Format
RichMedia Video Format	Advertising Category=RichMedia & Format選項in Video Format

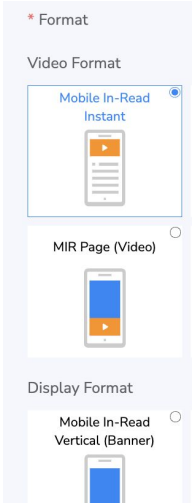

Cross Channel Targeting

Google Ads | LINE | Meta | Taboola

ID/Name/Pixel ID 支援部分匹配

Search

每個channel下最上方為None選項, default選項

	ID	Name	Pixel ID	Created Date
◉	--	None	--	--
○	19	CCT Google Ads – product 19	123456789	2025-08-26
○	18	CCT Google Ads – product 18	123456789	2025-08-26
○	17	CCT Google Ads – product 17	123456789	2025-08-26
○	16	CCT Google Ads – product 16	123456789	2025-08-26
○	15	CCT Google Ads – product 15	123456789	2025-08-26
○	14	CCT Google Ads – product 14	123456789	2025-08-26
○	13	CCT Google Ads – product 13	123456789	2025-08-26
○	12	CCT Google Ads – product 12	123456789	2025-08-26
○	11	CCT Google Ads – product 11	123456789	2025-08-26

Ad Group

Cross Channel Targeting +

沒有cross channel資料
搜尋沒有對應資料
-不顯示最上方的None選項
-搜尋時忽略None選項

Cross Channel Targeting

Google Ads | Meta | LINE | Taboola

test

ID	Name	Pixel ID	Created Date
No Record			

Ad Group

Hover and show information, “標題:“粗體

- 顯示Name
- 按照勾選順序顯示, ppt示意為先勾”OneAD_CCT Meta – product” -> 再勾” CCT Google Ads – product 19”

User/Platform Permission

Cross Channel權限控管(User)

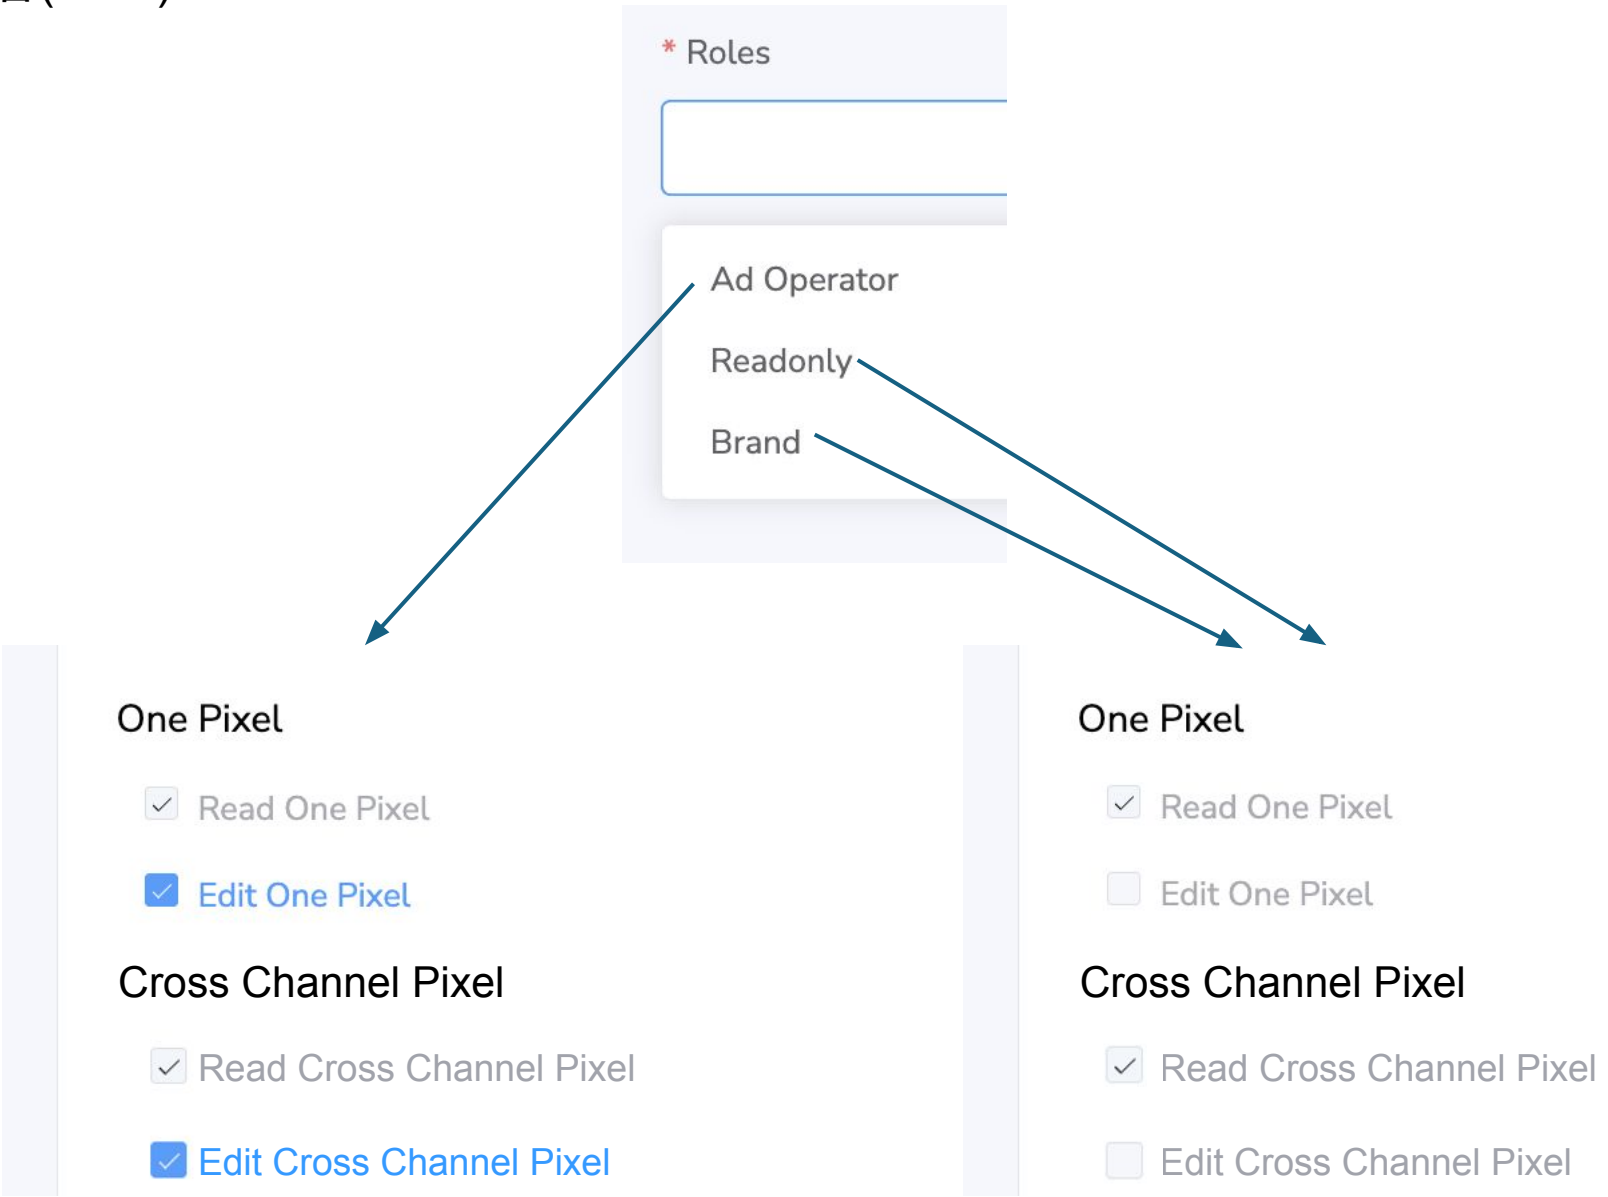

Cross Channel權限控管(User)

- [ ] Edit Cross Channel Pixel
- [ ] Edit Cross Channel Pixel

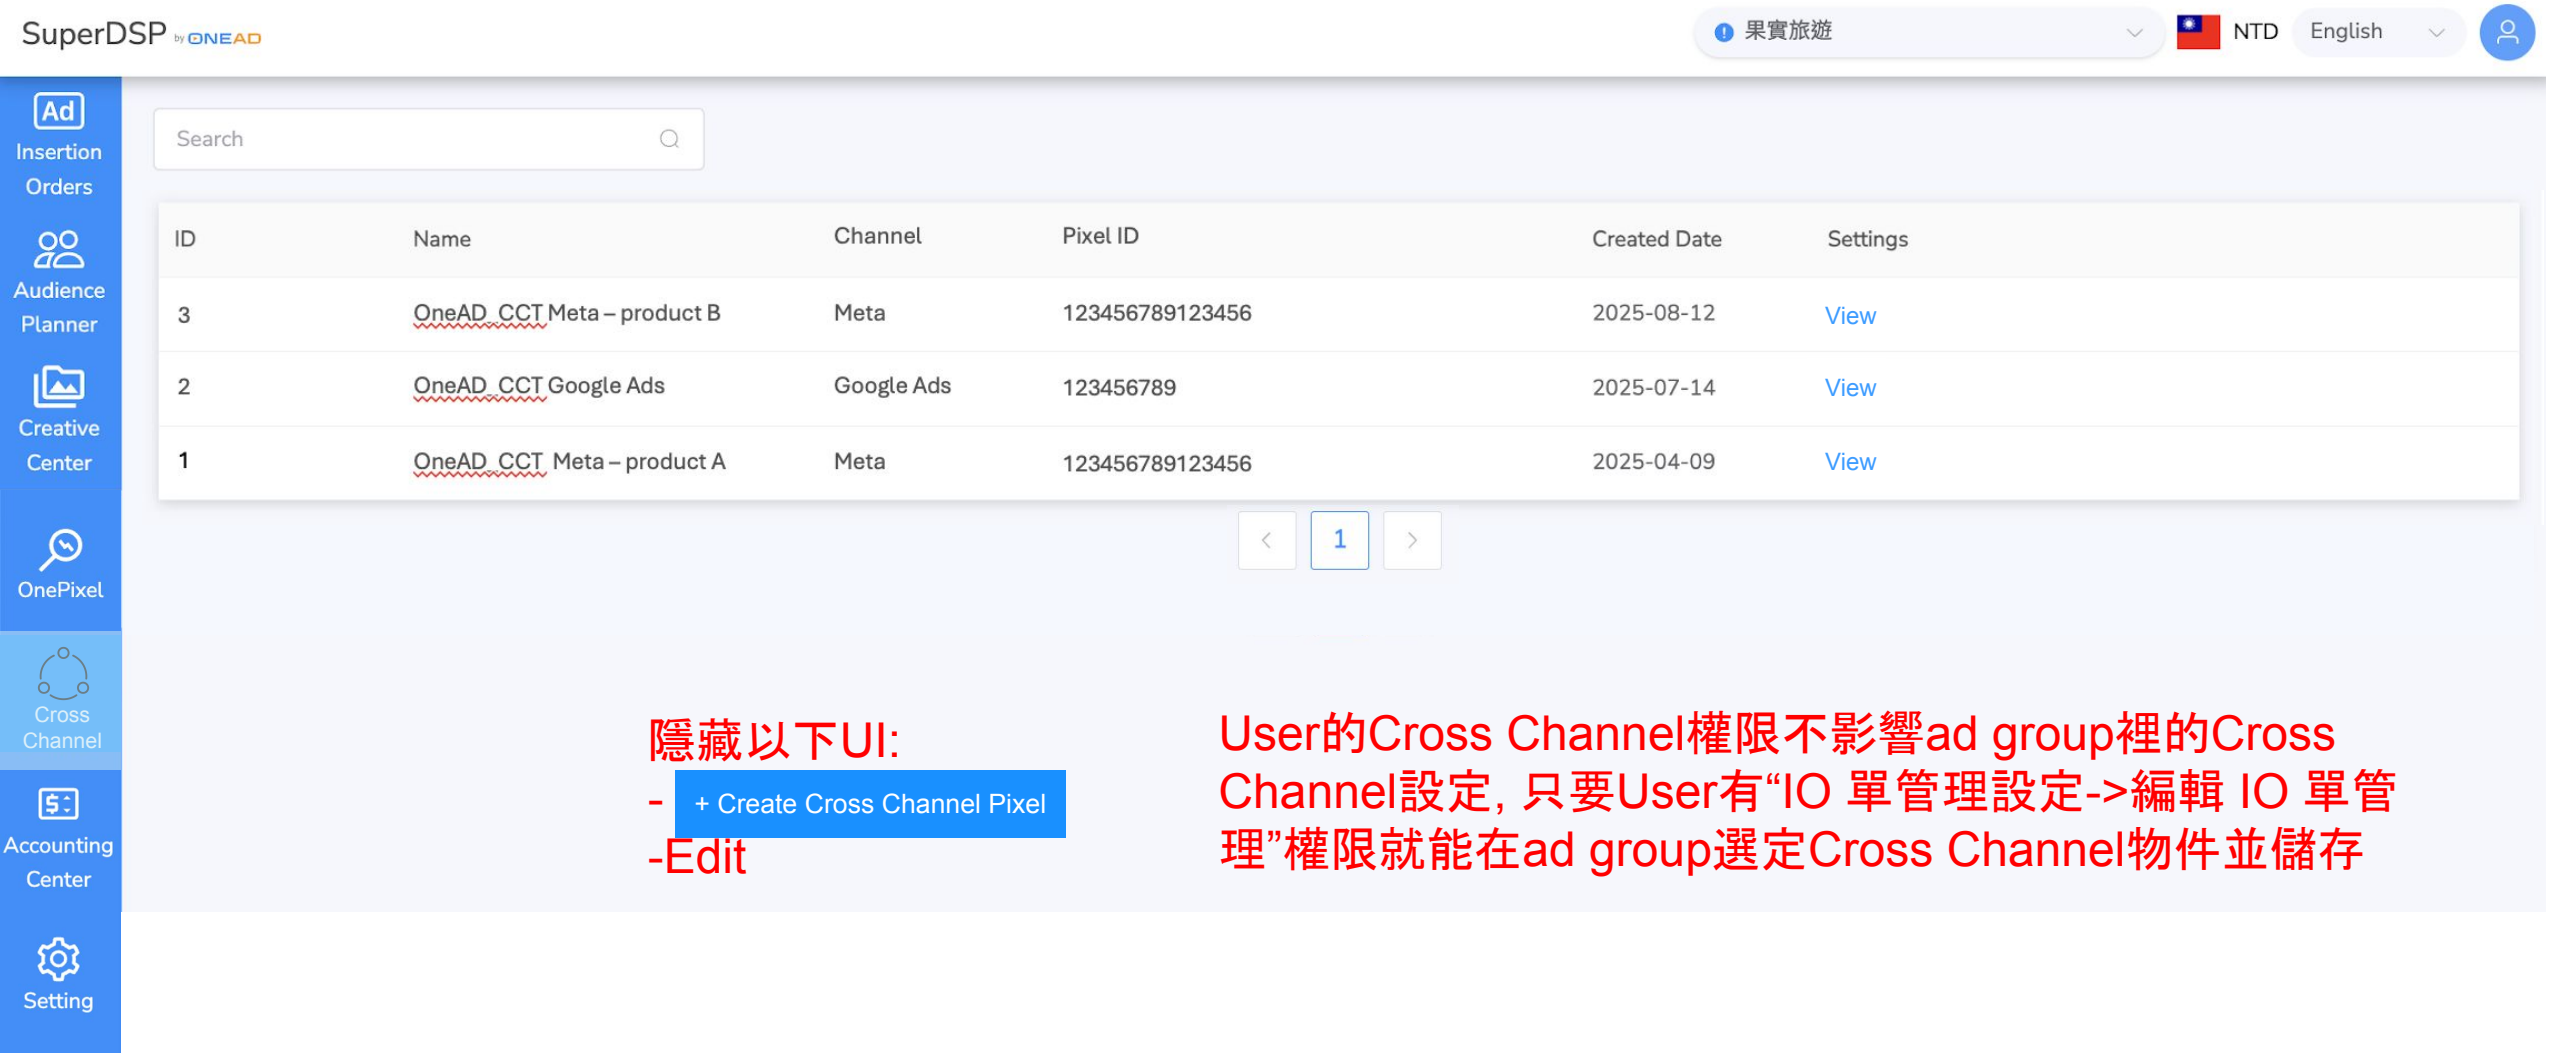

隱藏以下UI:

- + Create Cross Channel Pixel

-Edit

User的Cross Channel權限不影響ad group裡的Cross Channel設定, 只要User有“IO 單管理設定->編輯 IO 單管理”權限就能在ad group選定Cross Channel物件並儲存

Cross Channel權限控管(Platform)

(customer type in (代理商合約) & 費用設定裡有任一RichMedia or 任一InStream) = true

-顯示Cross Channel page

-顯示Cross channel in ad group (InStream/RichMedia)

-顯示Cross Channel權限設定UI區

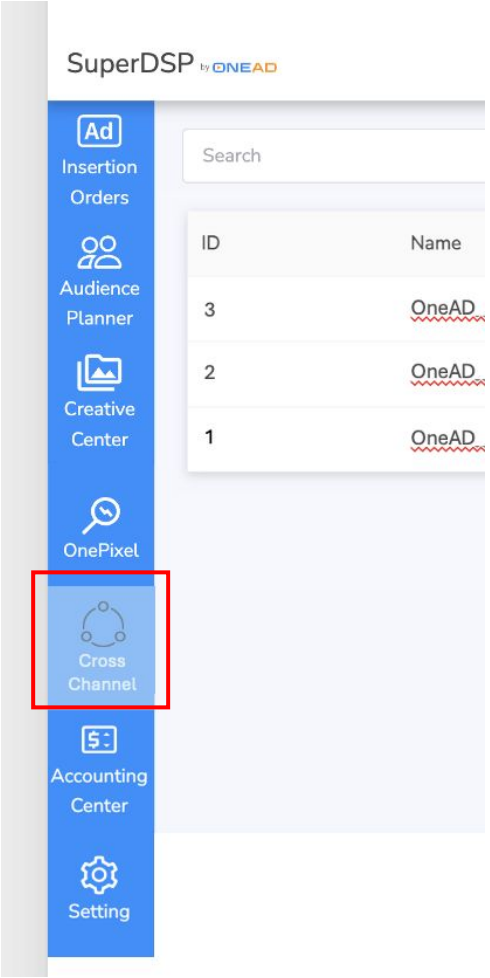

Ad Group (InStream/RichMedia)

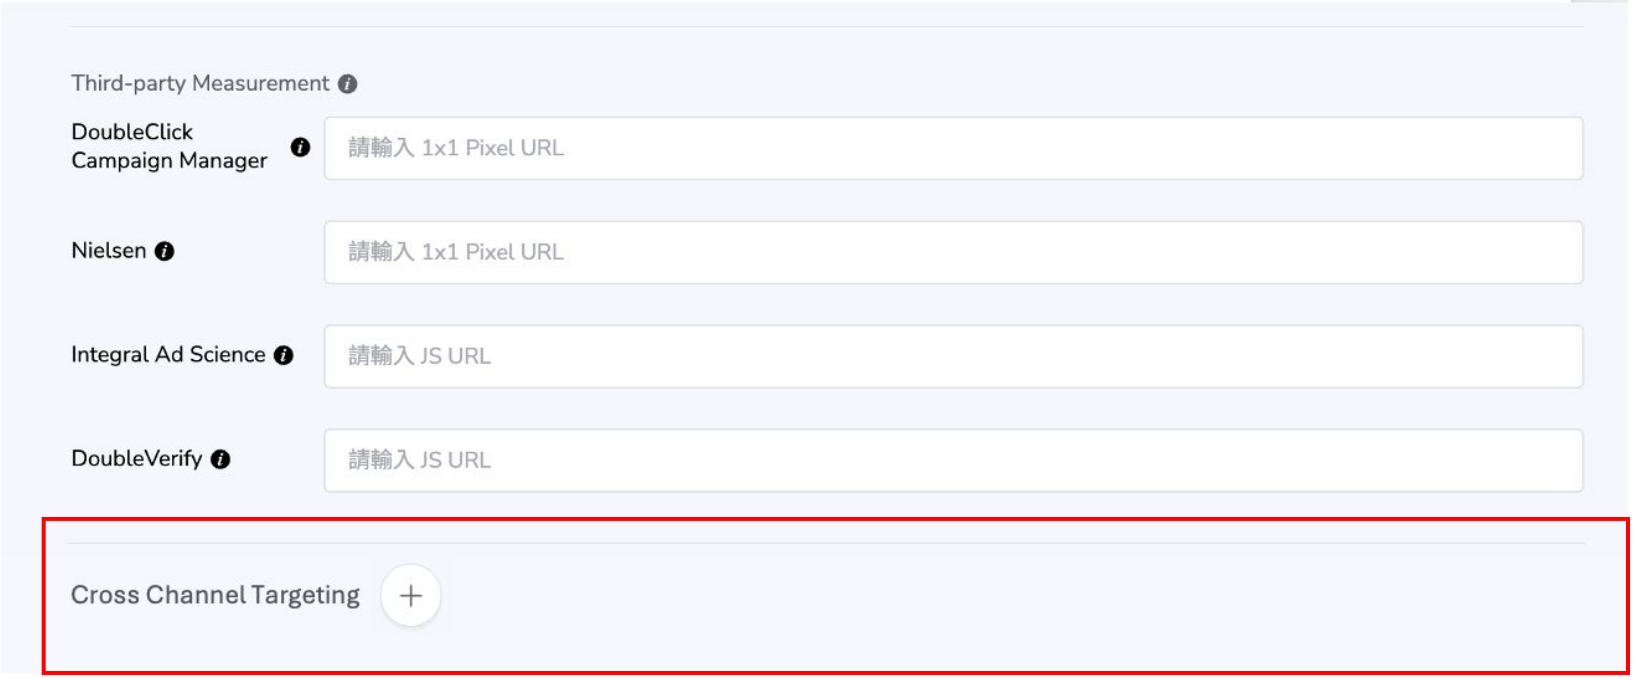

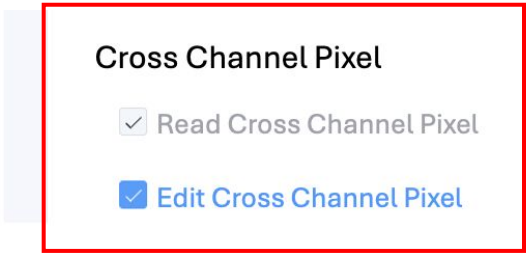

目前已知整個權限UI都是用相同邏輯處理, 已知問題是客戶角色是媒體時, 雖然沒打開Cross Channel功能, 卻會在使用者權限看到Cross Channel (OnePixel也是) -> known issue, 可先比照OnePixel處理

UI中英對照

UI中文

SuperDSP by ONEAD

果實旅遊 NTD English

Insertion Orders
Audience Planner
Creative Center
OnePixel
Cross Channel
Accounting Center
Setting

Search

+ 新增 Cross Channel Pixel

+ Create Cross Channel Pixel

渠道

Pixel ID

ID	Name	Channel	Pixel ID	Created Date	Settings
3	OneAD_CCT Meta – product B	Meta	123456789123456	2025-08-12	View Edit
2	OneAD_CCT Google Ads	Google Ads	123456789	2025-07-14	View Edit
1	OneAD_CCT Meta – product A	Meta	123456789123456	2025-04-09	View Edit

1

檢視

Cross Channel

UI中文

Create Cross Channel Pixel 新增 Cross Channel Pixel

名稱

* Name

OneAD_CCT Meta – product A 26 / 80

渠道

* Channel

Meta

Pixel ID

* Pixel ID

123456789123456

廣告品類和格式

* Advertising Category & Format

RichMedia Display Format

觸發事件類型

* Trigger Event Type

Impression × Click ×

事件名稱

* Event Name

Impression	superdsp_impression	19 / 50
Click	superdsp _click	14 / 50

Cancel Save

UI中文

Create Cross Channel Pixel

名稱必填

* Name

0 / 80

Name is required

渠道必填

* Channel

Meta

Channel is required

Pixel ID 必填

* Pixel ID

e.g., 123456789123456

Pixel ID is required

廣告品類和格式必填

* Advertising Category & Format

Advertising Category & Format is required

觸發事件類型必填

* Trigger Event Type

Trigger Event Type is required

Cancel

Save

UI中文

事件名稱開頭必須是英文字母。名稱只能以英文字母、數字和底線構成，不可包含空格。

UI中文

Impression

superdsp_impression 19 / 50

Click

12345 superdsp_click?測試 25 / 50

Only the underscore (_) symbol is allowed. Spaces are not allowed. Event names must start with a letter. Only letters and numbers are allowed.

Video played to 25%

superdsp_q25? 13 / 50

Only the underscore (_) symbol is allowed.

Video played to 50%

superdsp q50 12 / 50

Spaces are not allowed.

Video played to 75%

0 / 50

Event Name is required.

Video played to 100%

superdsp-q100 13 / 50

Only the underscore (_) symbol is allowed.

中文全形括號，英文半形括號

僅允許使用底線(_)符號。不可包含空格。事件名稱開頭必須是英文字母。僅允許使用英數字。

僅允許使用底線(_)符號。

不可包含空格。

事件名稱必填。

UI中文

Edit Cross Channel Pixel

編輯 Cross Channel Pixel

* Name

OneAD_CCT Meta – product A 26 / 80

* Channel

Meta

* Pixel ID

123456789123456

* Trigger Event Type

Impression × Click ×

* Event Name

Impression	onead_impression	16 / 50
Click	onead_click	11 / 50

Cancel Save

UI中文 中文全形冒號, 英文半形冒號

View Cross Channel Pixel 檢視 Cross Channel Pixel

名稱:

渠道:

Pixel ID:

廣告品類和格式:

觸發事件類型:

事件名稱:

Name: OneAD_CCT Meta – product A

Channel: Meta

Pixel ID: 123456789123456

Advertising Category & Format: RichMedia Display Format

Trigger Event Type: Impression, Click, Video played to 25%, Video played to 50%, Video played to 75%, Video played to 100%

Event Name:

Event 事件	Event Name 事件名稱
Impression	superdsp_impression
Click	superdsp _click
Video played to 25%	superdsp_q25
Video played to 50%	superdsp_q50
Video played to 75%	superdsp_q75
Video played to 100%	superdsp_q100

Close

UI中文

Third-party Measurement

DoubleClick Campaign Manager

請輸入 1x1 Pixel URL

Nielsen

請輸入 1x1 Pixel URL

Integral Ad Science

請輸入 JS URL

DoubleVerify

請輸入 JS URL

Cross Channel Targeting

Cross Channel 設定

Cancel

Save

UI中文

Cross Channel Targeting

Cross Channel 設定

Google Ads | Meta | LINE | Taboola

Search

Pixel ID

	ID	Name	Pixel ID	Created Date
◉	--	None 未指定	--	--
○	19	CCT Google Ads – product 19	123456789	2025-08-26
○	18	CCT Google Ads – product 18	123456789	2025-08-26
○	17	CCT Google Ads – product 17	123456789	2025-08-26
○	16	CCT Google Ads – product 16	123456789	2025-08-26
○	15	CCT Google Ads – product 15	123456789	2025-08-26
○	14	CCT Google Ads – product 14	123456789	2025-08-26
○	13	CCT Google Ads – product 13	123456789	2025-08-26
○	12	CCT Google Ads – product 12	123456789	2025-08-26
○	11	CCT Google Ads – product 11	123456789	2025-08-26

UI中文

Cross Channel Targeting

Google Ads | LINE | Meta | Taboola

test

ID	Name	Pixel ID	Created Date
No Record 此條件下查無資料			

UI中文

Third-party Measurement

DoubleClick Campaign Manager — 請輸入 1x1 Pixel URL

Nielsen — 請輸入 1x1 Pixel URL

Integral Ad Science — 請輸入 JS URL

DoubleVerify — 請輸入 JS URL

中文全形冒號, 英文半形冒號

ID：
名稱：
渠道：
Pixel ID：

ID: 19
Name: CCT Google Ads – product 19
Channel: Google Ads
Pixel ID: 123456789

Cross Channel Targeting +

OneAD_CCT Meta – product

CCT Google Ads – product 19

UI中文

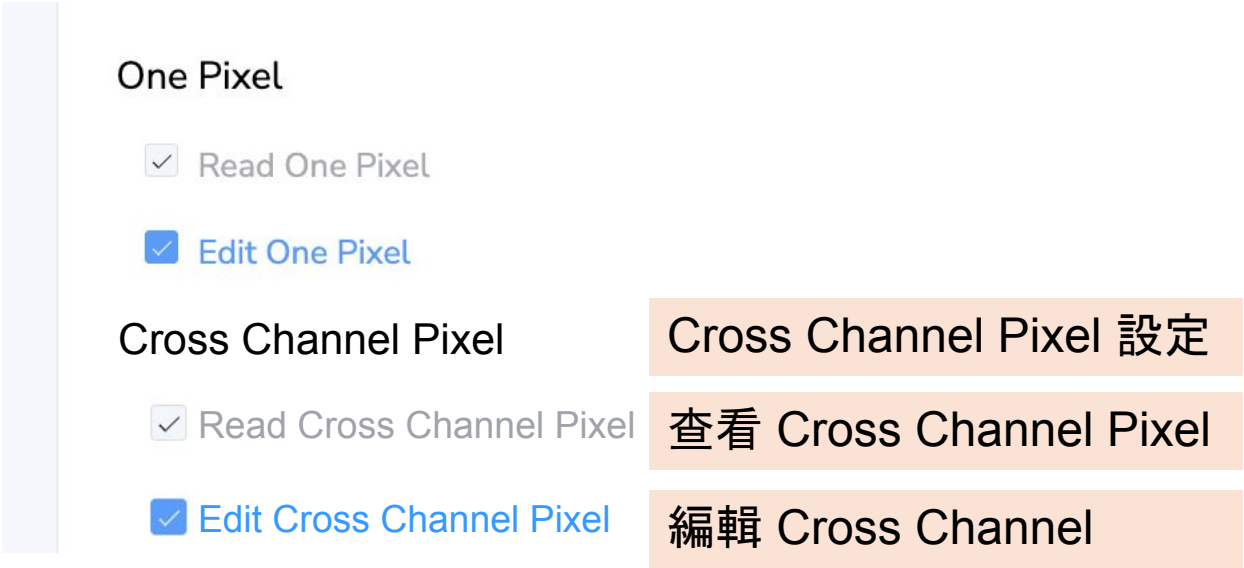
One Pixel
Read One Pixel
Edit One Pixel
Cross Channel Pixel
Cross Channel Pixel 設定
Read Cross Channel Pixel
查看 Cross Channel Pixel
Edit Cross Channel Pixel
編輯 Cross Channel

UI中文

前端顯示錯誤訊息	中文	英文
-進入Cross Channel page讀取清單失敗 -Ad Group點擊CCT (+)讀取清單失敗	取得Cross Channel Pixel列表錯誤 。	Failed to retrieve Cross Channel Pixel list.
-New mode-”Save” Cross Channel Pixel失敗 -Edit mode-”Save” Cross Channel Pixel失敗	儲存Cross Channel Pixel失敗。	Failed to save Cross Channel Pixel.
-Edit Cross Channel Pixel讀取資訊失敗 -View Cross Channel Pixel讀取資訊失敗	取得Cross Channel Pixel資訊錯誤。	Failed to retrieve Cross Channel Pixel information.

Figma Link

- **Cross Channel pages**
  - https://www.figma.com/design/6DLe9B0rw9V7YgBaSllgOQ/Super-dsp?node-id=6029-7300&t=DCMYV6Qecnhz0jNq-1
- **Ad Group - Cross Channel**
  - https://www.figma.com/design/6DLe9B0rw9V7YgBaSllgOQ/Super-dsp?node-id=6029-7301&t=DCMYV6Qecnhz0jNq-1
- **User Permission - Cross Channel**
  - https://www.figma.com/design/6DLe9B0rw9V7YgBaSllgOQ/Super-dsp?node-id=6029-7983&t=DCMYV6Qecnhz0jNq-1