
Practical 5: Create LL(1) parse table for a given CFG and hence simulate LL(1) parsing.


Aim: Using JFLAP create LL(1) parse table for a given CFG and hence Simulate LL(1) parsing

Implementation: -


Step 1. Choose the grammar from JFLAP and insert grammar you want to create LL(1) parsing table.

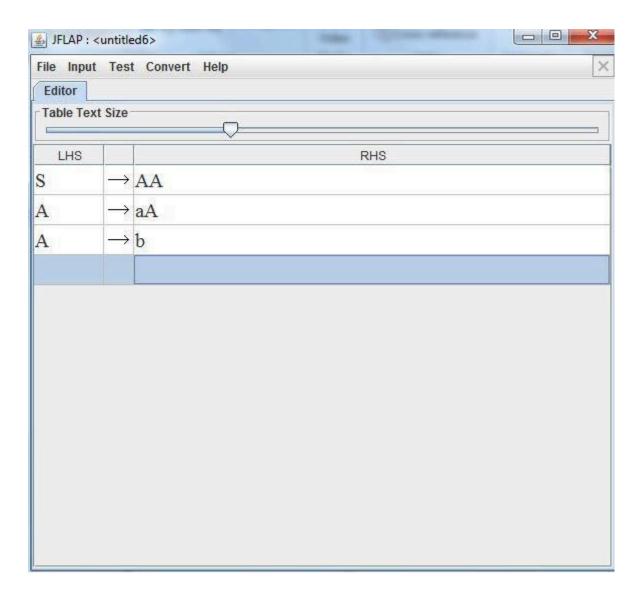

Step 2: - Select the Input from Menu and select Build LL(1) parsing table from it.

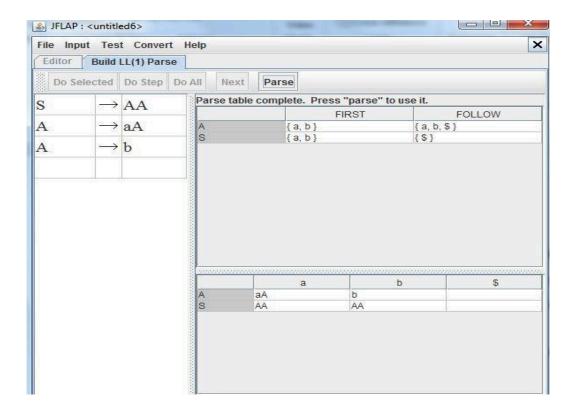

Step 3: - Now select parse to use that table to create parse tree from it.

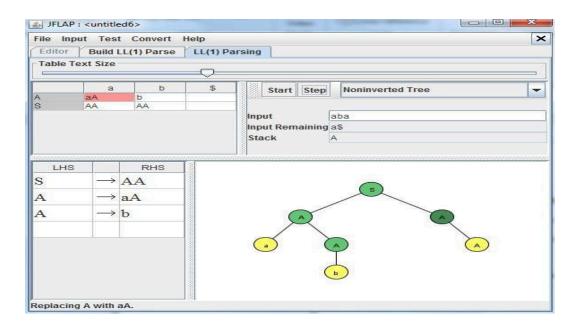

Result:- We create LL(1) parse table for a given CFG and hence Simulate LL(1) parsing