Gen-AI Solution

Monday, 19 January 2026 11:30 am

Approach

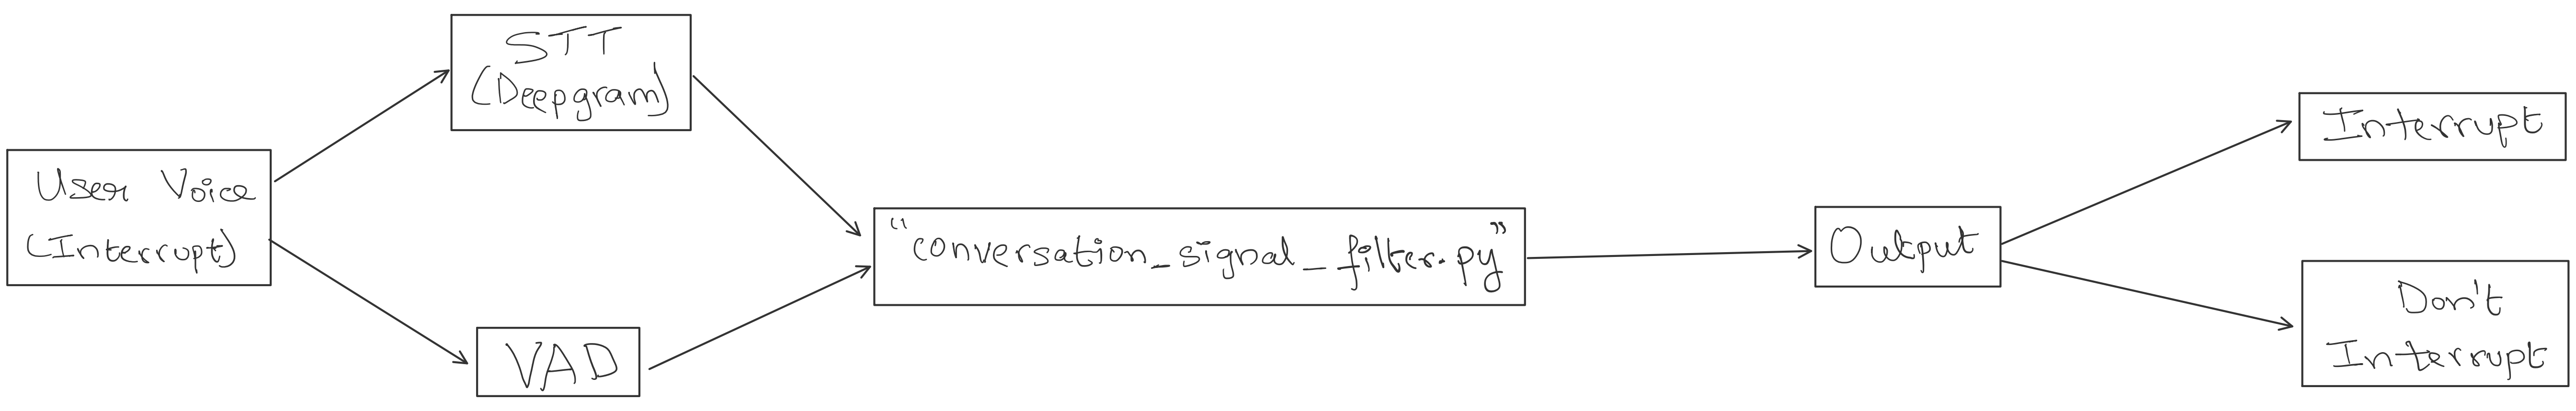

Example: Deleting Data

AI:- "I'm about to permanently delete all user logs older than 30 days.
This action cannot be undone. Do you want me to proceed?"

User:- "Yes"

In the above example, "Yes" is not a backchannel like "yeah" or "uh-huh."
It is an explicit authorization to perform a destructive action.
If the system treated "yes" as a soft-acknowledgement and ignored it, and that would be incorrect.

Contrast with a soft-input case

AI :- "I'm scanning the database and checking for inconsistencies. This may take a few seconds."

User (while AI is talking) :- "Yeah."

In the above example, "Yeah" has no operational intent.
It's just a conversational signal and should be ignored.

Key Takeaway :-

The same word ("yes", "yeah", "ok") can mean :-

(i) A meaningless backchannel
(ii) A decision, confirmation, or a command

depending entirely on :-

(i) what the AI just asked.
(ii) whether the system is awaiting confirmation.
(iii) whether an action is gated on user intent.

That's why context-aware handling is required.

My Solution :-

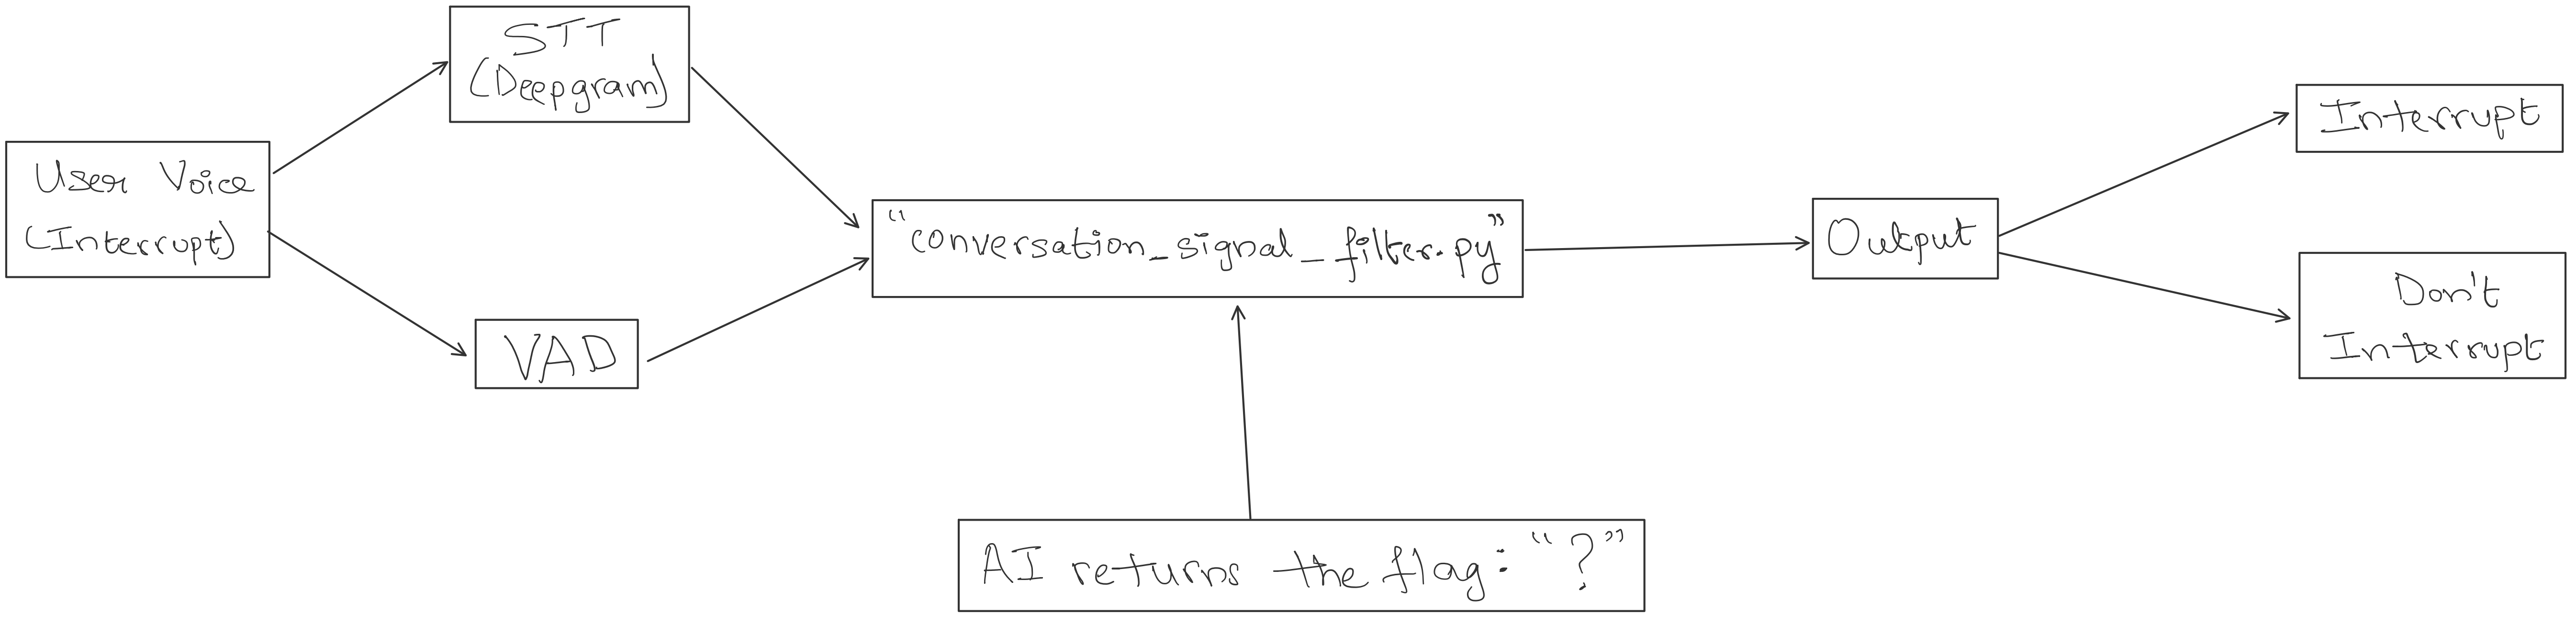

My Intelligent Interruption Handler :-

My Interruption Handler differentiates between passive conversation signals and deliberate user interruptions while the agent is speaking.

Core Behaviour :-

1) Backchannel Detection

While the agent is speaking, short acknowledgement such as "yeah", "ok", or "hmm" are interpreted as backchannel cues. These signals indicate attention or understanding and do not interrupt the agent.

2) Explicit Interruption Commands :-

Certain keywords like "wait", "stop", "no", or "actually" are always treated as intentional interruptions and immediately halt the agent's speech, regardless of context.

3) Question-Driven Responses :-

If the agent's current utterance contains a question (indicated by "?"), responses such as "yes", "yeah", or "no" are considered meaningful answers. In this case, the agent is interrupted so the response can be processed.

4) Context-Sensitive Handling :-

(i) Agent Speaking + backchannel : Ignore Input
(ii) Agent Speaking + interruption command : Interrupt Immediately
(iii) Agent Speaking + question + response word : Interrupt and handle response.
(iv) Agent Silent : Treat all user input as valid.

Configuration

The interruption handler can be enabled by setting "ignore_backchanelling = True" in the "AgentSession" configuration.

The list of backchannel terms and interruption commands can be customized using the "backchannel_terms" and "interrupt_terms" parameters.