

EXERCISE 346

Examination of permittivity of ferroelectricity

Krzysztof Palka and Dominik Odrowski

April 25, 2013

Abstract

This report presents measurement of the permittivity of ferroelectricity material using parallel-plate capacitor.

1 Introduction

The aim of this exercise was to determine, using experimental setup mainly based on capacitor, the Curie-Weiss temperature, dependency of permittivity from temperature in paraelectric and ferroelectric phase and in general to acquaint with properties of ferroelectric materials.

2 Theory and measurement

Electric permittivity can be determinate by measurement capacitance of capacitor C , which plates stick to plate cut form examined substance. As thickness of examined material is much less then it's area S we can calculate capacitance form formula for capacitor with 2 parallel plates. Transformation of this equation lets us to calculate electric permittivity form equation:

$$\epsilon = \frac{dC}{S\epsilon_0} \quad (1)$$

Near temperature of phase transition from ferroelectric to paraelectric permittivity can be described by Curie-Weiss law:

$$\epsilon = \frac{K}{T - T_c} \quad (2)$$

where K is Curie-Weiss constant. According to that inverse of permittivity is proportional to temperature

$$\frac{1}{\epsilon} = \frac{1}{K}T - \frac{T_c}{K} \quad (3)$$

It allows us to determine constans T_c and K , lets assume following factors:

$$\frac{1}{\epsilon} = mT + b \quad (4)$$

So respectively:

$$K = \frac{1}{m} \quad (5)$$

and

$$T_c = -Kb \quad (6)$$

3 Results

For calculation of ϵ we have used following parameters read form experimental set-up: $S = 89\text{mm}^2$, $d = 1.1 \text{ mm}$. To read capacitance we have added additional capacitance form electric connections, meters etc. This value also was given and was equal approximately 48 pF.

Table 1: Measured temperature T , capacitance C and calculated permittivity ϵ and inverse of permittivity ϵ^{-1}

T [K]	C [pF]	ϵ	ϵ^{-1} [10^{-3}]	T [K]	C [pF]	ϵ	ϵ^{-1} [10^{-3}]
342.5	127.2	242.0	4.133	320.5	2197.0	3100.4	0.323
340.5	130.4	246.4	4.059	318.5	1573.1	2238.8	0.447
338.5	144.5	265.9	3.762	316.5	1304.6	1868.0	0.535
336.5	150.0	273.4	3.657	314.5	1136.6	1636.0	0.611
334.5	165.9	295.4	3.385	312.5	1009.4	1460.3	0.685
332.5	184.5	321.1	3.114	310.5	911.9	1325.7	0.754
330.5	217.0	366.0	2.732	308.5	833.8	1217.8	0.821
328.5	255.2	418.7	2.388	306.5	765.8	1123.9	0.890
326.5	325.5	515.8	1.939	304.5	715.6	1054.6	0.948
324.5	436.9	669.7	1.493	302.5	672.7	995.3	1.005
322.5	883.5	1286.4	0.777	301.1	636.3	945.0	1.058

For linear approximation we have used points form 320.5 K to 332.5 K.

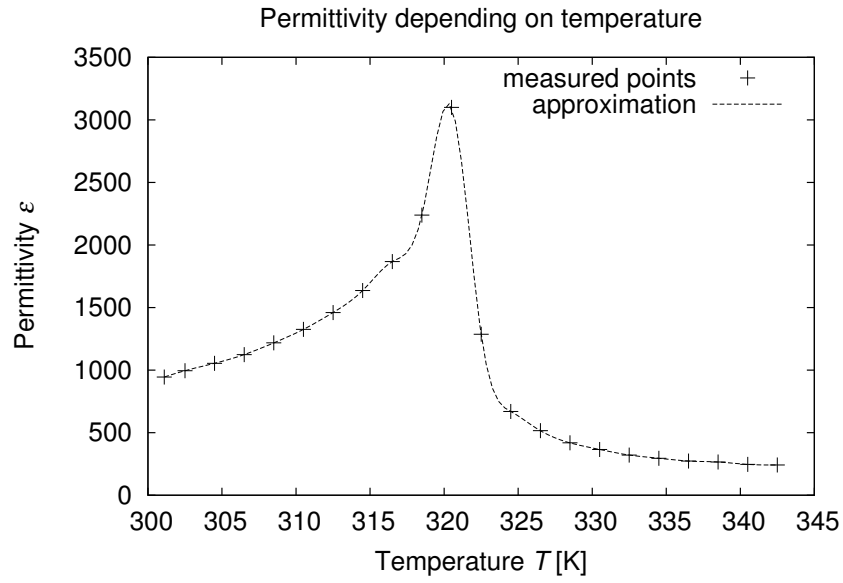


Figure 1: Graph of permittivity for measured temperature

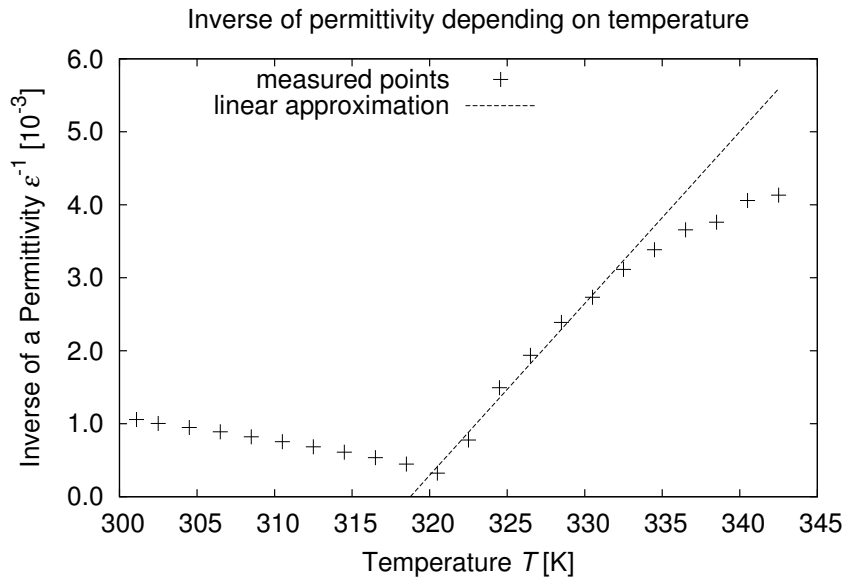


Figure 2: Graph of inverse of permittivity for measured temperature

Usage of least square regression for paraelectric state of of material gives factors $m =$

$(2.4 \pm 0.2) \cdot 10^{-1}$ and $b = (12.0 \pm 0.4)\text{K}$. Substituting those values to equations 5 and 6, we have obtained results:

$$K = \frac{1}{2.4 \cdot 10^{-4}} \approx 4.166 \cdot 10^3$$

and

$$T_c = -1 \cdot 4.166 \cdot 10^3 \cdot 7.5 \cdot 10^{-2}\text{K} \approx 312.5\text{K}$$

Propagation of error can be calculated from equations:

$$\Delta K = K \frac{\Delta a}{a} \tag{7}$$

$$\Delta T_c = T_c \left(\frac{\Delta K}{K} + \frac{\Delta b}{|b|} \right) \tag{8}$$

So complete results are as following

$$K = (4.2 \pm 0.4) \cdot 10^3$$

$$T_c = (3.1 \pm 0.5) \cdot 10^2\text{K}$$

4 Conclusions

As we can observe on graph 2 even though we have chose those points, which seemed to be quite linear, obtained uncertainty is huge. We have found 2 possible materials with such Curie temperature: Gd (gadolinium, 293K) and MnAs (combination of arsen and mangan, 318K) [1]. There was couple factors that inflated on results, for example precision of termometr, location of it sensor, additional capacitance of set-up. Using formula for capacitor with 2 parallel plates could affect result, but not in significant way. Other reason could be not sufficient resolution of measurement, 2 K in this case could led to bigger errors.

References

- [1] *Handbuch der Physik* (1966) F. Keffer. New York: Springer-Verlag. Cite available online at: <http://hyperphysics.phy-astr.gsu.edu/hbase/tables/curie.html>. Accessed April 29, 2013.