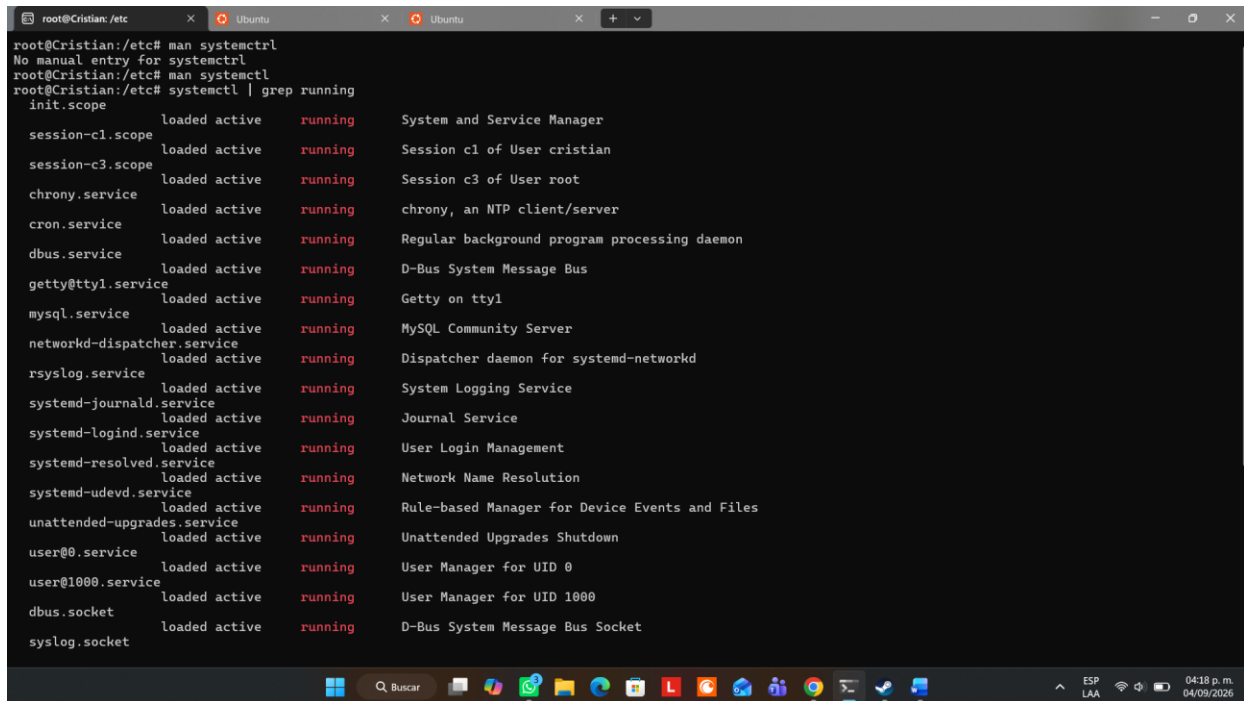


Práctica: systemctl

1. Ver solo los servicios que están funcionando



```
root@Cristian:/etc# man systemctl
No manual entry for systemctl
root@Cristian:/etc# man systemctl
root@Cristian:/etc# systemctl | grep running
init.scope      loaded active running System and Service Manager
session-c1.scope loaded active running Session c1 of User cristian
session-c3.scope loaded active running Session c3 of User root
chrony.service  loaded active running chrony, an NTP client/server
cron.service    loaded active running Regular background program processing daemon
dbus.service    loaded active running D-Bus System Message Bus
getty@tty1.service loaded active running Getty on tty1
mysql.service   loaded active running MySQL Community Server
networkd-dispatcher.service loaded active running Dispatcher daemon for systemd-networkd
rsyslog.service loaded active running System Logging Service
systemd-journald.service loaded active running Journal Service
systemd-logind.service loaded active running User Login Management
systemd-resolved.service loaded active running Network Name Resolution
systemd-udevd.service loaded active running Rule-based Manager for Device Events and Files
unattended-upgrades.service loaded active running Unattended Upgrades Shutdown
user@0.service  loaded active running User Manager for UID 0
user@1000.service loaded active running User Manager for UID 1000
dbus.socket     loaded active running D-Bus System Message Bus Socket
syslog.socket   loaded active running D-Bus System Message Bus Socket
```

Comando: systemctl | grep running

¿Qué hace?: Antes de esto se intentó "man systemctl" (con error de dedo) y "man systemctl", que muestran el manual de ayuda del comando. Luego, systemctl | grep running filtra la lista completa de servicios para enseñar únicamente los que están activos y corriendo en este momento.

Resultado en pantalla: Aparece una lista con el nombre de cada servicio (columna izquierda), su estado "loaded active running" y una breve descripción de para qué sirve, por ejemplo chrony (hora del sistema), cron (tareas programadas), mysql (el servidor de base de datos), etc.

2. Continuación del listado anterior

```
root@Cristian: /etc# systemctl | grep running
mysql.service      loaded active running MySQL Community Server
networkd-dispatcher.service loaded active running Dispatcher daemon for systemd-networkd
rsyslog.service    loaded active running System Logging Service
systemd-journald.service loaded active running Journal Service
systemd-logind.service loaded active running User Login Management
systemd-resolved.service loaded active running Network Name Resolution
systemd-udev.service loaded active running Rule-based Manager for Device Events and Files
unattended-upgrades.service loaded active running Unattended Upgrades Shutdown
user@.service      loaded active running User Manager for UID 0
user@1000.service  loaded active running User Manager for UID 1000
dbus.socket        loaded active running D-Bus System Message Bus Socket
syslog.socket      loaded active running Syslog Socket
systemd-journald-dev-log.socket loaded active running Journal Socket (/dev/log)
systemd-journald.socket loaded active running Journal Sockets
systemd-logind-varlink.socket loaded active running User Login Management Varlink Socket
systemd-resolved-monitor.socket loaded active running Resolve Monitor Varlink Socket
systemd-resolved-varlink.socket loaded active running Resolve Service Varlink Socket
systemd-udev-control.socket loaded active running udev Control Socket
systemd-udev-kernel.socket loaded active running udev Kernel Socket
systemd-udev-varlink.socket loaded active running udev Varlink Socket
root@Cristian: /etc#
```

Comando: (mismo comando: `systemctl | grep running`, se sigue mostrando el mismo resultado al bajar la pantalla)

¿Qué hace?: Es la parte de abajo de la misma lista de servicios activos; no se ejecutó un comando nuevo, solo se avanzó para ver el resto de la salida.

Resultado en pantalla: Se ven más servicios en ejecución, como los "sockets" del sistema (canales de comunicación internos) y al final el cursor listo para el siguiente comando.

3. Se repite la consulta desde otra carpeta

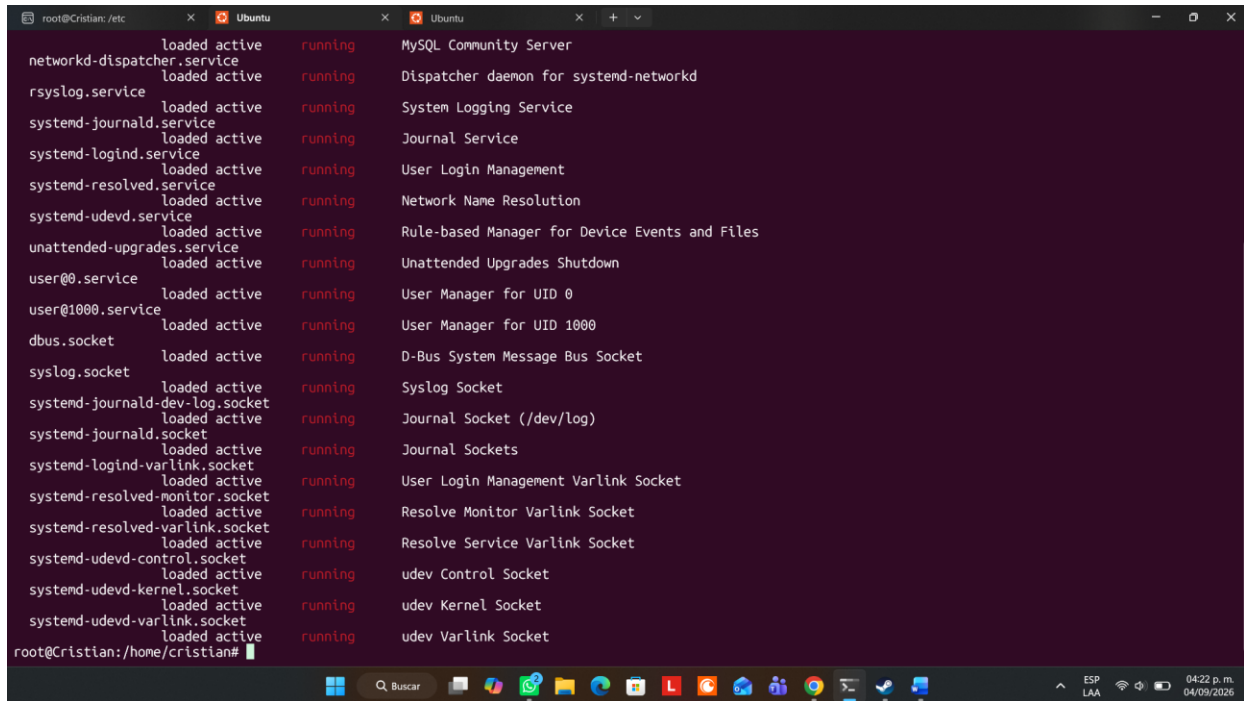
```
root@Cristian: /home/cristian# man systemctl
root@Cristian: /home/cristian# systemctl | grep running
init.scope         loaded active running System and Service Manager
session-c1.scope   loaded active running Session c1 of User cristian
session-c3.scope   loaded active running Session c3 of User root
session-c5.scope   loaded active running Session c5 of User root
chrony.service     loaded active running chrony, an NTP client/server
cron.service       loaded active running Regular background program processing daemon
dbus.service       loaded active running D-Bus System Message Bus
getty@tty1.service loaded active running Getty on tty1
mysql.service      loaded active running MySQL Community Server
networkd-dispatcher.service loaded active running Dispatcher daemon for systemd-networkd
rsyslog.service    loaded active running System Logging Service
systemd-journald.service loaded active running Journal Service
systemd-logind.service loaded active running User Login Management
systemd-resolved.service loaded active running Network Name Resolution
systemd-udev.service loaded active running Rule-based Manager for Device Events and Files
unattended-upgrades.service loaded active running Unattended Upgrades Shutdown
user@.service      loaded active running User Manager for UID 0
user@1000.service  loaded active running User Manager for UID 1000
dbus.socket        loaded active running D-Bus System Message Bus Socket
```

Comando: systemctl | grep running

¿Qué hace?: Se vuelve a pedir la lista de servicios activos, ahora estando parado en la carpeta /home/cristian en vez de /etc. La ubicación de la carpeta no cambia el resultado del comando.

Resultado en pantalla: Muestra prácticamente la misma lista de servicios corriendo que antes, confirmando que siguen activos los mismos programas del sistema.

4. Continuación del listado anterior



```
root@Cristian:/etc          x  Ubuntu          x  Ubuntu          x  +  v
loaded active              running    MySQL Community Server
networkd-dispatcher.service loaded active running    Dispatcher daemon for systemd-networkd
rsyslog.service            loaded active running    System Logging Service
systemd-journald.service   loaded active running    Journal Service
systemd-logind.service     loaded active running    User Login Management
systemd-resolved.service   loaded active running    Network Name Resolution
systemd-udev.service       loaded active running    Rule-based Manager for Device Events and Files
unattended-upgrades.service loaded active running    Unattended Upgrades Shutdown
user@0.service             loaded active running    User Manager for UID 0
user@1000.service          loaded active running    User Manager for UID 1000
dbus.socket                loaded active running    D-Bus System Message Bus Socket
syslog.socket              loaded active running    Syslog Socket
systemd-journald-dev-log.socket loaded active running    Journal Socket (/dev/log)
systemd-journald.socket    loaded active running    Journal Sockets
systemd-logind-varlink.socket loaded active running    User Login Management Varlink Socket
systemd-resolved-monitor.socket loaded active running    Resolve Monitor Varlink Socket
systemd-resolved-varlink.socket loaded active running    Resolve Service Varlink Socket
systemd-udev-control.socket loaded active running    udev Control Socket
systemd-udev-kernel.socket loaded active running    udev Kernel Socket
systemd-udev-varlink.socket loaded active running    udev Varlink Socket
root@Cristian:/home/cristian#
```

Comando: (continuación de systemctl | grep running)

¿Qué hace?: Es el resto de la misma lista, mostrando la parte final de los servicios activos.

Resultado en pantalla: Termina de mostrar los servicios y sockets en ejecución, y regresa el cursor a la línea de comandos.

5. Ver TODOS los servicios (activos e inactivos)

```
root@Cristian: /etc
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
systemd.service                   loaded inactive dead    Load Systemd profiles
systemd-udevd.service             loaded inactive dead    Process error reports when automatic reporting is enabled
systemd-udevmonitor.service       loaded inactive dead    automatic crash report generation
systemd-udevtrigger.service       loaded inactive dead    Daily apt upgrade and clean activities
systemd-udevtrigger.service       loaded inactive dead    Daily apt download activities
systemd-udevtrigger.service       loaded inactive dead    auditd.service
systemd-udevtrigger.service       loaded inactive dead    chromium, an XDP client/server
systemd-udevtrigger.service       loaded inactive dead    common.service
systemd-udevtrigger.service       loaded inactive dead    console-guile.service
systemd-udevtrigger.service       loaded inactive dead    console-screen.service
systemd-udevtrigger.service       loaded inactive dead    Set console font and keypad
systemd-udevtrigger.service       loaded inactive dead    Regular background program processing daemon
systemd-udevtrigger.service       loaded inactive dead    D-Bus System Message Bus
systemd-udevtrigger.service       loaded inactive dead    display-manager.service
systemd-udevtrigger.service       loaded inactive dead    Save initial kernel messages after boot
systemd-udevtrigger.service       loaded inactive dead    Daily snap database backup service
systemd-udevtrigger.service       loaded inactive dead    Online ext4 Metadata Check for all filesystems
systemd-udevtrigger.service       loaded inactive dead    Remove stale online ext4 Metadata Check Snapshots
systemd-udevtrigger.service       loaded inactive dead    Emergency Shell
systemd-udevtrigger.service       loaded inactive dead    Discard unused blocks on filesystems from /etc/fstab
systemd-udevtrigger.service       loaded inactive dead    Getty on tty2
systemd-udevtrigger.service       loaded inactive dead    Getty on tty2
systemd-udevtrigger.service       loaded inactive dead    Cleaning up and Shutting Down Daemons
systemd-udevtrigger.service       loaded inactive dead    Mountpoints Configured in the Real Root
systemd-udevtrigger.service       loaded inactive dead    Switch Root
systemd-udevtrigger.service       loaded inactive dead    Cleanup user database
systemd-udevtrigger.service       loaded inactive dead    kbd.service
systemd-udevtrigger.service       loaded inactive dead    Set the console keyboard layout
systemd-udevtrigger.service       loaded inactive dead    Create List of Static Device Nodes
systemd-udevtrigger.service       loaded inactive dead    Landscape Client daemons
systemd-udevtrigger.service       loaded inactive dead    Rebuild Dynamic Linker Cache
systemd-udevtrigger.service       loaded inactive dead    Rotate log files
systemd-udevtrigger.service       loaded inactive dead    Daily man-db regeneration
systemd-udevtrigger.service       loaded inactive dead    Load kernel module configs
systemd-udevtrigger.service       loaded inactive dead    Load kernel module dm
systemd-udevtrigger.service       loaded inactive dead    Load kernel module drm
systemd-udevtrigger.service       loaded inactive dead    Load kernel module fuse
systemd-udevtrigger.service       loaded inactive dead    Load kernel module loop
systemd-udevtrigger.service       loaded inactive dead    Message of the Day
systemd-udevtrigger.service       loaded inactive dead    MySQL Community Server
systemd-udevtrigger.service       loaded inactive dead    Netplan Backend Configuration
systemd-udevtrigger.service       loaded inactive dead    OpenSSH configuration for cleanup
systemd-udevtrigger.service       loaded inactive dead    Dispatcher daemon for system-networkd
systemd-udevtrigger.service       loaded inactive dead    NetworkManager.service
systemd-udevtrigger.service       loaded inactive dead    ntp.service
systemd-udevtrigger.service       loaded inactive dead    ntpsec.service
systemd-udevtrigger.service       loaded inactive dead    openntpd.service
systemd-udevtrigger.service       loaded inactive dead    openntpd.service
systemd-udevtrigger.service       loaded inactive dead    plymouth-quit-wait.service
systemd-udevtrigger.service       loaded inactive dead    plymouth-quit-wait.service
systemd-udevtrigger.service       loaded inactive dead    Authorization Manager
systemd-udevtrigger.service       loaded inactive dead    /etc/rc.local Compatibility
systemd-udevtrigger.service       loaded inactive dead    Rescue Shell
systemd-udevtrigger.service       loaded inactive dead    System Logging Service
systemd-udevtrigger.service       loaded inactive dead    Set console scheme
systemd-udevtrigger.service       loaded inactive dead    Load AppArmor profiles managed internally by snapd
systemd-udevtrigger.service       loaded inactive dead    Auto Import assertions from block devices
systemd-udevtrigger.service       loaded inactive dead    Automatically repair incorrect owner/permissions on core devices
systemd-udevtrigger.service       loaded inactive dead    Failure handling of the snapd snap
systemd-udevtrigger.service       loaded inactive dead    Wait for the Ubuntu Core chooser trigger
systemd-udevtrigger.service       loaded inactive dead    Wait until cloud is fully seeded
systemd-udevtrigger.service       loaded inactive dead    Snap Daemon
systemd-udevtrigger.service       loaded inactive dead    Automatically fetch and run repair assertions
systemd-udevtrigger.service       loaded inactive dead    Ubuntu core (all snaps) system shutdown helper setup service
systemd-udevtrigger.service       loaded inactive dead    OpenSSH Secure Shell server
systemd-udevtrigger.service       loaded inactive dead    Generate sshd host keys on first boot
systemd-udevtrigger.service       loaded inactive dead    OpenSSH Secure Shell server per-connection daemon
systemd-udevtrigger.service       loaded inactive dead    Dispatch Password Requests to Console
systemd-udevtrigger.service       loaded inactive dead    Forward Password Requests to Wall
systemd-udevtrigger.service       loaded inactive dead    Early Battery Level Check
```

Comando: systemctl (sin filtro) — listado completo de unidades

¿Qué hace?: A diferencia de los comandos anteriores que solo mostraban lo que está "running", aquí se ve la lista completa de servicios que conoce el sistema, estén encendidos o no.

Resultado en pantalla: Se muestra una tabla con columnas UNIT (nombre), LOAD, ACTIVE, SUB y DESCRIPTION. Algunos dicen "active running" (encendidos), otros "inactive dead" (apagados) y otros "not-found" (no están instalados). Por ejemplo, se alcanza a ver ssh.service como "active running".

6. Revisar el estado del servicio SSH

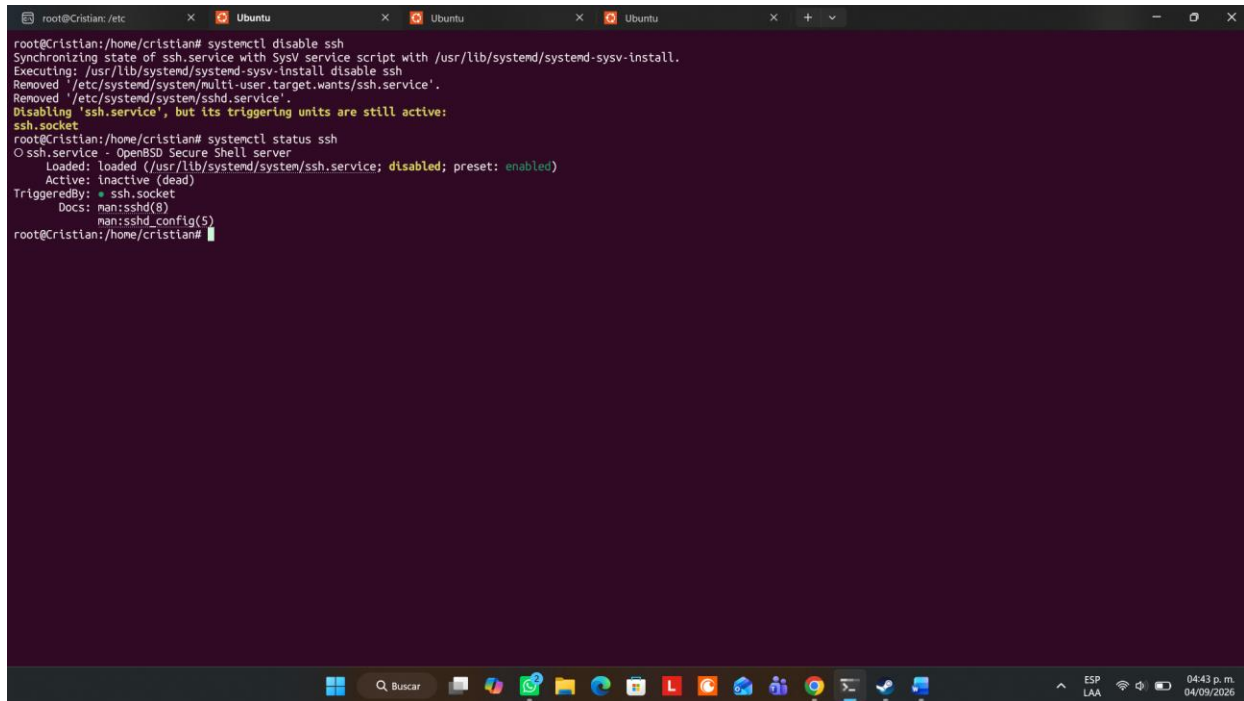
```
root@Cristian: /home/cristian# systemctl status ssh
O ssh.service - OpenSSH Secure Shell server
Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
Active: inactive (dead)
TriggeredBy: ● ssh.socket
Docs: man:sshd(8)
      man:ssh_config(5)
root@Cristian: /home/cristian#
```

Comando: systemctl status ssh

¿Qué hace?: Pregunta al sistema por el estado detallado de un servicio en particular, en este caso SSH (el servicio que permite conectarse remotamente a la computadora).

Resultado en pantalla: Indica que el servicio SSH existe y está configurado para encenderse ("enabled"), pero en ese momento está "inactive (dead)", es decir, apagado.

7. Deshabilitar el servicio SSH

A screenshot of a terminal window with a dark purple background. The terminal shows the execution of the command 'systemctl disable ssh'. The output indicates that the service is being disabled, but its triggering units are still active. It lists the units 'ssh.socket' and 'ssh.service'. The status of 'ssh.service' is shown as 'loaded' but 'inactive (dead)'. The terminal also shows the path to the service script and the location of the socket file. The terminal window has multiple tabs at the top, all labeled 'Ubuntu'. The bottom of the window shows a taskbar with various application icons and system status indicators on the right, including the time '04:43 p. m.' and date '04/09/2026'.

Comando: systemctl disable ssh → systemctl status ssh

¿Qué hace?: El primer comando hace que SSH ya no se encienda automáticamente cuando la computadora arranque. El segundo vuelve a consultar su estado para comprobar el cambio.

Resultado en pantalla: El sistema confirma que quitó los enlaces que hacían que SSH arrancara solo, y avisa que aunque se deshabilitó, todavía hay un "socket" relacionado activo. Al consultar el estado, ahora aparece como "disabled" (deshabilitado) e "inactive" (apagado).

8. Encender SSH manualmente

```
root@Cristian: /etc
x Ubuntu
x Ubuntu
x Ubuntu
x + v
cristian@Cristian: $ sudo systemctl start ssh
[sudo: authenticate] Password:
cristian@Cristian: $ systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:44:55 CST; 22s ago
     Invocation: ac7398821a3c497d954fa4d6500deeb6
   TriggeredBy: ● ssh.socket
      Docs: man:sshd(8)
            man:sshd_config(5)
   Process: 4053 ExecStartPre=/usr/sbin/sshd -t (code=exited, status=0/SUCCESS)
    Main PID: 4055 (sshd)
       Tasks: 1 (limit: 9332)
      Memory: 4M (peak: 4.4M)
         CPU: 58ms
    CGroup: /system.slice/ssh.service
            └─4055 'sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 04 16:44:55 Cristian systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on 0.0.0.0 port 22.
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on :: port 22.
Sep 04 16:44:55 Cristian systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
cristian@Cristian: $
```

Comando: `sudo systemctl start ssh → systemctl status ssh`

¿Qué hace?: "start" enciende el servicio en este momento (aunque esté deshabilitado para el próximo reinicio). Se pide la contraseña porque es una acción que requiere permisos de administrador. Después se revisa el estado para confirmar que ya está encendido.

Resultado en pantalla: El sistema pide y acepta la contraseña, y al consultar el estado muestra SSH como "active (running)", con la hora exacta en que se encendió, cuánta memoria usa y las últimas líneas de su registro ("log"), donde se ve que el servidor ya está escuchando conexiones en el puerto 22.

9. Habilitar SSH para que arranque solo

```
root@Cristian: /etc
TriggeredBy: ● ssh.socket
Docs: man:sshd(8)
man:sshd_config(5)
Process: 4053 ExecStartPre=/usr/sbin/sshd -t (code=exited, status=0/SUCCESS)
Main PID: 4055 (sshd)
Tasks: 1 (limit: 9332)
Memory: 4M (peak: 4.4M)
CPU: 58ms
CGroup: /system.slice/ssh.service
└─4055 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 04 16:44:55 Cristian systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on 0.0.0.0 port 22.
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on :: port 22.
Sep 04 16:44:55 Cristian systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
cristian@Cristian: ~$ sudo systemctl enable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable ssh
Created symlink '/etc/systemd/system/ssh.service' → '/usr/lib/systemd/system/ssh.service'.
cristian@Cristian: ~$ systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:44:55 CST; 1min 26s ago
  Invocation: ac7398821a3c497d954fa4d6500deeb6
TriggeredBy: ● ssh.socket
Docs: man:sshd(8)
man:sshd_config(5)
Main PID: 4055 (sshd)
Tasks: 1 (limit: 9332)
Memory: 4M (peak: 4.4M)
CPU: 58ms
CGroup: /system.slice/ssh.service
└─4055 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 04 16:44:55 Cristian systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on 0.0.0.0 port 22.
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on :: port 22.
Sep 04 16:44:55 Cristian systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
cristian@Cristian: ~$
```

Comando: `sudo systemctl enable ssh` → `systemctl status ssh`

¿Qué hace?: "enable" hace lo contrario de "disable": programa el servicio para que se encienda automáticamente cada vez que se reinicie la computadora. Luego se revisa el estado para confirmarlo.

Resultado en pantalla: El sistema crea de nuevo los enlaces necesarios y muestra el mensaje de que quedaron creados. Al ver el estado, SSH ahora aparece como "enabled" (se encenderá solo) y sigue "active (running)", llevando ya más de un minuto encendido.

10. Deshabilitar de nuevo (sin apagarlo)

```
root@Cristian: /etc
Docs: man:sshd(8)
man:sshd_config(5)
Main PID: 4055 (sshd)
Tasks: 1 (limit: 9332)
Memory: 4M (peak: 4.4M)
CPU: 58ms
CGroup: /system.slice/ssh.service
└─4055 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 04 16:44:55 Cristian systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on 0.0.0.0 port 22.
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on :: port 22.
Sep 04 16:44:55 Cristian systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
cristian@Cristian: ~$ sudo systemctl disable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install disable ssh
Removed '/etc/systemd/system/multi-user.target.wants/ssh.service'.
Removed '/etc/systemd/system/ssh.service'.
Disabling 'ssh.service', but its triggering units are still active:
ssh.socket
cristian@Cristian: ~$ systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:44:55 CST; 2min 3s ago
  Invocation: ac7398821a3c497d954fa4d6500deeb6
TriggeredBy: ● ssh.socket
Docs: man:sshd(8)
man:sshd_config(5)
Main PID: 4055 (sshd)
Tasks: 1 (limit: 9332)
Memory: 3.8M (peak: 4.4M)
CPU: 58ms
CGroup: /system.slice/ssh.service
└─4055 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 04 16:44:55 Cristian systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on 0.0.0.0 port 22.
Sep 04 16:44:55 Cristian sshd[4055]: Server listening on :: port 22.
Sep 04 16:44:55 Cristian systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
cristian@Cristian: ~$
```

Comando: `sudo systemctl disable ssh → systemctl status ssh`

¿Qué hace?: Se vuelve a deshabilitar el arranque automático de SSH. Es importante notar que "disable" solo evita que se encienda en el próximo reinicio; no apaga el servicio que ya está corriendo ahora mismo.

Resultado en pantalla: El sistema confirma que quitó otra vez los enlaces de arranque automático, y al revisar el estado se ve que SSH sigue marcado como "disabled" pero continúa "active (running)" porque nunca se pidió apagarlo, solo que no arranque solo la próxima vez.

11. Confirmar el estado de todos los servicios otra vez

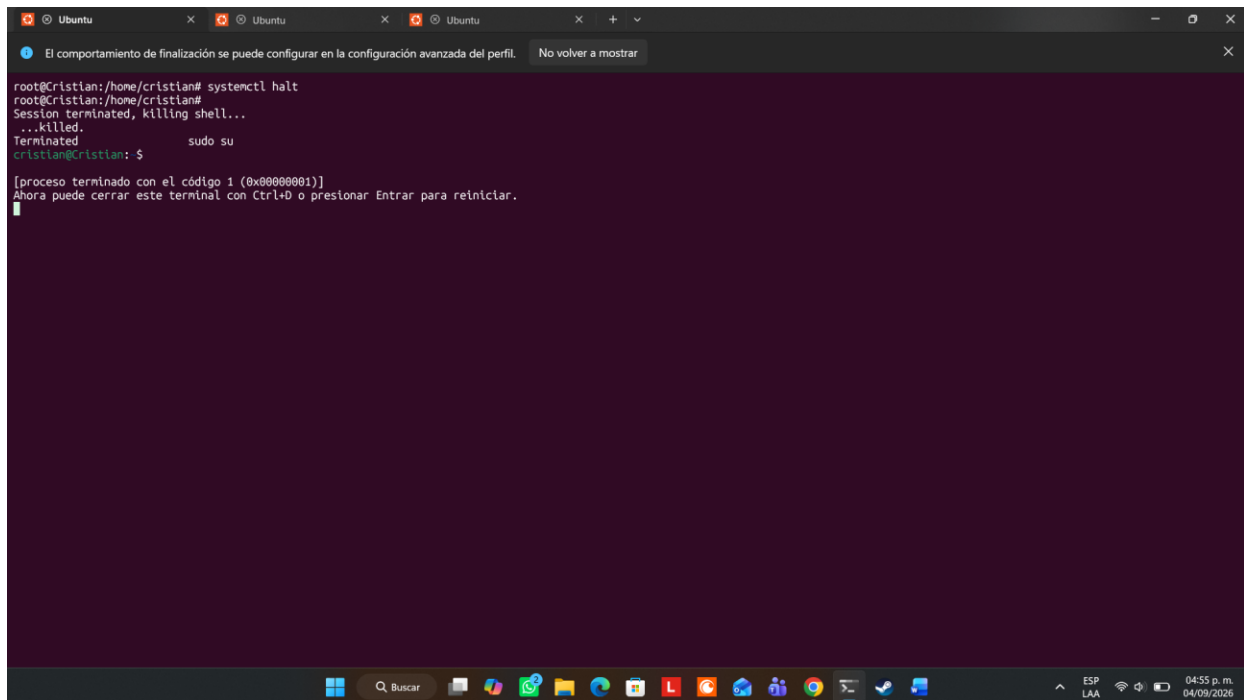
```
root@Cristian:/etc # systemctl list-unit-files --all
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
adaptor.service                    loaded active dead    Load Adaptor profiles
adaptor.service                    loaded inactive dead    Process error reports when automatic reporting is enabled
adaptor.service                    loaded active dead    automatic crash report generation
apt-daily.service                  loaded inactive dead    Daily apt update and clean activities
apt-daily.service                  loaded inactive dead    Daily apt download activities
audit.service                       loaded inactive dead    auditd.service
chrony.service                      loaded active running  chrony, an NTP client/server
console-getty.service              not-found inactive dead    console-getty.service
console-setup.service              not-found inactive dead    console-setup.service
console-setup.service              loaded active exited  Set console font and keypad
cron.service                        loaded active running  cron, the background program processing daemon
dbus.service                        loaded active running  D-Bus System Message Bus
dbus.service                        not-found inactive dead    Display Manager
dmg.service                         loaded inactive dead    Save initial kernel messages after boot
dmccg.service                       loaded inactive dead    Daily dmccg backup service
dmccg.service                       loaded inactive dead    Online exifs Metadata Check for All filesystems
emergency.service                  loaded inactive dead    Emergency Shell
fdm.service                         loaded inactive dead    Discard unused blocks on filesystems from /etc/fstab
fdm.service                         loaded inactive dead    Getty on tty2:tty4 (if dbus and login are not available)
fdm.service                         loaded active running  Getty on tty1
fdm.service                         loaded inactive dead    Cleaning Up and Shutting Down Daemons
fdm.service                         loaded inactive dead    Mountpoints Configured in the Real Root
fdm.service                         loaded inactive dead    Switch Root
fdm.service                         loaded inactive dead    Cleanup udwv Database
fdm.service                         not-found inactive dead    fdm.service
keyboard-setup.service             loaded active exited  Set the console keyboard layout
kiosk-shell-client.service           loaded active exited  Create list of Exotic Device Nodes
landscape-client.service             loaded inactive dead    Landscape Client daemons
landscape-client.service             loaded inactive dead    Landscape Dynamic Linker Cache
logrotate.service                  loaded inactive dead    Rotate log files
maillog.service                    loaded inactive dead    Daily mail log regeneration
modprobe.conf.d.service             loaded inactive dead    Load Kernel Module configs
modprobe.conf.d.service             loaded inactive dead    Load Kernel Module dm
modprobe.conf.d.service             loaded inactive dead    Load Kernel Module dm-dm
modprobe.conf.d.service             loaded inactive dead    Load Kernel Module efi-pstore
modprobe.conf.d.service             loaded inactive dead    Load Kernel Module fdc
modprobe.conf.d.service             loaded inactive dead    Load Kernel Module loop
modprobe.conf.d.service             loaded inactive dead    Message of the Day
mysql.service                       loaded active running  MySQL Community Server
netplan.config.service              loaded active exited  Netplan Backend Configuration
netplan.config.service              loaded inactive dead    Netplan configuration for cleanup
netplan.config.service              loaded active running  Dispatcher daemon for systemd-networkd
NetworkManager.service             not-found inactive dead    NetworkManager.service
nfs.service                         not-found inactive dead    nfs.service
ntfsd.service                       not-found inactive dead    ntfsd.service
nssd.service                        not-found inactive dead    nssd.service
nssd.service                        not-found inactive dead    nssd-server.service
plymouth-quit-wait.service          not-found inactive dead    plymouth-quit-wait.service
plymouth-start.service              loaded active running  Plymouth Start Service
polkit.service                      loaded active running  Authorization Manager
rescue.service                      loaded inactive dead    Rescue local Compatibility
rescue.service                      loaded active running  System Logging Service
rescue.service                      loaded active exited  Set console scheme
rsyncd.service                      loaded inactive dead    Load rsyncd profiles managed internally by snpd
rsyncd.service                      loaded active dead    Auto import assertions from block devices
rsyncd.service                      loaded active dead    Automatically report incorrect owner/permissions on core devices
rsyncd.service                      loaded inactive dead    Failure handling of the snpd snap
rsyncd.service                      loaded active dead    Wait for the Ubuntu Core chooser trigger
rsyncd.service                      loaded active exited  Wait until snpd is fully seeded
rsyncd.service                      loaded active dead    Snap Daemon
rsyncd.service                      loaded inactive dead    Automatically fetch and run repair assertions
rsyncd.service                      loaded active running  Ubuntu Core (Ubuntu) system shutdown helper setup service
sbl.service                         loaded active running  sbl.service
sbl.service                         loaded inactive dead    Generate sblmd host keys on first boot
sbl.service                         loaded inactive dead    OpenSSH Secure Shell server peer-connection daemon
systemd-ask-password-console.service loaded inactive dead    Dispatch Password Requests to Console
systemd-ask-password-wall.service   loaded inactive dead    Forward Password Requests to Wall
systemd-ask-password-wall.service   loaded inactive dead    Early Battery Level Check
```

Comando: `systemctl` (listado completo, sin filtro)

¿Qué hace?: Se vuelve a pedir la lista completa de todas las unidades del sistema, igual que en el paso 5, para comprobar cómo quedó todo al final.

Resultado en pantalla: En la tabla se puede ver, resaltado, que ssh.service aparece como "active running", confirmando que el servicio sigue encendido aunque esté deshabilitado para el arranque automático.

12. Apagar el equipo

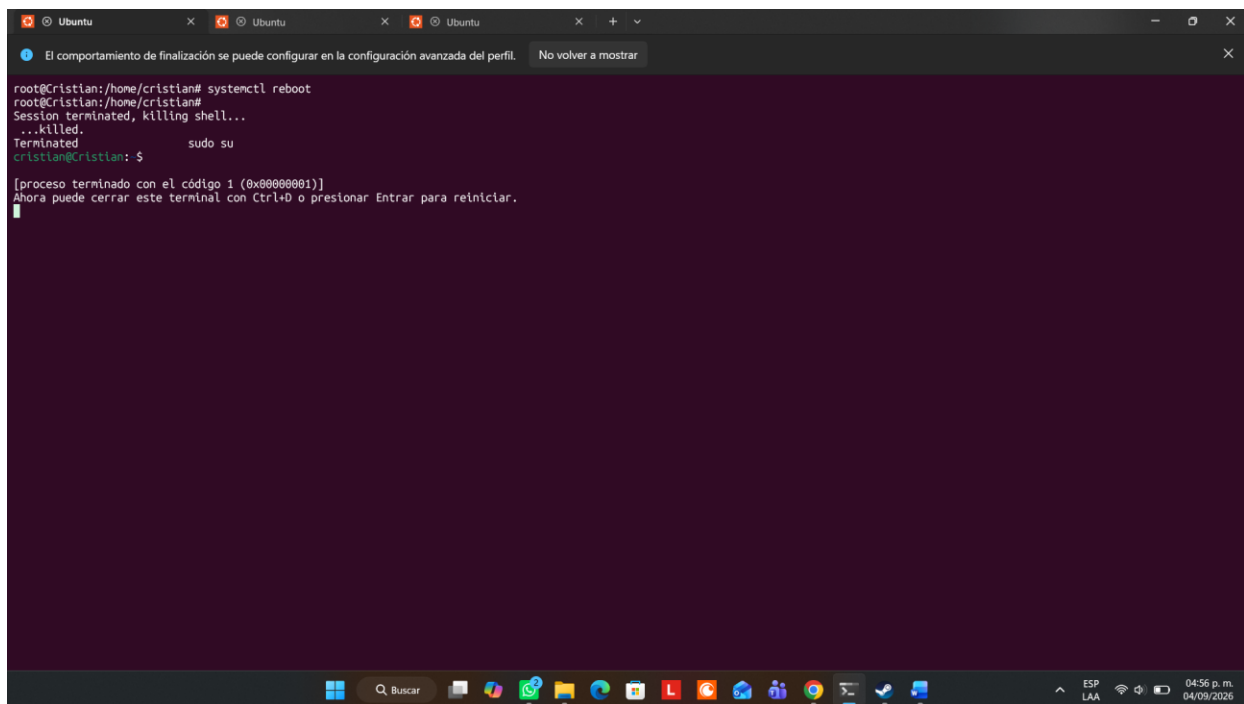
A screenshot of a terminal window with a dark purple background. At the top, there are three tabs labeled 'Ubuntu'. A notification bar at the top states: 'El comportamiento de finalización se puede configurar en la configuración avanzada del perfil. No volver a mostrar'. The terminal text shows a root user at 'Cristian' in the directory '/home/cristian' running 'systemctl halt'. The output is: 'root@Cristian:/home/cristian# systemctl halt', 'root@Cristian:/home/cristian#', 'Session terminated, killing shell...', '...killed.', 'Terminated', and 'sudo su'. The prompt changes to 'cristian@Cristian: \$'. Below this, a message in brackets says: '[proceso terminado con el código 1 (0x00000001)]'. A final line of text says: 'Ahora puede cerrar este terminal con Ctrl+D o presionar Entrar para reiniciar.' The bottom of the window shows a Windows taskbar with various icons and a system tray on the right indicating 'ESP LAA', signal strength, and the date/time '04:55 p. m. 04/09/2026'.

Comando: systemctl halt

¿Qué hace?: Este comando le ordena al sistema detenerse por completo, similar a apagar la computadora.

Resultado en pantalla: La terminal muestra que la sesión se cerró ("Session terminated, killing shell... killed") y que el proceso terminó, indicando que el sistema se apagó.

13. Reiniciar el equipo

A screenshot of a terminal window with a dark purple background, similar to the one above. It shows the execution of 'systemctl reboot'. The terminal text is: 'root@Cristian:/home/cristian# systemctl reboot', 'root@Cristian:/home/cristian#', 'Session terminated, killing shell...', '...killed.', 'Terminated', and 'sudo su'. The prompt changes to 'cristian@Cristian: \$'. Below this, a message in brackets says: '[proceso terminado con el código 1 (0x00000001)]'. A final line of text says: 'Ahora puede cerrar este terminal con Ctrl+D o presionar Entrar para reiniciar.' The bottom of the window shows a Windows taskbar with various icons and a system tray on the right indicating 'ESP LAA', signal strength, and the date/time '04:56 p. m. 04/09/2026'.

Comando: systemctl reboot

¿Qué hace?: Este comando le ordena al sistema apagarse y volver a encenderse automáticamente, es decir, reiniciar la computadora.

Resultado en pantalla: Igual que con "halt", la terminal muestra que la sesión y el proceso terminaron, lo que indica que el sistema comenzó su reinicio.