




Python Fundamentals

31 preguntas

Tu puntuación: 187

[¿Qué significan estas cifras?](#)

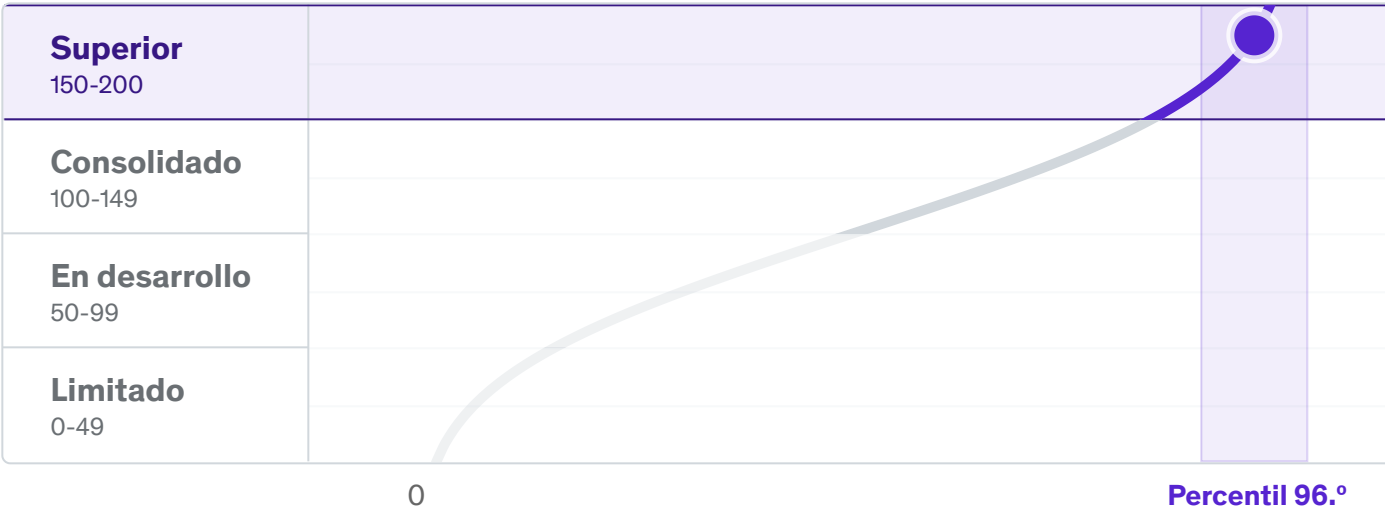

Tu rendimiento ha sido mejor que el del **96 %** de los estudiantes de Udemý que han completado esta evaluación.

Tus respuestas

Revisa tus respuestas. Aprende de las explicaciones que encontrarás en las opciones de respuesta correcta e incorrecta.

Todos los dominios

Todas las respuestas



25 respuesta correcta

6 respuesta incorrecta

0 respuesta saltada

× Pregunta 1 Incorrecto

Which of the following functions correctly uses a return statement? Select all that apply.

Has seleccionado Respuesta 3 Correcto

```
def addition(x, y): return x + y
```

Explicación de la respuesta: This is a simple function that returns the sum of the x and y parameter. The "return" keyword is used to return a value and/or exit a function. If it is called without a value following it, then it will simply exit the function and return "None" as a value.

Respuesta 4 Correcto

```
def addition(x, y): z = x + y if z > 10: return return z
```

Explicación de la respuesta: This option returns the sum of the x and y variables are not greater than 10. If the sum is greater than 10, "None" is returned. A return statement can be defined with no value being returned. This returns "None".

Enviar comentarios**✓ Pregunta 2 Correcto**

Analyze the while loop below. How many times will "Hello" be printed?

```
i = 1
while i < 6 :
    print("Hello")
    i += 1
```

Has seleccionado Respuesta 4 Correcto

Hello will be printed 5 times.

Explicación de la respuesta: "Hello" is printed 5 times. The condition for the while loop is " $i < 6$ " and i starts at 1 so the code block is iterated 5 times.

[Enviar comentarios](#)

✓ **Pregunta 3 Correcto**



You are developing a complex application. You have created the skeleton of a "Person" class, but haven't filled it with any code yet. How can you run and test the application without adding contents to the "Person" class?

Has seleccionado **Respuesta 3 Correcto**

Add the "pass" keyword to the class definition.

Explicación de la respuesta: The "pass" keyword is used as a placeholder for blocks of code that haven't been developed yet. When developing large scale code bases, there may be times that you create an empty skeleton of various classes and functions. To avoid raising an error, the "pass" keyword can be placed in the empty definition to act as a placeholder.

[Enviar comentarios](#)

✗ **Pregunta 4 Incorrecto**



Which is used to pass information to a function? Select all that apply.

Has seleccionado **Respuesta 1 Correcto**

parameters

Explicación de la respuesta: Parameters are defined in parentheses in the function definition. There are several ways you can manipulate functions to behave differently. When the function is called, arguments are passed into it. These arguments match previously defined parameters.

Respuesta 3 Correcto

arguments

Explicación de la respuesta: Arguments are passed into a function when the function is called. These arguments must match the parameters defined in the function.

Enviar comentarios

✓ **Pregunta 5 Correcto**



Which of the following lines of code will return class 'float'? Select all that apply.

Has seleccionado **Respuesta 1 Correcto**

`type(-3.14)`

Explicación de la respuesta: -3.14 is a floating point number (float) because it includes a decimal. Floats can be negative or positive numbers.

Has seleccionado **Respuesta 2 Correcto**

`type(1.00)`

Explicación de la respuesta: 1.0 is a floating point number(float). The number includes a decimal, so it is considered a float even though the numbers beyond the decimal are 0s.

Has seleccionado **Respuesta 4 Correcto**

`type(0.0)`

Explicación de la respuesta: 0.0 is a floating point number (float). The number includes a decimal, and that's what classifies it as a float.

Enviar comentarios

✓ **Pregunta 6 Correcto** ^

Which of the following code snippets correctly uses a list?

Has seleccionado **Respuesta 2 Correcto**

```
color_list = ["green", "orange", "blue"]  
print(color_list)
```

Explicación de la respuesta: Lists in Python are defined by square brackets []. Python does not have built-in arrays like most languages, but lists can be used instead and manipulated in a way similar to that of arrays.

Enviar comentarios

✓ **Pregunta 7 Correcto** ^

Given the string variable below, how can you convert its value to a float? s1 = "3.14"

Has seleccionado **Respuesta 1 Correcto**

```
f1 = float(s1)
```

Explicación de la respuesta: The float() function can convert a given value into a float. The value must be a number stored in a string or an integer.

Enviar comentarios

✓ **Pregunta 8 Correcto** ^

Which of the following is a correct definition of a function in Python?

Has seleccionado **Respuesta 4 Correcto**

```
def hello_world():  
    print("Hello world!")
```

Explicación de la respuesta: In Python, a function is defined using the "def" keyword, followed by the function name and parenthesis for the arguments. Where most languages would have an opening curly bracket {, Python instead uses a colon : to start the code within the function.

[Enviar comentarios](#)

✓ **Pregunta 9 Correcto**

Assume the Hello class below is a file named hello.py. Which of the following lines of code can be inserted at the top of another file to utilize the Hello class and its method?

```
class Hello:
    def say_hello():
        print("Hello!")
```

Has seleccionado **Respuesta 2 Correcto**

```
from hello import Hello
```

Explicación de la respuesta: "from hello import Hello" will import the Hello class from the hello.py file. The Hello class is available from the hello.py file, as well as any functions or methods in the class.

[Enviar comentarios](#)

✗ **Pregunta 10 Incorrecto**

How can "rocky road" be added to the end of the "ice_creams" list below? Select all that apply. ice_creams = ["chocolate", "vanilla", "cookies n cream", "strawberry"]

Has seleccionado **Respuesta 1 Correcto**

```
ice_creams.append("rocky road")
```

Explicación de la respuesta: The append() method can be used to add an item to the end of a list. The insert() method can be used to add an item to a specific position of a list.

Respuesta 4 Correcto

```
ice_creams.insert(4, "rocky road")
```

Explicación de la respuesta: The insert() method can be used to add an item to a list. Specify the position that the item will be added.

[Enviar comentarios](#)✓ **Pregunta 11 Correcto** ^

Which of the following variable declarations creates an int?

Has seleccionado **Respuesta 3 Correcto**

```
x = int(23.3)
```

Explicación de la respuesta: The int() function converts float values into ints. This sets the x variable to 23.

Has seleccionado **Respuesta 4 Correcto**

```
x = 23
```

Explicación de la respuesta: 23 is an int, and the x variable will be of the data type int. Integers are positive or negative whole numbers with no decimal point.

[Enviar comentarios](#)✓ **Pregunta 12 Correcto** ^

You need to know what attributes and methods are included in an object called myRecord. Which function will display a list of attributes for the object passed as an argument?

Has seleccionado **Respuesta 4 Correcto**

```
dir(myRecord)
```

Explicación de la respuesta: The `dir()` function in Python is a built-in function that shows a list of object attributes for any object passed as an argument. If no argument is provided, it will return a list of names present in the current local namespace.

[Enviar comentarios](#)

✓ **Pregunta 13 Correcto**



How can the names of the fields be specified when creating a CSV file using the DictWriter class?

Has seleccionado **Respuesta 4 Correcto**

The "fieldnames" parameter

Explicación de la respuesta: The "fieldnames" parameter passes the keys from the dictionary to the `writerow()` method. This is how the field names are passed in. The keys from the key-value pairs in the dictionary become the field names.

[Enviar comentarios](#)

✓ **Pregunta 14 Correcto**



Given the following import statement, what is being imported from where? `from test import Fish`

Has seleccionado **Respuesta 3 Correcto**

A function or class name "Fish" is being imported from file named "test".

Explicación de la respuesta: A function or class can be imported from a file. The file comes after the "from" keyword and the function or class comes after the "import" keyword.

[Enviar comentarios](#)

✓ **Pregunta 15 Correcto** ^

Using the zipfile library, how can you extract a single file from an archive?

Has seleccionado **Respuesta 2 Correcto**

extract()

Explicación de la respuesta: The extract() method can be used to extract a file from the zip archive. The extractall() method is used to extract all files/members from the archive.

Enviar comentarios

× **Pregunta 16 Incorrecto** ^

Which of the following code snippets results in the color attribute being set to "green"?
Select all that apply.

Has seleccionado **Respuesta 1 Incorrecto**

```
class Car:
    def __init__(self, color):
        self.color = color
```

```
c1 = Car()
c1.color = "green"
```

Explicación de la respuesta: This option is incorrect because the Car class requires a color to be passed into it. If Car() is called with no arguments, an error will occur.

Has seleccionado **Respuesta 2 Correcto**

```
class Car:
    def __init__(self, color):
        self.color = color
```

```
c1 = Car("green")
```

Explicación de la respuesta: The __init__ function is built in and will always be executed when a class is initiated. It can be used to set values of attributes and properties for an

object.

Respuesta 3 Correcto

```
class Car:
    def __init__(self, color):
        self.color = color

c1 = Car("blue")
c1.color = "green"
```

Explicación de la respuesta: The color of the "c1" Car object is initially set to "blue" when it is created. The color attribute is then changed to "green".

Respuesta 4 Correcto

```
class Car:
    color = "green"
```

Explicación de la respuesta: This is a very simple example of a class. The Car class has a color attribute that is "green".

Enviar comentarios

✓ Pregunta 17 Correcto



What would be the binary result of the operation "x | y"? x = 10 #1010 in binary y = 4 #0100 in binary

Has seleccionado **Respuesta 2 Correcto**

1110

Explicación de la respuesta: The | bitwise operator sets the resulting bit to 1 if either of the two given bits is 1. The value of x has the first and third bits set to 1, and the value of y has the second bit set to 1. So, the first 3 bits will be set to 1.

[Enviar comentarios](#)✓ **Pregunta 18 Correcto** ^

Identify the snippet that wraps a function in another function with a decorator.

Has seleccionado **Respuesta 4 Correcto**

```
def decor(x):  
    return x - 1  
  
def operation(func, x):  
    result = func(x)  
    return result  
  
>>>operation(decor, 42)
```

Explicación de la respuesta: The variable result is defined as what is returned by the passed-in function func() if variable x is passed into it. Since func() is a separate function used within another function, a decorator has been used.

[Enviar comentarios](#)✓ **Pregunta 19 Correcto** ^

Given the x and y variables below, which of the following conditions will be True? x = 15 y = 5

Has seleccionado **Respuesta 1 Correcto**

if(x is not y): #do something

Explicación de la respuesta: x is not y, so this condition is true. The "is not" operator checks if two variables are not the same object. The x variable is not the same object as the y variable, so this is true.

[Enviar comentarios](#)

✓ **Pregunta 20 Correcto** ^

Analyze the test below. What will be the result? `def test_upper(self): is_true = self.assertEqual('foo'.upper(), 'FOO')`

Has seleccionado Respuesta 3 Correcto

`is_true` will be set equal to "True"

Explicación de la respuesta: `is_true` will be set to `True`, because `'foo'.upper()` will be converted to `"FOO"` and it is equal to `"FOO"`. `assertEqual()` is a common assert method available for testing. It checks if two given values are equal.

[Enviar comentarios](#)✓ **Pregunta 21 Correcto** ^

Which of the following creates a "fish" dictionary with two dictionaries nested inside? Select all that apply.

Has seleccionado Respuesta 1 Correcto

```
fish1 = {  
    "name": "Pike",  
    "location": "River"  
}  
fish2 = {  
    "name": "Clownfish",  
    "location": "Ocean",  
}  
  
fish = {  
    "fish1" : fish1,  
    "fish2" : fish2,  
}
```

Explicación de la respuesta: In this option "fish1" and "fish2" are created first. They are later put inside the "fish" dictionary to become nested dictionaries.

Has seleccionado Respuesta 2 Correcto

```
fish = {  
    "fish1" : {  
        "name": "Pike",  
        "location": "River"  
    },  
    "fish2" : {  
        "name": "Clownfish",  
        "location": "Ocean",  
    }  
}
```

Explicación de la respuesta: "fish1" and "fish2" are nested inside the "fish" dictionary. In this example, the nested dictionaries are created at the same time as the "fish" dictionary. You can also create more dictionaries and add them at a later point.

[Enviar comentarios](#)

✓ **Pregunta 22** **Correcto**



How could you create a variable that contains an integer of 3? Select all that apply.

Has seleccionado **Respuesta 1** **Correcto**

`x = 3`

Explicación de la respuesta: A variable can be set to a number without quotation marks, so that it will be interpreted as an integer. If a string were desired, the 3 could be put inside quotation marks.

Has seleccionado **Respuesta 2** **Correcto**

`x = int(3)`

Explicación de la respuesta: When declaring a variable, a data type does not need to be specified, Python implicitly assumes the data type of a variable. However, if you want specify the type, specify with casting. Using the `int()` constructor will cast the variable as an integer.

[Enviar comentarios](#)

✓ **Pregunta 23 Correcto**

What operator will return True if a specific value is present in a set?

Has seleccionado **Respuesta 4 Correcto**

in

Explicación de la respuesta: The "in" operator will return "True" if a specified value is inside an object. It is often used to check if a value is present inside collections such as lists or sets.

Enviar comentarios

✓ **Pregunta 24 Correcto**

Examine the User class below. Which of the following are instance attributes? Select all that apply.

```
class User():  
    count = 0  
    def __init__(self, name, userid):  
        User.count += 1  
        self.name = name  
        self.userid = userid
```

Has seleccionado **Respuesta 2 Correcto**

name

Explicación de la respuesta: "name" and "userid" are both instance attributes. They can only be accessed in the scope of the object that owns them and not by the class.

Has seleccionado **Respuesta 3 Correcto**

userid

Explicación de la respuesta: "userid" is an instance attribute, along with "name". They can only be accessed by the instance and not by the class.

[Enviar comentarios](#)

× **Pregunta 25 Incorrecto** ^

When using an SMTPServer, what should be overridden to define behavior for receiving emails?

Respuesta 2 Correcto

`process_message()`

Explicación de la respuesta: `process_message()` is a method of the SMTPServer base class. The default implementation throws a `NotImplementedError` exception, so in order to receive and process emails/messages the method must be overridden.

Has seleccionado **Respuesta 3 Incorrecto**

`SMTPResponseException`

Explicación de la respuesta: `SMTPResponseException` is an exception often created by the server. It is the base class for all SMTP exceptions. It does not define behavior upon receiving an email.

[Enviar comentarios](#)

✓ **Pregunta 26 Correcto** ^

What will the order of the "veggies" list be after the following line is called? `veggies = ["zucchini", "peas", "carrots", "spinach", "squash"]` `veggies.sort(reverse=True)`

Has seleccionado **Respuesta 4 Correcto**

`"zucchini", "squash", "spinach", "peas", "carrots"`

Explicación de la respuesta: The `sort()` method can be used to order the elements in alphabetical order. When the "reverse" parameter is set to `True`, it reverses the order of the sorted elements.

[Enviar comentarios](#)✓ **Pregunta 27 Correcto** ^

Which of the following will put the below items from "fields" onto a single line with each item separated by a comma? Use the below "csvwriter" and assume the "csvfile" variable has already been created and is open for writing.

```
fields = ['Make', 'Model', 'Year']
```

```
csvwriter = csv.writer(csvfile)
```

Has seleccionado Respuesta 2 Correcto

```
csvwriter.writerow(fields)
```

Explicación de la respuesta: Using the `writerow()` method will write all of the items on a single row. The items will be separated by commas.

[Enviar comentarios](#)✓ **Pregunta 28 Correcto** ^

What is the purpose of a pass statement?

Has seleccionado Respuesta 4 Correcto

The "pass" keyword acts as a placeholder for a block of code that has not yet been developed.

Explicación de la respuesta: The "pass" keyword works as placeholder for future code that has not yet been developed. When creating large scale applications, you may need placeholders in some places before the application is complete.

[Enviar comentarios](#)

✓ **Pregunta 29 Correcto** ^

What is the output of the following code snippet? `x = 15 y = 2 print(x / y)`

Has seleccionado **Respuesta 2 Correcto**

7.5

Explicación de la respuesta: `15 / 2` will return 7.5. In other languages, the division operator rounds to the nearest whole number so that the integer data type is maintained. However, division operations are only rounded in Python if the `//` floor division operator is used.

Enviar comentarios

✗ **Pregunta 30 Incorrecto** ^

Using the `os` module, which of the following code lines will list all files and folders in the current directory?

Respuesta 1 Correcto

```
path = "./"
files = os.scandir(path)

for f in files:
    print(f)
```

Explicación de la respuesta: The `scandir()` method can be used to obtain a list of all files and folders in a given directory. File or folder type and file or folder attributes are also accessible through the `scandir()` method.

Has seleccionado **Respuesta 3 Correcto**

```
files = os.listdir()

for f in files:
    print(f)
```

Explicación de la respuesta: The `listdir()` method returns a list of all the files and folders in a given directory. The path is optional. If it's not specified, then it returns a list of the files and

folders in the current directory.

Enviar comentarios

✓ **Pregunta 31 Correcto**

What is the value of utilizing default parameters?

Has seleccionado **Respuesta 2 Correcto**

It makes arguments optional, giving the function more flexibility.

Explicación de la respuesta: Default parameters give a default value to parameters in case they aren't set when the function is called. This makes the function more flexible because it becomes optional to pass in arguments that already have default values.


Enviar comentarios

[Ver menos](#) ^

Tus recomendaciones de contenido

Este curso trata el **100 %** de los conocimientos que hemos identificado que necesitas según los resultados de tu evaluación e incluye sugerencias sobre qué secciones son

► [recomendado para ti.](#)



The Complete Python Bootcamp From Zero to Hero in Python

4,6 ★★★★★ (477.333)

22 horas en total • 156 clases • Todos los niveles



Las evaluaciones tienen un límite de dos intentos cada 24 horas.

Te queda(n) 1 intento durante 24 horas.

Descartar

Repetir evaluación

Compartir ▼