Parsing Command Lines

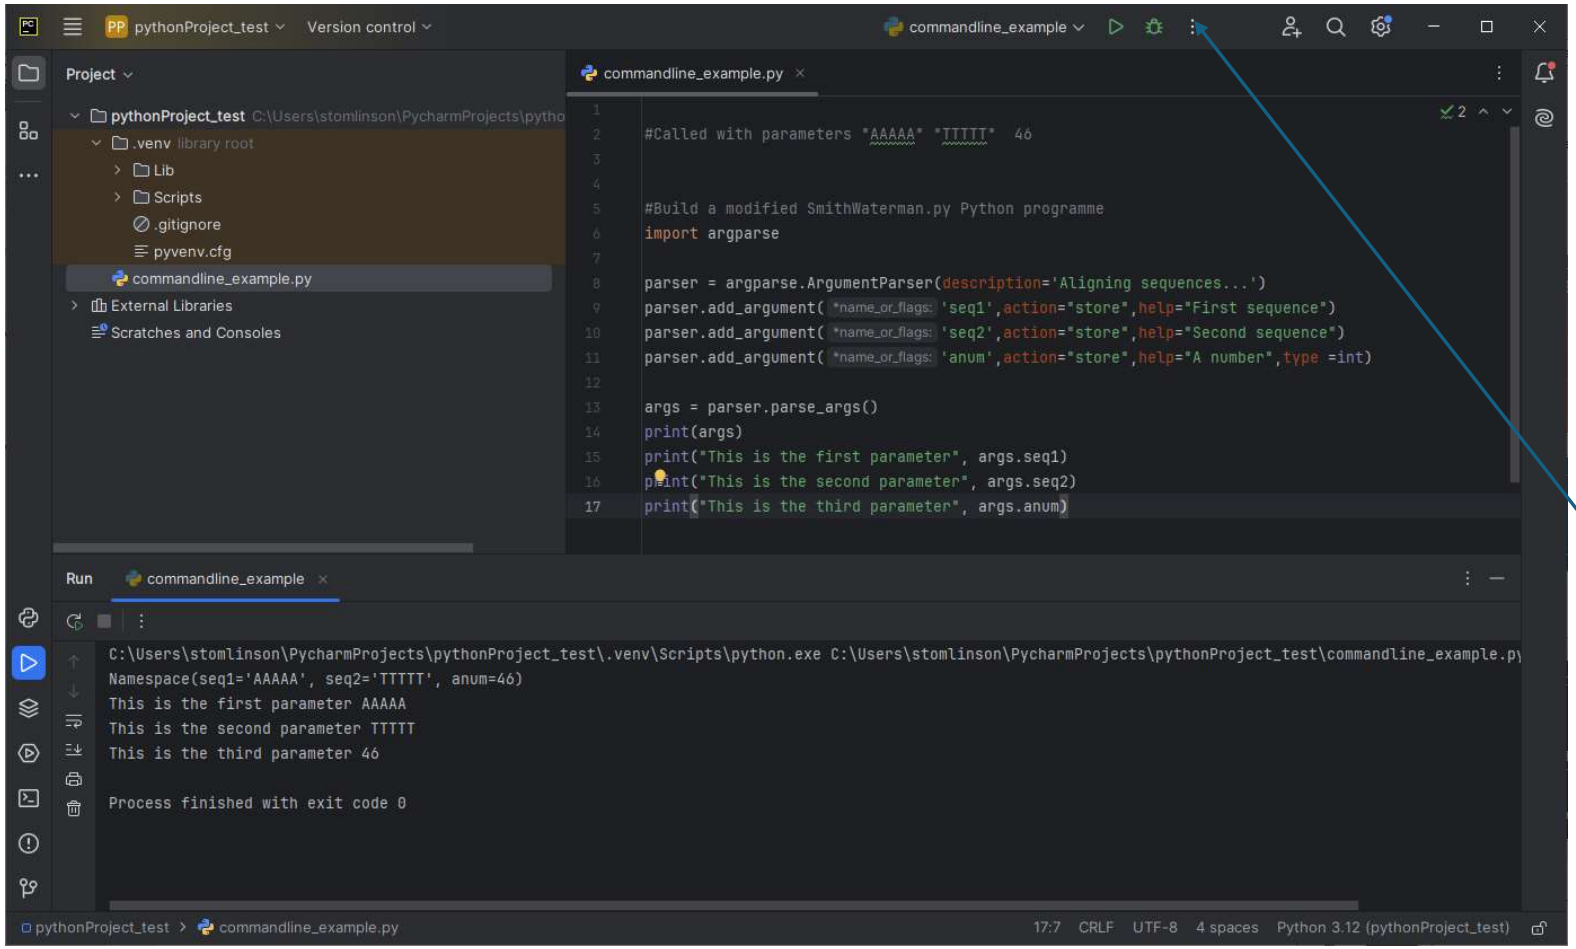

Set args from here

- Note how the arguments fed to the programme are picked up when it runs

Command Line Arguments

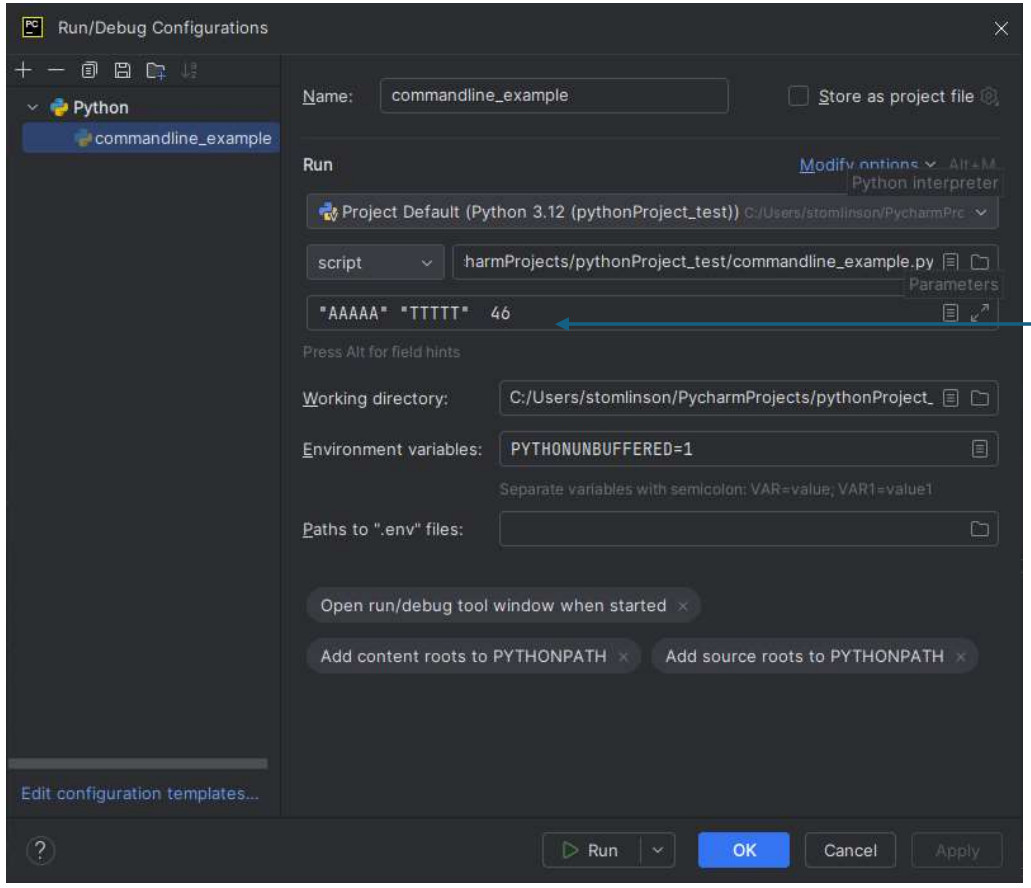

Here

Why bother?

- The programme might be run on the command line (outside the IDE as)

```
python commandline_example.py "AAAAA" "TTTTT"  46
```

- So we can write a programme and then pass parameters to the programme from the command line
- We can even have the programme run as a standalone executable and then it behaved like a small programme performing one step in a longer pipeline
- Command lines are important for managing IO and parameters when running programmes standalone
- We could even write a web interface and this itself would then set the parameters and call the python script- results would be returned to the user.