

Table of Contents

1. Webservice API Overview	5
1.1. About Webservice API.....	5
1.2. Purpose	5
1.3. HTTP Status Codes	5
1.4. Permissions	5
2. Webservice REST APIs	7
2.1. webServiceLookupByName.....	7
2.1.1. Description	7
2.1.2. Method.....	7
2.1.3. End Point / Request URL	7
2.1.4. Headers	7
2.1.5. Request Payload.....	7
2.1.6. Table of Parameters.....	7
2.1.7. Response Body	8
2.1.8. Failure Response Body	8
2.1.9. cURL.....	8
2.2. Example.....	9

1. Webservice API Overview

1.1. About Webservice API

An Application and Process flow within that application is associated with an organization created in the Platform background without initiating the process flow.

For example, when a user logs in, the system creates multiple instances of the application.

When a user logs in, the system creates multiple instances of the application.

When a user logs in, the system creates multiple instances of the application.

1.2. Purpose

This documentation helps you familiarize yourself with the webservice API resources (organization specific) and how to use them.

1.3. HTTP Status Codes

Status Code	Description
200	
400	
500	
401	

1.4. Permissions

This is an exposed API in the platform.

Based on the API requests the permission for the user differs.

2. Webservice REST APIs

2.1. webServiceLookupByName

2.1.1. Description

To call a web service without initiating a process flow in the organization.

2.1.2. Method

POST

2.1.3. End Point / Request URL

http://{domain_name}/nbt-qengine-service/ web-service-lookup/webServiceLookupByName

2.1.4. Headers

Key	Value
Content-Type	application/json
access_token	Provide the access token. Get access token from the Platform exposed API List.

2.1.5. Request Payload

```
{
  "organizationId": 36607,
  "userId": 54554,
  "applicationName": " ",
  "workflowName": " ",
  "webServiceName": " ",
  "cacheVariables": [{"name": "rm.com"}]}
}
```

2.1.6. Table of Parameters

Parameter	Description
organizationId	Provide the organization ID. Get Organization ID from the Platform exposed API List.
userId	Provide the user ID. Get User ID from the Platform exposed API List.
applicationName	Provide the application name.
workflowName	Provide the workflow name.
webServiceName	Provide the webservice entity name that you created within the process flow.
cacheVariables	The value of the cacheVariables can vary as per your variable details. • name: name of the variable.

Parameter	Description
	value: value of the variable. The variable name and value can be obtained as per requirement. For example: Value can be passed from run time form UI.

2.1.7. Response Body

The following is an example of success response.

```
{\"success\": true, \"requestId\": \"a018521\", \"errors\": [], \"statusCode\": 200}
```

2.1.8. Failure Response Body

The following is an error message (failure response) for not having the specified application in the specified organization in the platform.

```
{
  "success": false,
  "requestId": "a018521",
  "errors": [
    {
      "title": "Application not found or not active",
      "message": "Application not found or not active"
    }
  ],
  "statusCode": 500
}
```

2.1.9. cURL

```
curl --location 'http://{domain_name}/nbt-engine-service/web-service-lookup/web-service-lookup' \
--header 'Content-Type: application/json' \
--header 'Cookie: COOKIE_SUFFIX=JSESSIONID=1234567890' \
--data '{
  "organization": "orga",
  "username": "user",
  "application": "appl",
  "work": "work",
  "webService": "webS",
  "cache": "cach"
}'
```


2.2. Example

Follow the steps below for getting Variable value from DB for the execution of webservice API.

1. Create a Database script entity of type DB Lookup for fetching a desired output at runtime.

SQL Type

DB Lookup

Query String

```
1 select emailAddress from User_ where userId=<${system.loggedInUserId}>;
```

Figure 2.1: DB Lookup Query for the Database script

2. Create a variable. Configure the DB Lookup to the variable by selecting the Database script created.

Basic

Name *

emailAddress

Scope *

Local

Data Type *

Alphanumeric

☐ Is Collection

Default Value

Variable's default value

Max Length

250

☒ DB Lookup

Database Query

GetUserName

Datasource Name

Description

Description about the variable

Save Delete

Figure 2.2: Creating a variable - Selecting DB Lookup and mapping database script to the variable

3. Create a Webservice entity and provide the required configuration details. The Database script entity and webservice entity must be in the same process flow. The body of the webservice detail (payload) may have process variables.

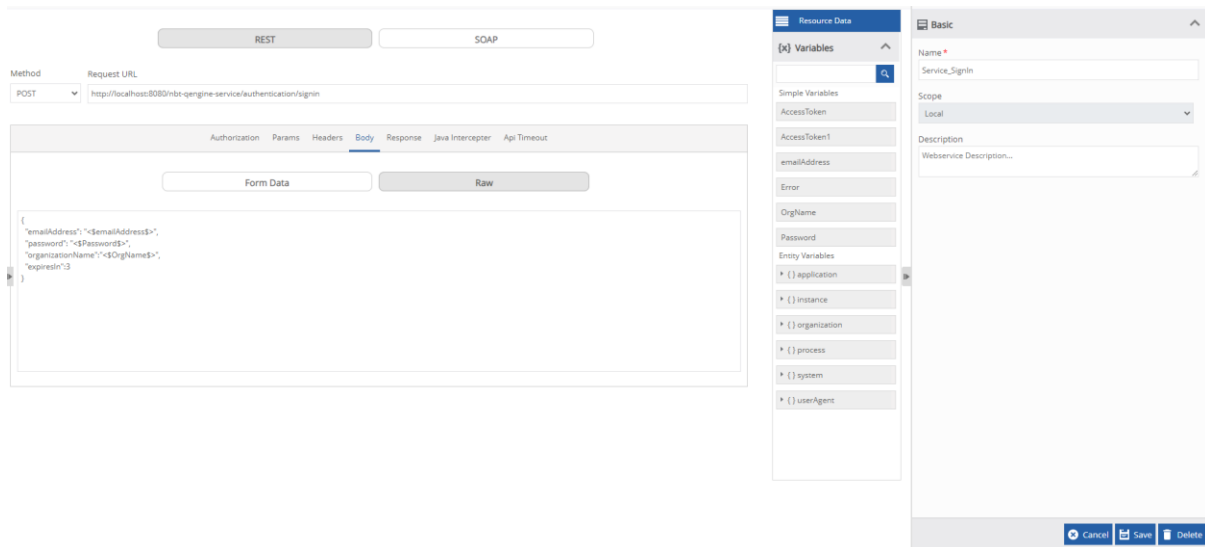


Figure 2.3: Creating webservice entity with the necessary variables as per requirement

4. Create a valid process flow and deploy it. It is not necessary to include any specific activity as part of this process flow. It can be any simple flow.

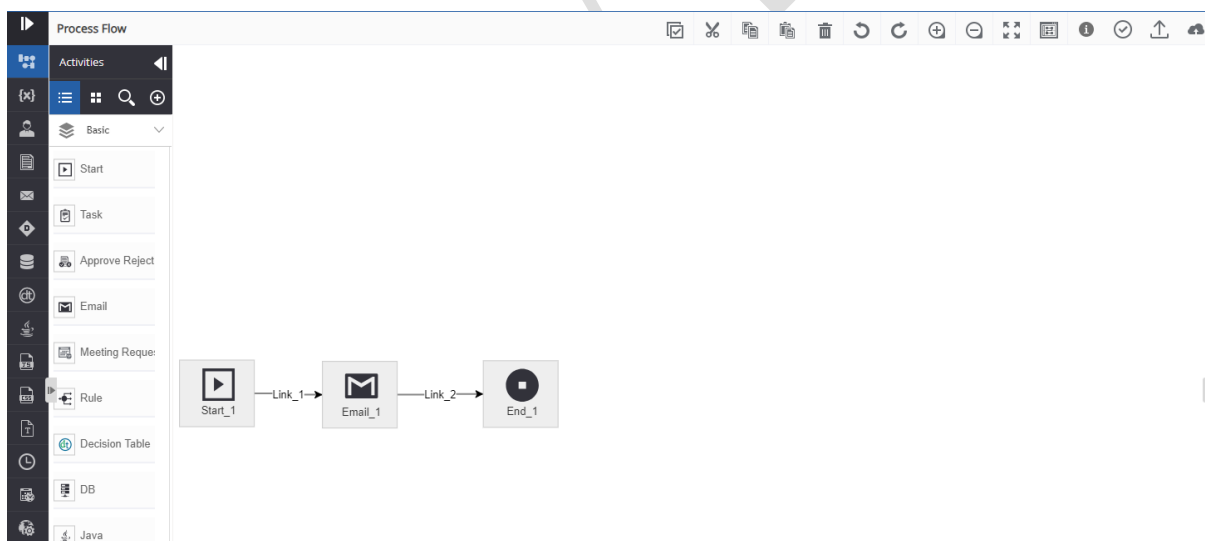


Figure 2.4: Process flow

5. Execute the webserviceLookupByName API.

The API execution order is as follows:

1. Variables entities are identified.
2. Database script is executed. Result set is stored in the variable to which the DB lookup is configured.
3. Webservice entity is executed. The variables in the webservice entity is resolved by taking the values from the variables.