



Intelligent Business Automation Platform

API DOC Webservice APIs

Version 5.1

A COMPREHENSIVE PROCESS AUTOMATION SUITE THAT PROVIDES END-TO-END COVERAGE
FOR A VARIETY OF COMPLEX ENTERPRISE BUSINESS PROCESSES

Copyright

Copyright © 2024. All rights reserved.

© All copyright and other property in this document and its contents are confidential and proprietary to the original Organization. No part of these materials should be reproduced, published, transmitted, or distributed in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, or stored in any information storage or retrieval system of any nature nor should the materials be disclosed to third parties without the prior written authorization of the original Organization.

DO NOT COPY . DARSANA

Table of Contents

1. Webservice API Overview	5
1.1. About Webservice API.....	5
1.2. Purpose	5
1.3. HTTP Status Codes	5
1.4. Permissions	5
2. Webservice REST APIs	7
2.1. webServiceLookupByName.....	7
2.1.1. Description	7
2.1.2. Method.....	7
2.1.3. End Point / Request URL	7
2.1.4. Headers	7
2.1.5. Request Payload.....	7
2.1.6. Table of Parameters.....	7
2.1.7. Response Body	8
2.1.8. Failure Response Body	8
2.1.9. cURL.....	8
2.2. Example.....	9

1. Webservice API Overview

1.1. About Webservice API

An Application and Process flow within that application is associated with an organization created in the Platform. The webservice API can call the webservice in the background without initiating the process flow associated with that webservice.

For example consider:

When a process flow calls another process flow for the purpose of executing a webservice, it creates multiple instances of that flow on each execution. This avoid the creation of multiple instances webservice API is used.

1.2. Purpose

This documentation helps you familiarize yourself with the webservice API resources (organization specific) and how to use them.

1.3. HTTP Status Codes

Status Code	Description
200	Ok Success
404	Not Found
500	Error
401	Unauthorized

1.4. Permissions

This is an exposed API in the platform.

Based on the API requests the permission for the user differs.

2. Webservice REST APIs

2.1. webServiceLookupByName

2.1.1. Description

To call a web service without initiating a process flow in the organization.

2.1.2. Method

POST

2.1.3. End Point / Request URL

http://{domain_name}/nbt-qengine-service/ web-service-lookup/webServiceLookupByName

2.1.4. Headers

Key	Value
Content-Type	application/json
access_token	Provide the access token. Get access token from the Platform exposed API List.

2.1.5. Request Payload

```
{
  "organizationId": 36607,
  "userId": 54554,
  "applicationName": " ",
  "workflowName": " ",
  "webServiceName": " ",
  "cacheVariables": [{"name": "rm.com"}]}
}
```

2.1.6. Table of Parameters

Parameter	Description
organizationId	Provide the organization Id. Get OrganizationId from the Platform exposed API List or from the JS library documentation.
userId	Provide the user Id. Get userId and OrganizationId from the Platform exposed API List or from the JS library documentation.
applicationName	Provide the application name.
workflowName	Provide the process flow name in the application.
webServiceName	Provide the webservice entity name that you created within the process flow.
cacheVariables	The value of the cacheVariables can vary as per your variable details. name: name of the variable.

2.2. Example

Follow the steps below for getting Variable value from DB for the execution of webservice API.

1. Create a Database script entity of type DB Lookup for fetching a desired output at runtime.

SQL Type

DB Lookup

Query String

```
1 select emailAddress from User_ where userId=<${system.loggedInUserId}>;
```

Figure 2.1: DB Lookup Query for the Database script

2. Create a variable. Configure the DB Lookup to the variable by selecting the Database script created.

Basic

Name *

emailAddress

Scope *

Local

Data Type *

Alphanumeric

☐ Is Collection

Default Value

Variable's default value

Max Length

250

☒ DB Lookup

Database Query

GetUserName

Datasource Name

Description

Description about the variable

Save Delete

Figure 2.2: Creating a variable - Selecting DB Lookup and mapping database script to the variable

3. Create a Webservice entity and provide the required configuration details. The Database script entity and webservice entity must be in the same process flow. The body of the webservice detail (payload) may have process variables.

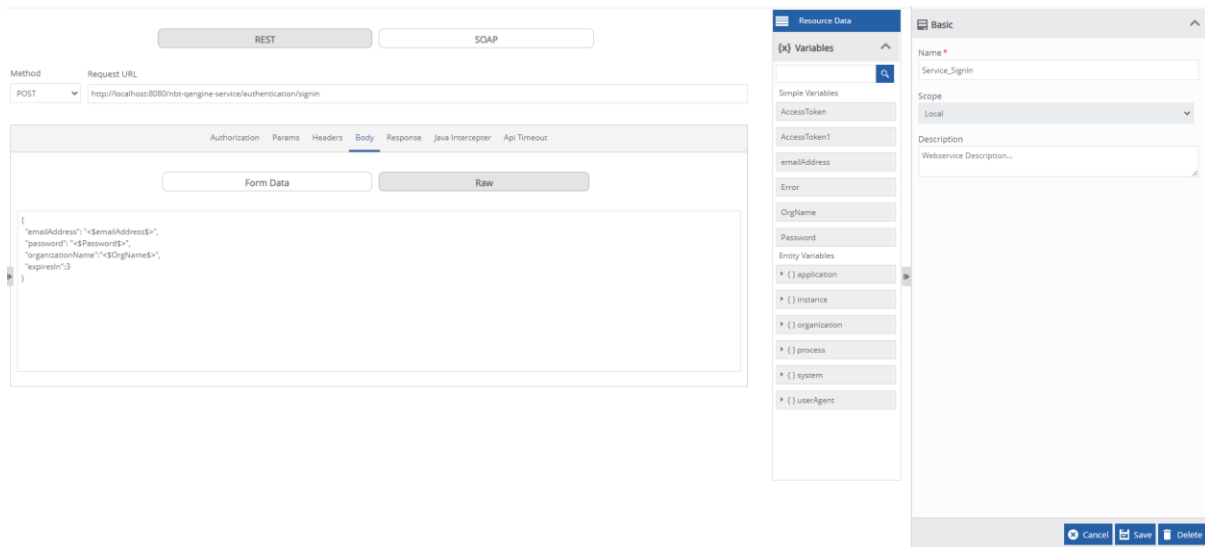


Figure 2.3: Creating webservice entity with the necessary variables as per requirement

4. Create a valid process flow and deploy it. It is not necessary to include any specific activity as part of this process flow. It can be any simple flow.

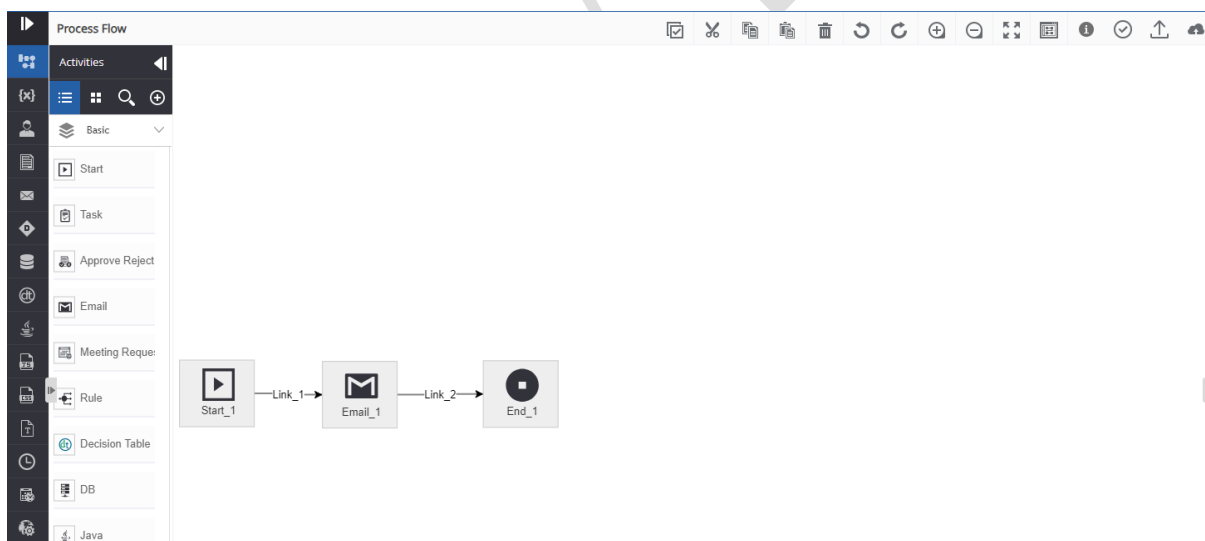


Figure 2.4: Process flow

5. Execute the webserviceLookupByName API.

The API execution order is as follows:

1. Variables entities are identified.
2. Database script is executed. Result set is stored in the variable to which the DB lookup is configured.
3. Webservice entity is executed. The variables in the webservice entity is resolved by taking the values from the variables.