Exp No: 15	Analyse various types of servers using Webalizer tool

AIM:

To generate the log file of a web server (Apache in XAMPP) and to analyse the log file using the Webalizer tool.

ALGORITHM / PROCEDURE:


1. Install XAMPP and open the XAMPP Control Panel.
2. Start the **Apache** module and open *http://localhost* in a browser (XAMPP dashboard) so that requests are recorded in the log.
3. Locate the Apache log files *access.log* and *error.log* (XAMPP folder, *apache\logs*) and open *access.log* to see the recorded requests (client IP address, date and time, request, response code and size, browser).
4. Install Webalizer and give the access log as the input log file with the options `-n` (host name), `-o` (output folder) and the log type.
5. Open the generated `usage_YYYYMM.html` report in a web browser and study the monthly summary, daily graph, top URLs, top clients and HTTP response codes.

DIAGRAM:




Fig 1: Log analysis of the Apache server using Webalizer


OUTPUT:

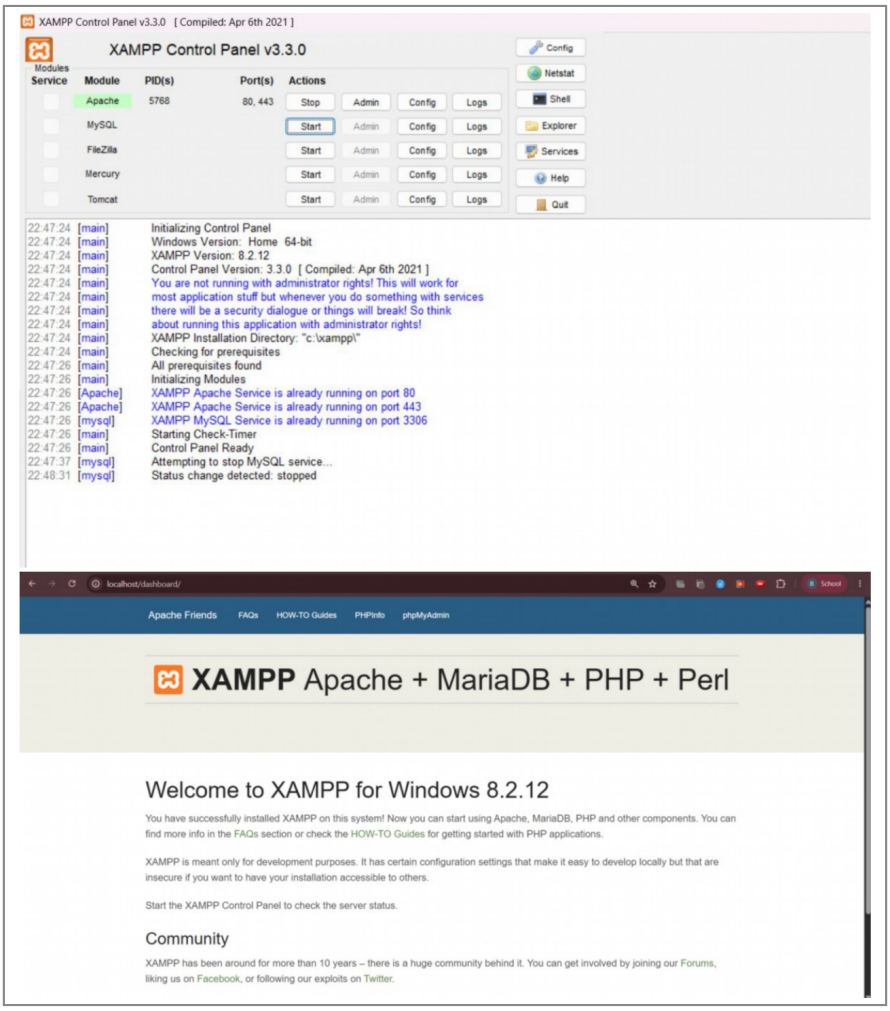


XAMPP Control Panel with Apache started and the XAMPP welcome page (http://localhost)

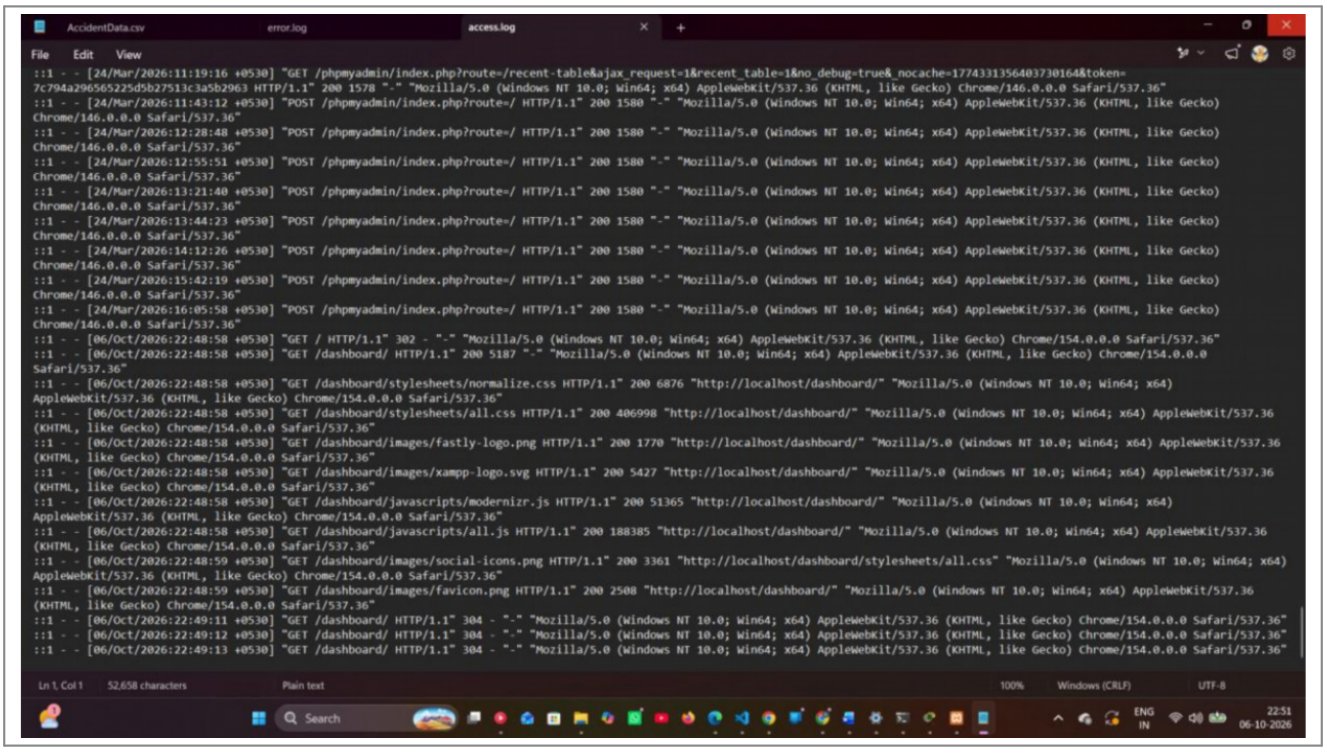

Apache access.log - requests recorded for /dashboard (status 200 and 304)

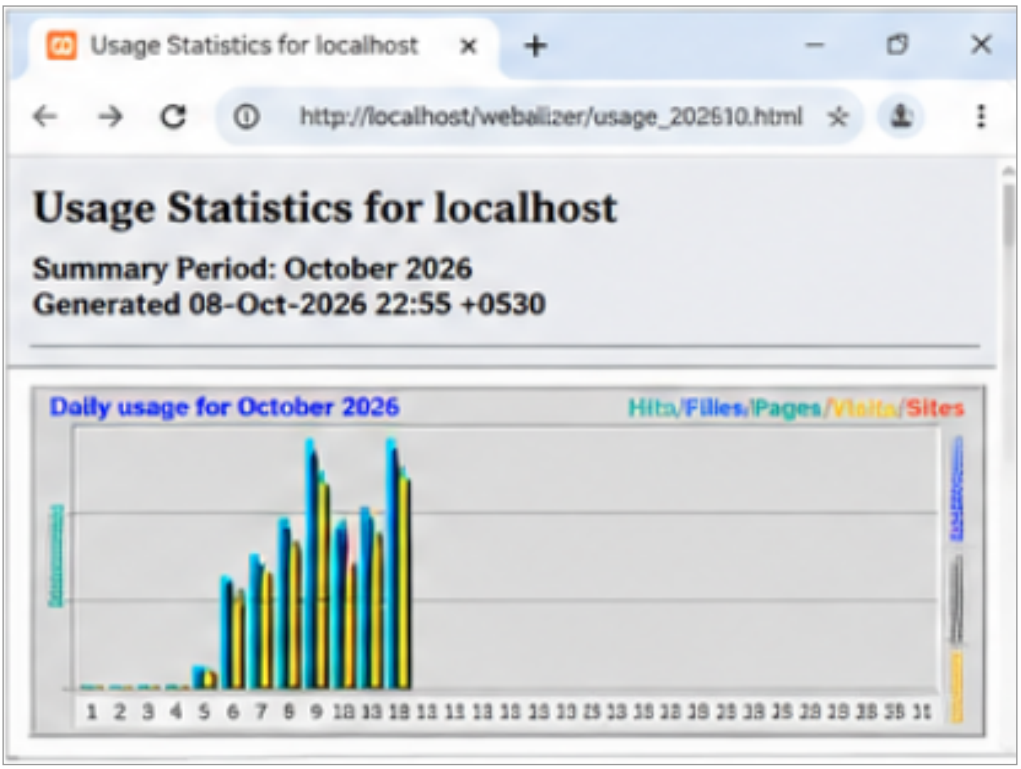

Webalizer report - Monthly / Daily usage graph

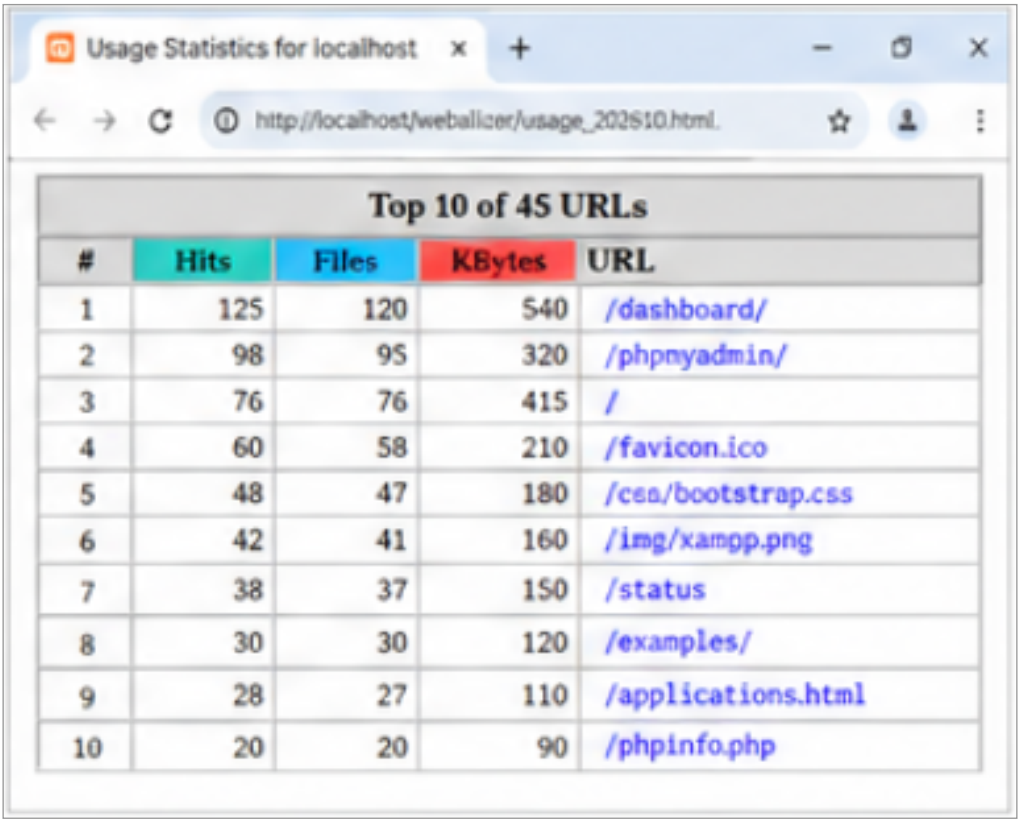

Top 10 of 45 URLs

#	Hits	Files	KBytes	URL
1	125	120	540	/dashboard/
2	98	95	320	/phpmyadmin/
3	76	76	415	/
4	60	58	210	/favicon.ico
5	48	47	180	/css/bootstrap.css
6	42	41	160	/img/xampp.png
7	38	37	150	/status
8	30	30	120	/examples/
9	28	27	110	/applications.html
10	20	20	90	/phpinfo.php

Webalizer report - Top 10 URLs

RESULT:

Thus the Apache web server was run using XAMPP, its access log was generated and studied, and the log was analysed with the Webalizer tool.