


Sharding in Elasticsearch

What is Sharding?

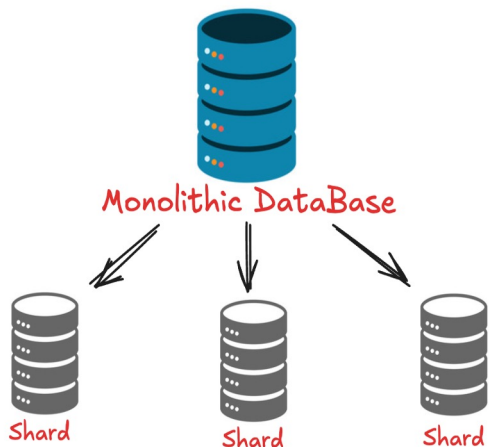

✓ Scalability ✓ Improved performance

✓ Availability

What is Sharding?

Sharding means splitting one large index into smaller pieces called shards.

Each shard stores a portion of the dataset.

Elasticsearch can search all shards in parallel, improving speed and scalability.

Used when datasets are too large for a single machine or storage unit.

How We Used Sharding in Our Project:

Our dataset has 846,757 documents (~1.08 GB).

Too large for a single node to handle efficiently.

We created 3 primary shards for each index:


arxiv_cs_text (BM25 text search)

arxiv_cs_vector (semantic vector search)

These shards were distributed across three Elasticsearch nodes (es01, es02, es03) in our Docker cluster.

Replication in Elasticsearch

Replication in Elasticsearch?

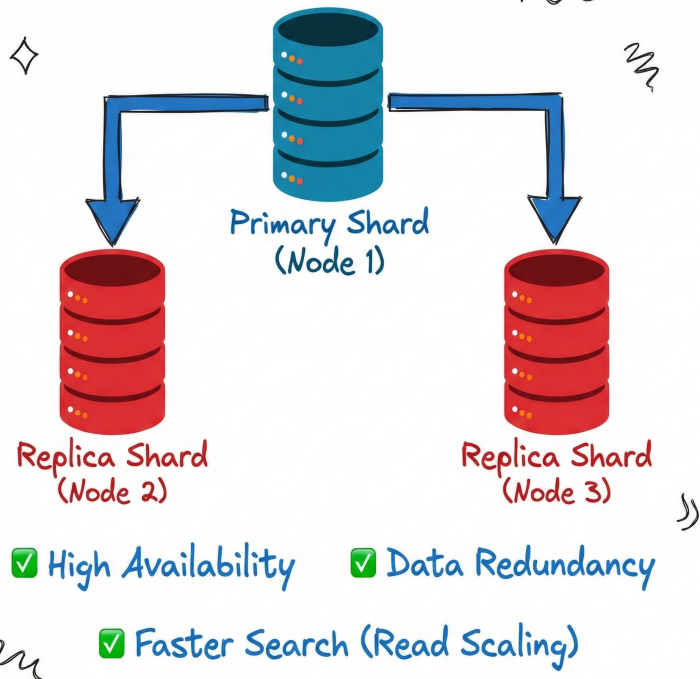


What is Replication?

- Replication creates copies of primary shards
- Ensures high availability and fault tolerance
- If a node fails, replicas serve search queries

How We Used Replication:

- 1 replica for each of 3 primary shards
- Total shard copies: 6 across 3 nodes
- Cluster remains operational during node failure

HNSW ANN Vector Indexing in Elasticsearch

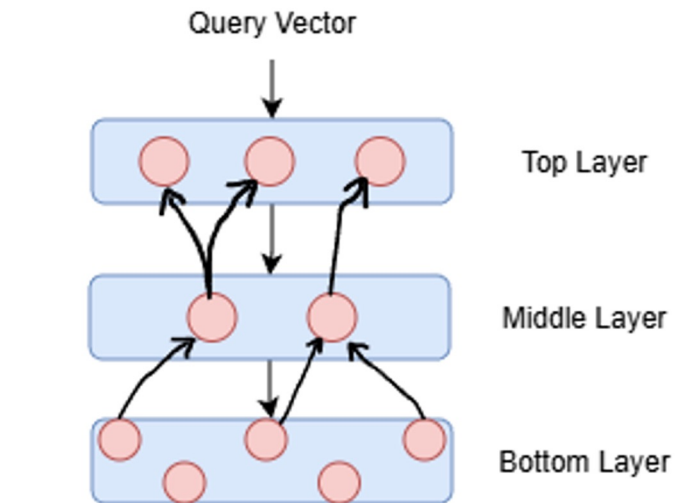

Hierarchical Navigable Small World (HNSW)

Approximate Nearest Neighbor Search

- ✓ Fast semantic search
- ✓ Scales to ~850,000 papers
- ✓ Works on distributed Elasticsearch cluster

What is HNSW ANN?

- Fast **approximate nearest neighbor** search
- Uses a **multi-layer graph structure**
- Avoids comparing with all vectors

How It Works in Our Project

- arXiv paper → vector embedding
- Stored in Elasticsearch (`arxiv_cs_vector`)
- Search uses **cosine similarity + HNSW**
- Returns **top-K similar research papers**