

Distributed Semantic Search on arXiv: Sharding, Vector ANN, and RAG over 846K CS Papers

ABSTRACT

We present a distributed semantic search system built on Elasticsearch that combines traditional keyword search with dense vector retrieval and a Retrieval-Augmented Generation (RAG) pipeline. The system indexes 846,757 Computer Science papers from arXiv, using SentenceTransformer embeddings (MiniLM-L6-v2, 384 dimensions) stored in a `dense_vector` field to support approximate nearest neighbor (ANN)-style similarity search. We configure sharding and replication to scale horizontally and provide fault tolerance, and use snapshot/restore for fast disaster recovery. On top of the search substrate, a lightweight RAG layer retrieves top- k relevant papers and passes their titles and abstracts as context to a large language model, enabling interactive semantic exploration of the corpus. The demo highlights (i) the behavior of sharding and replication under node failures, (ii) the trade-offs between keyword and vector search, and (iii) how Elasticsearch can act as a practical foundation for vector-based RAG workloads on real-world scientific data.

PVLDB Reference Format:

... PVLDB, (): xxxx-yyyy, .
DOI:

1. INTRODUCTION

Modern data systems must support not only high-throughput indexing and low-latency querying, but also increasingly semantic forms of retrieval that go beyond keyword matching. Scientific corpora such as arXiv contain millions of research papers whose relevance often depends on conceptual similarity rather than exact term overlap. At the same time, distributed systems concerns—sharding, replication, and fault tolerance—remain central to deploying such systems at scale.

Recent progress in neural text encoders and dense embeddings enables *vector search*, where documents and queries are mapped into a continuous embedding space and nearest neighbor search is used to retrieve semantically similar documents [3]. Integrating this capability into a mature distributed engine such as Elasticsearch yields a practical semantic search platform with familiar operational tooling [2]. In this demo, we build a semantic search system over the arXiv Computer Science subset [1]. The final corpus consists of 846,757 documents, each containing a paper identifier, title, abstract, and category metadata. We generate 384-dimensional embeddings for each document using the MiniLM-L6-v2 model from SentenceTransformers, and store them in an Elasticsearch index configured with three primary shards and one replica.

Our contributions are pragmatic rather than algorithmic:

- We demonstrate how to configure Elasticsearch for distributed keyword and vector search over a large real-world scientific corpus, including bulk loading strategies for multi-gigabyte NDJSON data.

- We illustrate the behavior of sharding and replication under node failures, and show how snapshot/restore can be used for disaster recovery of both text and vector indices.
- We implement a simple RAG workflow on top of the search substrate, retrieving semantically relevant papers and feeding them as context to an LLM for interactive question answering.
- While neural embeddings improve the expressiveness of document representations, deploying vector search at scale introduces new system challenges. The computational cost of embedding millions of documents, the storage overhead of dense vectors, and the need for efficient approximate nearest neighbor (ANN) structures must be reconciled with the existing constraints of distributed indexing and query execution in production search engines. A key motivation behind this work is to understand how a mature engine such as Elasticsearch can absorb these capabilities without sacrificing operational simplicity or cluster resilience.
- Beyond improving retrieval quality, semantic search enables richer interaction patterns with scientific literature. Researchers often explore conceptual neighborhoods of ideas rather than searching for exact keywords. For example, work on graph neural networks may be relevant to recommendation systems, even though papers in the latter domain rarely share explicit terminology with the former. Dense vector retrieval captures these latent relationships and surfaces related work that might otherwise be overlooked. Integrated with a lightweight RAG layer, these results can be transformed into synthesized answers, enabling exploratory workflows that are closer to how researchers gradually form understanding around a topic.

2. SYSTEM

2.1 Architecture Overview

The system architecture is centered around an Elasticsearch 8.x cluster and a Kibana instance for monitoring and interactive exploration. For the purposes of the demo, we deploy Elasticsearch in a containerized environment and configure each logical index with three primary shards and one replica. This setup allows us to illustrate how documents are distributed across shards and duplicated for fault tolerance. Figure 1 depicts the overall architecture. Client applications interact with Elasticsearch via REST APIs for both indexing and querying. A Python-based ingestion pipeline prepares the data and issues bulk requests, while a separate Python demo client issues text and vector search queries and implements the RAG workflow.

2.2 Data Preparation and Embeddings

We begin with an arXiv metadata dump in JSON format and filter it to retain only papers whose category string

contains at least one Computer Science code (e.g., cs.AI, cs.LG, cs.CL). From the resulting subset we keep four fields: paper identifier, title, abstract, and categories.

The architecture separates concerns across three major layers: **data processing**, **distributed indexing**, and **query execution**. At the bottom, Elasticsearch acts as the storage and retrieval backbone, maintaining two complementary indices for each document: a text-based index optimized for lexical scoring using BM25, and a vector index that stores a dense embedding for semantic similarity search. Both indices share the same document identifiers, allowing the system to return either classical keyword-based results or neural ANN-based matches depending on the query path. Storing text and vectors separately also avoids coupling dense vector structures with BM25 rankings, making it easier to evaluate search strategies in isolation.

The cluster is configured with **three primary shards and one replica per index**, forming a total of six shard copies distributed across three nodes. This configuration illustrates a typical deployment pattern in which data is horizontally partitioned for throughput while replicas provide resilience and enable concurrent search execution. During ingestion, Elasticsearch’s bulk API automatically assigns documents to shards using a consistent hashing algorithm based on the document identifier. As a result, the vector and text representations of the same paper can reside on different nodes, yet both remain accessible through a global query interface that unifies results returned to the client.

On top of Elasticsearch, a lightweight Python layer handles both ingestion and interactive querying. During indexing, the ingest service reads pre-computed MiniLM embeddings and streams batched bulk operations to the cluster, monitoring acknowledgment responses for shard-level failures. At query time, the same component encodes the user query into a dense embedding using the identical SentenceTransformer checkpoint, ensuring vector consistency between stored documents and queries. Elasticsearch then performs similarity scoring inside the cluster using cosine similarity over the `dense_vector` field, returning the top-k matching documents. This design pushes computation close to the data and minimizes application-side filtering.

A simple **RAG workflow** is implemented as a fourth layer on top of retrieval. Rather than building a separate retrieval engine, the system leverages Elasticsearch to fetch the most relevant titles and abstracts, then assembles them as structured context for an external LLM. This separation ensures that the retrieval component remains fully transparent, observable, and recoverable using standard cluster management tools, while generative reasoning is delegated to a stateless application layer. The result is an interactive semantic exploration environment that showcases how vector search can act as a foundation for richer knowledge-oriented applications without abandoning proven distributed system patterns.

Distributed Semantic Search Architecture

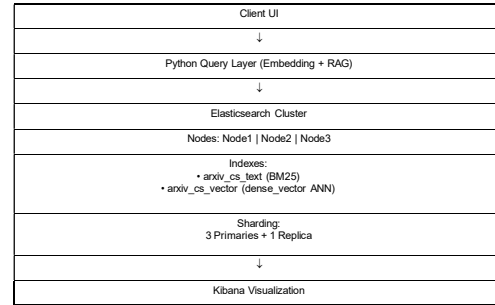


Figure 1: High-level architecture of the distributed semantic search system. Clients index and query arXiv CS papers via Elasticsearch, which stores both text and vector representations across sharded indices.

Data preparation is performed in Python using pandas. We remove rows with missing titles or abstracts and normalize column names. The final dataset contains 846,757 CS papers. To enable semantic search, we compute text embeddings using SentenceTransformers [3] with the all-MiniLM-L6-v2 model. For each paper we construct a text string by concatenating the title and abstract and pass it through the encoder, yielding a 384-dimensional vector. Embeddings are computed in batches to respect memory constraints, and this one-time preprocessing step produces two NDJSON files: a text bulk file and a vector bulk file augmented with an embedding field.

The vector NDJSON is approximately 8.8 GB in size. To make ingestion robust, we later split these files into smaller chunks so that individual `_bulk` requests stay within practical limits.

2.3 Elasticsearch Indices and Sharding

We create two separate indices:

- `arxiv_cs_text`: a text index for keyword search using BM25. The mapping declares title, abstract, and text as text fields and categories as keyword.
- `arxiv_cs_vector`: a vector index for semantic search. It uses the same textual fields plus an embedding field of type `dense_vector` with `dims=384`, `index=true`, and `similarity="cosine"`.

Both indices are configured with three primary shards and one replica. After creation, we use the bulk API to ingest documents. Because Elasticsearch rejects excessively large requests, we split the NDJSON files into many smaller parts: for example, 20,000 lines per chunk for the text index and 4,000 lines per chunk for the vector index (each document consumes two lines in the bulk format: an action line and a source line). We then iterate over all chunks and invoke the bulk endpoint on each.

Once indexing completes, we verify that both indices contain 846,757 documents. Kibana and the `_cat/indices` and `_cat/shards` APIs reveal how segments are distributed across shards and nodes. During the demo, we also show how cluster health changes when a node is stopped and replicas become unavailable, and how it recovers when the node is

restarted.

2.4 Vector Search and RAG

To implement semantic search, we use Elasticsearch’s support for scoring queries with arbitrary scripts over `dense_vector` fields. At query time, we encode the user query with the same SentenceTransformer model, obtaining a 384-dimensional query vector. We then issue a `_search` request against `arxiv_cs_vector` that uses a `script_score` query:

```
source:
"cosineSimilarity(params.query_vector,embedding')
+ 1.0"
```

The script computes the cosine similarity between the query vector and each document’s embedding. The constant offset ensures that scores remain positive. We request the top-*k* documents and return their titles, abstracts, and categories. On top of this retrieval primitive, we implement a simple RAG workflow. For a user question, the client:

1. Encodes the question as a query vector.
2. Runs semantic search to retrieve the top-*k* relevant papers.
3. Builds a context string containing titles and abstracts labeled as [DOC 1], [DOC 2], etc.
4. Sends a prompt containing the question and the context to an external LLM, instructing it to answer based solely on the provided documents and to cite the document identifiers used.

3. DEMO SCENARIO

The live demo walks attendees through three main scenarios: (i) distributed indexing and search, (ii) vector-based semantic retrieval, and (iii) a RAG-style interaction that uses search results as LLM context.

In the first part, we use Kibana to visualize shard placement and cluster health. We issue keyword queries such as “graph neural network” against the `arxiv_cs_text` index and show sample results. We then stop one node to demonstrate how the cluster transitions to yellow health while queries continue to succeed, thanks to the remaining primaries.

In the second part, we issue natural language queries like “techniques for improving transformer models for code generation”. The client encodes the query and performs semantic search against `arxiv_cs_vector`. We compare the returned papers with those obtained from BM25 and discuss cases where vector search uncovers semantically related work with little lexical overlap.

In the final part, we run the RAG workflow. For questions such as “How are graph neural networks applied to recommendation systems?”, the system retrieves relevant papers, constructs a context prompt, and calls an LLM. The generated answer explains how GNNs model user-item graphs and high-order connectivity, and cites the retrieved documents. This illustrates how Elasticsearch can act as a scalable retrieval backbone for RAG workloads over scientific corpora.

4. CONCLUSION

This demo shows how an off-the-shelf distributed search engine can be extended to support large-scale semantic retrieval and RAG. By combining sharding, replication, snapshot/restore, and vector indexing, our system provides a practical platform for interactive exploration of the arXiv CS corpus. We hope the demo will spark discussion on system design patterns for integrating vector search and LLM-based applications into existing data infrastructure.

5. REFERENCES

- [1] Elasticsearch reference. <https://www.elastic.co/guide/en/elasticsearch/reference/current/index.html>. Accessed 2025.
- [2] arXiv e-print archive. <https://arxiv.org>. Accessed 2025.
- [3] N. Reimers and I. Gurevych. Sentence-bert: Sentence embeddings using siamese bert-networks. *Proceedings of EMNLP*, 2019.