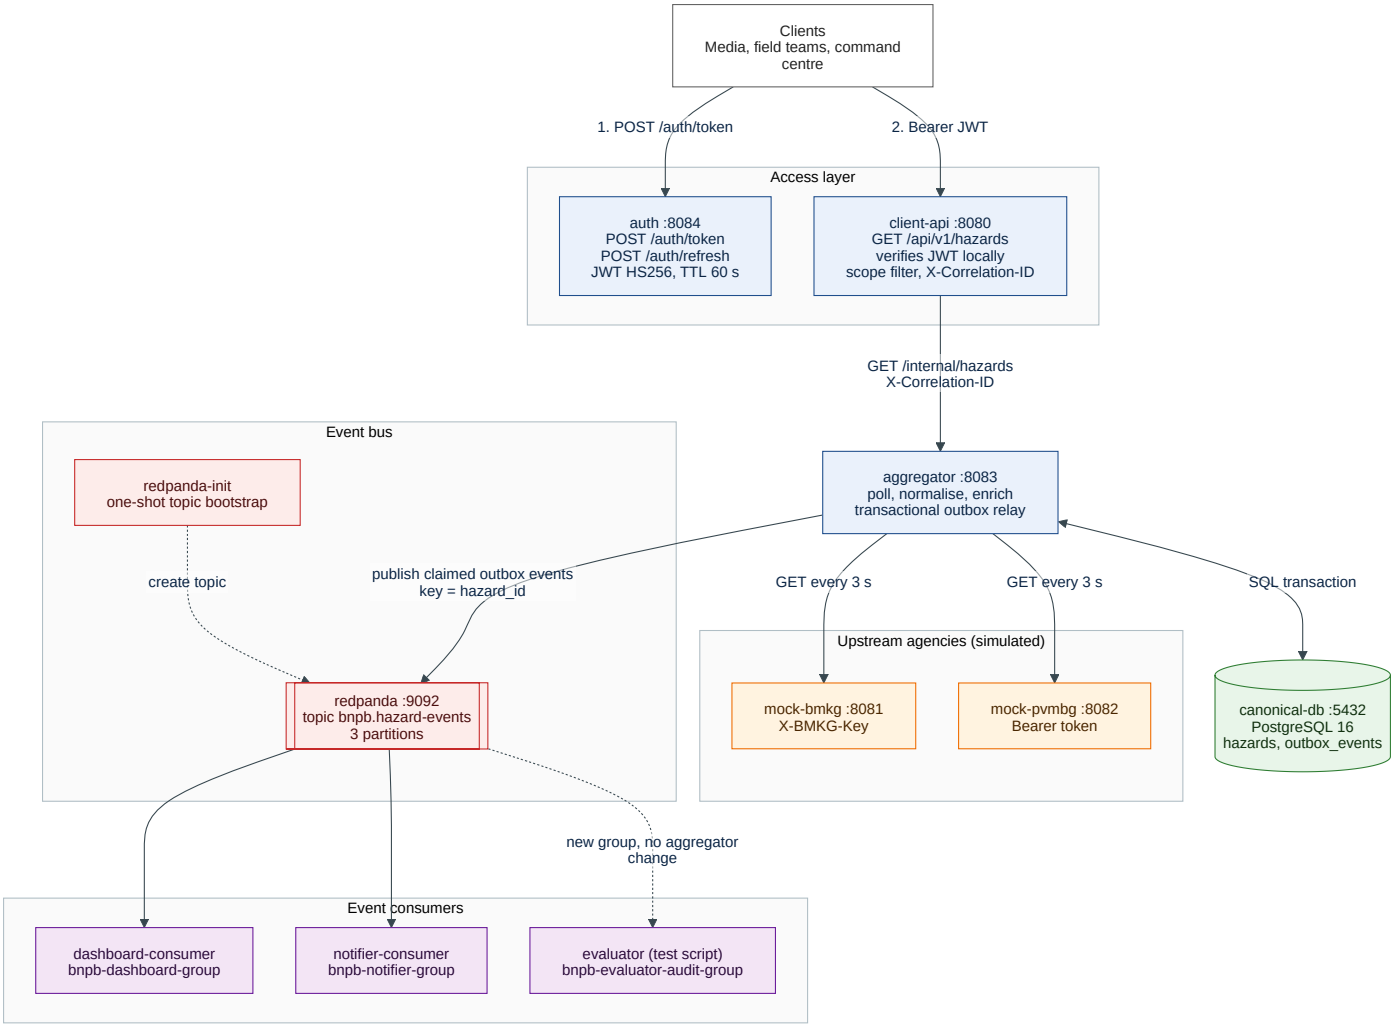
Clients
Media, field teams, command centre
1. POST /auth/token
2. Bearer JWT
Access layer
auth :8084
POST /auth/token
POST /auth/refresh
JWT HS256, TTL 60 s
client-api :8080
GET /api/v1/hazards
verifies JWT locally
scope filter, X-Correlation-ID
GET /internal/hazards
X-Correlation-ID
Event bus
redpanda-init
one-shot topic bootstrap
aggregator :8083
poll, normalise, enrich
transactional outbox relay
create topic
publish claimed outbox events
key = hazard_id
GET every 3 s
GET every 3 s
SQL transaction
Upstream agencies (simulated)
redpanda :9092
topic bnpb.hazard-events
3 partitions
mock-bmkg :8081
X-BMKG-Key
mock-pvmbg :8082
Bearer token
canonical-db :5432
PostgreSQL 16
hazards, outbox_events
new group, no aggregator change
Event consumers
dashboard-consumer
bnpb-dashboard-group
notifier-consumer
bnpb-notifier-group
evaluator (test script)
bnpb-evaluator-audit-group