

Disaster Recovery Plan

PrimeCore Minerals | Secure Multi Office Network

PC-10 | Version 0.1 | 23 September 2026

Status: Proposed plan with untested recovery targets

Owner: IT Administrator | Approver: Project lead | Approval date: Pending

Restore PrimeCore network, identity, files and monitoring after a serious outage or compromise. This plan translates the continuity priorities into a technical recovery order and measurable acceptance tests.

Recovery prerequisites

Maintain an offline contact sheet, configuration exports, supported identity backups, VM definitions, software sources, licences, backup catalogue and separately protected recovery keys. Verify spare host capacity and an isolated recovery network before an exercise. The later backup exercise demonstrates recovery of the Samba AD archive bytes through Restic. Full domain-controller recovery and the proposed recovery targets remain untested; see the screenshot evidence appendix.

Order	Service and dependency	Proposed target
1	EVE host or replacement platform and management access	Within network recovery window
2	HQ firewall, VLANs, routing, DNS and time dependencies	RTO 4 hours; configuration RPO 24 hours
3	Directory and authentication, using supported recovery method	RTO 8 hours; RPO 24 hours
4	Protected file service and original permissions	RTO 8 hours; RPO 4 hours
5	HQ-MONITOR and current monitoring configuration	RTO 8 hours; configuration RPO 24 hours
6	Historical log archive and incident evidence	RTO 24 hours; backup RPO 24 hours

Run independent recovery tasks together only when dependencies permit. RTO is measured from declared disruption to accepted service restoration, not from the moment an administrator starts a restore. Record the selected recovery point, data-loss interval and unachievable targets.

Declaration and isolation

1. Record the incident, affected systems and last known good time. The lead authorises disaster recovery under PC-07; the IT Administrator coordinates technical actions.
2. For compromise, isolate affected hosts, protect backups and preserve evidence before reusing infrastructure. Assess backup cleanliness and rotate compromised credentials through a clean management path.
3. Select a restore point and method with the data owner. Record expected loss, dependencies, required keys and rollback. Use an isolated recovery environment before reconnecting users.

Technical recovery runbook

1. Recover the virtualisation platform and required networks. Recreate verified VM specifications and NIC mappings. Keep recovered domain services isolated until their identity and recovery procedure are checked.
2. Restore the firewall configuration to a compatible platform. Verify WAN addressing, LAN 10.10.10.1/24 and each VLAN gateway in PC-13. Confirm console access before enabling remote management.
3. Recover DNS, time and directory services using the installed product's supported restore method. Validate name resolution, time, domain health, a normal login and denied privileged access. Do not arbitrarily revert one directory controller snapshot into a live replicated domain.
4. Restore protected files to a separate location with ownership and ACLs. Compare sample hashes or known content and test read-only, modify and denied access. The data owner approves replacement of the damaged copy.
5. Recover HQ-MONITOR at the approved address, currently 192.168.90.60/24. Restore rsyslog, Alloy, Loki and Grafana configuration and compatible data. Protect SMTP credentials and verify storage before starting ingestion.
6. Run the logging query and controlled R06 test. Verify a new event in Grafana, a manual contact-point email, and a scheduled test notification. Confirm collector health independently of NoData resolution.
7. Reconnect users in stages, monitor for at least 24 hours, and record owner acceptance, unresolved limitations and actual restoration time. Preserve the incident and recovery records.

Recovery acceptance

Check	Pass evidence
Network	Approved routes work; employee management restriction still blocks
Identity	Authorised login succeeds; restricted test operation fails
Files	Chosen restore point, content and permissions accepted by owner
Monitoring	Fresh source event, central query, notification and health check
Business service	Lead and data owners accept normal operation and known data loss

Failed recovery and exercises

If validation fails, keep users on the continuity method, preserve the failed restore and choose another clean point or rebuild method. Do not repeatedly overwrite the sole recovery copy. Exercise a firewall restore and isolated file restore monthly, and a representative full service recovery each term. Record start, declared incident time, accepted finish, data loss, test evidence and follow-up owner.

References and linked artefacts

[S1] HQ_Network_Addressing_Artefact.md, project deliverables, evidence dated 13 September 2026.

[S2] Security_Alerting_Implementation_Artefact.md, project deliverables, 13 September 2026. Credits Jared Williams for the original monitoring foundation and Adam Donovan for subsequent remediation, alerting and validation.


[S3] Security_Test_Results.md, project deliverables, 13 September 2026, tests T01 to T05 and their evidence limitations.

[S5] SEC-01 to SEC-05 procedures: 01_Network_Access_Procedure.docx; 02_Shared_File_Procedure.docx; 03_Notification_Escalation_Procedure.docx; 04_Logging_Evidence_Procedure.docx; 05_Authentication_Lockout_Procedure.docx. Proposed operating requirements are distinct from implemented controls.

Screenshot evidence appendix

These figures record selected laboratory observations. They support the tested functions described in this artefact. Proposed policies, untested controls and organisational approval remain separate from the pictured results.

Figure E1 Python archive validation succeeds

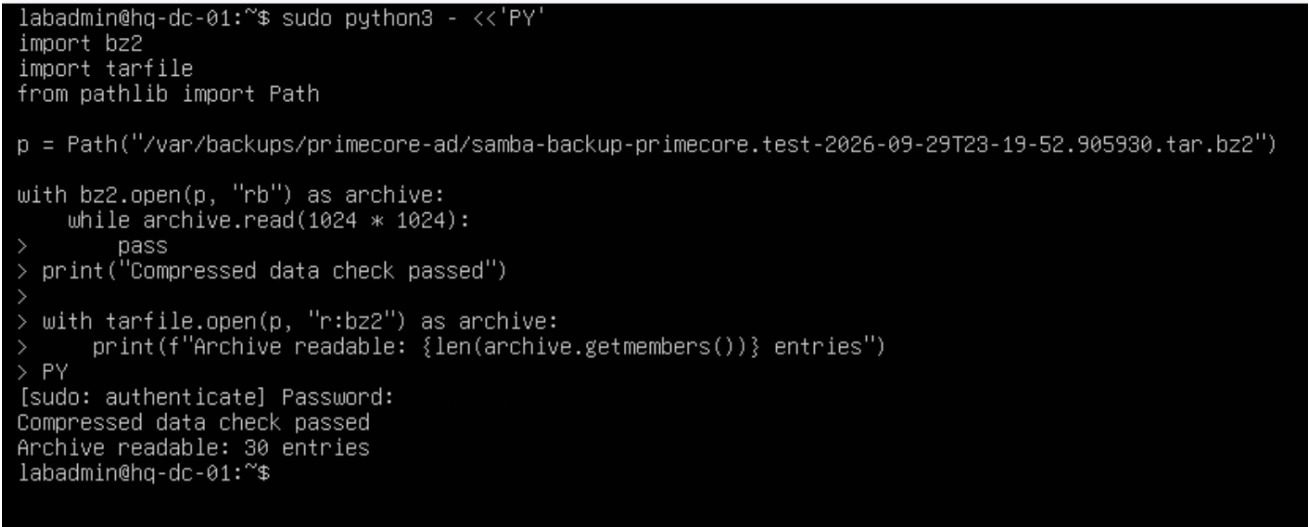

```
labadmin@hq-dc-01:~$ sudo python3 - <<'PY'
import bz2
import tarfile
from pathlib import Path

p = Path("/var/backups/primecore-ad/samba-backup-primecore.test-2026-09-29T23-19-52.905930.tar.bz2")

with bz2.open(p, "rb") as archive:
    while archive.read(1024 * 1024):
        pass
    > print("Compressed data check passed")
    >
    > with tarfile.open(p, "r:bz2") as archive:
    >     print(f"Archive readable: {len(archive.getmembers())} entries")
    > PY
[sudo: authenticate] Password:
Compressed data check passed
Archive readable: 30 entries
labadmin@hq-dc-01:~$
```

Python reads the full compressed stream and the tar catalogue. The result is a passed compressed-data check and 30 entries.

Source evidence: evidence/Backup_Server/B48_a3030f7a-f6a5-4720-aa0e-c2732e90cc36.png

Screenshot evidence continued

Figure E2 Active Directory archive recovery

```
labadmin@HQ-BACKUP:~$ sudo mountpoint -q /srv/backups && sudo restic -r /srv/backups/primecore backup /home/labadmin/backup-staging/hq-dc --tag hq-dc-ad
[sudo: authenticate] Password:
enter password for repository:
repository 4104af51 opened (version 2, compression level auto)
no parent snapshot found, will read all files
[0:00] 100.00% 1 / 1 index files loaded

Files:          1 new,      0 changed,      0 unmodified
Dirs:           4 new,      0 changed,      0 unmodified
Added to the repository: 1.396 MiB (1.360 MiB stored)

processed 1 files, 1.394 MiB in 0:07
snapshot e709d068 saved
labadmin@HQ-BACKUP:~$ sudo restic -r /srv/backups/primecore restore latest --tag hq-dc-ad --target /var/tmp/hq-dc-restore-check
enter password for repository:
repository 4104af51 opened (version 2, compression level auto)
[0:00] 100.00% 2 / 2 index files loaded
restoring snapshot e709d068 of [/home/labadmin/backup-staging/hq-dc] at 2026-09-30 04:42:30.016570392 +0000 UTC by root@HQ-BACKUP to /var/tmp/hq-dc-restore-check
Summary: Restored 5 files/dirs (1.394 MiB) in 0:00
labadmin@HQ-BACKUP:~$ sudo diff -s /home/labadmin/backup-staging/hq-dc/hq-dc-ad.tar.bz2 /var/tmp/hq-dc-restore-check/home/labadmin/backup-staging/hq-dc/hq-dc-ad.tar.bz2
Files /home/labadmin/backup-staging/hq-dc/hq-dc-ad.tar.bz2 and /var/tmp/hq-dc-restore-check/home/labadmin/backup-staging/hq-dc/hq-dc-ad.tar.bz2 are identical
labadmin@HQ-BACKUP:~$ _
```

Restic snapshot e709d068 is restored to a separate location and diff reports identical archive bytes. This is file-level archive recovery, not a full restored domain-controller service or a measured RTO/RPO.

Source evidence: evidence/Backup_Server/B51_508a1820-c4d3-4961-8a88-98c48e7e07f2.png