
Ethical Hacking Lab 2

By Navneet Dubey (260840140019) & Jai Pandey (260840140011)

S3 Bucket Enumeration

Q) The name of the organization is Phoenix Systems. They have been using AWS since 2000. The bucket naming convention used is phoenix-yyyy. However, the additional information is that buckets contain only 3 to 5 files. Two files contain flags. Your job is to find flags from these files.


A) First we prepared a word list based on the pattern provided.

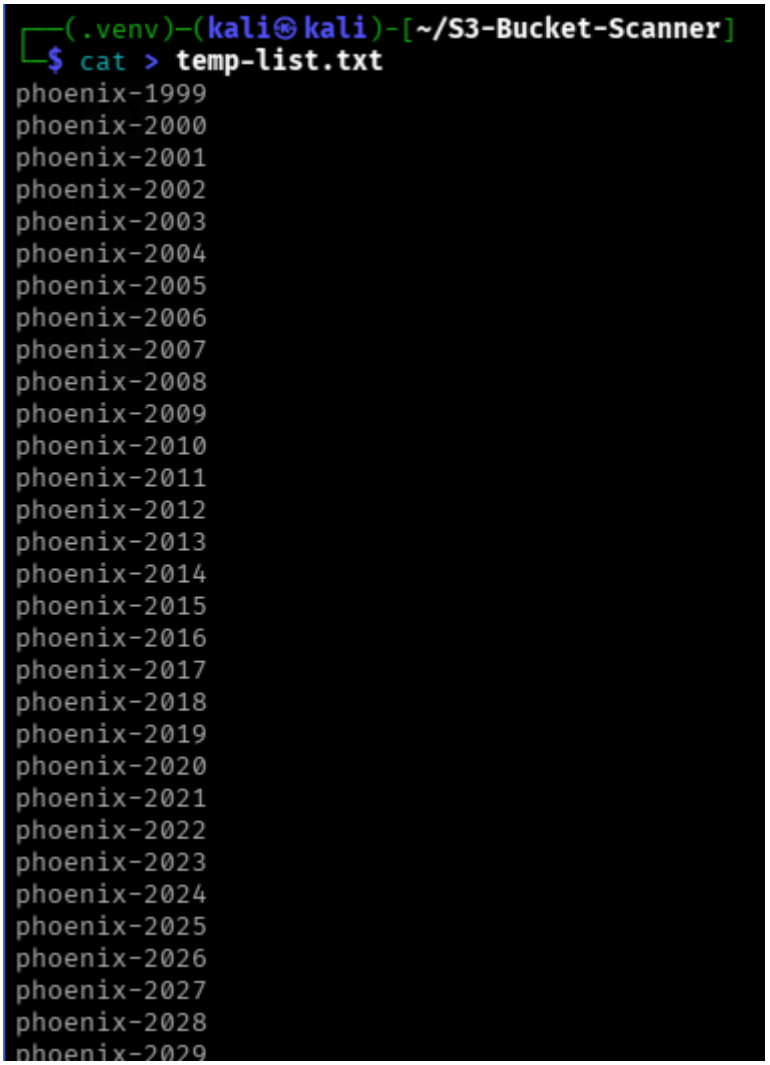


Then we enumerate the list using S3scanner

```
┌──(.venv)─(kali㉿kali)-[~/S3-Bucket-Scanner]
└─$ s3scanner -enumerate -bucket-file ./temp-list.txt
INFO not_exist | phoenix-2001
INFO not_exist | phoenix-2000
INFO not_exist | phoenix-1999
INFO exists    | phoenix-2002 | ap-south-1 | AuthUsers: [] | AllUsers: [READ, READ_ACP] | 3 objects (2.2 kB)
INFO not_exist | phoenix-2003
INFO not_exist | phoenix-2004
INFO not_exist | phoenix-2005
INFO not_exist | phoenix-2006
INFO not_exist | phoenix-2007
INFO not_exist | phoenix-2008
INFO not_exist | phoenix-2009
INFO not_exist | phoenix-2010
INFO not_exist | phoenix-2011
INFO not_exist | phoenix-2012
INFO not_exist | phoenix-2013
INFO exists    | phoenix-2014 | ap-south-1 | AuthUsers: [] | AllUsers: []
INFO not_exist | phoenix-2015
INFO not_exist | phoenix-2016
INFO not_exist | phoenix-2017
INFO not_exist | phoenix-2018
INFO not_exist | phoenix-2019
INFO not_exist | phoenix-2020
INFO not_exist | phoenix-2021
INFO not_exist | phoenix-2022
INFO not_exist | phoenix-2024
INFO exists    | phoenix-2023 | ap-south-1 | AuthUsers: [] | AllUsers: [READ, READ_ACP] | 4 objects (1.8 kB)
INFO not_exist | phoenix-2025
INFO not_exist | phoenix-2026
INFO not_exist | phoenix-2027
INFO not_exist | phoenix-2028
INFO not_exist | phoenix-2029
INFO not_exist | phoenix-2030
INFO not_exist | phoenix-2031
INFO not_exist | phoenix-2032
INFO not_exist | phoenix-2033
INFO not_exist | phoenix-2034
INFO not_exist | phoenix-2035
INFO not_exist | phoenix-2036
INFO not_exist | phoenix-2037
INFO not_exist | phoenix-2038
INFO not_exist | phoenix-2039
INFO not_exist | phoenix-2040
```

We found the first flag

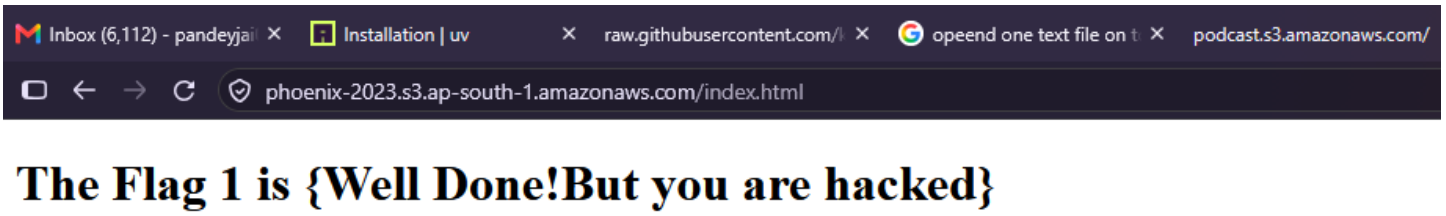

We found the second flag

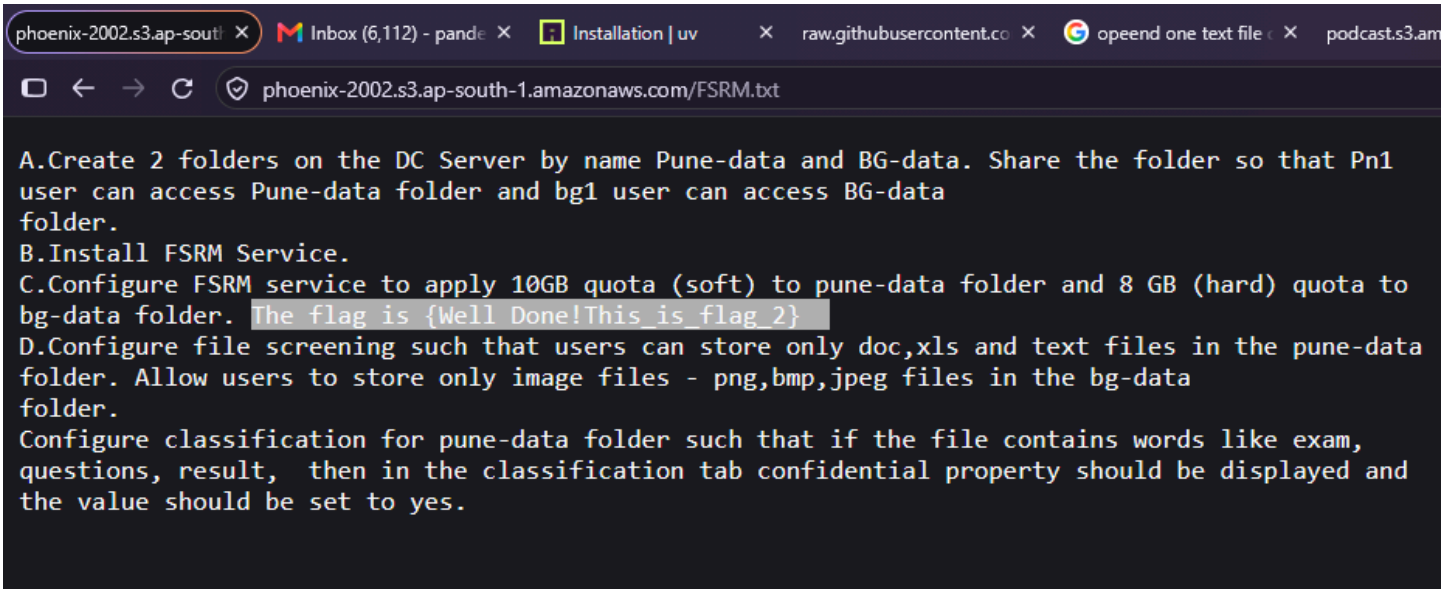
phoenix-2002.s3.ap-south
Inbox (6,112) - pande
Installation | uv
raw.githubusercontent.co
opeend one text file
podcast.s3.am
phoenix-2002.s3.ap-south-1.amazonaws.com/FSRM.txt
A.Create 2 folders on the DC Server by name Pune-data and BG-data. Share the folder so that Pn1 user can access Pune-data folder and bg1 user can access BG-data folder.
B.Install FSRM Service.
C.Configure FSRM service to apply 10GB quota (soft) to pune-data folder and 8 GB (hard) quota to bg-data folder. The flag is {Well Done!This_is_flag_2}
D.Configure file screening such that users can store only doc,xls and text files in the pune-data folder. Allow users to store only image files - png,bmp,jpeg files in the bg-data folder.
Configure classification for pune-data folder such that if the file contains words like exam, questions, result, then in the classification tab confidential property should be displayed and the value should be set to yes.