


Windows Lab 4


By Jai Pandey (260840140011) & Navneet Dubey (260840140019)

To setup LDAP & SRV Records to so Domain users can join Workgroup



Go to Tools > DNS

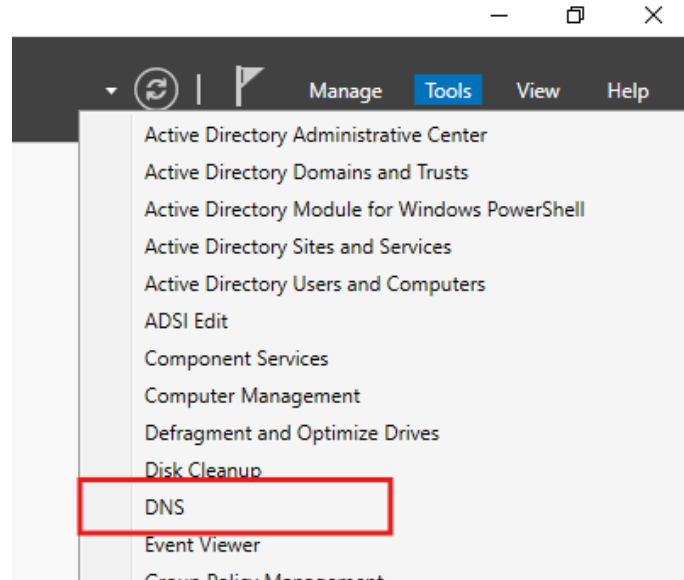


Create a New Domain

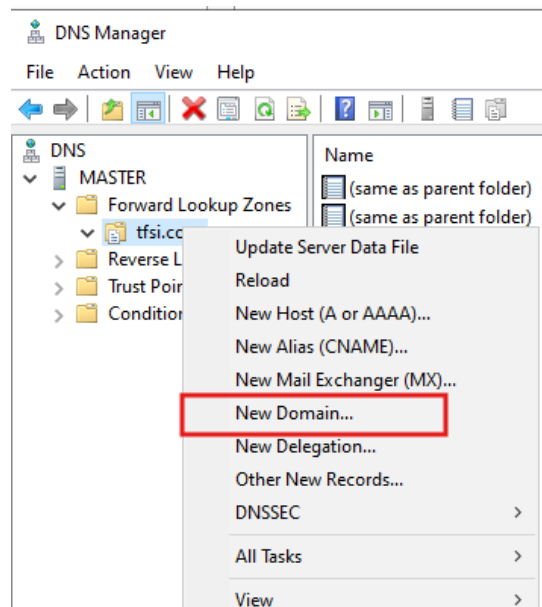


Name the domain as **_msdcs** and create another nested domain named **dc**

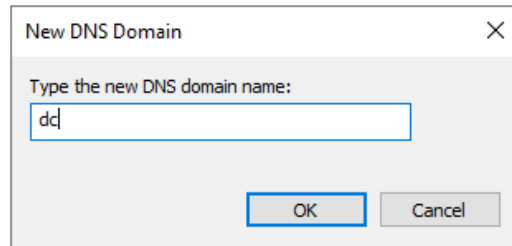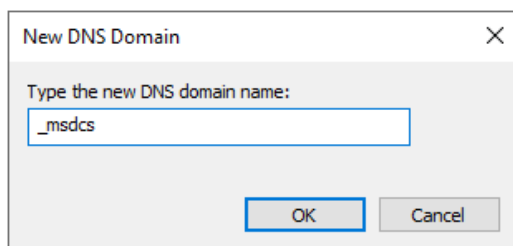

In the dc domain, we need to create a SRV record, so right click and select “Other new Record”

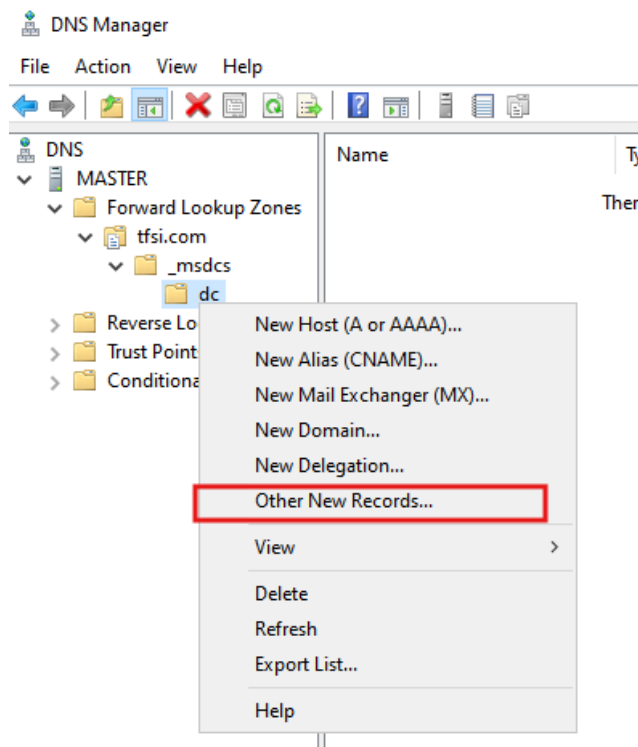

Select the SRV record from the list and click on create record

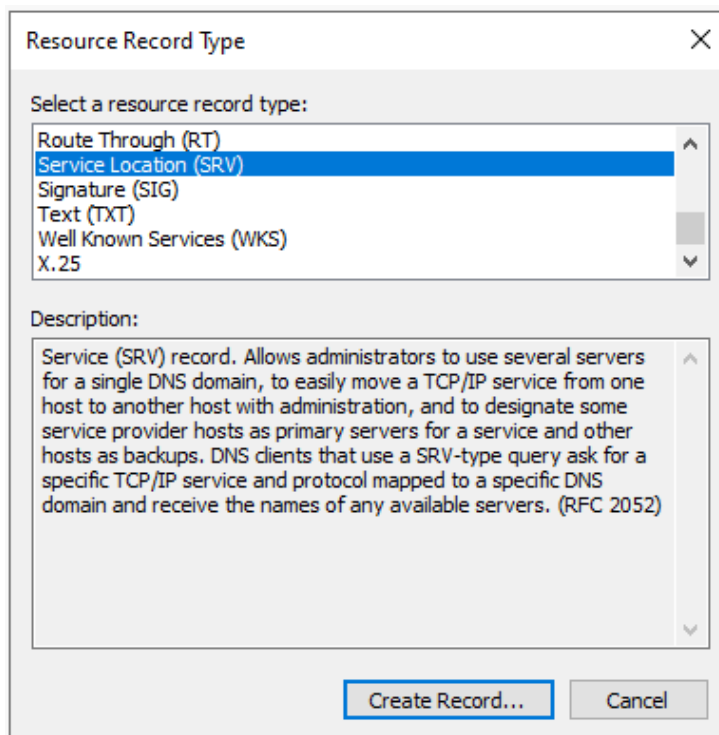

Fill out the information as provided below

New Resource Record

Service Location (SRV)

Domain: dc._msdcs.tfsi.com

Service: _ldap

Protocol: _tcp

Priority: 0

Weight: 0

Port number: 389

Host offering this service: tfsi.com

OK Cancel Help

We can see a newly created _ldap SRV record.

DNS Manager

File Action View Help

DNS

- MASTER
 - Forward Lookup Zones
 - tfsi.com
 - _msdcs
 - dc
 - _tcp
 - Reverse Lookup Zones
 - Trust Points
 - Conditional Forwarders

Name	Type	Data
_ldap	Service Location (SRV)	[0][0][389] tfsi.com

Manageability

Events

_ldap Properties

Service Location (SRV)

Domain: dc._msdcs.tfsi.com

Service: _ldap

Protocol: _tcp

Priority: 0

Weight: 0


Port number: 389

Host offering this service: tfsi.com


OK Cancel Apply Help

Verification (Client Machine)


To open network connection manager, run **ncpa.cpl** in the RUN prompt.

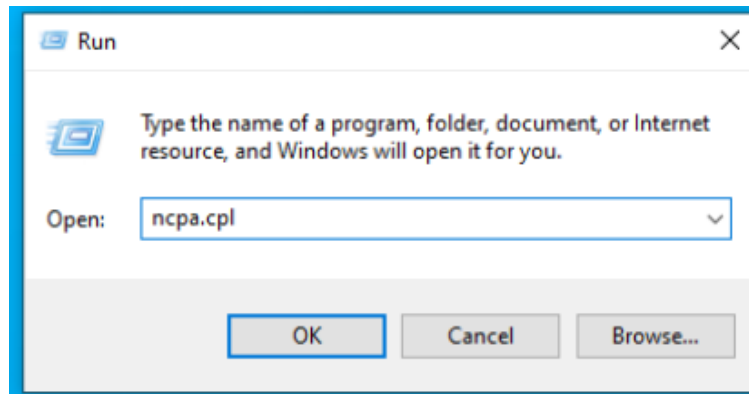


Right click on the network adapter & select the properties option.

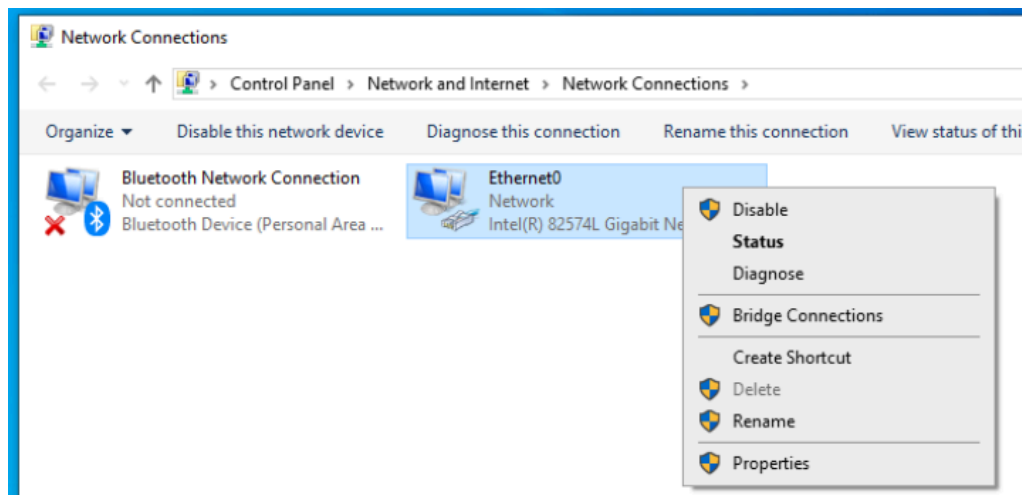


Select the IPv4 Option from the list and click on properties.

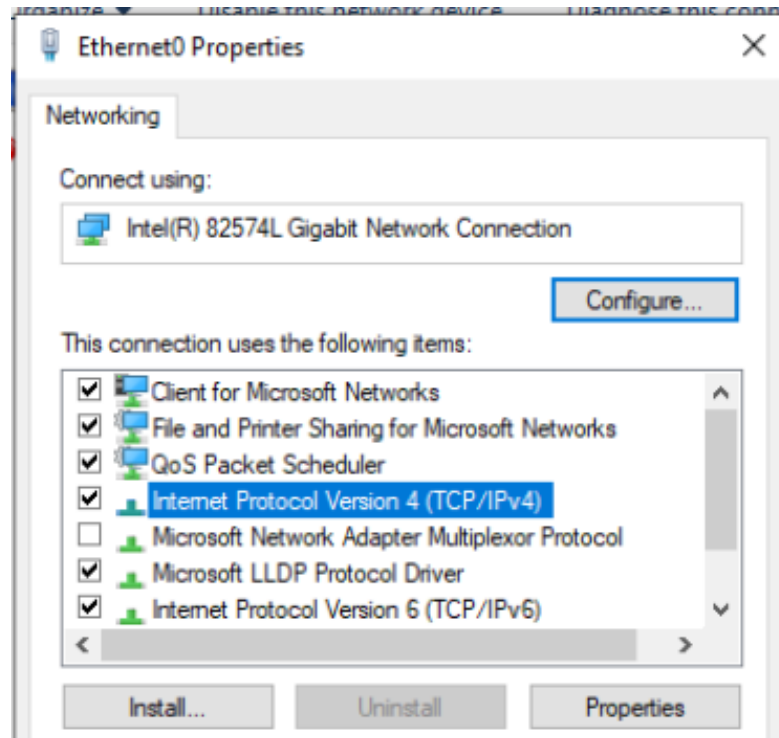


Now assign a static IP to this client machine, with subnet mask, and keep the default gateway as is.
In the DNS Section, use the AD DC as the primary DNS IP, and the gateway as the Alternate DNS Server

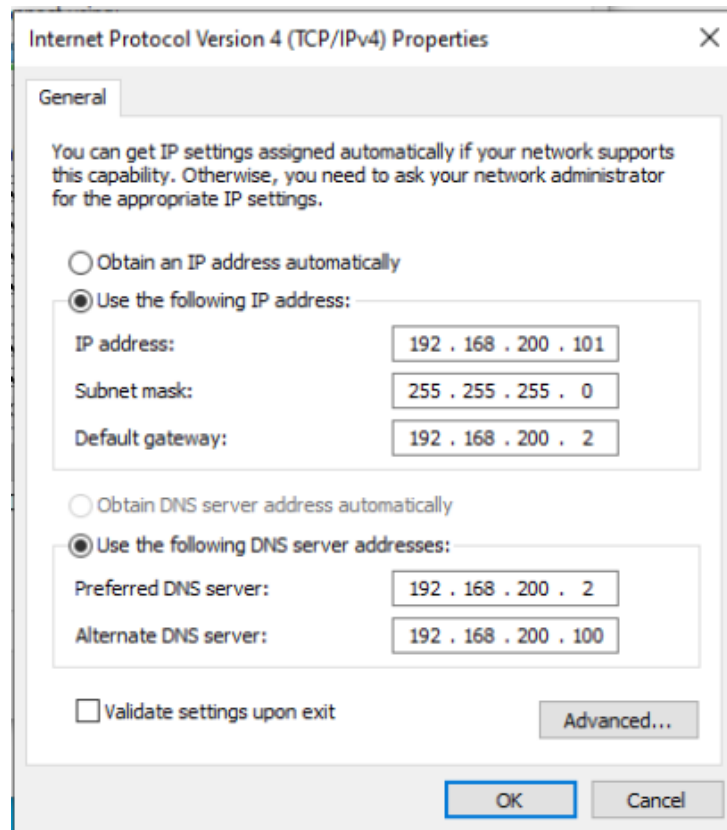


In the about section of the PC, click on the “Advance System Settings” from the hyperlinks.

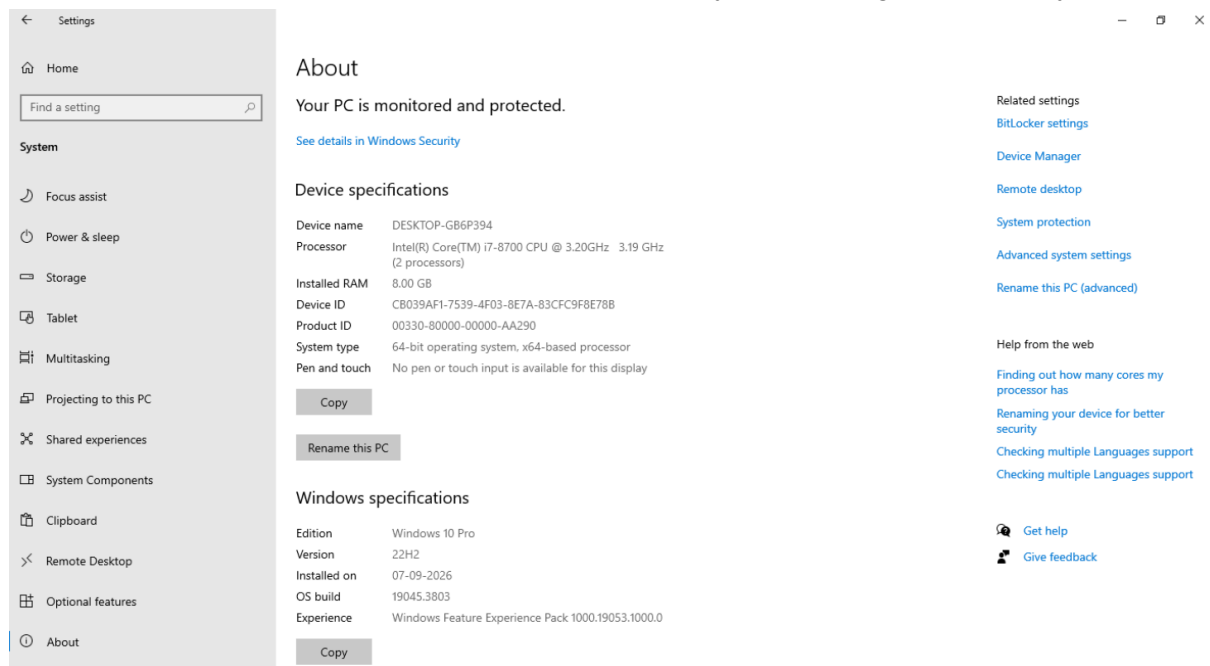


In the Computer Name tab, Click on “Change” Button and in the Member of Section, Select Domain and enter the ADDC Domain.

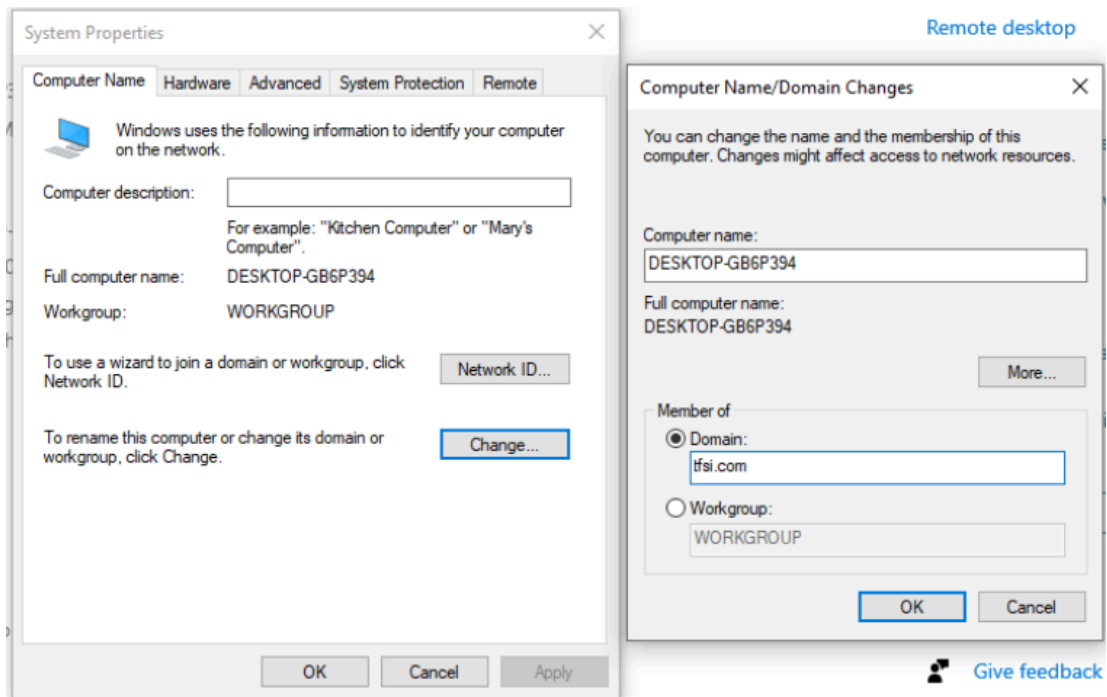


If the DNS is configured properly and the AD DC server is active, this client will join the Domain.

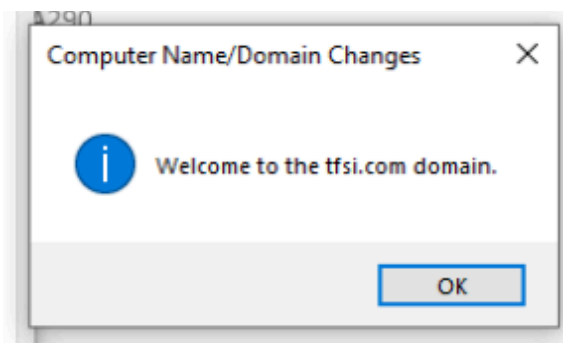


The client machine will be prompted to restart to apply changes.

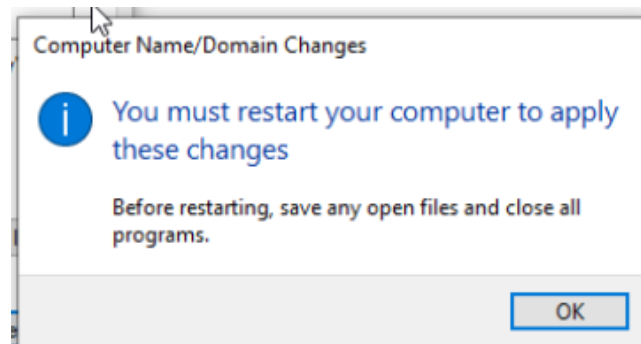

Now we can login as the users that is part of the active directory.

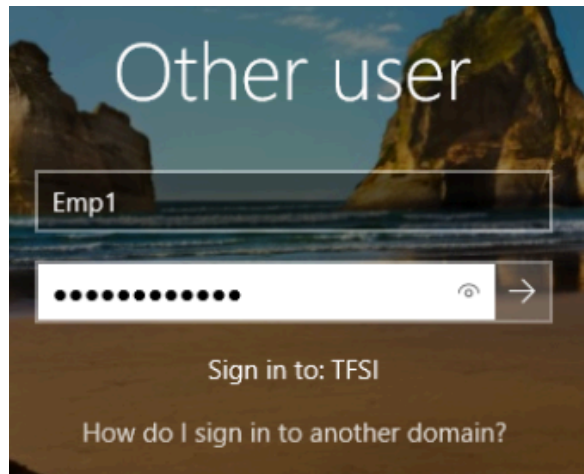

The user will be prompted to create a new password.

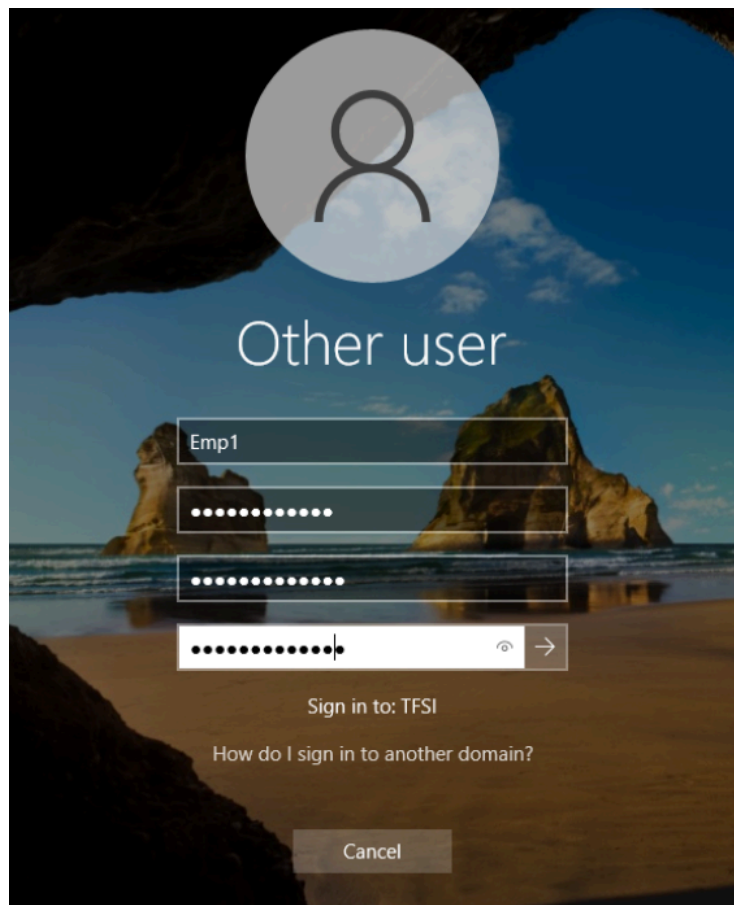

Now we can successfully use this machine as an AD DC client machine.

