

New Skies API User Guide for Modify Booking

Client: API Partners

Project Name: Modify Booking

Version No: 1.1

Release Date: 10 Dec 2019

Document Classification: Restricted Confidential

InterGlobe Aviation Ltd

Tower C, Global Business Park

Mehrauli Gurgaon Road

Gurgaon 122 002, INDIA

www.goindigo.in

Contents

1. Introduction	3
2. Change/Modify Booking.....	3
2.1 Change Booking	3
2.1.1 GetBooking	5
2.1.2 GetAvailabilityVer2	6
2.1.3 Sell Request	7
2.1.4 Sell SSR.....	7
2.1.5 GetBookingFromState	8
2.1.6 AddPaymentToBooking	8
2.1.7 BookingCommit.....	9
2.2 Divide PNR	9
2.2.1 Divide.....	9-10
3. Cancel Booking	11
3.1. Cancel All.....	11-12
3.2. Cancel Journey	13-15
4. Check-in/Undo Check-in	15
4.1. Operation Manager	15
4.2. Check-in	15-22
4.3. Undo Check-in	22-30
4.4. Web Check-in Process.....	31-32
5. Terms and Conditions.....	32
5.1. Cancel/Modify	32
5.2. Web Check-in Service via API	33
6. Test Cases	34

1. Introduction

Modify booking allows passenger to alter booking for journey or date as required. Passenger can cancel the journey segment or complete booking. Passenger can also add ancillaries post booking during the modification of booking.

2. Change a Journey/Date



2.1. Change a Journey/Date

Modification in existing booking can be done by following method.

Methods:-

- GetBooking
- Cancel (Journey)- refer cancel booking section
- GetAvailability
- Sell Request
- Sell SSR (If any)
- GetBookingFromState
- AddPaymentToBooking
- BookingCommit
- GetBooking

Combinability matrix for all bookings and rescheduling (single leg, multi leg and RT).

PRODUCT	PRODUCT CLASS	COMBINABILITY-Product class	Product class to be shown while rescheduling under agency login	Product class to be shown while rescheduling as an anonymous
REGULAR	R	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
RETURN SPECIAL	N	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
FAMILY	A	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
LITE	B	B	R/N/A/T/S/B/J	R/N/A/S/J
FLEXI	J	J	J	J
SALE	S	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
CORPORATE	F	F	F	J
TACTICAL	T	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
COUPON	C	C	C	J
SME	M	M	M	J

2.1.1.1. GetBooking

Retrieves a booking by its record locator. A simple way to get a booking is to provide a signature and a record locator. If the matching PNR is found this method replaces the booking data in booking state with the retrieved booking. Bookings may be retrieved by Record Locator, BookingID or a Third Party Record Locator. An enumeration specifies which data will be used to retrieve bookings. The GetBooking method retrieves the requested booking from the database.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- GetBookingBy
- RecordLocator (If GetBookingBy.RecordLocator)

Request

```
<GetBookingReqData xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <a:GetBookingBy>RecordLocator</a:GetBookingBy>
  <a:GetByRecordLocator>
    <a:RecordLocator>XXXXXX</a:RecordLocator>
  </a:GetByRecordLocator>
  <a:GetByThirdPartyRecordLocator i:nil="true"></a:GetByThirdPartyRecordLocator>
  <a:GetByID i:nil="true"></a:GetByID>
</GetBookingReqData>
</GetBookingRequest>
</s:Body>
</s:Envelope>
```

2.1.2. GetAvailabilityVer2

Gets flight availability and fare information for one or more markets. (Does not update booking state) Availability may be requested in many ways each of which may result in a different Journeys being returned. Be aware that requesting availability for many days and many passenger types will significantly affect the performance of the call. In some cases it may be better to break the request into multiple requests and combine the responses in the client application. Input to GetAvailabilityVer2 controls the number of journeys returned.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- DepartureStation
- ArrivalStation
- BeginDate
- EndDate
- CarrierCode
- FlightType
- PaxCount
- DOW (Day of Week)
- CurrencyCode
- AvailabilityType
- MaximumConnectingFlights
- AvailabilityFilter
- FareClassControl
- FareTypes
- ProductClasses
- PaxPriceTypes

2.1.3. Sell

Sell holds space for the requested journeys and it updates the booking state.

The Sell method provides the way to sell journeys by `SellBy.JourneySellByKey`. `SellJourneyByKey` followed with `UpdatePassengers` to set passenger information in booking state. A description of using `SellJourneyByKey` follows the `SellJourney` details:

- **SellBy.JourneyBySellKey**

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- SellBy(JourneyBySellKey)
- ActionStatusCode
- JourneySellKey
- FareSellKey
- PaxPriceType
- CurrencyCode
- SourcePOS

2.1.4. Sell (SSR)

Sells one or more special service request (SSR) on the current booking. The `SSRRequest` can either specify a Segment level SSR sell or a leg level SSR sell. In order to sell an SSR the booking in state must include at least one passenger. The `SellBy.SSR` updates the current state with the data provided in the `SellRequest`. The sell method updates booking state therefore a commit must be performed to write the changes to the database.

- **SellBy.SSR**

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- SellBy(SSR)
- CarrierCode
- FlightNumber
- DepartureStation
- ArrivalStation
- PassengerNumber
- SSRCode
- CurrencyCode

2.1.5. GetBookingFromState

The GetBookingFromState method retrieves a booking from booking state without accessing the database or altering the booking in booking state. Contrast this with GetBooking which retrieves the requested booking from the database and replaces any booking that may be in booking state.

Note: - The purpose of executing GetBookingFromState API Call to get the fare breakup of all tax components once GST number gets entered therefore we are suggesting you to execute GetBookingFromState API call for updated fare breakup.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)

2.1.6. AddPaymentToBooking: -

Adds the given payment to the booking currently in state. A booking must exist in the booking state before you add a payment to a booking or unpredictable errors occur.

If the payment data provided fails validation the PaymentAddedToState property in the response is set to false and specific information about the failure is under the PaymentValidationErrors collection.

Payment fields can also cause validation errors. The payment fields that are defined in the Management Console and associated to the payment method and set as required must be provided with the payment request, otherwise the payment will not pass validation.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- PaymentMethodType
- PaymentMethodCode
- QuotedAmount
- QuotedCurrencyCode
- AccountNumber
- Status (New)
- Installments (1)

2.1.7. BookingCommit

Within a transaction, BookingCommit updates the booking in state in the database and validates the commit request. This method prepares the booking in state for the commit and then processes the commit. It then generates the delta for the return value, clears the booking in state, and runs the commit synchronization.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- RecordLocator
- CurrencyCode
- PaxCount

2.2. Divide PNR

Divide method is used to Split the passengers from the PNR. Divide can be applicable on PNR having more than one Passenger.

Divide Flow Diagram:-



Methods:-

- GetBooking
- Divide
- Commit
- GetBooking(Parent, Child PNRs)

2.2.1. Divide

This method provides you to split Booked PNR. Child PNR gets created after the Split

Note: It requires a booking in state and a commit after the call.

Required Parameters:

- ContractVersion
- Signature
- DivideAction (DivideAction : Divide)
- SourceRecordLocator
- PassengerNumbers (You have to entered those PassengerNumbers which have to Divided)
- AutoDividePayments (True)

Request

```
<DivideAction>Divide</DivideAction>
<SourceRecordLocator>XXXXXXX</SourceRecordLocator>
<CrsRecordLocators i:nil="true" xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
<PassengerNumbers xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
  <a:short>0</a:short>
  <a:short>2</a:short>
  <a:short>4</a:short>
  <a:short>6</a:short>
</PassengerNumbers>
<AutoDividePayments>true</AutoDividePayments>
<BookingPaymentTransfers i:nil="true" />
```

Identifier of Parent PNR

Once PNR gets divided you can retrieve child PNR from GetBooking API call and verify the same by tag namely 'ParentRecordLocator'. Below is the reference.


```
<GetBookingResponse xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
  - <Booking xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
    <OtherServiceInfoList xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
    <State>Clean</State>
    <RecordLocator>XXXXXXX</RecordLocator> // Parent PNR
    <CurrencyCode>INR</CurrencyCode>
    <PaxCount>4</PaxCount>
    <SystemCode />
    <BookingID>XXXXXXX</BookingID>
    <BookingParentID>0</BookingParentID>
    <ParentRecordLocator>XXXXXXX <ParentRecordLocator> //Child PNR
    <BookingChangeCode />
    <GroupName />
```

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

3. Cancel PNR

Cancel PNR allows user to cancel the journey segment or cancel the complete journey.

Cancel Booking Flow:-

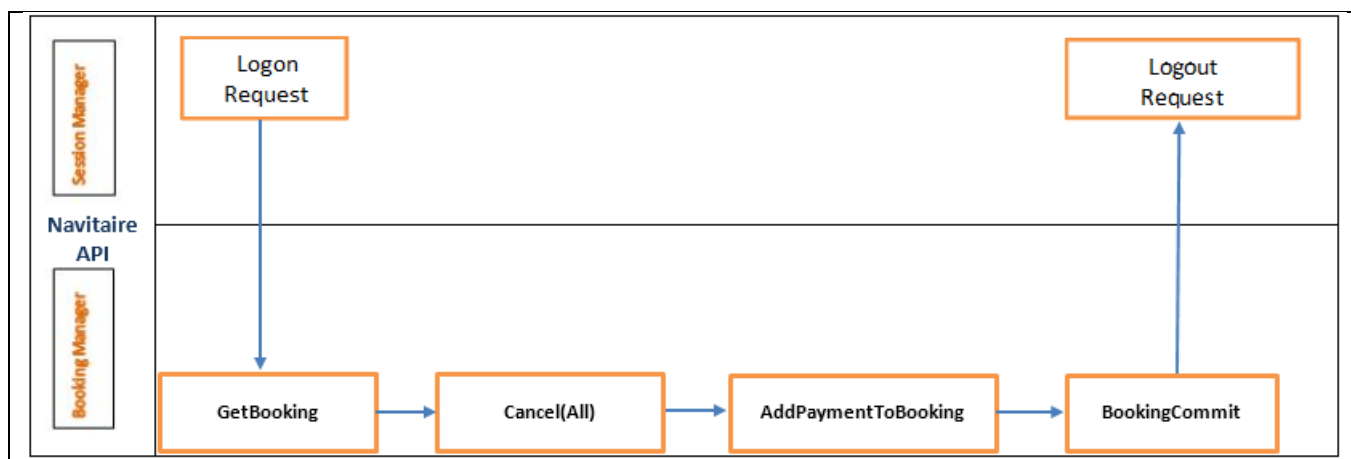

Methods:-

- GetBooking
- Cancel
- AddPaymentToBooking
- BookingCommit
- GetBooking

3.1. Cancel All

This method provides you to cancel complete booking.

Note: If you use Cancel All, it requires a booking in state and a commit after the call.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- CancelBy
 - All(Parameter will cancel the entire PNR)

Request

```
<s:Body>
  <CancelRequest xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
    <CancelRequestData xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
      <CancelBy>All</CancelBy>
      <CancelJourney i:nil="true"></CancelJourney>
      <CancelFee i:nil="true"></CancelFee>
      <CancelSSR i:nil="true"></CancelSSR>
    </CancelRequestData>
  </CancelRequest>
</s:Body>
</s:Envelope>
```

Response

```
<CancelResponse xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
  <BookingUpdateResponseData xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
    <Success>
      <RecordLocator>XXXXXX</RecordLocator>
      <PNRAmount>
        <BalanceDue>-66142.0000</BalanceDue>
        <AuthorizedBalanceDue>-66142.0000</AuthorizedBalanceDue>
        <SegmentCount>0</SegmentCount>
        <PassiveSegmentCount>0</PassiveSegmentCount>
        <TotalCost>0</TotalCost>
        <PointsBalanceDue>0</PointsBalanceDue>
        <TotalPointCost>0</TotalPointCost>
        <AlternateCurrencyCode></AlternateCurrencyCode>
        <AlternateCurrencyBalanceDue>0</AlternateCurrencyBalanceDue>
      </PNRAmount>
    </Success>
```

3.2. Cancel Journey

This method provides you to cancel particular journey of booking.

Note: If you use Cancel journey, it requires a booking in state and a commit after the call.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- CancelBy
 - Journey (**Parameter will Cancel your selected Journey**)
- Journey

Request

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
- <s:Header>
<h:ContractVersion xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
<h:EnableExceptionStackTrace xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
<h:MessageContractVersion i:nil="true" xmlns:h="http://schemas.navitaire.com/WebServices"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
<h:Signature
  xmlns:h="http://schemas.navitaire.com/WebServices">41N1ERI5Lhc=|hjmUo2/zjmWElec1UNWoAFjmHbeyAnEZS+DbifiW
nCo62MqQ7koGhyQ2WNG6OCxz8JnSB0cOAtsu/DIb8gYwhTwQexWfWnXyd1vYGar6HbxFaFiT97nuxxa7tGLf5aNjWXrdwX
vx2g=</h:Signature>
</s:Header>
- <s:Body>
- <CancelRequest xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
- <CancelRequestData xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
<CancelBy>Journey</CancelBy>
- <CancelJourney>
- <CancelJourneyRequest>
- <Journeys>
- <Journey>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State>
<NotForGeneralUse>false</NotForGeneralUse>
- <Segments>
- <Segment>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State>
<ActionStatusCode>HK</ActionStatusCode>
<ArrivalStation>DOH</ArrivalStation>
<CabinOfService i:nil="true" />
<ChangeReasonCode i:nil="true" />
<DepartureStation>DEL</DepartureStation>
<PriorityCode i:nil="true" />
<SegmentType i:nil="true" />
<STA>2019-09-28T03:40:00</STA>
<STD>2019-09-28T01:55:00</STD>
<International>false</International>
- <FlightDesignator xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<a:CarrierCode>6E</a:CarrierCode>
<a:FlightNumber>1701</a:FlightNumber>
<a:OpSuffix />
```

```

    </FlightDesignator>
    <XrefFlightDesignator i:nil="true" xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
    <Fares i:nil="true" />
    <Legs i:nil="true" />
    <PaxBags i:nil="true" />
    <PaxSeats i:nil="true" />
    <PaxSSRs i:nil="true" />
    <PaxSegments i:nil="true" />
    <PaxTickets i:nil="true" />
    <PaxSeatPreferences i:nil="true" />
    <SalesDate>0001-01-01T00:00:00</SalesDate>
    <SegmentSellKey>6E~1701~ ~C~DEL~09/28/2019 01:55~DOH~09/28/2019 03:40~~</SegmentSellKey>
    <PaxScores i:nil="true" />
    <ChannelType>Default</ChannelType>
    <AvailabilitySourceCode i:nil="true" />
    <InventorySourceCode i:nil="true" />
    </Segment>
    </Segments>
    <JourneySellKey>6E~1701~ ~C~DEL~09/28/2019 01:55~DOH~09/28/2019 03:40~~</JourneySellKey>
    </Journey>
    </Journeys>
    <WaivePenaltyFee>false</WaivePenaltyFee>
    <WaiveSpoilageFee>false</WaiveSpoilageFee>
    <PreventReprice>false</PreventReprice>
    <ForceRefareFortineraryIntegrity>false</ForceRefareFortineraryIntegrity>
    </CancelJourneyRequest>
    </CancelJourney>
    <CancelFee i:nil="true" />
    <CancelSSR i:nil="true" />
    </CancelRequestData>
    </CancelRequest>
  </s:Body>
</s:Envelope>

```

Response

```

<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  <s:Body>
    <CancelResponse xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <BookingUpdateResponseData xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <Success>
          <RecordLocator>XXXXXX</RecordLocator>
          <PNRAmount>
            <BalanceDue>-5374.00000</BalanceDue>
            <AuthorizedBalanceDue>-5374.00000</AuthorizedBalanceDue>
            <SegmentCount>2</SegmentCount>
            <PassiveSegmentCount>0</PassiveSegmentCount>
            <TotalCost>25330.00000</TotalCost>
            <PointsBalanceDue>0</PointsBalanceDue>
            <TotalPointCost>0</TotalPointCost>
            <AlternateCurrencyCode />
            <AlternateCurrencyBalanceDue>0</AlternateCurrencyBalanceDue>
          </PNRAmount>
        </Success>
      </BookingUpdateResponseData>
    </CancelResponse>
  </s:Body>
</s:Envelope>

```

```
<Warning i:nil="true" />
<Error i:nil="true" />
<OtherServiceInformations i:nil="true" xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
</BookingUpdateResponseData>
</CancelResponse>
</s:Body>
</s:Envelope>
```

4. Check-in/Undo Check-in

4.1. Operation Manager and Method

Sample Code

```
OperationManagerClient client = new OperationManagerClient();
```

Operation Manager Web Service URL

<https://6etestr4xapi.navitaire.com/Operationmanager.svc>

Methods:-

- CheckInPassengers(CheckIn and Undo CheckIn)

4.2. CheckInPassengers

Web check-in feature helps the customers avoid waiting in long queues at the airport, by simply checking-in free online. Web check-in can be done anytime upto 1 hour prior to the scheduled departure. This method provides you to CheckIn the passengers in booked PNR.

Required Parameters:-

- Signature
- ContractVersion
- RecordLocator
- InventoryLegKey
 - CarrierCode → 6E
 - FlightNumber // It should be same as mentioned in GetBooking Response
 - DepartureDate // It should be same as mentioned in GetBooking Response
 - DepartureStation // It should be same as mentioned in GetBooking Response
 - ArrivalStation // It should be same as mentioned in GetBooking Response

- LiftStatus → CheckedIn (It should be 'CheckedIn' only, in case of Checkin)
- BySegment – False
- CheckSameDayReturn – False
- SkipSecurityChecks – False
- SeatRequired – False
- RetrieveBoardingZone – False
- AllowPartialCheckIn – False
- OtherAirlineCheckin – False
- ReturnDownlineSegments – False
- ProcessDownlineATCI – False
- CheckInPaxRequestList
 - Name -> Title // It should be same as mentioned in GetBooking Response
 - Name -> First Name // It should be same as mentioned in GetBooking Response
 - Name -> Last Name // It should be same as mentioned in GetBooking Response

Request

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace xmlns:h="http://schemas.navitaire.com/WebServices">>false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true" xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></h:MessageContractVersion>
    <h:Signature
      xmlns:h="http://schemas.navitaire.com/WebServices">fC3r4WmJN28=|RRNDwXI+4q+uOOlgPRNotic5PYW7/RX8rT6SXXuNv05FOj58NWW
      5qWWji56WMzyDSCGPcV33ejvKSXZYUEavPiLg8Zf9nRs6QbcglubEjguQF0FiNKdat5gGP4M+M5QKZUas0Sqfs=</h:Signature>
  </s:Header>
  <s:Body>
    <CheckInPassengersRequest xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/OperationService">
      <CheckInMultiplePassengersRequest xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Operation"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <CheckInMultiplePassengerRequestList>
          <CheckInMultiplePassengerRequest>
            <RecordLocator>XJNTPK</RecordLocator>
            <InventoryLegKey xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
              <a:CarrierCode>6E</a:CarrierCode>
              <a:FlightNumber>171</a:FlightNumber>
              <a:OpSuffix i:nil="true"></a:OpSuffix>
              <a:DepartureDate>2018-11-01T00:00:00</a:DepartureDate>
              <a:DepartureStation>DEL</a:DepartureStation>
              <a:ArrivalStation>BOM</a:ArrivalStation>
            </InventoryLegKey>
            <LiftStatus>CheckedIn</LiftStatus>
            <BySegment>false</BySegment>
            <PassengerStatusCode i:nil="true"></PassengerStatusCode>
            <CheckSameDayReturn>false</CheckSameDayReturn>
            <SkipSecurityChecks>false</SkipSecurityChecks>
            <SeatRequired>false</SeatRequired>
            <RetrieveBoardingZone>false</RetrieveBoardingZone>
            <AllowPartialCheckIn>false</AllowPartialCheckIn>
            <OtherAirlineCheckin>false</OtherAirlineCheckin>
            <CheckInDestination i:nil="true"></CheckInDestination>
            <ReturnDownlineSegments>false</ReturnDownlineSegments>
            <InventoryLegKeyDepartureDateTime>0001-01-01T00:00:00</InventoryLegKeyDepartureDateTime>
            <ProcessDownlineATCI>false</ProcessDownlineATCI>
            <CheckInPaxRequestList>
```

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

```

<CheckInPaxRequest>
<Name xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <a:Title>MR</a:Title>
  <a:FirstName>TESTA</a:FirstName>
  <a:MiddleName i:nil="true"></a:MiddleName>
  <a:LastName>TEST</a:LastName>
  <a:Suffix i:nil="true"></a:Suffix>
</Name>
<VerifiedDocs i:nil="true"></VerifiedDocs>
<VerifiedID>false</VerifiedID>
<PassengerID>0</PassengerID>
<IATCISatPreference i:nil="true"></IATCISatPreference>
<ProcessAPPS>false</ProcessAPPS>
<APPSTransitType>TransitDefault</APPSTransitType>
</CheckInPaxRequest>
</CheckInPaxRequestList>
</CheckInMultiplePassengerRequest>
</CheckInMultiplePassengerRequestList>
</CheckInMultiplePassengersRequest>
</CheckInPassengersRequest>
</s:Body>
</s:Envelope>

```

Response

```

<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header></s:Header>
  <s:Body>
    <CheckInPassengersResponse xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/OperationService">
      <CheckInPassengersResponseData xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Operation"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <CheckInMultiplePassengerResponseList>
          <CheckInMultiplePassengerResponse>
            <InventoryLegKey xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
              <a:CarrierCode>6E</a:CarrierCode>
              <a:FlightNumber> 171</a:FlightNumber>
              <a:OpSuffix></a:OpSuffix>
              <a:DepartureDate>2018-11-01T00:00:00</a:DepartureDate>
              <a:DepartureStation>DEL</a:DepartureStation>
              <a:ArrivalStation>BOM</a:ArrivalStation>
            </InventoryLegKey>
            <ReturnDepartureStation></ReturnDepartureStation>
            <ReturnArrivalStation></ReturnArrivalStation>
            <ReturnFlightDesignator xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
              <a:CarrierCode></a:CarrierCode>
              <a:FlightNumber></a:FlightNumber>
              <a:OpSuffix></a:OpSuffix>
            </ReturnFlightDesignator>
            <ContractSegments xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking">
              <a:Segment>
                <State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
                <a:ActionCode>HK</a:ActionCode>
                <a:ArrivalStation>BOM</a:ArrivalStation>
                <a:CabinOfService>Y</a:CabinOfService>
                <a:ChangeReasonCode></a:ChangeReasonCode>
                <a:DepartureStation>DEL</a:DepartureStation>
                <a:PriorityCode></a:PriorityCode>
                <a:SegmentType></a:SegmentType>
                <a:STA>2018-11-01T07:10:00</a:STA>

```

```

<a:STD>2018-11-01T04:55:00</a:STD>
<a:International>false</a:International>
<a:FlightDesignator xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <b:CarrierCode>6E</b:CarrierCode>
  <b:FlightNumber>171</b:FlightNumber>
  <b:OpSuffix></b:OpSuffix>
</a:FlightDesignator>
<a:XrefFlightDesignator
  xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common"></a:XrefFlightDesignator>
<a:Fares>
  <a:Fare>
    <State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
    <a:ClassOfService>U</a:ClassOfService>
    <a:ClassType></a:ClassType>
    <a:RuleTariff></a:RuleTariff>
    <a:CarrierCode>6E</a:CarrierCode>
    <a:RuleNumber>1057</a:RuleNumber>
    <a:FareBasisCode>U0IP</a:FareBasisCode>
    <a:FareSequence>0</a:FareSequence>
    <a:FareClassOfService>U</a:FareClassOfService>
    <a:FareStatus>Default</a:FareStatus>
    <a:FareApplicationType>Route</a:FareApplicationType>
    <a:OriginalClassOfService>U</a:OriginalClassOfService>
    <a:XrefClassOfService></a:XrefClassOfService>
    <a:PaxFares>
      <a:PaxFare>
        <State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
        <a:PaxType>ADT</a:PaxType>
        <a:PaxDiscountCode></a:PaxDiscountCode>
        <a:FareDiscountCode></a:FareDiscountCode>
        <a:ServiceCharges>
          <a:BookingServiceCharge>
            <State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
            <a:ChargeType>FarePrice</a:ChargeType>
            <a:CollectType>SellerChargeable</a:CollectType>
            <a:ChargeCode></a:ChargeCode>
            <a:TicketCode></a:TicketCode>
            <a:CurrencyCode>INR</a:CurrencyCode>
            <a:Amount>5747.0000</a:Amount>
            <a:ChargeDetail></a:ChargeDetail>
            <a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
            <a:ForeignAmount>5747.0000</a:ForeignAmount>
          </a:BookingServiceCharge>
          <a:BookingServiceCharge>
            <State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
            <a:ChargeType>TravelFee</a:ChargeType>
            <a:CollectType>SellerChargeable</a:CollectType>
            <a:ChargeCode>BKF</a:ChargeCode>
            <a:TicketCode>BKF</a:TicketCode>
            <a:CurrencyCode>INR</a:CurrencyCode>
            <a:Amount>200.0000</a:Amount>
            <a:ChargeDetail>DEL-BOM</a:ChargeDetail>
            <a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
            <a:ForeignAmount>200.0000</a:ForeignAmount>
          </a:BookingServiceCharge>
          <a:BookingServiceCharge>
            <State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
            <a:ChargeType>TravelFee</a:ChargeType>
            <a:CollectType>SellerChargeable</a:CollectType>
            <a:ChargeCode>PHF</a:ChargeCode>
            <a:TicketCode>PHF</a:TicketCode>
            <a:CurrencyCode>INR</a:CurrencyCode>
            <a:Amount>50.0000</a:Amount>

```

i:nil="true"

```

<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>50.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>RCF</a:ChargeCode>
<a:TicketCode>RCF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>100.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>100.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>YQ</a:ChargeCode>
<a:TicketCode>YQ</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>400.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>400.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>Tax</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>TTF</a:ChargeCode>
<a:TicketCode>TF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>215.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>215.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>PSF</a:ChargeCode>
<a:TicketCode>PSF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>153.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>153.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>UDF</a:ChargeCode>
<a:TicketCode>UDF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>12.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>12.0000</a:ForeignAmount>

```

```

</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>Tax</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>07CGST</a:ChargeCode>
<a:TicketCode>CGT</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>168.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>168.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>Tax</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>07SGST</a:ChargeCode>
<a:TicketCode>SGT</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>168.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>168.0000</a:ForeignAmount>
</a:BookingServiceCharge>
</a:ServiceCharges>
<a:TicketFareBasisCode></a:TicketFareBasisCode>
<a:ProofOfStatusRequired>false</a:ProofOfStatusRequired>
</a:PaxFare>
</a:PaxFares>
<a:ProductClass>R</a:ProductClass>
<a:IsAllotmentMarketFare>false</a:IsAllotmentMarketFare>
<a:TravelClassCode>Y</a:TravelClassCode>
<a:FareSellKey>0~U~ ~6E~U0IP~1057~0~0~X</a:FareSellKey>
<a:InboundOutbound>None</a:InboundOutbound>
<a:FareLink>0</a:FareLink>
<a:FareDesignator i:nil="true"></a:FareDesignator>
</a:Fare>
</a:Fares>
<a:Legs>
<a:Leg>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ArrivalStation>BOM</a:ArrivalStation>
<a:DepartureStation>DEL</a:DepartureStation>
<a:STA>2018-11-01T07:10:00</a:STA>
<a:STD>2018-11-01T04:55:00</a:STD>
<a:FlightDesignator xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:CarrierCode>6E</b:CarrierCode>
<b:FlightNumber> 171</b:FlightNumber>
<b:OpSuffix></b:OpSuffix>
</a:FlightDesignator>
<a:LegInfo>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:AdjustedCapacity>180</a:AdjustedCapacity>
<a:EquipmentType>320</a:EquipmentType>
<a:EquipmentTypeSuffix></a:EquipmentTypeSuffix>
<a:ArrivalTerminal>1</a:ArrivalTerminal>
<a:ArrvLTV>330</a:ArrvLTV>
<a:Capacity>180</a:Capacity>
<a:CodeShareIndicator></a:CodeShareIndicator>
<a:DepartureTerminal>1</a:DepartureTerminal>
<a:DeptLTV>330</a:DeptLTV>
<a:ETicket>false</a:ETicket>

```

```

<a:FlifoUpdated>false</a:FlifoUpdated>
<a:IROP>false</a:IROP>
<a>Status>Normal</a>Status>
<a:Lid>180</a:Lid>
<a:OnTime></a:OnTime>
<a:PaxSTA>2018-10-22T09:06:15.7811436Z</a:PaxSTA>
<a:PaxSTD>2018-10-22T09:06:15.7811436Z</a:PaxSTD>
<a:PRBCCode>Y180</a:PRBCCode>
<a:ScheduleServiceType></a:ScheduleServiceType>
<a:Sold>0</a:Sold>
<a:OutMoveDays>0</a:OutMoveDays>
<a:BackMoveDays>0</a:BackMoveDays>
<a:LegNests></a:LegNests>
<a:LegSSRs></a:LegSSRs>
<a:OperatingFlightNumber></a:OperatingFlightNumber>
<a:OperatedByText></a:OperatedByText>
<a:OperatingCarrier></a:OperatingCarrier>
<a:OperatingOpSuffix></a:OperatingOpSuffix>
<a:SubjectToGovtApproval>false</a:SubjectToGovtApproval>
<a:MarketingCode></a:MarketingCode>
<a:ChangeOfDirection>false</a:ChangeOfDirection>
<a:MarketingOverride>false</a:MarketingOverride>
<a:AircraftOwner></a:AircraftOwner>
</a:LegInfo>
<a:OperationsInfo i:nil="true"></a:OperationsInfo>
<a:InventoryLegID>2089266</a:InventoryLegID>
</a:Leg>
</a:Legs>
<a:PaxBags></a:PaxBags>
<a:PaxSeats></a:PaxSeats>
<a:PaxSSRs></a:PaxSSRs>
<a:PaxSegments>
<a:PaxSegment>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:BoardingSequence>2</a:BoardingSequence>
<a:CreatedDate>2018-10-22T09:01:39.867Z</a:CreatedDate>
<a:LiftStatus>CheckedIn</a:LiftStatus>
<a:OverBookIndicator></a:OverBookIndicator>
<a:PassengerNumber>0</a:PassengerNumber>
<a:PriorityDate>2018-10-22T09:01:39.907Z</a:PriorityDate>
<a:TripType>None</a:TripType>
<a:TimeChanged>false</a:TimeChanged>
<a:POS xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:State>Clean</b:State>
<b:AgentCode>XXXX</b:AgentCode>
<b:OrganizationCode>6E</b:OrganizationCode>
<b:DomainCode>WWW</b:DomainCode>
<b:LocationCode>HDQ</b:LocationCode>
</a:POS>
<a:SourcePOS xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:State>Clean</b:State>
<b:AgentCode>XXXXXX</b:AgentCode>
<b:OrganizationCode>XXXXXX</b:OrganizationCode>
<b:DomainCode>WWW</b:DomainCode>
<b:LocationCode>HDQ</b:LocationCode>
</a:SourcePOS>
<a:VerifiedTravelDocs></a:VerifiedTravelDocs>
<a:ModifiedDate>2018-10-22T09:01:39.867Z</a:ModifiedDate>
<a:ActivityDate>2018-10-22T09:01:39.867Z</a:ActivityDate>
<a:BaggageAllowanceWeight>15</a:BaggageAllowanceWeight>
<a:BaggageAllowanceWeightType>Kilograms</a:BaggageAllowanceWeightType>
<a:BaggageAllowanceUsed>false</a:BaggageAllowanceUsed>
<a:ReferenceNumber>0</a:ReferenceNumber>

```

```

<a:BoardingPassDetail i:nil="true"></a:BoardingPassDetail>
<a:ServiceBundleCode></a:ServiceBundleCode>
<a:BaggageGroupNumber>0</a:BaggageGroupNumber>
</a:PaxSegment>
</a:PaxSegments>
<a:PaxTickets></a:PaxTickets>
<a:PaxSeatPreferences i:nil="true"></a:PaxSeatPreferences>
<a:SalesDate>2018-10-22T09:01:39.867Z</a:SalesDate>
<a:SegmentSellKey>6E~ 171~ ~DEL~11/01/2018 04:55~BOM~11/01/2018 07:10~</a:SegmentSellKey>
<a:PaxScores></a:PaxScores>
<a:ChannelType>Direct</a:ChannelType>
<a:AvailabilitySourceCode></a:AvailabilitySourceCode>
<a:InventorySourceCode></a:InventorySourceCode>
</a:Segment>
</ContractSegments>
<DownlineSegments i:nil="true"></DownlineSegments>
<IATCISegments i:nil="true" xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"></IATCISegments>
<CheckInPaxResponseList>
<CheckInPaxResponse>
  <PassengerID>290215124</PassengerID>
  <Name xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
    <a:Title>MR</a:Title>
    <a:FirstName>TESTA</a:FirstName>
    <a:MiddleName></a:MiddleName>
    <a:LastName>TEST</a:LastName>
    <a:Suffix></a:Suffix>
  </Name>
  <ErrorList></ErrorList>
  <WarningList i:nil="true" xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></WarningList>
  <ConnectingMsg></ConnectingMsg>
  <PromptForSameDayReturnSeatAssign>false</PromptForSameDayReturnSeatAssign>
  <IsSelecteePax>false</IsSelecteePax>
  <BoardingZone>99</BoardingZone>
  <PaxBPPR></PaxBPPR>
  <InfBPPR></InfBPPR>
  <PassengerIATCIResponse></PassengerIATCIResponse>
  <PaxIAPPClearance></PaxIAPPClearance>
  <InfIAPPClearance></InfIAPPClearance>
  <APPSBoardingDirectiveList></APPSBoardingDirectiveList>
  <SecurityAuthorizationList></SecurityAuthorizationList>
</CheckInPaxResponse>
</CheckInPaxResponseList>
</CheckInMultiplePassengerResponse>
</CheckInMultiplePassengerResponseList>
</CheckInPassengersResponseData>
</CheckInPassengersResponse>
</s:Body>
</s:Envelope>

```

4.3. Undo CheckInPassengers

Undo Web check-in feature helps the customers to change the check-in status back to initial i.e. not checked-in.

Required Parameters:-

- Signature
- ContractVersion
- RecordLocator
- InventoryLegKey
 - CarrierCode → 6E
 - FlightNumber // It should be same as mentioned in GetBooking Response
 - DepartureDate // It should be same as mentioned in GetBooking Response
 - DepartureStation // It should be same as mentioned in GetBooking Response
 - ArrivalStation // It should be same as mentioned in GetBooking Response
- LiftStatus → Default (It should be 'Default' only, in case of Undo Checkin)
- BySegment – False
- CheckSameDayReturn – False
- SkipSecurityChecks – False
- SeatRequired – False
- RetrieveBoardingZone – False
- AllowPartialCheckIn – False
- OtherAirlineCheckin – False
- ReturnDownlineSegments – False
- ProcessDownlineIATCI – False
- CheckInPaxRequestList
 - Name -> Title // It should be same as mentioned in GetBooking Response
 - Name -> First Name // It should be same as mentioned in GetBooking Response
 - Name -> Last Name // It should be same as mentioned in GetBooking Response

Request

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true" xmlns:h="http://schemas.navitaire.com/WebServices"
    xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></h:MessageContractVersion>
    <h:Signature
    xmlns:h="http://schemas.navitaire.com/WebServices">fC3r4WmJN28=|RRNDwXI+4q+uOOlgPRNotic5PYW7/RX8rT6SXXuNv05FOJ58NWW
    5qWWji56WMzyDSCGPcV33ejvKSXZYUEavPIlg8Zfnr9nRs6QbcglubEjguQF0FiNKdat5gGP4M+M5QKZUas0Sqfs=</h:Signature>
  </s:Header>
  <s:Body>
    <CheckInPassengersRequest xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/OperationService">
      <CheckInMultiplePassengersRequest xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Operation"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <CheckInMultiplePassengerRequestList>
          <CheckInMultiplePassengerRequest>
```

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

```

<RecordLocator>XJNTPK</RecordLocator>
<InventoryLegKey xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <a:CarrierCode>6E</a:CarrierCode>
  <a:FlightNumber>171</a:FlightNumber>
  <a:OpSuffix i:nil="true"></a:OpSuffix>
  <a:DepartureDate>2018-11-01T00:00:00</a:DepartureDate>
  <a:DepartureStation>DEL</a:DepartureStation>
  <a:ArrivalStation>BOM</a:ArrivalStation>
</InventoryLegKey>
<LiftStatus> Default</LiftStatus>
<BySegment>false</BySegment>
<PassengerStatusCode i:nil="true"></PassengerStatusCode>
<CheckSameDayReturn>false</CheckSameDayReturn>
<SkipSecurityChecks>false</SkipSecurityChecks>
<SeatRequired>false</SeatRequired>
<RetrieveBoardingZone>false</RetrieveBoardingZone>
<AllowPartialCheckIn>false</AllowPartialCheckIn>
<OtherAirlineCheckIn>false</OtherAirlineCheckIn>
<CheckInDestination i:nil="true"></CheckInDestination>
<ReturnDownlineSegments>false</ReturnDownlineSegments>
<InventoryLegKeyDepartureDateTime>0001-01-01T00:00:00</InventoryLegKeyDepartureDateTime>
<ProcessDownlineIATCI>false</ProcessDownlineIATCI>
<CheckInPaxRequestList>
<CheckInPaxRequest>
  <Name xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
    <a>Title>MR</a>Title>
    <a:FirstName>TESTA</a:FirstName>
    <a:MiddleName i:nil="true"></a:MiddleName>
    <a:LastName>TEST</a:LastName>
    <a:Suffix i:nil="true"></a:Suffix>
  </Name>
  <VerifiedDocs i:nil="true"></VerifiedDocs>
  <VerifiedID>false</VerifiedID>
  <PassengerID>0</PassengerID>
  <IATCISeatPreference i:nil="true"></IATCISeatPreference>
  <ProcessAPPS>false</ProcessAPPS>
  <APPSTransitType>TransitDefault</APPSTransitType>
</CheckInPaxRequest>
</CheckInPaxRequestList>
</CheckInMultiplePassengerRequest>
</CheckInMultiplePassengerRequestList>
</CheckInMultiplePassengersRequest>
</CheckInPassengersRequest>
</s:Body>
</s:Envelope>

```

Response

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
<s:Header></s:Header>
<s:Body>
<CheckInPassengersResponse xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/OperationService">
<CheckInPassengersResponseData xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Operation"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
<CheckInMultiplePassengerResponseList>
<CheckInMultiplePassengerResponse>
<InventoryLegKey xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<a:CarrierCode>6E</a:CarrierCode>
<a:FlightNumber> 171</a:FlightNumber>
<a:OpSuffix></a:OpSuffix>
<a:DepartureDate>2018-11-01T00:00:00</a:DepartureDate>
<a:DepartureStation>DEL</a:DepartureStation>
<a:ArrivalStation>BOM</a:ArrivalStation>
</InventoryLegKey>
<ReturnDepartureStation></ReturnDepartureStation>
<ReturnArrivalStation></ReturnArrivalStation>
<ReturnFlightDesignator xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<a:CarrierCode></a:CarrierCode>
<a:FlightNumber></a:FlightNumber>
<a:OpSuffix></a:OpSuffix>
</ReturnFlightDesignator>
<ContractSegments xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking">
<a:Segment>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ActionCode>HK</a:ActionCode>
<a:ArrivalStation>BOM</a:ArrivalStation>
<a:CabinOfService>Y</a:CabinOfService>
<a:ChangeReasonCode></a:ChangeReasonCode>
<a:DepartureStation>DEL</a:DepartureStation>
<a:PriorityCode></a:PriorityCode>
<a:SegmentType></a:SegmentType>
<a:STA>2018-11-01T07:10:00</a:STA>
<a:STD>2018-11-01T04:55:00</a:STD>
<a:International>false</a:International>
<a:FlightDesignator xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:CarrierCode>6E</b:CarrierCode>
<b:FlightNumber> 171</b:FlightNumber>
<b:OpSuffix></b:OpSuffix>
</a:FlightDesignator>
<a:XrefFlightDesignator
xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common"></a:XrefFlightDesignator>
<a:Fares>
<a:Fare>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ClassOfService>U</a:ClassOfService>
<a:ClassType></a:ClassType>
<a:RuleTariff></a:RuleTariff>
<a:CarrierCode>6E</a:CarrierCode>
<a:RuleNumber>1057</a:RuleNumber>
<a:FareBasisCode>U0IP</a:FareBasisCode>
<a:FareSequence>0</a:FareSequence>
<a:FareClassOfService>U</a:FareClassOfService>
<a:FareStatus>Default</a:FareStatus>
<a:FareApplicationType>Route</a:FareApplicationType>
<a:OriginalClassOfService>U</a:OriginalClassOfService>
<a:XrefClassOfService></a:XrefClassOfService>
<a:PaxFares>
```

i:nil="true"

```

<a:PaxFare>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:PaxType>ADT</a:PaxType>
<a:PaxDiscountCode></a:PaxDiscountCode>
<a:FareDiscountCode></a:FareDiscountCode>
<a:ServiceCharges>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>FarePrice</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode></a:ChargeCode>
<a:TicketCode></a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>5747.0000</a:Amount>
<a:ChargeDetail></a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>5747.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>BKF</a:ChargeCode>
<a:TicketCode>BKF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>200.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>200.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>PHF</a:ChargeCode>
<a:TicketCode>PHF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>50.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>50.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>RCF</a:ChargeCode>
<a:TicketCode>RCF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>100.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>100.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>YQ</a:ChargeCode>
<a:TicketCode>YQ</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>400.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>

```

```

<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>400.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>Tax</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>TTF</a:ChargeCode>
<a:TicketCode>TF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>215.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>215.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>PSF</a:ChargeCode>
<a:TicketCode>PSF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>153.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>153.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>TravelFee</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>UDF</a:ChargeCode>
<a:TicketCode>UDF</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>12.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>12.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>Tax</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>07CGST</a:ChargeCode>
<a:TicketCode>CGT</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>168.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>168.0000</a:ForeignAmount>
</a:BookingServiceCharge>
<a:BookingServiceCharge>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ChargeType>Tax</a:ChargeType>
<a:CollectType>SellerChargeable</a:CollectType>
<a:ChargeCode>07SGST</a:ChargeCode>
<a:TicketCode>SGT</a:TicketCode>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:Amount>168.0000</a:Amount>
<a:ChargeDetail>DEL-BOM</a:ChargeDetail>
<a:ForeignCurrencyCode>INR</a:ForeignCurrencyCode>
<a:ForeignAmount>168.0000</a:ForeignAmount>
</a:BookingServiceCharge>

```

```

</a:ServiceCharges>
<a:TicketFareBasisCode></a:TicketFareBasisCode>
<a:ProofOfStatusRequired>false</a:ProofOfStatusRequired>
</a:PaxFare>
</a:PaxFares>
<a:ProductClass>R</a:ProductClass>
<a:IsAllotmentMarketFare>false</a:IsAllotmentMarketFare>
<a:TravelClassCode>Y</a:TravelClassCode>
<a:FareSellKey>0~U~ ~6E~U0IP~1057~0~0~X</a:FareSellKey>
<a:InboundOutbound>None</a:InboundOutbound>
<a:FareLink>0</a:FareLink>
<a:FareDesignator i:nil="true"></a:FareDesignator>
</a:Fare>
</a:Fares>
<a:Legs>
<a:Leg>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:ArrivalStation>BOM</a:ArrivalStation>
<a:DepartureStation>DEL</a:DepartureStation>
<a:STA>2018-11-01T07:10:00</a:STA>
<a:STD>2018-11-01T04:55:00</a:STD>
<a:FlightDesignator xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:CarrierCode>6E</b:CarrierCode>
<b:FlightNumber> 171</b:FlightNumber>
<b:OpSuffix></b:OpSuffix>
</a:FlightDesignator>
<a:LegInfo>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:AdjustedCapacity>180</a:AdjustedCapacity>
<a:EquipmentType>320</a:EquipmentType>
<a:EquipmentTypeSuffix></a:EquipmentTypeSuffix>
<a:ArrivalTerminal>1</a:ArrivalTerminal>
<a:ArrvLTV>330</a:ArrvLTV>
<a:Capacity>180</a:Capacity>
<a:CodeShareIndicator></a:CodeShareIndicator>
<a:DepartureTerminal>1</a:DepartureTerminal>
<a:DeptLTV>330</a:DeptLTV>
<a:ETicket>false</a:ETicket>
<a:FlifoUpdated>false</a:FlifoUpdated>
<a:IROP>false</a:IROP>
<a>Status>Normal</a>Status>
<a:Lid>180</a:Lid>
<a:OnTime></a:OnTime>
<a:PaxSTA>2018-10-22T09:06:15.7811436Z</a:PaxSTA>
<a:PaxSTD>2018-10-22T09:06:15.7811436Z</a:PaxSTD>
<a:PRBCCode>Y180</a:PRBCCode>
<a:ScheduleServiceType></a:ScheduleServiceType>
<a:Sold>0</a:Sold>
<a:OutMoveDays>0</a:OutMoveDays>
<a:BackMoveDays>0</a:BackMoveDays>
<a:LegNests></a:LegNests>
<a:LegSSRs></a:LegSSRs>
<a:OperatingFlightNumber></a:OperatingFlightNumber>
<a:OperatedByText></a:OperatedByText>
<a:OperatingCarrier></a:OperatingCarrier>
<a:OperatingOpSuffix></a:OperatingOpSuffix>
<a:SubjectToGovtApproval>false</a:SubjectToGovtApproval>
<a:MarketingCode></a:MarketingCode>
<a:ChangeOfDirection>false</a:ChangeOfDirection>
<a:MarketingOverride>false</a:MarketingOverride>
<a:AircraftOwner></a:AircraftOwner>
</a:LegInfo>
<a:OperationsInfo i:nil="true"></a:OperationsInfo>

```

```

<a:InventoryLegID>2089266</a:InventoryLegID>
</a:Leg>
</a:Legs>
<a:PaxBags></a:PaxBags>
<a:PaxSeats></a:PaxSeats>
<a:PaxSSRs></a:PaxSSRs>
<a:PaxSegments>
<a:PaxSegment>
<State xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</State>
<a:BoardingSequence>2</a:BoardingSequence>
<a:CreateDate>2018-10-22T09:01:39.867Z</a:CreateDate>
<a:LiftStatus> Default</a:LiftStatus>
<a:OverBookIndicator></a:OverBookIndicator>
<a:PassengerNumber>0</a:PassengerNumber>
<a:PriorityDate>2018-10-22T09:01:39.907Z</a:PriorityDate>
<a:TripType>None</a:TripType>
<a:TimeChanged>>false</a:TimeChanged>
<a:POS xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:State>Clean</b:State>
<b:AgentCode>XXXX</b:AgentCode>
<b:OrganizationCode>6E</b:OrganizationCode>
<b:DomainCode>WWW</b:DomainCode>
<b:LocationCode>HDQ</b:LocationCode>
</a:POS>
<a:SourcePOS xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:State>Clean</b:State>
<b:AgentCode>XXXXXX</b:AgentCode>
<b:OrganizationCode>XXXXXX</b:OrganizationCode>
<b:DomainCode>WWW</b:DomainCode>
<b:LocationCode>HDQ</b:LocationCode>
</a:SourcePOS>
<a:VerifiedTravelDocs></a:VerifiedTravelDocs>
<a:ModifiedDate>2018-10-22T09:01:39.867Z</a:ModifiedDate>
<a:ActivityDate>2018-10-22T09:01:39.867Z</a:ActivityDate>
<a:BaggageAllowanceWeight>15</a:BaggageAllowanceWeight>
<a:BaggageAllowanceWeightType>Kilograms</a:BaggageAllowanceWeightType>
<a:BaggageAllowanceUsed>>false</a:BaggageAllowanceUsed>
<a:ReferenceNumber>0</a:ReferenceNumber>
<a:BoardingPassDetail i:nil="true"></a:BoardingPassDetail>
<a:ServiceBundleCode></a:ServiceBundleCode>
<a:BaggageGroupNumber>0</a:BaggageGroupNumber>
</a:PaxSegment>
</a:PaxSegments>
<a:PaxTickets></a:PaxTickets>
<a:PaxSeatPreferences i:nil="true"></a:PaxSeatPreferences>
<a:SalesDate>2018-10-22T09:01:39.867Z</a:SalesDate>
<a:SegmentSellKey>6E~ 171~ ~DEL~11/01/2018 04:55~BOM~11/01/2018 07:10~</a:SegmentSellKey>
<a:PaxScores></a:PaxScores>
<a:ChannelType>Direct</a:ChannelType>
<a:AvailabilitySourceCode></a:AvailabilitySourceCode>
<a:InventorySourceCode></a:InventorySourceCode>
</a:Segment>
</ContractSegments>
<DownlineSegments i:nil="true"></DownlineSegments>
<IATCISegments i:nil="true" xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"></IATCISegments>
<CheckInPaxResponseList>
<CheckInPaxResponse>
<PassengerID>290215124</PassengerID>
<Name xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<a>Title>MR</a>Title>
<a:FirstName>TESTA</a:FirstName>
<a:MiddleName></a:MiddleName>
<a:LastName>TEST</a:LastName>

```

```


<a:Suffix></a:Suffix>
</Name>
<ErrorList></ErrorList>
<WarningList i:nil="true" xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></WarningList>
<ConnectingMsg></ConnectingMsg>
<PromptForSameDayReturnSeatAssign>false</PromptForSameDayReturnSeatAssign>
<IsSelecteePax>false</IsSelecteePax>
<BoardingZone>99</BoardingZone>
<PaxBPPR></PaxBPPR>
<InfBPPR></InfBPPR>
<PassengerIATCIResponse></PassengerIATCIResponse>
<PaxIAPPClearance></PaxIAPPClearance>
<InfiAPPClearance></InfiAPPClearance>
<APPSBoardingDirectiveList></APPSBoardingDirectiveList>
<SecurityAuthorizationList></SecurityAuthorizationList>
</CheckInPaxResponse>
</CheckInPaxResponseList>
</CheckInMultiplePassengerResponse>
</CheckInMultiplePassengerResponseList>
</CheckInPassengersResponseData>
</CheckInPassengersResponse>
</s:Body>
</s:Envelope>

```

4.4. Web Check-in Process:-

Web check-in feature helps the customers avoid waiting in long queues at the airport, by simply checking-in free online. Web check-in can be done anytime upto 1 hour prior to the scheduled departure. Post Completion of the booking updates the CheckIn Process can be trigger at this stage you needs to display dangerous goods and restricted articles to your customers.

Below are the dangerous goods and restricted articles.

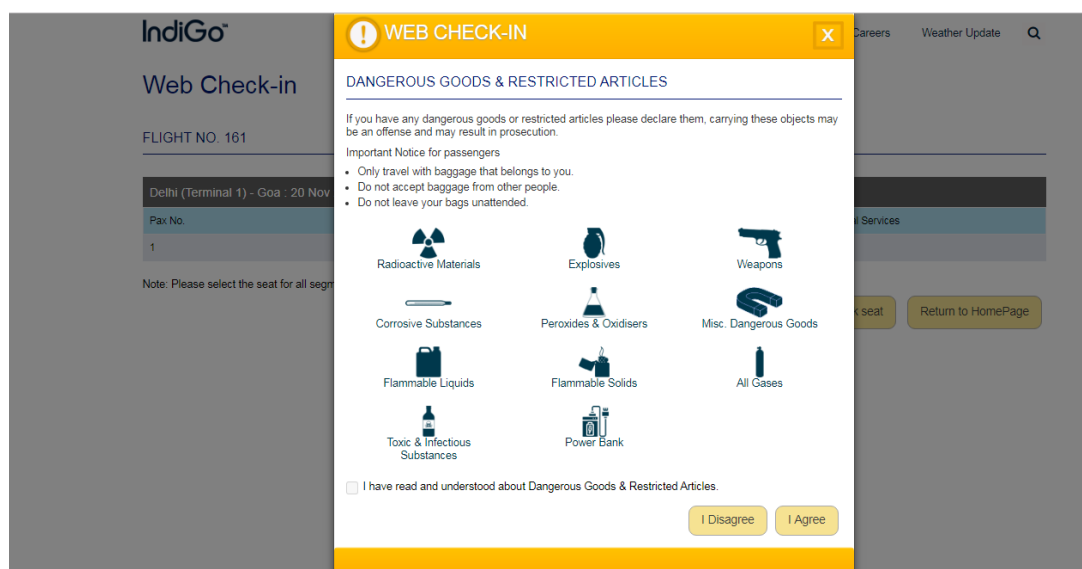

IndiGo

Web Check-in

FLIGHT NO. 161

Delhi (Terminal 1) - Goa : 20 Nov

Pax No. 1

Note: Please select the seat for all segments

WEB CHECK-IN

DANGEROUS GOODS & RESTRICTED ARTICLES

If you have any dangerous goods or restricted articles please declare them, carrying these objects may be an offense and may result in prosecution.

Important Notice for passengers

- Only travel with baggage that belongs to you.
- Do not accept baggage from other people.
- Do not leave your bags unattended.

Radioactive Materials

Explosives

Weapons

Corrosive Substances

Peroxides & Oxidisers

Misc. Dangerous Goods

Flammable Liquids

Flammable Solids

All Gases

Toxic & Infectious Substances

Power Bank

☐ I have read and understood about Dangerous Goods & Restricted Articles.

I Disagree I Agree

You must ensure to display this image and get a consent from the customers prior to proceeding with Check In.

Note: - IndiGo will own above content & Images of dangerous goods and will provide the updated details as per requirement.

Conditions for Web Check-In (To be displayed on OTA Webpage):-

- Passengers holding a valid and confirmed IndiGo booking Reference or PNR
- A PNR containing maximum of 9 passengers and 4 segments
- A PNR containing any 'Special Service Requests (e.g. Infant/Wheelchair etc.) other than Meal SSR must not be allowed to Check-in.
- Passengers travelling on International Flights are also not eligible for Web check-in.

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

Steps for Web Check-in:-



Tips for your trip!

-  Make sure your hand baggage weighs no more than 7 kg
-  Your check-in baggage allowance is 15 kg
-  Take your check-in baggage straight to the bag drop area
-  Carry a printout of your boarding pass

✔ Allowed on board ✘ Not allowed on board



Power Bank

- ✔ On person
- ✔ Hand baggage
- ✘ Check-in baggage



Samsung Galaxy Note 7

- ✘ On person
- ✘ Hand baggage
- ✘ Check-in baggage



E-cigarettes

- ✘ On person
- ✘ Hand baggage
- ✘ Check-in baggage

5. Terms and Conditions

5.1. Cancel/Modify

- Please ensure compliance on following points before making it live on your website
- All request and response XML'S based upon the above mentioned scenarios should be approved and certified by IndiGo.
- Cancellation for a domestic sector can only done 2 Hrs. prior to the schedule departures.
- Cancellation for an International sector can only be done 4 Hrs. prior to the schedule departure.
- Cancellation for a booking made in corporate product class(F) cancellation can be done 1 Hr. prior to the schedule departure.
- In case of any kind of modification in the date or the flight no. of a journey which has SSR associated with it, the SELL SSR XML need to be executed again with updated segment details.

5.2. Web Check-In Service via API

- All Passengers should have pre-selected seats.
- Check-In is allowed any time up to 1 hour before the scheduled departure time of the domestic flight.
- Check-In can be performed for all passengers in a PNR. Check-In for partial passengers is not allowed.
- No further Modification or Cancellation can be done once a PNR is Checked-In.
- PNR should not carry and Infant SSR.
- All segments in the must have a confirmed status only.
- PNR should not have any pending payable amount by the customer.
- PNR should not be pre checked In (Lift Status should not be: Checked-In).
- In case of Modifications or Cancellations, the agent must first perform an Undo Check-In prior to performing the modification or cancellation.
- Undo Check-In is not allowed within 2 hours prior to the scheduled time of Departure for domestic flights.
- Check-In and Undo Check-In is not allowed on international flights.
- Kindly refer Indigo website for Updated Terms and Conditions.

6. Test Cases

Change/Cancellation scenarios

- Cancel a PNR with single segment and single passenger
- Cancel a PNR with single segment and multiple passengers
- Cancel a PNR with multiple segments and multiple passengers
- Cancel a PNR with any of the SSR-(special service request) like, Infant, Meal, Excess baggage

Journey-Date Change scenarios

- Change the date of a reservation with one segment and one passenger
- Change the onwards date of a reservation in a round trip PNR for single passengers
- Change the flight with the same date for the return segment of a reservation in a round trip PNR for multiple passengers
- Cancel anyone of the segment in a round trip PNR
- Change the date of a segment with any of the SSR for single passenger-(special service request) like Infant, Meal and Excess baggage
- Change the date of a segment in a PNR that has multiple passenger and one of the passenger has infant associated with him/her.

Please ensure compliance on following points before making it live on your website

- All request and response XML'S based upon the above mentioned scenarios should be approved and certified by IndiGo.
- Cancellation for a domestic sector can only done 2 Hrs. prior to the schedule departures.
- Cancellation for an International sector can only be done 4 Hrs. prior to the schedule departure.
- Cancellation for a booking made in corporate product class(F) cancellation can be done 1 Hr. prior to the schedule departure.
- In case of any kind of modification in the date or the flight no. of a journey which has SSR associated with it, the SELL SSR XML need to be executed again with updated segment details.

Divide PNR Scenarios

- One way 2 ADT and 2 CHD
- One way 4 ADT and 1 INFT
- Roundtrip 2 ADT and 2 CHD
- Roundtrip 9 ADT and 1 INFT

Note: - Performa all of the above scenarios and perform cancellation and date changes in each of the above scenario for the divided out passenger and share logs.