

New Skies Booking API User Guide (Retail)

Client: API Partners

Project Name: 6E Booking

Version No: 2.3

Draft Date: 30 December 2022

Document Classification: Restricted Confidential

InterGlobe Aviation Ltd

Tower C, Global Business Park

Mehrauli Gurgaon Road

Gurgaon 122 002, INDIA

www.goindigo.in

Contents

1. INTRODUCTION.....	5
1.1. BOOKING API OVERVIEW	5
1.2. ACTIONSTATUSCODE.....	5
1.3. FARE TYPES AND PRODUCT CLASSES.....	5
1.4. THE WEB SERVICES FLOW	6
2. FARE TYPES FOR BOOKING	6
2.1. RETAIL BOOKING	6
2.1.1. Regular Fare.....	7
2.1.2. Family Fare.....	7
2.1.3. Return Fare	7
2.1.4. Sale Fare	7
2.1.5. Lite Fare Booking.....	8
2.1.6. Flexi Fare Booking.....	8
2.1.7. Tactical (Promo) Fare.....	8
2.1.8. Super 6E Fare.....	8
2.1.9. SOS Booking Add in new Booking type process	8
2.2. RETAIL FARE BOOKING.....	10
2.2.1. Retail Fare.....	10
2.2.2. Lite Fare	10
2.2.3. Flexi Fare	10
2.2.4. Super 6E Fare (Domestic and International)	10
2.2.4.1. Product Specification/ Definition / Validation	10
2.2.4.2. API Flow with Service Bundle for Super6E Fare.....	13
2.2.4.2.1. Booking Flow with Service Bundle.....	13
2.2.4.2.2. Modification Flow with (Change Journey Date/ Flight)	14
2.2.4.3. API Methods	14
2.2.4.3.1. Booking Methods	14
2.2.4.3.2. Modify Booking Methods for Change Journey Date/Flights	15
2.2.4.4. Instruction for use of NonBundle SSRs and BundleSSRs.....	15
2.2.4.4.1. Get BundleSSR List.....	15
2.2.4.4.2. Sell (SSR): Bundle SSRs as Replacement (Eg: Meal)	17
2.2.4.4.3. Get NonBundleSSR List	19
2.2.4.4.4. Sell (SSR) : Non Bundle SSRs.....	20
2.2.4.5. Review Methods.....	23
2.2.4.4. Exception Handling in Sell Response.	24
2.2.4.5. Test Cases.....	24
2.2.5. Combinability matrix for all bookings and rescheduling (single leg, multi leg and RT).25	
3. CODESHARE BOOKING.....	25
3.2. IMPORTANT RULES FOR 6E MARKETED CODE SHARE FLIGHTS	26
3.3. PROCESS OF HANDLING THE BOOKING WITH AN “HP” STATUS	27
4. BOOKING TYPES	28
4.2. DIRECT	28
4.3. VIA	28
4.4. ROUNDTrip	28
4.5. CONNECTION	28

4.6	MULTICITY	28
5	PROMOCODE.....	28
6	API DEVELOPMENT BEST PRACTICES	29
6.2	STATEFUL VS STATELESS	29
6.2.4	<i>Stateful Methods</i>	29
6.2.5	<i>Stateless Methods</i>	29
6.3	HTTP COMPRESSION	30
6.4	SESSION POOLING	30
6.5	SESSION TIMEOUT.....	31
6.6	FILTERED METHODS	31
6.6.4	<i>GetBookingFromStateFiltered</i>	31
6.6.5	<i>GetBookingStatelessFiltered</i>	31
6.7	EXCEPTION HANDLING	31
7	SESSION MANAGEMENT.....	32
7.2	SESSIONMANAGERCLIENT AND METHODS	32
7.3	LOGON	32
7.4	LOGOUT	33
7.5	ERROR LIST FOR SESSIONMANAGER.....	34
8	BOOKING MANAGEMENT.....	35
8.2	BOOKINGMANAGERCLIENT AND METHODS	35
8.3	GETAVAILABILITYVER2.....	36
8.4	GETITINERARYPRICE	52
8.4.4	<i>Instructions for GetItineraryPrice API to Get Fare Breakup</i>	53
8.4.5	<i>Instructions for GetItineraryPrice API to Get Fare Breakup on SOS Connection</i>	53
8.5	UPDATECONTACTS	59
8.6	SELL	63
8.7	GETBOOKINGFROMSTATE	67
8.8	GETBAGGAGEALLOWANCES	69
8.9	GETSSRAVAILABILITYFORBOOKING	71
8.10	SELL(SSR).....	74
8.10.4	<i>Direct Flight Logic for SSRRequest</i>	75
8.10.5	<i>Via Flight Logic for SSRRequest</i>	79
8.10.6	<i>Connecting Flight Logic for SSRRequest</i>	82
8.11	UPDATEPASSENGERS	86
8.12	GETSEATAVAILABILITY	91
8.13	ASSIGNSEAT	94
8.14	ADDPAYMENTTOBOOKING.....	96
8.15	BOOKINGCOMMIT	102
8.16	GETBOOKING.....	109
9	CONTENT MANAGEMENT.....	112
9.2	CONTENTMANAGERCLIENT SERVICE AND METHOD	112
9.3	GETFARERULEINFO.....	112
10	GET 6E CITY PAIRS API.....	115
10.2	OND API METHOD AND INTEGRATION PROCESS.	115
11	OSI TYPES.....	117

12	GST AND UIN NUMBER.....	119
13	TEST CASES	119

1. Introduction

The Web Services Application Programming Interface (API) is an integral service arm of the system. The API offers a means of accessing and using data from Navitaire-hosted system. This document serves as integration guide for all IndiGo partners who use Navitaire API as per the agreed contract between IndiGo and its partners.

1.1. Booking API Overview

Booking API provides the methods to create the booking in the system. Booking flow must to be followed while creating the booking. Session has to be created when user logs on contains a booking state for further booking flow. During the booking methods to be used in flow and complete after calling the commit to get the result set i.e. Record Locator or PNR. After completing the booking session must be logged out. Other services can also be added during the booking flow for the passengers.

1.2. ActionStatusCode

IATA standard booking action codes. Specifies a requested action, or the current status of a segment. On many request objects in the New Skies API there is a property called ActionStatusCode. Here are the most common values for this field when requesting action:

NN	Need space. This code should be used in normal sell requests.
----	---

Here are other codes that indicate the current status of a segment:


HP	Confirming. Space is held pending booking confirmation.
KK	Carrier Confirmed
HK	Held and confirmed. Space is held and booking is confirmed.

1.3. Fare Types and Product Classes

Flight Fare	FareTypes	ProductClasses	Example Fare Classes
Retail / Return Trip	R	R	E01P, H07AP, K014AP
Sale Fare (If available)	R	S	LS14AP
Family Fare	R	A	VF14AP

(applicable for 4 - 9 passengers)			
Special Round Trip	R	N	E0IPRT, H07APRT
Flexi Fare	R	J	LUIP
Lite Fare	Z	B	MZIP
Tactical Fare	F	T	E0T7Z
Super 6E	R	O	


1.4. The Web Services flow

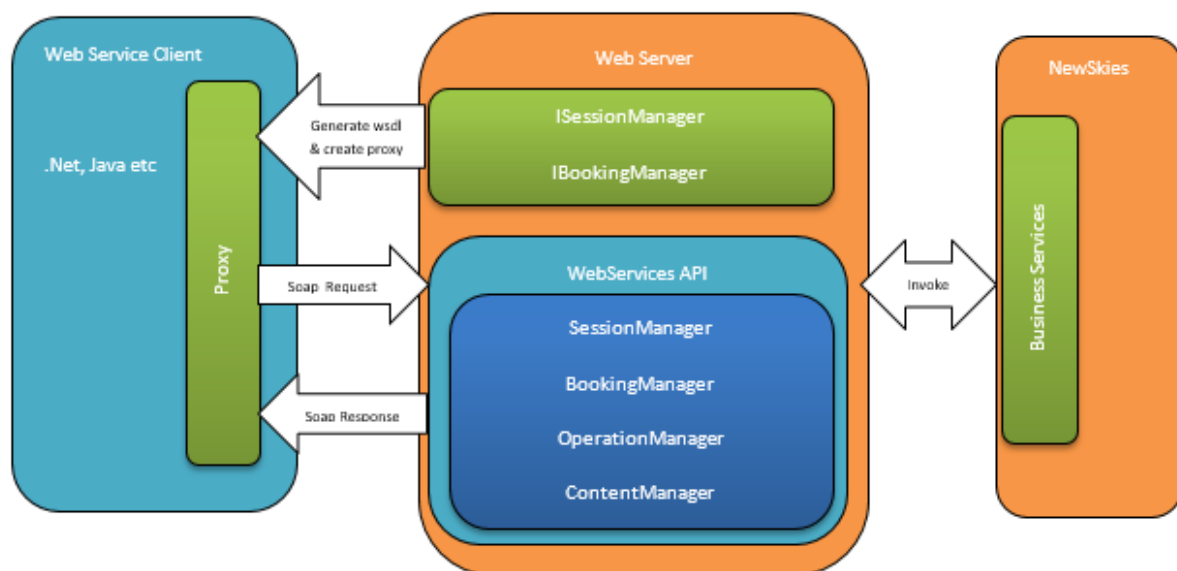

2. Fare Types for Booking

2.1. Retail Booking

Booking with regular fares and product classes without any additional services

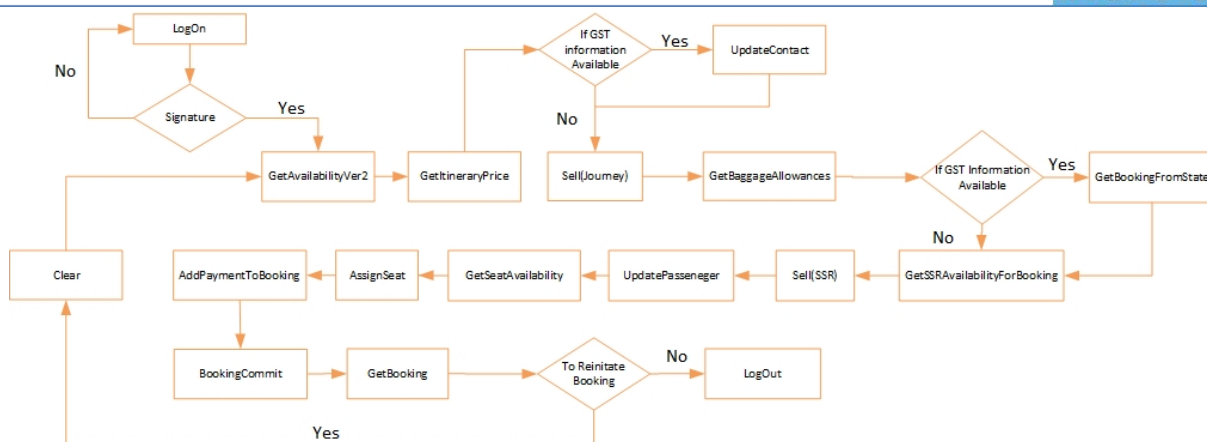

2.1.1. Regular Fare

Regular Fare are standard/normal fares that IndiGo offers via its distribution channels.

Please refer IndiGo website for T&C.

<https://www.goindigo.in/travel-information/en/fare-rules.en-7cc615262a574d5bbf94b92deb680692.html>

2.1.2. Family Fare

A family of 4 to 9 passengers can book special Family Fare and save upto 10% on base fare and fuel charge.

Please refer IndiGo website for T&C.

<https://www.goindigo.in/travel-information/en/fare-rules.en-7cc615262a574d5bbf94b92deb680692.html>

2.1.3. Return Fare

Return Fare are Special Round Trip fares that you will get on Round Trip search that IndiGo offers via its distribution channels.

Please refer IndiGo website for T&C.

<https://www.goindigo.in/travel-information/en/fare-rules.en-7cc615262a574d5bbf94b92deb680692.html>

2.1.4. Sale Fare

Sale Fare are discounted fares that IndiGo offers via its distribution channels.

Please refer IndiGo website for T&C.

<https://www.goindigo.in/travel-information/en/fare-rules.en-7cc615262a574d5bbf94b92deb680692.html>

2.1.5. Lite Fare Booking

This is hand-baggage only fare. If you are travelling light with cabin baggage only, you can now look forward to additional savings on our always affordable fares.

Please refer IndiGo website for T&C.

<https://www.goindigo.in/travel-information/en/fare-rules.en-7cc615262a574d5bbf94b92deb680692.html>

2.1.6. Flexi Fare Booking

This fare allows unlimited changes. Just right for the busy business travelers who want flexibility and comfort in their travel.

Please refer IndiGo website for T&C.

<https://www.goindigo.in/travel-information/en/fare-rules.en-7cc615262a574d5bbf94b92deb680692.html>

2.1.7. Tactical (Promo) Fare

Promo Fare are only for selected Travel Partners that IndiGo offers via its distribution channels.

Please refer IndiGo website for T&C.

<https://www.goindigo.in/travel-information/en/fare-rules.en-7cc615262a574d5bbf94b92deb680692.html>

2.1.8. Super 6E Fare

Book with Super 6E fare to enjoy a host of complimentary benefits and services.

Please refer IndiGo website for T&C.

<https://www.goindigo.in/add-on-services/super-6e-fare.html>

2.1.9. SOS Booking Add in new Booking type process

Instructions for Multi Stop Connecting SoS Logic

- **'ProductClasses'** is optional field in GetAvailability Request. Either you can enter valid ProductClasses or keep this field to null.
- Base fare would be **'FarePrice'** + **'ConnectionAdjustmentAmount'** (if any)
- Logic should be **'JourneyBySellKey'** in **GetItineraryPrice**
- Logic should be **'JourneyBySellKey'** in **Sell Request**
- In case of multi Stop Over connecting flight you need to clubbed all segment Faresellkey by caret symbol (^). For ex (**Faresellkey1^ Faresellkey2^ Faresellkey3**).
- Under GetItineraryPrice Response you will get **Base fare + fare breakup** under **Segment1** and SUM of sector fares IF any under **Segment 2** and **Segment 3**.
- SSR's – INFANT need to sell under all segments.
- SSR's – Retail Meal (VGML/NVML) can be sell in all segments or as per passenger's choice.

- SSR's – Baggage need to sell only on first segment of connecting flight.
 - In case of Corporate booking Meal (CPML) is only needs to Sell First Segment of Connecting flight.
 - Combined FareSellKey needs to be added of all segments with caret symbol (^).
- Below is the example


**1~R~~6E~ROINT~5000~~0~12~~^2~J~~6E~JOIP~1057~~0~31~~X^1~J~~6E~JO
INT~5000~~0~3~~**

- To avail the SSRs will remain the same.
- Structure of API XML Response will be same.
- If there is more than 2 Stop over Connecting flight than logic should be same as per above and you needs to combined all segments FareSellKey with caret symbol (^).

List of multi stop connection logic for fare Combinations and benefits

Multi stop connection SoS Fare combinations			
First Segment	Second Segment	Third Segment	Benefit/ Treated as
Sale(S)/Retail (R)	Retail (R)/ Sale(S)	Sale(S)/Retail (R)	Retail
Retail (R)/RT Special (N)	RT Special (N)/ Retail (R)	Retail (R)/RT Special (N)	Retail
RT Special (N)/ Sale(S)	Sale(S)/ RT Special (N)	RT Special (N)/ Sale(S)	RT Special

- Agent needs to display combined fare (Segment 1 + Segment2 + Segment3 + if More Segments) on their portal.
- Fare mapping on segments based on One to One relationship. For ex. combine 1st Fare of the 1st Segment with the 1st Fare of the 2nd Segment, the 2nd Fare of the 1st Segment with the 2nd Fare of the 2nd Segment, , the 3rd Fare of the 1st Segment with the 3rd Fare of the 3rd Segment and so on (if there are more fares under each Segment). Below is the figure for more reference :

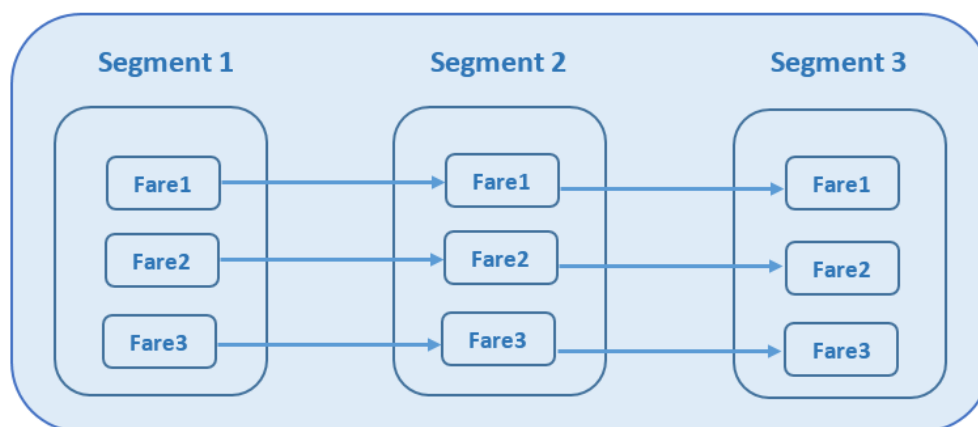

2.2. Retail Fare Booking

2.2.1. Retail Fare

- Retail fare can be combined with Retail Fares.
- Rescheduling can be done from Retail to Retail Fares only.
- In case of RoundTrip Journey, you can't combine Retail fare with Corporate/Coupon or SME fares.

2.2.2. Lite Fare

- Lite fare can be combined with Lite Fares.
- Rescheduling can be done from Lite to Lite Fares only.
- In case of RoundTrip Journey, you can't combine lite fares with any other fares.
- In Case of RoundTrip Journey lite fare can be sell with lite fare only.

2.2.3. Flexi Fare

- Flexi fare can be combined with Flexi Fares.
- Rescheduling can be done from Flexi to Flexi Fares only.
- In case of RoundTrip Journey, you can't combine Flexi fares with any other fares.
- In Case of RoundTrip Journey Flexi fare can be sell with Flexi fare only.

2.2.4. Super 6E Fare (Domestic and International)

2.2.4.1. Product Specification/ Definition / Validation

Product Name	Super 6E
Product Description	A fare for retail customers with offering at par with corporate fares, objective is to offer a fare with the most flexible cancelation and change

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved


	<i>polices along with free meals, Free seats (Including XL rows), Free FFWD, Free PRBG, Free BRB, 10KG excess baggage and Zero Convenience fee.</i>
<i>Product Details</i>	<i>This product will give customers with following benefits"</i> <i>1. No convenience fee applicable</i> <i>2. Free snack combo of customer's choice (1 snack + 1 non-alcoholic beverage)</i> <i>3. Free Seat including XL Rows</i> <i>4. An extra 10 kg baggage allowance</i> <i>5. Free Fast Forward-FFWD (wherever available)</i> <i>6. Free 6E Quick Board -PRBG (wherever available)</i> <i>7. Free Delayed and lost baggage protection service -LBG/BRB (wherever available)</i> <i>8. An additional piece of checked –in baggage on domestic sectors.</i> <i>9. Unlimited change outside 03 days of flight Departure and lower change fee for 0-3 days flights up to 2 hrs. with minimal charge of INR 500 for domestic sectors and reduced change fee till 4 days beyond departure at ₹500, and within 3 days before departure, at ₹900 for international sectors.</i> <i>10. Customer can cancel booking upto 2 hrs. with minimal charge of INR 500 for domestic sectors and INR upto 4 hrs. with minimal charge of INR 1500 for international sectors.</i>
<i>Product Class</i>	<i>"O"</i>
<i>Fare type</i>	<i>"R"</i>
<i>Product Approach</i>	<i>Product class "O" will have all the features mentioned in 'Product details' section above.</i>
<i>Channel / Point of Sale***</i>	<i>API/Agent login</i>
<i>Sector Applicability</i>	<i>Applicable for Domestic and International sectors</i>
<i>Aircraft Applicability</i>	<i>Applicable for all type of aircraft</i>
<i>Trip type</i>	<i>Applicable for one way, Roundtrip and multicity</i>
<i>Passenger Type</i>	<i>Will be applicable all for all type of passenger</i>
<i>Change</i>	<i>No change fee till up to 4 days beyond domestic flight departure, and at a nominal fee of ₹500 within 3 days before domestic flight. International flyers can avail change fee till 4 days beyond departure at ₹500, and within 3 days before departure, at ₹900.</i>
<i>Cancellation</i>	<i>Enjoy reduced cancellation on domestic flights, for ₹500, and on international flights for ₹1500.</i>
<i>Combinability in case of SOS/ROUND TRIP/MULTICITY</i>	<i>Combinability Of Super6E fare with any other product class should be restricted at the time of booking.</i>

	Combinability of ' Super6E Fare' can only be combined with ' Super6E Fare' for change of 'Round Trip' and 'Multicity' booking, combinability applicable for both booking and modification
Baggage allowance	Extra 10KG Baggage allowance for both Domestic & International.
SSR	SSR SUPR will be a part of LTCP bundle should be pushed while booking SUPER 6E fare
Advance Purchase	No Restriction
Seat & Meal Selection	To be made mandatory
Seat	All Seats free (including XL rows).
Meal	All meals will be free. In case of shorter duration flight, CPML should be pushed as a meal option.
ServiceBundleCode	LTCP : Required to added for All Journey, re-added during Change Journey
Ancillary services	- All the ancillary services included in the offering of Super6E fare are being pushed through the bundle code "LTCP" - Seat- fee of all seats will be zero. However, selection of seat has to be made mandatory by the API partner - Meal- meal fee will be zero. However, selection of meal has to be made mandatory by the API partner, in case of a shorter duration flight a choice of meal is not available CPML meal code will be pushed automatically, for meal upgrade refer to the below section - PRBG (Priority boarding)- will be pushed automatically where available - FFWD (fast forward)- will be pushed automatically where available - Connecting flight - Seat- fee of seat will be zero. However, selection of seat has to be made mandatory by the API partner - PRBG (Priority boarding)- will be pushed automatically where available - FFWD (Fast forward) – Will be pushed automatically where available - Meal – Meal fee will be Zero. However, selection of meal has to be made mandatory by the API partner. In case of connecting flight meal should be pushed on one leg only


	(first leg of journey and if meal not available on the first leg then the meal to be pushed on the second leg).
SSR Association matrix on Connecting Flight	Please do refer: 2.2.3.3. Connecting Flight logic for SSR Request of the NewSkies Ancillaries API Guide

2.2.4.2. API Flow with Service Bundle for Super6E Fare

2.2.4.2.1. Booking Flow

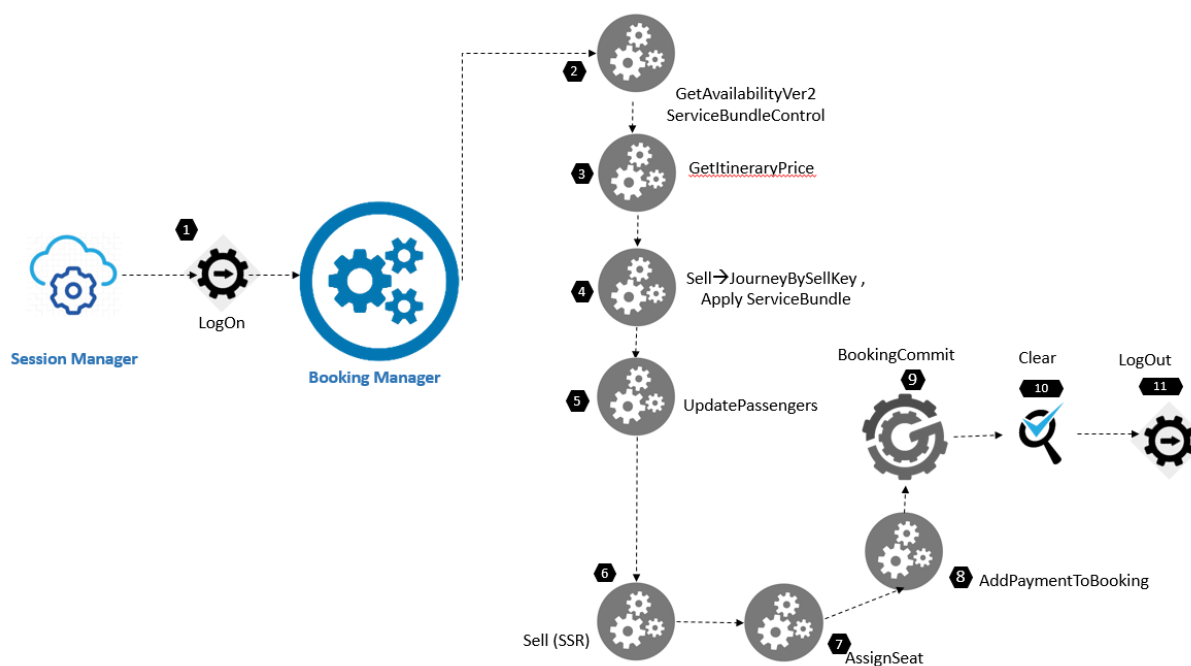

2.2.4.2.2. Modification Flow with (Change Journey Date/ Flight)

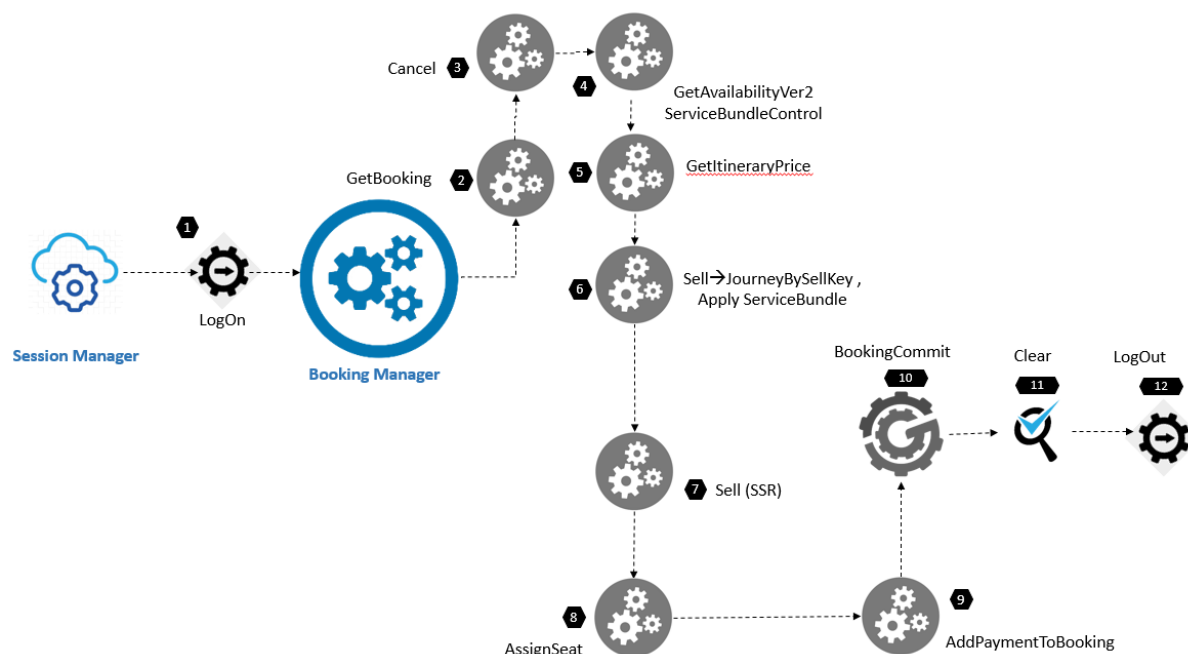

2.2.4.3. API Methods

2.2.4.3.1. Booking Methods

Flow with Default/ Preferred Meal and Bundle Components .

- Logon **No change in the process it remains as - is**
- GetAvailabilityVer2 (To Get Service Bundle)
- GetItineraryPrice **No change in the process it remains as - is**
- Sell (Journey) **ApplyServiceBundle as "Yes" Mandatory**
- GetBookingFromState (To verify SSR applied on the bookings only in cases required) **Refer Section 2.2.4.5 for more details.**
- UpdatePassengers **No change in the process it remains as - is**
- GetSSRAvailabilityForBooking

This tag value /paramters required to get NonBundle SSRs List

<SSRAvailabilityMode>**NonBundledSSRs**</SSRAvailabilityMode>

This tag value /paramters required to get Bundle SSRs List

<SSRAvailabilityMode>**FilteredBundleSSRs**</SSRAvailabilityMode>

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

Please refer [Section 2.2.4.4](#) for more details

- Sell (SSR) In case if any. Please refer [Section 2.2.4.4](#) for more details
- AssignSeat No change in the process it remains as - is
- AddPaymentToBooking No change in the process it remains as - is
- BookingCommit No change in the process it remains as - is
- Logout No change in the process it remains as – is

2.2.4.3.2. Modify Booking Methods for Change Journey Date/Flights

- Logon No change in the process it remains as - is
- GetBooking No change in the process it remains as - is
- Cancel (Journey)- refer cancel booking section in modify booking Guide Version 1.1
- GetAvailabilityVer2 (To Get Service Bundle)
- GetItineraryPrice No change in the process it remains as - is
- Sell (Journey) ApplyServiceBundle as “Yes” Mandatory
- GetBookingFromState (To verify SSR applied on the bookings)
- GetSSRAvailabilityForBooking

This tag value /parmaters required to get NonBundle SSRs List

<SSRAvailabilityMode>NonBundledSSRs</SSRAvailabilityMode>

This tag value /parmaters required to get Bundle SSRs List

<SSRAvailabilityMode>FilteredBundleSSRs</SSRAvailabilityMode>

Please refer [Section 2.2.4.4](#) for more details

- Sell (SSR) In case if any. Please refer [Section 2.2.4.4](#) for more details
- AssignSeat No change in the process it remains as - is
- AddPaymentToBooking No change in the process it remains as - is
- BookingCommit No change in the process it remains as - is
- Logout No change in the process it remains as – is

2.2.4.4 Instruction for use of NonBundle SSRs and BundleSSRs

2.2.4.4.1 Get BundleSSR List

GetSSRAvailabilityForBooking

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

This API method (GetSSRAvailabilityForBooking) is used to get SSR availability and price for Bundle SSRs List (SSR Included in the Bundle)

Required Parameters:

- ContractVersion
- Signature
- EnableExceptionStackTrace
- DepartureDate
- DepartureStation
- ArrivalStation
- CarrierCode
- FlightNumber
- PassengerNumberList
- InventoryControlled
- NonInventoryControlled
- SeatDependent
- NonSeatDependent
- CurrencyCode
- SSRAvailabilityMode (FilteredBundleSSRs)

Request

```
<?xml version="1.0" encoding="UTF-8" ?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true" xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
    <h:Signature xmlns:h="http://schemas.navitaire.com/WebServices">UDZ2p4HtzOE=| h:Signature>
  </s:Header>
  <s:Body>
    <GetSSRAvailabilityForBookingRequest
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <SSRAvailabilityForBookingRequest xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <SegmentKeyList>
          <LegKey>
            <CarrierCode xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">6E</CarrierCode>
            <FlightNumber xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">171</FlightNumber>
            <OpSuffix i:nil="true" xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
            <DepartureDate>2018-11-10T00:00:00</DepartureDate>
            <DepartureStation>DEL</DepartureStation>
            <ArrivalStation>BOM</ArrivalStation>
          </LegKey>
        </SegmentKeyList>
        <PassengerNumberList xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
          <a:short>0</a:short>
        </PassengerNumberList>
        <InventoryControlled>true</InventoryControlled>
        <NonInventoryControlled>true</NonInventoryControlled>
      </SSRAvailabilityForBookingRequest>
    </GetSSRAvailabilityForBookingRequest>
  </s:Body>
</s:Envelope>
```

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved


```
<SeatDependent>true</SeatDependent>
<NonSeatDependent>true</NonSeatDependent>
<CurrencyCode>INR</CurrencyCode>
<OptimizationInputParameterList i:nil="true" />
<SSRAvailabilityMode>FilteredBundleSSRs</SSRAvailabilityMode>
  </SSRAvailabilityForBookingRequest>
</GetSSRAvailabilityForBookingRequest>
</s:Body>
</s:Envelope>
```

2.2.4.4.2 Sell (SSR): Bundle SSRs as Replacement (Eg: Meal)

Required Parameters:

- ContractVersion
- Signature
- SellBy.SSR
- CarrierCode
- FlightNumber
- STD
- DepartureStation
- ArrivalStation
- ActionStatusCode
- ArrivalStation
- DepartureStation
- PassengerNumber
- SSRCode
- CurrencyCode
- SellSSRMode:: BundleSSRSwap

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true"
xmlns:h="http://schemas.navitaire.com/WebServices"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></h:MessageContractVersion>
```

```

    <h:Signature
xmlns:h="http://schemas.navitaire.com/WebServices">Cak0JawsAQc=|
LVt81ywCVhtN+ZswYm2iRc84Mqlgm0PLWh0UhDVwy2uKcRA2XDWUN
UIAouV1FeB1BWzT6ZP6HPbLgAJKVTlqEo/yeRnbKZ6jxHV5wSoUQrTrv9c
k18feYGEICqp1N8fkNXPd6wdQIRE=</h:Signature>
  </s:Header>
  <s:Body>
    <SellRequest
xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/B
ookingService">
      <SellRequestData
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/B
ooking" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:SellBy>SSR</a:SellBy>
        <a:SellJourneyByKeyRequest
i:nil="true"></a:SellJourneyByKeyRequest>
        <a:SellJourneyRequest i:nil="true"></a:SellJourneyRequest>
        <a:SellSSR>
          <a:SSRRequest>
            <a:SegmentSSRRequests>
              <a:SegmentSSRRequest>
                <a:FlightDesignator
xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/C
ommon">
                  <b:CarrierCode>6E</b:CarrierCode>
                  <b:FlightNumber>171</b:FlightNumber>
                  <b:OpSuffix i:nil="true"></b:OpSuffix>
                </a:FlightDesignator>
                <a:STD>2021-06-26T04:45:00</a:STD>
                <a:DepartureStation>DEL</a:DepartureStation>
                <a:ArrivalStation>BOM</a:ArrivalStation>
                <a:PaxSSRs>
                  <a:PaxSSR>
                    <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Co
mmon">New</State>
                      <a:ActionCode>NU</a:ActionCode>
                      <a:ArrivalStation>BOM</a:ArrivalStation>
                      <a:DepartureStation>DEL</a:DepartureStation>
                      <a:PassengerNumber>0</a:PassengerNumber>

```

```

        <a:SSRCode>JNML</a:SSRCode>
        <a:SSRNumber>0</a:SSRNumber>
        <a:SSRDetail i:nil="true"></a:SSRDetail>
        <a:FeeCode i:nil="true"></a:FeeCode>
        <a:Note i:nil="true"></a:Note>
        <a:SSRValue>0</a:SSRValue>
        <a:IsInServiceBundle>true</a:IsInServiceBundle>
    </a:PaxSSR>
</a:PaxSSRs>
</a:SegmentSSRRequest>
</a:SegmentSSRRequests>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:CancelFirstSSR>false</a:CancelFirstSSR>

<a:SSRFeeForceWaiveOnSell>false</a:SSRFeeForceWaiveOnSell>
    <a:SellSSRMode>BundleSSRSwap</a:SellSSRMode>
</a:SSRRequest>
    <a:OptimizationInputParameterList
i:nil="true"></a:OptimizationInputParameterList>
    </a:SellSSR>
    <a:SellFee i:nil="true"></a:SellFee>
</SellRequestData>
</SellRequest>
</s:Body>
</s:Envelope>

```

2.2.4.4.3 Get NonBundleSSR List

GetSSRAvailabilityForBooking This API method is used to get SSR availability and price.

Required Parameters:

- ContractVersion
- Signature
- EnableExceptionStackTrace
- DepartureDate
- DepartureStation
- ArrivalStation
- CarrierCode
- FlightNumber
- PassengerNumberList

- InventoryControlled
- NonInventoryControlled
- SeatDependent
- NonSeatDependent
- CurrencyCode
- SSRAvailabilityMode (NonBundledSSRs)

Request

```
<?xml version="1.0" encoding="UTF-8" ?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true" xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
    <h:Signature xmlns:h="http://schemas.navitaire.com/WebServices">UDZ2p4HtzOE= | h:Signature>
  </s:Header>
  <s:Body>
    <GetSSRAvailabilityForBookingRequest
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <SSRAvailabilityForBookingRequest xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <SegmentKeyList>
          <LegKey>
            <CarrierCode xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">6E</CarrierCode>
            <FlightNumber xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">171</FlightNumber>
            <OpSuffix i:nil="true" xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
            <DepartureDate>2018-11-10T00:00:00</DepartureDate>
            <DepartureStation>DEL</DepartureStation>
            <ArrivalStation>BOM</ArrivalStation>
          </LegKey>
        </SegmentKeyList>
        <PassengerNumberList xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
          <a:short>0</a:short>
        </PassengerNumberList>
        <InventoryControlled>true</InventoryControlled>
        <NonInventoryControlled>true</NonInventoryControlled>
        <SeatDependent>true</SeatDependent>
        <NonSeatDependent>true</NonSeatDependent>
        <CurrencyCode>INR</CurrencyCode>
        <OptimizationInputParameterList i:nil="true" />
        <SSRAvailabilityMode>NonBundledSSRs </SSRAvailabilityMode>
      </SSRAvailabilityForBookingRequest>
    </GetSSRAvailabilityForBookingRequest>
  </s:Body>
</s:Envelope>
```

2.2.4.4.4 Sell (SSR) : Non Bundle SSRs

Required Parameters:

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

- ContractVersion
- Signature
- SellBy.SSR
- CarrierCode
- FlightNumber
- STD
- DepartureStation
- ArrivalStation
- ActionStatusCode
- ArrivalStation
- DepartureStation
- PassengerNumber
- SSRCode
- CurrencyCode
- SellSSRMode:: NonBundle

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true"
xmlns:h="http://schemas.navitaire.com/WebServices"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></h:MessageContractVersion>
    <h:Signature
xmlns:h="http://schemas.navitaire.com/WebServices">Cak0JawsAQc=|LVt81ywCVhtN+ZswYm2iRc84MqIgm0PLWh0UhDVwy2uKcRA2XDWUNUIAouV1FeB1BWzT6ZP6HPbLgAJKVTlqEo/yeRnbKZ6jxHV5wSoUQrTRv9ck18feYGEICqp1N8fkNXPd6wdQIRE=</h:Signature>
  </s:Header>
  <s:Body>
    <SellRequest
xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
```

```

<SellRequestData
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/B
ooking" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <a:SellBy>SSR</a:SellBy>
  <a:SellJourneyByKeyRequest
i:nil="true"></a:SellJourneyByKeyRequest>
  <a:SellJourneyRequest i:nil="true"></a:SellJourneyRequest>
  <a:SellSSR>
    <a:SSRRequest>
      <a:SegmentSSRRequests>
        <a:SegmentSSRRequest>
          <a:FlightDesignator
xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/C
ommon">
            <b:CarrierCode>6E</b:CarrierCode>
            <b:FlightNumber>171</b:FlightNumber>
            <b:OpSuffix i:nil="true"></b:OpSuffix>
          </a:FlightDesignator>
          <a:STD>2021-06-26T04:45:00</a:STD>
          <a:DepartureStation>DEL</a:DepartureStation>
          <a:ArrivalStation>BOM</a:ArrivalStation>
          <a:PaxSSRs>
            <a:PaxSSR>
              <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Co
mmon">New</State>
                <a:ActionStatusCode>NU</a:ActionStatusCode>
                <a:ArrivalStation>BOM</a:ArrivalStation>
                <a:DepartureStation>DEL</a:DepartureStation>
                <a:PassengerNumber>0</a:PassengerNumber>
                <a:SSRCode>JNML</a:SSRCode>
                <a:SSRNumber>0</a:SSRNumber>
                <a:SSRDetail i:nil="true"></a:SSRDetail>
                <a:FeeCode i:nil="true"></a:FeeCode>
                <a>Note i:nil="true"></a>Note>
                <a:SSRValue>0</a:SSRValue>
                <a:IsInServiceBundle>true</a:IsInServiceBundle>
              </a:PaxSSR>
            </a:PaxSSRs>
          </a:SegmentSSRRequest>

```

```

</a:SegmentSSRRequests>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:CancelFirstSSR>>false</a:CancelFirstSSR>

<a:SSRFeeForceWaiveOnSell>>false</a:SSRFeeForceWaiveOnSell>
  <a:SellSSRMode>NonBundle</a:SellSSRMode>
</a:SSRRequest>
  <a:OptimizationInputParameterList
i:nil="true"></a:OptimizationInputParameterList>
  </a:SellSSR>
  <a:SellFee i:nil="true"></a:SellFee>
</SellRequestData>
</SellRequest>
</s:Body>
</s:Envelope>

```

Note: Separate GetSSRAvailabilityForBooking Request and Sell (SSR) Request would be required for selling SSR as part for Bundle and NonBundle.

Example: Infant or any other SSR (NonBundleSSR) and any Choice Meal (BundleSSR) in case of Supe 6E.

2.2.4.5 Review Methods

- During Booking Process
 - GetBookingFromState : No change in the process it remains as – is
 - Or
 - GetBooking: No change in the process it remains as – is
 - Post Booking Process
 - GetBooking: No change in the process it remains as – is
 - Remarks: Use the existing approach to call these above 2 methods
- Important booking elements for review
- Seat should be selected
 - Meal should be selected
 - Fast forward SSR (FFWD) should be added wherever available, in case of unavailability same should be notified to the passenger in the booking flow

- Priority boarding SSR (PRBG) should be added wherever available in case of unavailability same should be notified to the passenger in the booking flow

List of airport where FFWD and PRBG are available.

FFWD	PRBG
All domestic except airport KNU, PGH All operating International station except SGN, RGN, RUH, CTU, CAN, RKT	BLR, BOM, CCU, DEL, HYD, MAA, AMD, JAI, PNQ, LKO, COK, GAU, BBI, IDR, DEL, BOM, HYD, MAA, BLR, CCU, VTZ, TRV, NAG, GOI, CJB, BDQ, IXE, RPR, PAT, IXC, PAT)

2.2.4.4 Exception Handling in Sell Response.

Please ignore the warning related to SSRs, in the Sell Response and proceed to next step, in case require to validate the below details please refer to [Review Method Section 2.2.4.5](#)

- BalanceDue
- SSRs Association
- JourneyDetails

2.2.4.5 Test Cases

6E Super 6E Fare Booking Scenarios

- One Way _1ADT_1CHD_1 Infant
- Via _ 4 ADT
- Connection _ 4 ADT_2CHD
- Return Trip _ 5 ADT_2CHD

Change journey date/Flight

- One Way _ 2ADT_2CHD_Change Journey date
- Return Trip _ 5 ADT_2CHD_Change Journey date for return trip

Cancel Booking

- Cancel full Booking (One Way _ 2ADT_2CHD)
- Cancel single Journey (Return Trip _ 5 ADT_2CHD)

Business rules to be ensure by agent:

- Fare type R and Product class O to be passed for Super 6E fare.
- Combinability of Super 6E fare with any other product class should be restricted at the time of booking and Modification.
- Combinability of Super 6E Fare' can only be combined with 'Super 6E Fare' for change of 'Round Trip' and 'Multicity' booking.
- All fare and associated bundle included SSRs should be passed at the time flight change.
- CPML should be passed while booking if no meals are available for the flight. In case of a connect flight, CPML should be pass on single leg (longest leg) of the Journey.
- Exception handling to be ensure by agent for unavailable SSRs (if, any) included in the Super 6E fare and to be informed customer while booking.

2.2.5 Combinability matrix for all bookings and rescheduling (single leg, multi leg and RT)

PRODUCT	PRODUCT CLASS	COMBINABILITY-Product class	Product class to be shown while rescheduling under agency login	Product class to be shown while rescheduling as an anonymous
REGULAR	R	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
RETURN SPECIAL	N	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
FAMILY	A	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
LITE	B	B	R/N/A/T/S/B/J	R/N/A/S/J
FLEXI	J	J	J	J
SALE	S	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
CORPORATE	F	F	F	J
TACTICAL	T	R/N/A/T/S	R/N/A/T/S/J	R/N/A/S/J
COUPON	C	C	C	J
SME	M	M	M	J
Super6E	O	O	O	O

3 CodeShare Booking

API Method	Indicator	Description
GetAvailability, GetBooking	L (Code share segment indicator)	Code Share(Indicator to show Code Share Flight) You will get value as 'L' for code share flights under SegmentType Eg. Journeys -> Segments -> SegmentType>L</SegmentType>
	XrefFlightDesignator	You will get Code Share flightnumber and carriercode under XrefFlightDesignator only in case of Code share flights.

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

		Eg. Journeys -> Segments -> XrefFlightDesignator -> FlightNumber. Eg. Journeys -> Segments -> XrefFlightDesignator -> CarrierCode.
	OperatingFlightNumber	You will get Code Share Operating FlightNumber under OperatingFlightNumber tag. Eg. Journeys -> Segments -> Legs -> LegInfo -> <OperatingFlightNumber>XXX</OperatingFlightNumber>
	OperatingCarrier	You will get Code Share Operating carrier value in OperatingCarrier tag. Eg. Journeys -> Segments -> Legs -> LegInfo -> <OperatingCarrier>TK</OperatingCarrier>
	ETicket	ETicket you will get value as "true" under ETicket tag. Eg. Journeys -> Segments -> Legs -> LegInfo <ETicket>>true</ETicket>
	ActionStatusCode (HP)	Booking is on hold, but confirmation pending.
	ActionStatusCode (HK)	Held and confirmed. Space is held and booking is confirmed
	Operating Carrier RecordLocators	RecordLocators you can get the Code Share flight PNR in RecordLocators tag <a:RecordLocator> <a:State>Clean</a:State> <a:SystemDomainCode>IST</a:SystemDomainCode> <a:SystemCode>TK</a:SystemCode> // Code share System Code <a:RecordCode>T5FI7D</a:RecordCode> // Code share PNR <a:InteractionPurpose>MC</a:InteractionPurpose> <a:HostedCarrierCode>6E</a:HostedCarrierCode> // Hosted Carrier Code </a:RecordLocator>
	TicketNumber (PaxTickets)	PaxTickets you will get pax tickets under PaxTickets tag and it will generated Per Passenger per segments. Eg. Journeys -> Segments -> <PaxTickets> Eg : - <PaxTicket> <State>Clean</State> <PassengerNumber>0</PassengerNumber> <TicketIndicator>H</TicketIndicator> <TicketNumber>3122400005541</TicketNumber> // Ticket Number and Coupon <TicketStatus>O</TicketStatus> <InfantTicketNumber /> </PaxTicket>

3.2 Important rules for 6E marketed code share flights

- Display complete flight information for both the carriers.

- Operating carrier name and flight details to be displayed clearly.
- Baggage allowance to be displayed across all touch points including the itinerary confirmation.
- Terminal information to be displayed across all touch points including the itinerary confirmation.
- Infant can only be added during the booking process not after the booking is made.
- Equipment type for both the carriers to be displayed across all touch points.
- Ticket number and record locator for both the carriers should be shown on the confirmation page as well as itinerary.
- Ticket number should be considered as the final confirmation for a code share booking. However, in case there is a lag in the issuance of ticket number then action status code in get booking call as “HK” for Turkish airline operated flight should be considered as the final confirmation.
- Ticket number for the above scenario should be send to the customer as and when its received from IndiGo.
- Seat selection can only be done on a 6E operated flights for code share bookings.
- Complimentary meal will be included and OTA’S are required to display the same on the search result page and itinerary.
- Currently we are only allowed SSR-INFANT in codeshare flight.
- Maximum number of passengers for a code share booking is 4 passengers per PNR.
- Maximum 25 characters allowed in each booking fields (FirstName (25 Char) and LastName (25 Char)).
- No ancillaries will currently be sold on code share flights.

3.3 Process of handling the booking with an “HP” status

- If the action status code for any of the segments in a PNR comes as “HP” then perform the GetBooking call thrice in an interval of 20 seconds.
- After performing the above if the ActionStatusCode gets changed to “HK” for all the segments then the ticket can be shown as confirmed to the customer.
- However, even after following the above process if the ActionStatusCode does not get changed to HK for any of the segments than cancel the complete booking and send a consolidated list of all such PNR’S on a weekly basis to your IndiGo account manager for the waiver of cancellation fee.
- Above process must be followed for both fresh bookings and date change.
- Please make sure to store the ActionStatuscode and the relevant XML logs for future justification.

4 Booking Types

4.2 Direct

Passenger books the flight from one station to another and not to travel back to origin station.

Example- DEL-BOM (6E 171)

4.3 Via

Passenger books the flight from origin station to destination and travelling through a station route to a destination without the change of aircraft.

Example- DEL-BOM-GOA (6E 181)

4.4 Roundtrip

Passenger books the flight from origin station to destination and travel back to the origin location.

Example- Onward: DEL-BOM (6E 171) **Return:** BOM-DEL (6E 334)

4.5 Connection

Passenger books the flight from origin station to destination and through a station with change in aircraft.

Example- First Segment: DEL-BOM (6E 171) Second Segment: BOM-GOA (6E 181)

4.6 Multicity

Passenger books the flight from origin station to destination with multiple city stops.


Example- DEL-BOM (6E 171) BOM-GOA (6E 334) GOA-COK (6E 881)

5 PromoCode

Kindly find below API calls and methods where PromotionCode is applied:

- **Getavailability -> PromotionCode:** - Kindly enter Promocode in tag namely "PromotionCode".
- **GetItineraryPrice -> ItineraryPriceRequest -> TypeOfSale -> PromotionCode:** Kindly enter Promocode in tag namely "PromotionCode".
- **GetItineraryPrice -> ItineraryPriceRequest -> TypeOfSale -> FareTypes:** Kindly enter FareType as "R" for Retail.
- **Sell -> SellJourneyByKeyRequest -> TypeOfSale -> PromotionCode:** Kindly enter Promocode in tag namely "PromotionCode".
- **Sell -> SellJourneyByKeyRequest -> TypeOfSale -> FareTypes :** Kindly enter FareType as "R" for Retail.

Same could you identify in **Getavailability Response -> Fares -> PaxFares -> ServiceCharges -> BookingServiceCharge -> TicketCode**
Below is the screenshot for same:

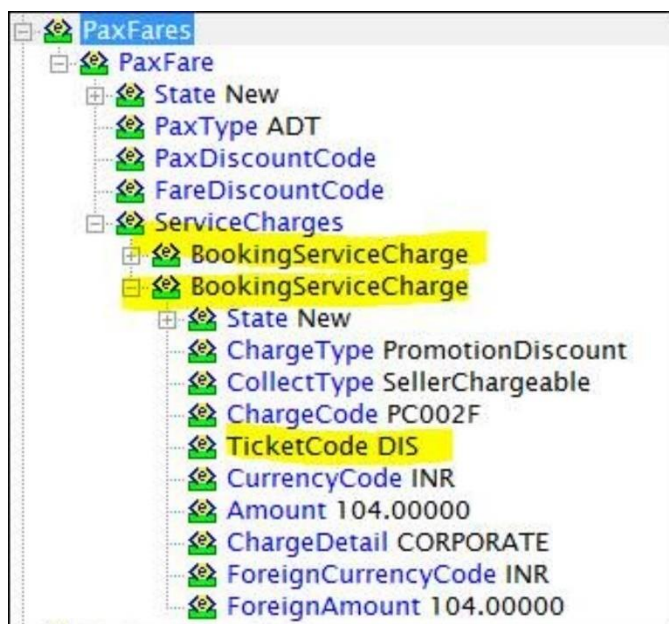

Same could you identify in **GetItineraryPrice Response -> Journeys -> Segments -> Fares -> PaxFares -> ServiceCharges -> BookingServiceCharge -> TicketCode**

6 API Development Best Practices

6.2 Stateful vs Stateless

The New Skies API contains a mix of stateful and stateless methods.

6.2.4 Stateful Methods

- Actions performed by the method effect the booking in state.
- The method will not require a Record Locator in the request.
- Operations performed by the method are not committed to the database until Commit/BookingCommit are explicitly called.
- Exception is Sell method which will hold the inventory until the session expires.

6.2.5 Stateless Methods

- The method will require a Record Locator in the request to identify the booking to be updated.
- Operations will be committed to the database immediately

6.3 HTTP Compression


The New Skies web servers have been configured to return a compressed response when requested via the HTTP header. To ensure the highest performance, compression should be enabled via the request header.

Enabling Compression

Compression can be enabled by referencing the Navitaire.NPS.HTTPCompressionServices.dll assembly provided by Navitaire. After adding this assembly as a reference in your application, please add the following to you application/web configuration file:

```
<configuration>
<system.net>
<webRequestModules>
<remove prefix="http:"/>
<add prefix="http:"
      type="Navitaire.NPS.HTTPCompressionServices.CompressibleHttpRequestCreat
      or, Navitaire.NPS.HTTPCompresssionServices" />
<remove prefix="https:"/>
<add prefix="https:"
      type="Navitaire.NPS.HTTPCompressionServices.CompressibleHttpRequestCreat
      or, Navitaire.NPS.HTTPCompresssionServices" />
</webRequestModules>
</system.net>
</configuration>
```

Fiddler can be used to determine if the requests you are sending are being returned compressed. Check the response returned to see if the “GZIP Encoding” is selected:

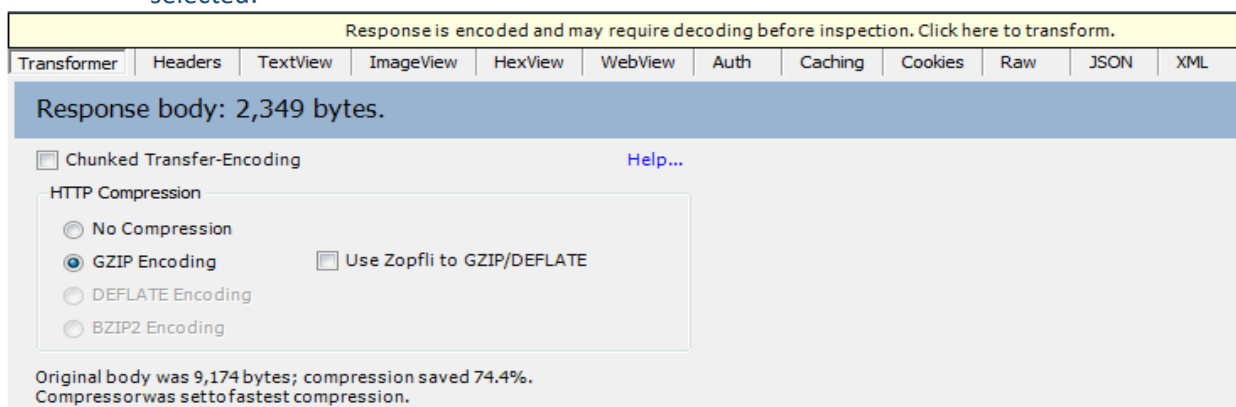

6.4 Session Pooling

The use of session pooling can reduce the number of individual sessions in memory. An

effective session pool limits the number of sessions that can be used concurrently and employs a check-in/checkout system with the sessions. As sessions are freed up they can be checked-in and checked-out by other threads so as to limit the memory footprint on the app server. Sessions can be cleared using the Clear method and kept alive using the KeepAlive method. When all processing is done the sessions should be logged out, releasing them from memory. Search requests are stateless calls and do not need to be tied to a specific session. One call after another can be made on the same session without the need to call Clear or Logout. Reuse of sessions in this case can reduce stress on the system and prevent unnecessary session usage.

6.5 Session Timeout

New Skies allows the session timeout to be defined by role. Care should be taken to determine the appropriate setting for each role so that sessions do not timeout too fast and do not remain idle too long. Applications that employ numerous concurrent logins should be given a short timeout to prevent the buildup of unintentionally abandoned sessions. As a general rule session timeout should be between 15-20 mins for web users, 10 mins for anonymous users, and 5-10 mins for batch processes. It is recommended to employ separate roles in order to take advantage of these restrictions.

6.6 Filtered Methods

In an effort to reduce that amount of data returned in the XML response messages a number of filtered methods have been introduced. Where a filtered method is available these are considered the recommended call to use over the standard (non-filtered) method.

6.6.4 GetBookingFromStateFiltered

Replaces the GetBookingFromState method for returning specific components of the current session state booking. Note: This method does not return BookingSum, OperationsInfo, LegInfo, or LegSSR collections. If this data is needed, the standard GetBookingFromState method will need to be called.

6.6.5 GetBookingStatelessFiltered

This is the only method to retrieve a booking and not load it into session state.

6.7 Exception Handling

An exception is an event, which occurs during the execution of a program that disrupts the normal flow of the program's instructions. When an error occurs within a method, the method creates an object and hands it off to the runtime system is called throwing an exception. The runtime system searches the call stack for a method that contains a block of code that can handle the exception. This block of code is called an exception handler. Always use the Exception Handler to catch the exception for the flawless booking process.

7 Session Management

7.2 SessionManagerClient and Methods

The SessionManagerClient groups the methods for logging users into the system, logging them off, creating agents into a single client component within the New Skies system. The SessionManagerClient.asmx Web Service wraps the SessionManagerClient methods into a single .NET Web Service for exposure over the Web using SOAP messaging.

Sample Code

```
ISessionManager sessionManager = new SessionManagerClient();
```

Session Manager Web Service URL

<https://6etestr4xapi.navitaire.com/sessionmanager.svc>

Methods:-

- Logon
- Logout

7.3 Logon

Logon provides a session for subsequent service usage and establishes the user's role for the session. In order to use Web Services, you must establish a session with a specific login identification and password. The user ID and password give the application user specific rights to Web Services based on the role for the job function.

Required Parameters:-

- ContractVersion
- EnableExceptionStackTrace(default False)
- DomainCode
- AgentName
- Password

Request

```
<?xml version="1.0" encoding="UTF-8" ?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
```



```
<h:EnableExceptionStackTrace
  xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
</s:Header>
<s:Body>
<LogonRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/SessionService">
<logonRequestData xmlns:a="http://schemas.navitaire.com/WebServices">
<a:DomainCode>WWW</a:DomainCode>
<a:AgentName>XXXXXX</a:AgentName>
<a:Password>XXXXXXX</a:Password>
<a:LocationCode i:nil="true" />
<a:RoleCode i:nil="true" />
<a:TerminalInfo i:nil="true" />
<a:ClientName i:nil="true" />
</logonRequestData>
</LogonRequest>
</s:Body>
</s:Envelope>
```

Response

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  <s:Body>
  <LogonResponse xmlns="http://schemas.navitaire.com/WebServices">
    <Signature>AWIiU+DzsoE=|cxMm6y5mbAwm6PqIMVwRZzA+GfQLfABjVf8lCnzgwE1pdGED
      5xPuj3leQLHt/f5V9R4DWGThhK4KWf7OEVb43Xh+PM4Mm2FUp5Mmrc672D1EuVTfx8
      5BEBF01CxRdCB2nAlp2SW7Aws=</Signature>
  </LogonResponse>
  </s:Body>
</s:Envelope>
```

7.4 Logout

Logout terminates an existing session. Any data that is not committed to the database is lost and all database and system resources associated with the session are released.

Required Parameters

- Signature
- EnableExceptionStackTrace(default False)

Request

```
<?xml version="1.0" encoding="UTF-8" ?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackT
      race>
    <h:MessageContractVersion i:nil="true"
      xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
    <h:Signature
      xmlns:h="http://schemas.navitaire.com/WebServices">TLibUwah+Fs=|tFXodaU/mrRDz
      ID57BEqyTl1QIZ/mDAstaTQL4pyJadtMcWTgOr1fNPZEmw7KfaiBAGS04ke11wIZMElcp
      mLwV33hFpZXynSOGgKRu/X4J4eu5cl3xSqptj1fml2xxPrxg10Glsw6cKSnoyA5uF1RQ==<
      /h:Signature>
  </s:Header>
  <s:Body>
    <LogoutRequest
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/SessionService" />
  </s:Body>
</s:Envelope>
```

Response

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  <s:Body />
</s:Envelope>
```

7.5 Error List for SessionManager

Agent Locked

"The agent ([Domain]/[AgentName]) is locked."

Authorization

"Could not determine agent ([OrganizationCode]/ [DomainCode]/ [AgentName]) session settings."

Agent Authentication

"Session Token authentication failure."

No Agent Roles

"No roles specified for agent [OrganizationCode]/ [DomainCode]/ [AgentName] id [AgentID] in [SystemType][ChannelType]"

"Unable to find valid role for agent [OrganizationCode]/ [DomainCode]/ [AgentName] id [AgentID] in [SystemType][ChannelType]"

"Unable to find best role for agent [OrganizationCode]/ [DomainCode]/ [AgentName] id [AgentID] in [SystemType][ChannelType]"

Agent Authentication

"The agent ([DomainCode]/ [AgentName]) was not authenticated."

Agent Not Found

"No agent found for requested agent name [DomainCode]/ [AgentName]"

"No agent found for requested agent ID [AgentID]"

"The domain for the agent ([DomainCode]/ [AgentName]) was not found."

"No organization found for requested agent name [DomainCode]/ [AgentName]"

"No location found for requested agent name [DomainCode]/ [AgentName]"

Agent Not Active

"The agent ([DomainCode]/ [AgentName]) is not active."

Password Expired

"The agent ([DomainCode]/ [AgentName]) must reset their password."

Password Expired

"The agent ([DomainCode]/ [AgentName]) has an expired password."

Failed Logons

"The agent ([DomainCode]/ [AgentName]) has too many failed logon attempts."

Session Timeout

"No such session [SessionID]."

"Session [SessionID] has expired."

Invalid Session

"The sessionState signature ([Signature]) is not equal to the provided signature ([Signature])"

Organization Not Found

"The Organization Code [OrganizationCode] does not exist"

Organization Not Active

"The Organization [OrganizationName] ([OrganizationCode]) is not active."

Agent Access Restricted

"Agent {[DomainCode]/ [AgentName]} with role [RoleCode] is not allowed to access the system."

8 Booking Management

8.2 BookingManagerClient and Methods

The BookingManagerClient groups the methods for creating and manipulating bookings into a single client component within the New Skies system. The BookingManagerClient.asmx Web Service wraps the BookingManagerClient methods into a single .NET Web Service for exposure over the Web using SOAP messaging.

Sample Code

```
IBookingManager bookingManager = new BookingManagerClient();
```

Booking Manager Web Service URL

<https://6etestr4xapi.navitaire.com/bookingmanager.svc>

Methods:-

- GetAvailabilityVer2
- GetItineraryPrice (Tax and Fare details)
- UpdateContacts (Enter GST Number)
- Sell (Journey)
- GetBaggageAllowances
- GetSSRAvailability
- Sell (SSR)
- GetBookingFromState
- UpdatePassengers (Adult and Infant)
- GetSeatAvailability
- AssignSeat
- AddPaymentToBooking
- BookingCommit
- GetBooking

8.3 GetAvailabilityVer2

Gets flight availability and fare information for one or more markets. (Does not update booking state) Availability may be requested in many ways each of which may result in a different Journeys being returned. In some cases it may be better to break the request into multiple requests and combine the responses in the client application. Input to GetAvailabilityVer2 controls the number of journeys returned.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- DepartureStation
- ArrivalStation
- BeginDate
- EndDate
- CarrierCode
- FlightType
- PaxCount
- DOW (Day of Week)

- CurrencyCode
- AvailabilityType
- MaximumConnectingFlights
- PromotionCode(Optional/If applicable)
- AvailabilityFilter
- FareClassControl
- FareTypes
- ProductClasses
- PaxPriceTypes
 - PaxType (ADT/ CHD)
 - PaxCount (Must Be Greater than 0)
- ServiceBundleControl
 - Disabled when Non Bundle Product
 - ReturnServiceBundleOffers when Bundle Product (Ex Super 6E Fare)

Fields Name and DataType:

S. No.	Field Name	Data type	Max Length	Technical Description
1	ContractVersion			
2	Signature			
3	DepartureStation	char	3	Station code where travel will commence. The station code is defined in the Station table
4	ArrivalStation	char	3	Station code where travel will conclude. The station code is defined in the Station table
5	BeginDate	datetime	8	
6	EndDate	datetime	8	
7	CarrierCode	varchar	3	
8	FlightType	Enumeration	2	FlightType used for flight application restriction. Flight must or must not be this type depending on the value in FlightApplType. Refer to valid values section. Valid Values non-stop is a single leg. Through is multiple legs without a change in plane. Direct can be either a non-stop or a through. A connection is multiple direct flights requiring a change in planes.

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

				Valid Values: 0=None 1=Non-Stop 2=Through 3=Direct 4=Connect 7=All
9	PaxCount	Int	4	
10	Dow	Enumeration	2	This is a bit field enumeration with each bit corresponding to a day of week starting with Monday. 15 decimal = 1111 binary = Monday through Thursday, 112 = Friday, Sat, and Sun. Valid Values: 0=None 1=Monday 2=Tuesday 4=Wednesday 8=Thursday 16=Friday 31=WeekDay 32=Saturday 64=Sunday 96=WeekEnd 127=Daily
11	CurrencyCode			
12	AvailabilityType			
13	MaximumConnectingFlights			
14	AvailabilityFilter			
15	FareClassControl			
16	PaxType	varchar	4	Passenger type code associated with the current record. The passenger type code should be obtained from the PaxType table. Default = ADT.
17	FareTypes	varchar	2	
18	ProductClasses	Varchar	2	

Request

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">>false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true"
      xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></h:MessageContractVersion>
    <h:Signature
      xmlns:h="http://schemas.navitaire.com/WebServices">bbj4n+60pBg=|+gaxFAIbdhZaGm
      9Sn02gYyggVtKBUJmoMCprOsSK04TRI12xb29fq1LJ1LbtXR6zRyu7jzkhcFvqLhIYo/EmpXbxj
      nzMSygeN1v3VDMtoJwhPbRHg/CG/irB1y3KaLxOivzvq9QZbUU=</h:Signature>
  </s:Header>
  <s:Body>
    <GetAvailabilityRequest
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <TripAvailabilityRequest
        xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <AvailabilityRequests>
          <AvailabilityRequest>
            <DepartureStation>DEL</DepartureStation>
            <ArrivalStation>BOM</ArrivalStation>
            <BeginDate>2019-12-01T00:00:00</BeginDate>
            <EndDate>2019-12-01T00:00:00</EndDate>
            <CarrierCode>6E</CarrierCode>
            <FlightNumber i:nil="true"></FlightNumber>
            <FlightType>All</FlightType>
            <PaxCount>1</PaxCount>
            <Dow>Daily</Dow>
            <CurrencyCode>INR</CurrencyCode>
            <DisplayCurrencyCode i:nil="true"></DisplayCurrencyCode>
            <DiscountCode i:nil="true"></DiscountCode>
            <PromotionCode>XXXXXX</PromotionCode>(Optional/If applicable)
            <AvailabilityType>Default</AvailabilityType>
            <SourceOrganization i:nil="true"></SourceOrganization>
            <MaximumConnectingFlights>20</MaximumConnectingFlights>
            <AvailabilityFilter>Default</AvailabilityFilter>
          </AvailabilityRequest>
        </AvailabilityRequests>
      </TripAvailabilityRequest>
    </GetAvailabilityRequest>
  </s:Body>
</s:Envelope>
```

```

<FareClassControl>LowestFareClass</FareClassControl>
<MinimumFarePrice>0</MinimumFarePrice>
<MaximumFarePrice>0</MaximumFarePrice>
<ProductClassCode i:nil="true"></ProductClassCode>
<SSRCollectionsMode>None</SSRCollectionsMode>
<InboundOutbound>None</InboundOutbound>
<NightsStay>0</NightsStay>
<IncludeAllotments>false</IncludeAllotments>
<BeginTime i:nil="true"></BeginTime>
<EndTime i:nil="true"></EndTime>
<DepartureStations i:nil="true"
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></DepartureStations>
    <ArrivalStations i:nil="true"
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></ArrivalStations>
    <FareTypes
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
        <a:string>R</a:string>
    </FareTypes>
    <ProductClasses
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
        <a:string>R</a:string>
    </ProductClasses>
    <FareClasses i:nil="true"
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></FareClasses>
    <PaxPriceTypes>
        <PaxPriceType>
            <PaxType>ADT</PaxType>
            <PaxDiscountCode i:nil="true"></PaxDiscountCode>
            <PaxCount>0</PaxCount>
        </PaxPriceType>
    </PaxPriceTypes>
    <JourneySortKeys i:nil="true"
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common/Enumerations"></JourneySortKeys>
    <TravelClassCodes i:nil="true"
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></TravelClassCodes>
    <IncludeTaxesAndFees>false</IncludeTaxesAndFees>
    <FareRuleFilter>Default</FareRuleFilter>
    <LoyaltyFilter>MonetaryOnly</LoyaltyFilter>
    <PaxResidentCountry i:nil="true"></PaxResidentCountry>

```



```

        <TravelClassCodeList i:nil="true"
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></TravelClassCo
deList>
        <SystemCode i:nil="true"></SystemCode>
        <CurrentSourceOrganization i:nil="true"></CurrentSourceOrganization>
        <PaxPriceDetailList i:nil="true"></PaxPriceDetailList>
        <ServiceBundleControl>Disabled</ServiceBundleControl>
        <BookingStatus>Default</BookingStatus>
    </AvailabilityRequest>
</AvailabilityRequests>
<LoyaltyFilter>MonetaryOnly</LoyaltyFilter>
<SourceOrganization i:nil="true"></SourceOrganization>
<SourceAgentCode i:nil="true"></SourceAgentCode>
<SourceDomainCode i:nil="true"></SourceDomainCode>
<SourceLocationCode i:nil="true"></SourceLocationCode>
<SourceIOSCountryCode i:nil="true"></SourceIOSCountryCode>
<SourceSystemCode i:nil="true"></SourceSystemCode>
<LowFareMode>false</LowFareMode>
</TripAvailabilityRequest>
</GetAvailabilityRequest>
</s:Body>
</s:Envelope>

```

Response

```

<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header></s:Header>
  <s:Body>
    <GetAvailabilityVer2Response
xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <GetTripAvailabilityVer2Response
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <OtherServiceInfoList
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common"></Other
ServiceInfoList>
        <Schedules>
          <ArrayOfJourneyDateMarketVer2>
            <JourneyDateMarketVer2>
              <DepartureDate>2019-12-01T00:00:00</DepartureDate>
              <DepartureStation>DEL</DepartureStation>
              <ArrivalStation>BOM</ArrivalStation>
              <AvailableJourneys>
                <AvailableJourney>

```

```

<AvailableSegment>
  <AvailableSegment>
    <AvailableFares>
      <AvailableFare2>
        <AvailableCount>2</AvailableCount>
        <Status>Active</Status>
        <FareIndex>0</FareIndex>
        <ServiceBundleSetCode></ServiceBundleSetCode>
        <ServiceBundleOfferIndexes
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></ServiceBundle
OfferIndexes>
      </AvailableFare2>
    </AvailableFares>
    <ArrivalStation>BOM</ArrivalStation>
    <CabinOfService></CabinOfService>
    <DepartureStation>DEL</DepartureStation>
    <SegmentType></SegmentType>
    <STA>2019-12-02T00:00:00</STA>
    <STD>2019-12-01T00:00:00</STD>
    <International>false</International>
    <FlightDesignator
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
      <a:CarrierCode>6E</a:CarrierCode>
      <a:FlightNumber> 111</a:FlightNumber>
      <a:OpSuffix></a:OpSuffix>
    </FlightDesignator>
    <XrefFlightDesignator i:nil="true"
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common"></XrefFligh
tDesignator>
    <Legs>
      <Leg>
        <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</St
ate>
        <ArrivalStation>BOM</ArrivalStation>
        <DepartureStation>DEL</DepartureStation>
        <STA>2019-12-02T00:00:00</STA>
        <STD>2019-12-01T00:00:00</STD>
        <FlightDesignator
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
          <a:CarrierCode>6E</a:CarrierCode>
          <a:FlightNumber> 111</a:FlightNumber>
          <a:OpSuffix></a:OpSuffix>
        </FlightDesignator>

```

```

<LegInfo>
  <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</St
ate>

    <AdjustedCapacity>0</AdjustedCapacity>
    <EquipmentType>321</EquipmentType>
    <EquipmentTypeSuffix>222</EquipmentTypeSuffix>
    <ArrivalTerminal>1</ArrivalTerminal>
    <ArrvLTV>330</ArrvLTV>
    <Capacity>0</Capacity>
    <CodeShareIndicator></CodeShareIndicator>
    <DepartureTerminal>1</DepartureTerminal>
    <DeptLTV>330</DeptLTV>
    <ETicket>true</ETicket>
    <FlifoUpdated>false</FlifoUpdated>
    <IROP>false</IROP>
    <Status>Normal</Status>
    <Lid>0</Lid>
    <OnTime></OnTime>
    <PaxSTA>2019-12-02T00:00:00</PaxSTA>
    <PaxSTD>2019-12-01T00:00:00</PaxSTD>
    <PRBCCode>Y222</PRBCCode>
    <ScheduleServiceType>J</ScheduleServiceType>
    <Sold>0</Sold>
    <OutMoveDays>0</OutMoveDays>
    <BackMoveDays>0</BackMoveDays>
    <LegNests></LegNests>
    <LegSSRs></LegSSRs>
    <OperatingFlightNumber></OperatingFlightNumber>
    <OperatedByText></OperatedByText>
    <OperatingCarrier></OperatingCarrier>
    <OperatingOpSuffix></OperatingOpSuffix>
    <SubjectToGovtApproval>false</SubjectToGovtApproval>
    <MarketingCode></MarketingCode>
    <ChangeOfDirection>false</ChangeOfDirection>
    <MarketingOverride>false</MarketingOverride>
    <AircraftOwner></AircraftOwner>
  </LegInfo>
  <OperationsInfo i:nil="true"></OperationsInfo>
  <InventoryLegID>2894520</InventoryLegID>
</Leg>
</Legs>
<SegmentSellKey>6E~ 111~ ~~DEL~12/01/2019
00:00~BOM~12/02/2019 00:00~~</SegmentSellKey>

```

```

        <AvailabilitySourceCode></AvailabilitySourceCode>
    </AvailableSegment>
</AvailableSegment>
    <JourneySellKey>6E~ 111~ ~~DEL~12/01/2019 00:00~BOM~12/02/2019
00:00~~</JourneySellKey>
    <NotForGeneralUse>false</NotForGeneralUse>
</AvailableJourney>
<AvailableJourney>
    <AvailableSegment>
        <AvailableSegment>
            <AvailableFares>
                <AvailableFare2>
                    <AvailableCount>43</AvailableCount>
                    <Status>Active</Status>
                    <FareIndex>1</FareIndex>
                    <ServiceBundleSetCode></ServiceBundleSetCode>
                    <ServiceBundleOfferIndexes
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></ServiceBundle
OfferIndexes>
                        </AvailableFare2>
                    </AvailableFares>
                    <ArrivalStation>BOM</ArrivalStation>
                    <CabinOfService></CabinOfService>
                    <DepartureStation>DEL</DepartureStation>
                    <SegmentType></SegmentType>
                    <STA>2019-12-01T07:10:00</STA>
                    <STD>2019-12-01T04:45:00</STD>
                    <International>false</International>
                    <FlightDesignator
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
                        <a:CarrierCode>6E</a:CarrierCode>
                        <a:FlightNumber> 171</a:FlightNumber>
                        <a:OpSuffix></a:OpSuffix>
                    </FlightDesignator>
                    <XrefFlightDesignator i:nil="true"
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common"></XrefFli
ghtDesignator>
                        <Legs>
                            <Leg>
                                <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</St
ate>
                                    <ArrivalStation>BOM</ArrivalStation>
                                    <DepartureStation>DEL</DepartureStation>

```

```

<STA>2019-12-01T07:10:00</STA>
<STD>2019-12-01T04:45:00</STD>
<FlightDesignator
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <a:CarrierCode>6E</a:CarrierCode>
  <a:FlightNumber> 171</a:FlightNumber>
  <a:OpSuffix></a:OpSuffix>
</FlightDesignator>
<LegInfo>
  <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</St
ate>

    <AdjustedCapacity>0</AdjustedCapacity>
    <EquipmentType>320</EquipmentType>
    <EquipmentTypeSuffix></EquipmentTypeSuffix>
    <ArrivalTerminal>1</ArrivalTerminal>
    <ArrvLTV>330</ArrvLTV>
    <Capacity>0</Capacity>
    <CodeShareIndicator></CodeShareIndicator>
    <DepartureTerminal>1</DepartureTerminal>
    <DeptLTV>330</DeptLTV>
    <ETicket>false</ETicket>
    <FlifoUpdated>false</FlifoUpdated>
    <IROP>false</IROP>
    <Status>Normal</Status>
    <Lid>0</Lid>
    <OnTime></OnTime>
    <PaxSTA>2019-12-01T07:10:00</PaxSTA>
    <PaxSTD>2019-12-01T04:45:00</PaxSTD>
    <PRBCCode>Y180</PRBCCode>
    <ScheduleServiceType>J</ScheduleServiceType>
    <Sold>0</Sold>
    <OutMoveDays>0</OutMoveDays>
    <BackMoveDays>0</BackMoveDays>
    <LegNests></LegNests>
    <LegSSRs></LegSSRs>
    <OperatingFlightNumber></OperatingFlightNumber>
    <OperatedByText></OperatedByText>
    <OperatingCarrier></OperatingCarrier>
    <OperatingOpSuffix></OperatingOpSuffix>
    <SubjectToGovtApproval>false</SubjectToGovtApproval>
    <MarketingCode></MarketingCode>
    <ChangeOfDirection>false</ChangeOfDirection>
    <MarketingOverride>false</MarketingOverride>

```

```

        <AircraftOwner></AircraftOwner>
        </LegInfo>
        <OperationsInfo i:nil="true"></OperationsInfo>
        <InventoryLegID>2716452</InventoryLegID>
    </Leg>
</Legs>
    <SegmentSellKey>6E~ 171~ ~~DEL~12/01/2019
04:45~BOM~12/01/2019 07:10~~</SegmentSellKey>
    <AvailabilitySourceCode></AvailabilitySourceCode>
</AvailableSegment>
</AvailableSegment>
    <JourneySellKey>6E~ 171~ ~~DEL~12/01/2019 04:45~BOM~12/01/2019
07:10~~</JourneySellKey>
    <NotForGeneralUse>false</NotForGeneralUse>
</AvailableJourney>
<Fares>
    <Fare>
        <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Stat
e>
            <ClassOfService>L</ClassOfService>
            <ClassType></ClassType>
            <RuleTariff></RuleTariff>
            <CarrierCode>6E</CarrierCode>
            <RuleNumber>1057</RuleNumber>
            <FareBasisCode>L08AP</FareBasisCode>
            <FareSequence>1</FareSequence>
            <FareClassOfService>L</FareClassOfService>
            <FareStatus>Default</FareStatus>
            <FareApplicationType>Route</FareApplicationType>
            <OriginalClassOfService>L</OriginalClassOfService>
            <XrefClassOfService></XrefClassOfService>
            <PaxFares>
                <PaxFare>
                    <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Stat
e>
                        <PaxType>ADT</PaxType>
                        <PaxDiscountCode></PaxDiscountCode>
                        <FareDiscountCode></FareDiscountCode>
                        <ServiceCharges>
                            <BookingServiceCharge>

```

```

        <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Stat
e>

        <ChargeType>FarePrice</ChargeType>
        <CollectType>SellerChargeable</CollectType>
        <ChargeCode></ChargeCode>
        <TicketCode></TicketCode>
        <CurrencyCode>INR</CurrencyCode>
        <Amount>3542.0000</Amount>
        <ChargeDetail></ChargeDetail>
        <ForeignCurrencyCode>INR</ForeignCurrencyCode>
        <ForeignAmount>3542.0000</ForeignAmount>
        </BookingServiceCharge>
    </ServiceCharges>
    <TicketFareBasisCode></TicketFareBasisCode>
    <ProofOfStatusRequired>false</ProofOfStatusRequired>
</PaxFare>
</PaxFares>
<ProductClass>R</ProductClass>
<IsAllotmentMarketFare>false</IsAllotmentMarketFare>
<TravelClassCode></TravelClassCode>
<FareSellKey>0~L~ ~6E~L08AP~1057~~0~1~~X</FareSellKey>
<InboundOutbound>None</InboundOutbound>
<FareLink>0</FareLink>
<FareDesignator>
    <FareTypeIndicator></FareTypeIndicator>
    <CityCode></CityCode>
    <TravelCityCode></TravelCityCode>
    <RuleFareTypeCode></RuleFareTypeCode>
    <BaseFareFareClassCode></BaseFareFareClassCode>
    <DowType></DowType>
    <SeasonType></SeasonType>
    <RoutingNumber>0</RoutingNumber>
    <OneWayRoundTrip></OneWayRoundTrip>
    <OpenJawAllowed>false</OpenJawAllowed>
    <TripDirection></TripDirection>
</FareDesignator>
</Fare>
<Fare>
    <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Stat
e>

        <ClassOfService>T</ClassOfService>
        <ClassType></ClassType>

```

```

<RuleTariff></RuleTariff>
<CarrierCode>6E</CarrierCode>
<RuleNumber>1059</RuleNumber>
<FareBasisCode>TOIP</FareBasisCode>
<FareSequence>29</FareSequence>
<FareClassOfService>T</FareClassOfService>
<FareStatus>Default</FareStatus>
<FareApplicationType>Route</FareApplicationType>
<OriginalClassOfService>T</OriginalClassOfService>
<XrefClassOfService></XrefClassOfService>
<PaxFares>
  <PaxFare>
    <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Stat
e>

    <PaxType>ADT</PaxType>
    <PaxDiscountCode></PaxDiscountCode>
    <FareDiscountCode></FareDiscountCode>
    <ServiceCharges>
      <BookingServiceCharge>
        <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Stat
e>

        <ChargeType>FarePrice</ChargeType>
        <CollectType>SellerChargeable</CollectType>
        <ChargeCode></ChargeCode>
        <TicketCode></TicketCode>
        <CurrencyCode>INR</CurrencyCode>
        <Amount>3065.0000</Amount>
        <ChargeDetail></ChargeDetail>
        <ForeignCurrencyCode>INR</ForeignCurrencyCode>
        <ForeignAmount>3065.0000</ForeignAmount>
      </BookingServiceCharge>
    </ServiceCharges>
    <TicketFareBasisCode></TicketFareBasisCode>
    <ProofOfStatusRequired>false</ProofOfStatusRequired>
  </PaxFare>
</PaxFares>
<ProductClass>R</ProductClass>
<IsAllotmentMarketFare>false</IsAllotmentMarketFare>
<TravelClassCode></TravelClassCode>
<FareSellKey>0~T~ ~6E~TOIP~1059~~0~29~~X</FareSellKey>
<InboundOutbound>None</InboundOutbound>
<FareLink>0</FareLink>

```



```

    <FareDesignator>
      <FareTypeIndicator></FareTypeIndicator>
      <CityCode></CityCode>
      <TravelCityCode></TravelCityCode>
      <RuleFareTypeCode></RuleFareTypeCode>
      <BaseFareFareClassCode></BaseFareFareClassCode>
      <DowType></DowType>
      <SeasonType></SeasonType>
      <RoutingNumber>0</RoutingNumber>
      <OneWayRoundTrip></OneWayRoundTrip>
      <OpenJawAllowed>>false</OpenJawAllowed>
      <TripDirection></TripDirection>
    </FareDesignator>
  </Fare>
  <Fare>
    <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Stat
e>
      <ClassOfService>T</ClassOfService>
      <ClassType></ClassType>
      <RuleTariff></RuleTariff>
      <CarrierCode>6E</CarrierCode>
      <RuleNumber>1057</RuleNumber>
      <FareBasisCode>T08AP</FareBasisCode>
      <FareSequence>1</FareSequence>
      <FareClassOfService>T</FareClassOfService>
      <FareStatus>Default</FareStatus>
      <FareApplicationType>Route</FareApplicationType>
      <OriginalClassOfService>T</OriginalClassOfService>
      <XrefClassOfService></XrefClassOfService>
      <PaxFares>
        <PaxFare>
          <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Stat
e>
            <PaxType>ADT</PaxType>
            <PaxDiscountCode></PaxDiscountCode>
            <FareDiscountCode></FareDiscountCode>
            <ServiceCharges>
              <BookingServiceCharge>
                <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Stat
e>
                  <ChargeType>FarePrice</ChargeType>

```

```

        <CollectType>SellerChargeable</CollectType>
        <ChargeCode></ChargeCode>
        <TicketCode></TicketCode>
        <CurrencyCode>INR</CurrencyCode>
        <Amount>4191.0000</Amount>
        <ChargeDetail></ChargeDetail>
        <ForeignCurrencyCode>INR</ForeignCurrencyCode>
        <ForeignAmount>4191.0000</ForeignAmount>
    </BookingServiceCharge>
</ServiceCharges>
<TicketFareBasisCode></TicketFareBasisCode>
<ProofOfStatusRequired>>false</ProofOfStatusRequired>
</PaxFare>
</PaxFares>
<ProductClass>R</ProductClass>
<IsAllotmentMarketFare>>false</IsAllotmentMarketFare>
<TravelClassCode></TravelClassCode>
<FareSellKey>0~T~ ~6E~T08AP~1057~~0~1~~X</FareSellKey>
<InboundOutbound>None</InboundOutbound>
<FareLink>0</FareLink>
<FareDesignator>
    <FareTypeIndicator></FareTypeIndicator>
    <CityCode></CityCode>
    <TravelCityCode></TravelCityCode>
    <RuleFareTypeCode></RuleFareTypeCode>
    <BaseFareFareClassCode></BaseFareFareClassCode>
    <DowType></DowType>
    <SeasonType></SeasonType>
    <RoutingNumber>0</RoutingNumber>
    <OneWayRoundTrip></OneWayRoundTrip>
    <OpenJawAllowed>>false</OpenJawAllowed>
    <TripDirection></TripDirection>
</FareDesignator>
</Fare>
</Fares>
<ServiceBundleOfferList></ServiceBundleOfferList>
</GetTripAvailabilityVer2Response>
</GetAvailabilityVer2Response>
</s:Body>
</s:Envelope>

```

Identifier for Terminal Information in Getavailability Response

Same could be get in tag namely ArrivalTerminal and DepartureTerminal under Legs in GetBooking Response.


Booking -> Journeys -> Segments -> Legs -> LegInfo -> ArrivalTerminal
 Booking -> Journeys -> Segments -> Legs -> LegInfo ->
 DepartureTerminal

Identifier for Code share flights in Getavailability Response

- **SegmentType** – You will get value as ‘L’ for code share flights under **SegmentType**.
 Eg. Journeys -> Segments -> SegmentType>L</SegmentType>
- **XrefFlightDesignator** - You will get Code Share flightnumber and carriercode under **XrefFlightDesignator** only in case of Code share flights.
 Eg. Journeys -> Segments -> XrefFlightDesignator -> FlightNumber.
 Eg. Journeys -> Segments -> XrefFlightDesignator -> CarrierCode.
- **CodeShareIndicator** - You will get value as ‘L’ for Code Share flights under **CodeShareIndicator**.
 Eg. Journeys -> Segments -> Legs -> LegInfo ->
 <CodeShareIndicator>L</CodeShareIndicator>
- **OperatingFlightNumber** – You will get Code Share Operating FlightNumber under OperatingFlightNumber tag.
 Eg. Journeys -> Segments -> Legs -> LegInfo ->
 <OperatingFlightNumber>XXX</OperatingFlightNumber>
- **OperatingCarrier** - You will get Code Share Operating carrier under • OperatingCarrier tag.
 Eg. Journeys -> Segments -> Legs -> LegInfo ->
 <OperatingCarrier>TK</OperatingCarrier>

Calculate Flight Time Between two Cities

- LegInfo -> ARRLTV and DEPTLTV for making the time in UTC.
- The value in API tag is 330 in IST and if minus 330 minutes from STD it will give us the UTC time of STD value.

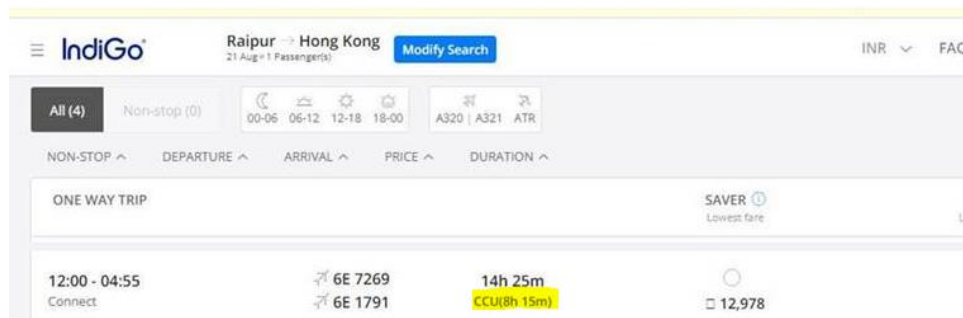

8.4 GetItineraryPrice

Prices a complete itinerary, computes fees, charges and taxes, and prices using the supplied parameters and returns a response containing the total price including all fees, charges and taxes. Price Itinerary does not update the booking state. Use the Sell methods to update the booking state. The purpose of GetItineraryPrice is to provide the cost of a what-if scenario for an itinerary. Given a valid itinerary, it returns the fees and taxes for that itinerary. GetItineraryPrice will not validate that the data identifying the journeys or segments are valid therefore the caller is responsible for providing valid data. A typical usage for a caller is to use the data returned by GetAvailability to populate the GetItineraryPrice request. It performs logic similar to a Sell journey request to obtain the fare, fees and taxes. It does not hold inventory and it does not update the booking state.

○ PriceltineraryBy. JourneyBySellKey

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- TypeOfSale (Optional/If applicable)
 - PromotionCode
 - FareTypes
 - FareTypes
- PriceltineraryBy (JourneyBySellKey)
- ActionStatusCode
- JourneySellKey
- FareSellKey

- PaxPriceType
- CurrencyCode
- SourcePOS
- PaxCount

8.4.4 Instructions for GetItineraryPrice API to Get Fare Breakup

The GetItineraryPrice call is only intended to be used to price a booking scenario. This means that the only flights that should be included in a request are ones that would be sold as part of a single booking.

For instance, if you wanted to price out a one-way journey, you would only include a single flight. If you wanted to price a round-trip journey, you would include 2 flights in the request. If you had a multi-flight journey, you would include the flights that make up that trip.

At no point should this method be used to price multiple flights with the same O&D for the same or multiple days just to get pricing. This is not a “price generator” call it is a “booking quote” call intended to give you a total price of a potential booking. If users are putting in flights that are not intended to be sold together to make a booking, they are using it wrong.

To check the fare breakup in GetItineraryPrice API call you need to clubbed maximum up to 5 journeys in a single GetItineraryPrice API call.

8.4.5 Instructions for GetItineraryPrice API to Get Fare Breakup on SOS Connection

You may get multiple connection of single flight that may cause an error ‘**Segment already booked**’ while executing GetItineraryPrice. Request to get Fare Breakup for all SOS connection flights in single call.

For example: - Customer selects a journey as BLR – MCT, and he gets 5 connecting flights as below:

Journey	Flight No 1	Flight No 2	Result
Journey 1	424 (BLR - BOM)	81 (BOM – MCT)	-
Journey 2	413 (BLR – COK)	83 (COK – MCT)	-
Journey 3	464 (BLR – BOM)	81 (BOM – MCT)	Flight 81 is repeating
Journey 4	346 (BLR – BOM)	81 (BOM – MCT)	Flight 81 is repeating
Journey 5	407 (BLR – COK)	83 (COK – MCT)	Flight 83 is repeating

If you execute above all the journeys clubbed together in single request, then you may get an error ‘**Segment already booked**’ due to repetition of flight.

- To avoid Repetition in connecting flights in fare breakup, you need to execute multiple GetItineraryPrice API call.

- In such cases, GetItineraryPrice API call should be executed equals to the maximum frequency of repetition of a flight in a sector.
- Connecting flight should be executed on SoS logic only.
- In above example, Flight No 81 making three connections and it is maximum in BLR – MCT sector therefore GetItineraryPrice request should be executed thrice as below :

Journey	Flight No 1	Flight No 2	GetItinerary Price Request set
Journey 1	424 (BLR - BOM)	81 (BOM – MCT)	1
Journey 2	413 (BLR – COK)	83 (COK – MCT)	1
Journey 3	464 (BLR – BOM)	81 (BOM – MCT)	2
Journey 4	346 (BLR – BOM)	81 (BOM – MCT)	3
Journey 5	407 (BLR – COK)	83 (COK – MCT)	2

- Above logic will be applicable on both Domestic and International sectors.
- For Direct and Via flights, no changes needs to be done.
- Below are some more example to avoid repetition factor :

Journey Count	Inventory	GetItinerary Price Request set
Journey 1	6E~ 47~ ~DEL~08/25/2019 02:10~DXB~08/25/2019 04:35~	1
Journey 2	6E~ 23~ ~DEL~08/25/2019 07:10~DXB~08/25/2019 09:40~	1
Journey 3	6E~ 21~ ~DEL~08/25/2019 17:05~DXB~08/25/2019 19:25~	1
Journey 4	6E~ 683~ ~DEL~08/25/2019 08:05~HYD~08/25/2019 10:10~^6E~ 26~ ~HYD~08/25/2019 14:30~DXB~08/25/2019 16:55~	1
Journey 5	6E~ 841~ ~DEL~08/25/2019 08:50~HYD~08/25/2019 11:10~^6E~ 26~ ~HYD~08/25/2019 14:30~DXB~08/25/2019 16:55~	2
Journey 6	6E~ 223~ ~DEL~08/25/2019 10:40~COK~08/25/2019 15:30~BOM^6E~ 67~ ~COK~08/25/2019 18:45~DXB~08/25/2019 21:20~	1
Journey 7	6E~ 933~ ~DEL~08/25/2019 11:30~BOM~08/25/2019 13:35~^6E~ 61~ ~BOM~08/25/2019 18:35~DXB~08/25/2019 20:25~	1
Journey 8	6E~ 175~ ~DEL~08/25/2019 13:10~BOM~08/25/2019 15:05~^6E~ 61~ ~BOM~08/25/2019 18:35~DXB~08/25/2019 20:25~	2
Journey 9	6E~ 289~ ~DEL~08/25/2019 13:30~COK~08/25/2019 16:40~^6E~ 67~ ~COK~08/25/2019 18:45~DXB~08/25/2019 21:20~	2

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

Journey 10	6E~ 613~ ~DEL~08/25/2019 17:40~MAA~08/25/2019 20:30~^6E~ 65~ ~MAA~08/26/2019 07:30~DXB~08/26/2019 10:30~	1
Journey 11	6E~ 355~ ~DEL~08/25/2016 20:20~MAA~08/25/2016 23:10~^6E~ 65~ ~MAA~08/26/2016 07:30~DXB~08/26/2016 10:30~	2

Flight No. 26 making 2 combinations therefore total no of GetItineraryPrice API call should be executed as 2.

Request

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true"
      xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></h:MessageContractVersion>
    <h:Signature
      xmlns:h="http://schemas.navitaire.com/WebServices">EKk1l8Mq9fM=|E7waagXNTJPjYH
      PPNy9heswHPuB426m9Y7yaZsJ1Edqjhdak8uB2zkf3rbdeXbbvXdYth7mXKHU3YN2sK/+VFx
      vlqvMpXCxfuoNpURreP2lvj/NVahBoO3lNKSCf4rvzRmrCWj+w01Y=</h:Signature>
  </s:Header>
  <s:Body>
    <PriceltineraryRequest
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <ltineraryPriceRequest
        xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:TypeOfSale>
        <State
          xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</S
          tate>
        <a:PaxResidentCountry i:nil="true" />
        <a:PromotionCode>XXXXXXX</a:PromotionCode>
        - <a:FareTypes xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
          <b:string>R</b:string>
        </a:FareTypes>
```

```

<a:PromotionSold>false</a:PromotionSold>
</a:TypeOfSale>
  <a:SSRRequest i:nil="true"></a:SSRRequest>
  <a:SellRequest i:nil="true"></a:SellRequest>
  <a:SellByKeyRequest>
    <a:ActionStatusCode>NU</a:ActionStatusCode>
    <a:JourneySellKeys>
      <a:SellKeyList>
        <a:JourneySellKey>6E~5098~ ~~DEL~12/01/2019 07:40~JAI~12/01/2019
08:40~~</a:JourneySellKey>
        <a:FareSellKey>0~P~ ~6E~P015AP~1057~0~7~~X</a:FareSellKey>
        <a:StandbyPriorityCode i:nil="true"></a:StandbyPriorityCode>
      </a:SellKeyList>
    </a:JourneySellKeys>
  <a:PaxPriceType>
    <a:PaxPriceType>
      <a:PaxType>ADT</a:PaxType>
      <a:PaxDiscountCode i:nil="true"></a:PaxDiscountCode>
      <a:PaxCount>0</a:PaxCount>
    </a:PaxPriceType>
  </a:PaxPriceType>
  <a:CurrencyCode>INR</a:CurrencyCode>
  <a:SourcePOS
xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
    <b:State>New</b:State>
    <b:AgentCode>AG</b:AgentCode>
    <b:OrganizationCode>XXXXXX</b:OrganizationCode>
    <b:DomainCode>WWW</b:DomainCode>
    <b:LocationCode i:nil="true"></b:LocationCode>
  </a:SourcePOS>
  <a:PaxCount>1</a:PaxCount>
  <a:TypeOfSale i:nil="true"></a:TypeOfSale>
  <a:LoyaltyFilter>MonetaryOnly</a:LoyaltyFilter>
  <a:IsAllotmentMarketFare>false</a:IsAllotmentMarketFare>
  <a:SourceBookingPOS i:nil="true"
xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common"></a:Sou
rceBookingPOS>
    <a:PreventOverLap>false</a:PreventOverLap>
    <a:ReplaceAllPassengersOnUpdate>false</a:ReplaceAllPassengersOnUpdate>
    <a:ServiceBundleList i:nil="true"
xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></a:ServiceBundl
eList>
      <a:ApplyServiceBundle>No</a:ApplyServiceBundle>
    </a:SellByKeyRequest>

```



```

    <a:PriceJourneyWithLegsRequest i:nil="true"></a:PriceJourneyWithLegsRequest>
    <a:PrictineraryBy>JourneyBySellKey</a:PrictineraryBy>
    <a:BookingStatus>Default</a:BookingStatus>
    <a:SSROptimizationInputParameterList
i:nil="true"></a:SSROptimizationInputParameterList>
    <a:FareOptimizationInputParameterList
i:nil="true"></a:FareOptimizationInputParameterList>
    </ItineraryPriceRequest>
  </PrictineraryRequest>
</s:Body>
</s:Envelope>

```

Response

```

<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header></s:Header>
  <s:Body>
    <PrictineraryResponse
xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <Booking xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <OtherServiceInfoList
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common"></Other
ServiceInfoList>
          <State>Modified</State>
          <RecordLocator></RecordLocator>
          <CurrencyCode>INR</CurrencyCode>
          <PaxCount>1</PaxCount>
          <SystemCode></SystemCode>
          <BookingID>0</BookingID>
          <BookingParentID>0</BookingParentID>
          <ParentRecordLocator></ParentRecordLocator>
          <BookingChangeCode></BookingChangeCode>
          <GroupName></GroupName>
          <BookingInfo>
            <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</St
ate>
            <BookingStatus>Default</BookingStatus>
            <BookingType></BookingType>
            <ChannelType>Default</ChannelType>
            <CreatedDate>9999-12-31T00:00:00Z</CreatedDate>
            <ExpiredDate>9999-12-31T00:00:00Z</ExpiredDate>
            <ModifiedDate>9999-12-31T00:00:00Z</ModifiedDate>

```

```

<PriceStatus>Valid</PriceStatus>
<ProfileStatus>Default</ProfileStatus>
<ChangeAllowed>true</ChangeAllowed>
<CreatedAgentID>0</CreatedAgentID>
<ModifiedAgentID>0</ModifiedAgentID>
<BookingDate>2019-07-22T11:04:30.3899486Z</BookingDate>
<OwningCarrierCode></OwningCarrierCode>
<PaidStatus>UnderPaid</PaidStatus>
<ActivityDate>9999-12-31T00:00:00Z</ActivityDate>
</BookingInfo>
<POS
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <a:State>New</a:State>
  <a:AgentCode>XXXX</a:AgentCode>
  <a:OrganizationCode>XXXXX</a:OrganizationCode>
  <a:DomainCode>WWW</a:DomainCode>
  <a:LocationCode>XXXXX</a:LocationCode>
</POS>
<SourcePOS
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <a:State>New</a:State>
  <a:AgentCode>XXXXX</a:AgentCode>
  <a:OrganizationCode>XXXXX</a:OrganizationCode>
  <a:DomainCode>WWW</a:DomainCode>
  <a:LocationCode>XXXXX</a:LocationCode>
</SourcePOS>
<TypeOfSale>
  <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Sta
te>
    <PaxResidentCountry>IN</PaxResidentCountry>
    <PromotionCode></PromotionCode>
    <FareTypes
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></FareTypes>
      <PromotionSold>>false</PromotionSold>
    </TypeOfSale>
    <BookingHold i:nil="true"></BookingHold>
    <BookingSum>
      <BalanceDue>2825.00000</BalanceDue>
      <AuthorizedBalanceDue>2825.00000</AuthorizedBalanceDue>
      <SegmentCount>1</SegmentCount>
      <PassiveSegmentCount>0</PassiveSegmentCount>
      <TotalCost>2825.00000</TotalCost>
      <PointsBalanceDue>0</PointsBalanceDue>

```

```

<TotalPointCost>0</TotalPointCost>
<AlternateCurrencyCode></AlternateCurrencyCode>
<AlternateCurrencyBalanceDue>0</AlternateCurrencyBalanceDue>
</BookingSum>
<ReceivedBy>
  <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</St
ate>
  <ReceivedBy></ReceivedBy>
  <ReceivedReference></ReceivedReference>
  <ReferralCode></ReferralCode>
  <LatestReceivedBy></LatestReceivedBy>
  <LatestReceivedReference></LatestReceivedReference>
</ReceivedBy>

```

8.5 UpdateContacts

The UpdateContacts method allows for you to add GST/ UIN details, and this API method has TypeCode tag where value should be "1". And this call only recommended to be used during booking process for adding either GST details or UIN details.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- TypeCode ("1" For GST and UIN only)
- EmailAddress
- CompanyName
- CustomerNumber

Note:-

- GST /UIN Number is optional field however you have to ask your customer for GST/ UIN number, if he wants to enter GST/UIN number then can enter all GST/UIN fields otherwise he can skip GST/UIN fields and booking flow will be the same as existing.
- UIN/ GST Numbers should only be in Capitals.
- IndiGo Website screen for capturing details.

Format of Provisional ID

22 AAAAAA0000A 1 Z 5

State Code


Permanent Account Number (PAN)

Entity number of the same PAN holder in a state

Alphabet 'Z' by default

Check sum digit

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

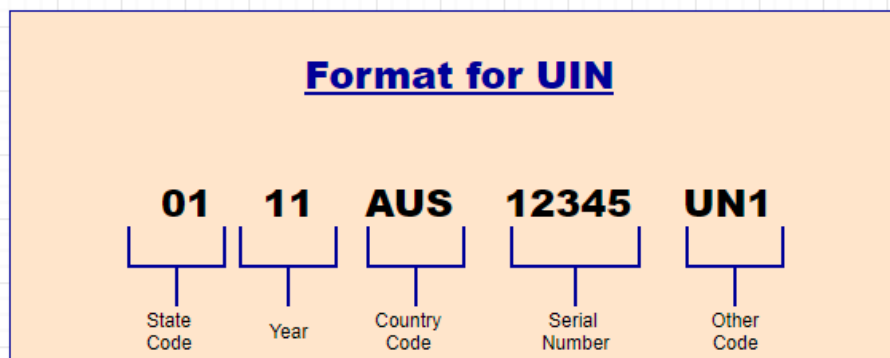

Request

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true"
      xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></h:MessageContractVersion>
    <h:Signature
      xmlns:h="http://schemas.navitaire.com/WebServices">yJX0mwBThUM=|o9YRu4VwyQm
      0o1ZJf37MulF+K40aBW/9QUfcAkHG3b22fVXhUVhBPlgi1tuFbwCUiKTik+k</h:Signature>
  </s:Header>
  <s:Body>
    <UpdateContactsRequest
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <updateContactsRequestData
        xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:BookingContactList>
          <a:BookingContact>
            <State
              xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State>
            <a:TypeCode>I</a:TypeCode>
            <Names i:nil="true" />
            <a:EmailAddress>api.support@goindigo.in</a:EmailAddress>
            <a:HomePhone i:nil="true"></a:HomePhone>
            <a:WorkPhone i:nil="true"></a:WorkPhone>
          </a:BookingContact>
        </a:BookingContactList>
      </updateContactsRequestData>
    </UpdateContactsRequest>
  </s:Body>
</s:Envelope>
```

```

<a:OtherPhone i:nil="true"></a:OtherPhone>
<a:Fax i:nil="true"></a:Fax>
<a:CompanyName>IndiGo</a:CompanyName>
<a:AddressLine1 i:nil="true"></a:AddressLine1>
<a:AddressLine2 i:nil="true"></a:AddressLine2>
<a:AddressLine3 i:nil="true"></a:AddressLine3>
<a:City i:nil="true"></a:City>
<a:ProvinceState i:nil="true"></a:ProvinceState>
<a:PostalCode i:nil="true"></a:PostalCode>
<a:CountryCode i:nil="true"></a:CountryCode>
<a:CultureCode i:nil="true"></a:CultureCode>
<a:DistributionOption>None</a:DistributionOption>
<a:CustomerNumber>27AAAAA0000A1Z5</a:CustomerNumber> // GST /UIN Number
<a:NotificationPreference>None</a:NotificationPreference>
<a:SourceOrganization i:nil="true"></a:SourceOrganization>
</a:BookingContact>
</a:BookingContactList>
</updateContactsRequestData>
</UpdateContactsRequest>
</s:Body>
</s:Envelope>

```

Response

```

<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  <s:Body>
    <UpdateContactsResponse
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <BookingUpdateResponseData
        xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <Success>
          <RecordLocator />
        <PNRAmount>
          <BalanceDue>0</BalanceDue>
          <AuthorizedBalanceDue>0</AuthorizedBalanceDue>
          <SegmentCount>0</SegmentCount>
          <PassiveSegmentCount>0</PassiveSegmentCount>
          <TotalCost>0</TotalCost>
          <PointsBalanceDue>0</PointsBalanceDue>
          <TotalPointCost>0</TotalPointCost>
          <AlternateCurrencyCode />

```

```

<AlternateCurrencyBalanceDue>0</AlternateCurrencyBalanceDue>
</PNRAmount>
</Success>
<Warning i:nil="true" />
<Error i:nil="true" />
<OtherServiceInformations i:nil="true"
  xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
</BookingUpdateResponseData>
</UpdateContactsResponse>

```

8.6 Sell

Sell holds space for the requested journeys and it updates the booking state. The Sell method provides the way to sell journeys by SellBy.JourneySellByKey. SellJourneyByKey followed with UpdatePassengers to set passenger information in booking state. A description of using SellJourneyByKey follows the SellJourney details:

- **SellBy.JourneyBySellKey**

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- SellBy(JourneyBySellKey)
- ActionStatusCode
- JourneySellKey
- FareSellKey
- PaxPriceType
- CurrencyCode
- TypeOfSale (Optional/If applicable)
 - PromotionCode
 - FareTypes
- SourcePOS

Fields Name and DataType

S. No.	Field Name	Data type	Max Length	Technical Description
1.	ContractVersion			
2.	Signature			
3.	PriceltineraryBy			
4.	ActionStatusCode	string		IATA Standard Booking action code

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

5.	JourneySellKey	string		
6.	FareSellKey			
7.	PaxType	varchar	4	Passenger type code associated with the current record. The passenger type code should be obtained from the PaxType table. Default = ADT.
8.	CurrencyCode		3	
9.	AgentCode			
10.	OrganizationCode		10	
11.	DomainCode			
12.	PaxCount	int	4	

Request

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
    <h:MessageContractVersion i:nil="true"
      xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></h:MessageContractVersion>
    <h:Signature
      xmlns:h="http://schemas.navitaire.com/WebServices">yJX0mwBThUM=|o9YRu4VwyQm
      0o1ZJf37MulF+K40aBW/9QUfcAkHG3b22fVXhUVhBP1gi1tuFbwCUiKTik+kNLpLExwFOPVmi
      iQSMGkUNRMkzudvEvg1kNLj/Uo9/3uFKstJmTq59WixkMsBAG26qG7OE=</h:Signature>
  </s:Header>
  <s:Body>
    <SellRequest
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <SellRequestData
        xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:SellBy>JourneyBySellKey</a:SellBy>
        <a:SellJourneyByKeyRequest>
          <a:SellJourneyByKeyRequestData>
```



```

<a:ActionCode>NU</a:ActionCode>
<a:JourneySellKeys>
  <a:SellKeyList>
    <a:JourneySellKey>6E~5098~ ~~DEL~12/01/2019 07:40~JAI~12/01/2019
08:40~~</a:JourneySellKey>
    <a:FareSellKey>0~P~ ~6E~P015AP~1057~~0~7~~X</a:FareSellKey>
    <a:StandbyPriorityCode i:nil="true"></a:StandbyPriorityCode>
  </a:SellKeyList>
</a:JourneySellKeys>
<a:PaxPriceType>
  <a:PaxPriceType>
    <a:PaxType>ADT</a:PaxType>
    <a:PaxDiscountCode i:nil="true"></a:PaxDiscountCode>
    <a:PaxCount>0</a:PaxCount>
  </a:PaxPriceType>
</a:PaxPriceType>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:SourcePOS
xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <b:State>New</b:State>
  <b:AgentCode>AG</b:AgentCode>
  <b:OrganizationCode>XXXXXX</b:OrganizationCode>
  <b:DomainCode>WWW</b:DomainCode>
  <b:LocationCode i:nil="true"></b:LocationCode>
</a:SourcePOS>
<a:PaxCount>1</a:PaxCount>
<a:TypeOfSale>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State>
    <a:PaxResidentCountry i:nil="true" />
    <a:PromotionCode>XXXXXXX</a:PromotionCode>
  - <a:FareTypes
    xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
    <b:string>R</b:string>
  </a:FareTypes>
  <a:PromotionSold>>false</a:PromotionSold>
</a:TypeOfSale>
  <a:LoyaltyFilter>MonetaryOnly</a:LoyaltyFilter>
  <a:IsAllotmentMarketFare>>false</a:IsAllotmentMarketFare>
  <a:SourceBookingPOS i:nil="true"
xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common"></a:Sou
rceBookingPOS>
  <a:PreventOverLap>>false</a:PreventOverLap>

```

```

        <a:ReplaceAllPassengersOnUpdate>false</a:ReplaceAllPassengersOnUpdate>
        <a:ServiceBundleList i:nil="true"
xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays"></a:ServiceBundl
eList>
        <a:ApplyServiceBundle>No</a:ApplyServiceBundle>
    </a:SellJourneyByKeyRequestData>
</a:SellJourneyByKeyRequest>
    <a:SellJourneyRequest i:nil="true"></a:SellJourneyRequest>
    <a:SellSSR i:nil="true"></a:SellSSR>
    <a:SellFee i:nil="true"></a:SellFee>
</SellRequestData>
</SellRequest>
</s:Body>
</s:Envelope>

```

Response

```

<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  <s:Body>
    <SellResponse
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <BookingUpdateResponseData
        xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <Success>
          <RecordLocator />
        <PNRAmount>
          <BalanceDue>2825.00000</BalanceDue>
          <AuthorizedBalanceDue>2825.00000</AuthorizedBalanceDue>
          <SegmentCount>1</SegmentCount>
          <PassiveSegmentCount>0</PassiveSegmentCount>
          <TotalCost>2825.00000</TotalCost>
          <PointsBalanceDue>0</PointsBalanceDue>
          <TotalPointCost>0</TotalPointCost>
          <AlternateCurrencyCode />
          <AlternateCurrencyBalanceDue>0</AlternateCurrencyBalanceDue>
        </PNRAmount>
        </Success>
        <Warning i:nil="true" />
        <Error i:nil="true" />

```

```
<OtherServiceInformations i:nil="true"
  xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
</BookingUpdateResponseData>
</SellResponse>
</s:Body>
</s:Envelope>
```

8.7 GetBookingFromState

The GetBookingFromState method retrieves a booking from booking state without accessing the database or altering the booking in booking state. Contrast this with GetBooking which retrieves the requested booking from the database and replaces any booking that may be in booking state.

Note: - The purpose of executing GetBookingFromState API Call to get the fare breakup of all tax components once GST number gets entered therefore we are suggesting you to execute GetBookingFromState API call for updated fare breakup.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)

Request

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
- <s:Header>
  <h:ContractVersion
    xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
  <h:EnableExceptionStackTrace
    xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTr
    ace>
  <h:MessageContractVersion i:nil="true"
    xmlns:h="http://schemas.navitaire.com/WebServices"
    xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
  <h:Signature
    xmlns:h="http://schemas.navitaire.com/WebServices">9rqPM7W031g=|l1oK2Q5zOADy
    S7wiJvLNbYHkh6ZYjdRmtS+qU/5O78P+8tBegYsV6RR/XVo8hBRcanBG/h1oHuY24wuaz7
    VmPXiQ+kqGYJJ//BgS+XSv4W3DUSqFhNt+J4K1bIXuzRUmrHF8qpkHp+U=</h:Signature>
  </s:Header>
- <s:Body>
  <GetBookingFromStateRequest xmlns="http://schemas.navitaire.com/WebServices" />
```

```
</s:Body>
</s:Envelope>
```

Response

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  <s:Body>
    <GetBookingFromStateResponse
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <BookingData xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <OtherServiceInfoList
          xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
        <State>New</State>
        <RecordLocator />
        <CurrencyCode>INR</CurrencyCode>
        <PaxCount>1</PaxCount>
        <SystemCode />
        <BookingID>0</BookingID>
        <BookingParentID>0</BookingParentID>
        <ParentRecordLocator />
        <BookingChangeCode />
        <GroupName />
      <BookingInfo>
        <State
          xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Sta
            te>
        <BookingStatus>Default</BookingStatus>
        <BookingType />
        <ChannelType>Default</ChannelType>
        <CreatedDate>9999-12-31T00:00:00Z</CreatedDate>
        <ExpiredDate>9999-12-31T00:00:00Z</ExpiredDate>
        <ModifiedDate>9999-12-31T00:00:00Z</ModifiedDate>
        <PriceStatus>Valid</PriceStatus>
        <ProfileStatus>Default</ProfileStatus>
        <ChangeAllowed>true</ChangeAllowed>
```

```
<CreatedAgentID>0</CreatedAgentID>
<ModifiedAgentID>0</ModifiedAgentID>
<BookingDate>2019-07-22T11:37:48.9645942Z</BookingDate>
<OwningCarrierCode />
<PaidStatus>UnderPaid</PaidStatus>
<ActivityDate>9999-12-31T00:00:00Z</ActivityDate>
</BookingInfo>
```

8.8 GetBaggageAllowances

Retrieves baggage information. If the GetFromCurrentState flag is set, then the request only requires the signature to be passed and API will provide in response with allowed baggage weight based on your journey.

Required Parameters:-

- ContractVersion
- EnableExceptionStackTrace(default False)
- IncludeUsageDetails (Set this tag to True to get baggage allowances on passenger level)

Request

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
- <s:Header>
  <h:ContractVersion
    xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
  <h:EnableExceptionStackTrace
    xmlns:h="http://schemas.navitaire.com/WebServices">>false</h:EnableExceptionStackTrace>
  <h:MessageContractVersion i:nil="true"
    xmlns:h="http://schemas.navitaire.com/WebServices"
    xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
  <h:Signature
    xmlns:h="http://schemas.navitaire.com/WebServices">yqVtrzxjBBg=|f1b3Am6oh6wojjfVB2S0C6ZYCEyNH+5kmQihAGfFIkDIPZ1ecdVJfu1vYcah0J8Fk0+yBPnAG9DIQRWpf9yhOGUkt5ra2PHzUX6w85yvyZNcjLBbIXY9ItWt8PzbspNXrElZNPeMnG0=</h:Signature>
</s:Header>
- <s:Body>
- <GetBaggageAllowancesRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
```

```
- <getBaggageAllowancesRequestData
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <IncludeUsageDetails>true</IncludeUsageDetails>
</getBaggageAllowancesRequestData>
</GetBaggageAllowancesRequest>
</s:Body>
</s:Envelope>
```

Response

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  <s:Body>
  - <GetBaggageAllowancesResponse
    xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
  - <getBaggageAllowancesResponseData
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
    xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  - <BaggageAllowanceList>
  - <BaggageAllowance>
  - <FlightKeyList xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
    <a:string>20191201 6E5098 DELJAI</a:string>
  </FlightKeyList>
  - <PassengerNumberList
    xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
    <a:short>0</a:short>
  </PassengerNumberList>
  <ForInfant>false</ForInfant>
  <AllowanceType>Undefined</AllowanceType>
  <AllowanceBehavior>WeightSharing</AllowanceBehavior>
  <BaggageTypeList i:nil="true" />
  <MaxPieces>0</MaxPieces>
  <MaxWeightPerPiece>0</MaxWeightPerPiece>
  <TotalWeight>15</TotalWeight>
  <WeightUnitType>Kilograms</WeightUnitType>
  <MaxLengthPerPiece>0</MaxLengthPerPiece>
  <DimensionUnitType>Default</DimensionUnitType>
  <BaggageAllowanceNumber>1</BaggageAllowanceNumber>
  </BaggageAllowance>
  </BaggageAllowanceList>
```

```
<BaggageAllowanceUsageList i:nil="true" />
</getBaggageAllowancesResponseData>
</GetBaggageAllowancesResponse>
</s:Body>
</s:Envelope>
```

8.9 GetSSRAvailabilityForBooking

All SSRs have their fixed price, so you can get the SSRs fee before sell. In case of Availability of SSRs, you need to execute Sell Request first then later execute GetSSRAvailabilityForBooking Request API Call.

Required Parameters:-

- ContractVersion
- EnableExceptionStackTrace(default False)
- Signature
- DepartureDate
- DepartureStation
- ArrivalStation
- CarrierCode
- FlightNumber
- PassengerNumberList
- InventoryControlled
- NonInventoryControlled
- SeatDependent
- NonSeatDependent

Request

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">>false</h:EnableExceptionStackTra
      ce>
    <h:MessageContractVersion i:nil="true"
      xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></h:MessageContractVersion>
```

```

<h:Signature
  xmlns:h="http://schemas.navitaire.com/WebServices">yJX0mwBThUM=|o9YRu4VwyQm0
  o1ZJf37MuIF+K40aBW/9QUfcAkHG3b22fVXhUVhBP1gi1tuFbwCUiKTik+kNLpLExwFOPVmiQ
  SMGkUNRMkzudvEvg1kNLj/Uo9/3uFKstJmTq59WixkMsBAg26qG7OE=</h:Signature>
</s:Header>
<s:Body>
  <GetSSRAvailabilityForBookingRequest
    xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
    <SSRAvailabilityForBookingRequest
      xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
      <SegmentKeyList>
        <LegKey>
          <CarrierCode
            xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">6E</CarrierCode>
          <FlightNumber
            xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">5098</FlightNumber>
          <OpSuffix i:nil="true"
            xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common"></OpSuffix>
          <DepartureDate>2019-12-01T07:40:00</DepartureDate>
          <DepartureStation>DEL</DepartureStation>
          <ArrivalStation>JAI</ArrivalStation>
        </LegKey>
      </SegmentKeyList>
      <PassengerNumberList
        xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
        <a:short>0</a:short>
      </PassengerNumberList>
      <InventoryControlled>true</InventoryControlled>
      <NonInventoryControlled>true</NonInventoryControlled>
      <SeatDependent>true</SeatDependent>
      <NonSeatDependent>true</NonSeatDependent>
      <CurrencyCode>INR</CurrencyCode>
      <OptimizationInputParameterList i:nil="true"></OptimizationInputParameterList>
      <SSRAvailabilityMode>NonBundledSSRs</SSRAvailabilityMode>
    </SSRAvailabilityForBookingRequest>
  </GetSSRAvailabilityForBookingRequest>
</s:Body>
</s:Envelope>

```

Response

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved


```

<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header></s:Header>
  <s:Body>
    <GetSSRAvailabilityForBookingResponse
xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      <SSRAvailabilityForBookingResponse
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <OtherServiceInfoList
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common"></OtherServiceInfoList>
          <SSRSegmentList>
            <SSRSegment>
              <LegKey>
                <CarrierCode
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">6E</CarrierCode>
                <FlightNumber
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">5098</FlightNumber>
                <OpSuffix
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common"></OpSuffix>
                <DepartureDate>2019-12-01T00:00:00</DepartureDate>
                <DepartureStation>DEL</DepartureStation>
                <ArrivalStation>JAI</ArrivalStation>
              </LegKey>
              <AvailablePaxSSRList>
                <AvailablePaxSSR>
                  <SSRCode>XBPE</SSRCode>
                  <InventoryControlled>>false</InventoryControlled>
                  <NonInventoryControlled>>true</NonInventoryControlled>
                  <SeatDependent>>false</SeatDependent>
                  <NonSeatDependent>>true</NonSeatDependent>
                  <Available>0</Available>
                  <PassengerNumberList
xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
                    <a:short>0</a:short>
                  </PassengerNumberList>
                  <PaxSSRPriceList>
                    <PaxSSRPrice>
                      <PaxFee>
                        <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State>

```

```

<ActionCode>NN</ActionCode>
<FeeCode>XBPE</FeeCode>
<FeeDetail></FeeDetail>
<FeeNumber>0</FeeNumber>
<FeeType>SSRFee</FeeType>
<FeeOverride>>false</FeeOverride>
<FlightReference></FlightReference>
<Note></Note>
<SSRCode></SSRCode>
<SSRNumber>0</SSRNumber>
<PaymentNumber>0</PaymentNumber>
<ServiceCharges>
  <BookingServiceCharge>
    <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State>
    <ChargeType>ServiceCharge</ChargeType>
    <CollectType>SellerChargeable</CollectType>
    <ChargeCode>XBPE</ChargeCode>
    <TicketCode>XBG</TicketCode>
    <CurrencyCode>INR</CurrencyCode>
    <Amount>960.0000</Amount>
    <ChargeDetail>prepaid 3 </ChargeDetail>
    <ForeignCurrencyCode>INR</ForeignCurrencyCode>
    <ForeignAmount>960.0000</ForeignAmount>
  </BookingServiceCharge>

```

8.10 Sell(SSR)

Sells one or more special service request (SSR) on the current booking. The SSRRequest can either specify a Segment level SSR sell or a leg level SSR sell. In order to sell an SSR the booking in state must include at least one passenger. The SellBy.SSR updates the current state with the data provided in the SellRequest. The sell method updates booking state therefore a commit must be performed to write the changes to the database.

- **SellBy.SSR**

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- SellBy(SSR)
- CarrierCode
- FlightNumber
- DepartureStation

- ArrivalStation
- PassengerNumber
- SSRCode
- CurrencyCode

Field Names and DataTypes:-

S. No.	Filed Name	Data type	Max Length	Technical Description
1.	ContractVersion			
2.	Signature			
3.	SellBy			
4.	CarrierCode			
5.	FlightNumber			
6.	STD	datetime2	6	
7.	DepartureStation	char	3	Station code where travel will commence. The station code is defined in the Station table. There is no foreign key constraint but the code should be one from the Station table.
8.	ArrivalStation	Char	3	Station code where travel will conclude. The station code is defined in the Station table. There is no foreign key constraint but the code should be one from the Station table. Sample Value: SLC
9.	ActionStatusCode	String		IATA Standard Booking action code
10.	PassengerNumber	int		
11.	SSRCode	varchar	4	
12.	CurrencyCode			



8.10.4 Direct Flight Logic for SSRRequest

- *In case of Direct flight there is only one segment. For example a booking as DEL – BOM then all SSR need to be sent to DEL – BOM.*
- *Only one type of Meal and Baggage can be availed in one journey for one passenger.*

SSR Association matrix on Direct Flight

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

SSRType	Segment /Flight Leg example for SSR Association	Reservation screen
INFT	As per above mentioned example INFT need to be enter to DEL - BOM	
Meal	As per above mentioned example Meal need to be enter to DEL - BOM	
Baggage	As per above mentioned example Baggage need to be enter to DEL - BOM	

Request

(If a PNR having 2PAX and you want to add INFT, VGML and XBPA for 1Pax and VGML for 2Pax. Below is the Request/Response XMLs for same scenario)

```
<?xml version="1.0" encoding="UTF-8" ?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
<s:Header>
<h:ContractVersion
  xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
<h:EnableExceptionStackTrace
  xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace
>
<h:MessageContractVersion i:nil="true" xmlns:h="http://schemas.navitaire.com/WebServices"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
<h:Signature xmlns:h="http://schemas.navitaire.com/WebServices">SCX64R8HwEIh:Signature>
</s:Header>
<s:Body>
<SellRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
<SellRequestData xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
<a:SellBy>SSR</a:SellBy>
<a:SellJourneyByKeyRequest i:nil="true" />
<a:SellJourneyRequest i:nil="true" />
<a:SellSSR>
<a:SSRRequest>
```

```

<a:SegmentSSRRequests>
<a:SegmentSSRRequest>
<a:FlightDesignator
  xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:CarrierCode>6E</b:CarrierCode>
<b:FlightNumber>993</b:FlightNumber>
<b:OpSuffix i:nil="true" />
  </a:FlightDesignator>
<a:STD>2018-11-10T00:00:00</a:STD>
<a:DepartureStation>DEL</a:DepartureStation>
<a:ArrivalStation>BOM</a:ArrivalStation>
<a:PaxSSRs>
<a:PaxSSR>
<State
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
<a:ActionStatusCode>NN</a:ActionStatusCode>
<a:ArrivalStation>BOM</a:ArrivalStation>
<a:DepartureStation>DEL</a:DepartureStation>
<a:PassengerNumber>0</a:PassengerNumber>
<a:SSRCode>VGML</a:SSRCode>
<a:SSRNumber>0</a:SSRNumber>
<a:SSRDetail i:nil="true" />
<a:FeeCode i:nil="true" />
<a>Note i:nil="true" />
<a:SSRValue>0</a:SSRValue>
<a:IsInServiceBundle>false</a:IsInServiceBundle>
  </a:PaxSSR>
<a:PaxSSR>
<State
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
<a:ActionStatusCode>NN</a:ActionStatusCode>
<a:ArrivalStation>BOM</a:ArrivalStation>
<a:DepartureStation>DEL</a:DepartureStation>
<a:PassengerNumber>0</a:PassengerNumber>
<a:SSRCode>INFT</a:SSRCode>
<a:SSRNumber>0</a:SSRNumber>
<a:SSRDetail i:nil="true" />
<a:FeeCode i:nil="true" />
<a>Note i:nil="true" />
<a:SSRValue>0</a:SSRValue>
<a:IsInServiceBundle>false</a:IsInServiceBundle>
  </a:PaxSSR>

```

```




<a:PaxSSR>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
  <a:ActionStatusCode>NN</a:ActionStatusCode>
  <a:ArrivalStation>BOM</a:ArrivalStation>
  <a:DepartureStation>DEL</a:DepartureStation>
  <a:PassengerNumber>0</a:PassengerNumber>
  <a:SSRCode>XBPA</a:SSRCode>
  <a:SSRNumber>0</a:SSRNumber>
  <a:SSRDetail i:nil="true" />
  <a:FeeCode i:nil="true" />
  <a>Note i:nil="true" />
  <a:SSRValue>0</a:SSRValue>
  <a:IsInServiceBundle>false</a:IsInServiceBundle>
</a:PaxSSR>
<a:PaxSSR>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
  <a:ActionStatusCode>NN</a:ActionStatusCode>
  <a:ArrivalStation>BOM</a:ArrivalStation>
  <a:DepartureStation>DEL</a:DepartureStation>
  <a:PassengerNumber>1</a:PassengerNumber>
  <a:SSRCode>VGML</a:SSRCode>
  <a:SSRNumber>0</a:SSRNumber>
  <a:SSRDetail i:nil="true" />
  <a:FeeCode i:nil="true" />
  <a>Note i:nil="true" />
  <a:SSRValue>0</a:SSRValue>
  <a:IsInServiceBundle>false</a:IsInServiceBundle>
</a:PaxSSR>
</a:PaxSSRs>
</a:SegmentSSRRequest>
</a:SegmentSSRRequests>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:CancelFirstSSR>false</a:CancelFirstSSR>
<a:SSRFeeForceWaiveOnSell>false</a:SSRFeeForceWaiveOnSell>
<a:SellSSRMode>NonBundle</a:SellSSRMode>
</a:SSRRequest>
<a:OptimizationInputParameterList i:nil="true" />
</a:SellSSR>
<a:SellFee i:nil="true" />
</SellRequestData>

```

```
</SellRequest>
</s:Body>
</s:Envelope>
```

8.10.5 Via Flight Logic for SSRRequest

- In Case of Via flight, there are possibly having more than one legs but only one segment, provision that passenger can avail pre book meal only on first leg. For Example, a booking as BOM – PAT via DEL then segment should be BOM – PAT and leg should be BOM – DEL and DEL –PAT.
- In case of Via flight MEAL can be pushed only on first leg of the journey i.e. BOM – DEL. If Passenger wants meal on second leg as well, then he can buy on flight by cash.
- In case of Via flight INFT and Baggage should be enter on entire journey, i.e. BOM – PAT.
- Only one type of Meal and Baggage can be availed in one journey for one passenger.

SSR Type	Segment /Flight Leg example for SSR Association	Reservation screen
INFT	As per above mentioned example INFT need to be enter to entire journey, i.e. BOM – PAT.	
Meal	As per above mentioned example Meal should be enter only on first leg of the journey i.e. BOM – DEL instead of BOM – PAT.	
Baggage	As per above mentioned example Baggage need to be enter to entire journey, i.e. BOM – PAT.	

Request

(If a PNR having 2PAX and you want to add INFT, VGML and XBPA for 1Pax and VGML for 2Pax. Below is the Request/Response XMLs for same scenario.)

```
<?xml version="1.0" encoding="UTF-8" ?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStackTrace>
  >
```

```

<h:MessageContractVersion i:nil="true" xmlns:h="http://schemas.navitaire.com/WebServices"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
<h:Signature
  xmlns:h="http://schemas.navitaire.com/WebServices">SCX64R8HwEI=|UEGh:Signature>
</s:Header>
<_s:Body>
<_s:SellRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
<_s:SellRequestData
  xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
<a:SellBy>SSR</a:SellBy>
<a:SellJourneyByKeyRequest i:nil="true" />
<a:SellJourneyRequest i:nil="true" />
<_a:SellSSR>
<_a:SSRRequest>
<_a:SegmentSSRRequests>
<_a:SegmentSSRRequest>
<_a:FlightDesignator
  xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:CarrierCode>6E</b:CarrierCode>
<b:FlightNumber>5126</b:FlightNumber>
<b:OpSuffix i:nil="true" />
</a:FlightDesignator>
<a:STD>2018-11-10T00:00:00</a:STD>
<a:DepartureStation>BOM</a:DepartureStation>
<a:ArrivalStation>PAT</a:ArrivalStation>
<_a:PaxSSRs>
<_a:PaxSSR>
<State
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
<a:ActionStatusCode>NN</a:ActionStatusCode>
<a:ArrivalStation>DEL</a:ArrivalStation>
<a:DepartureStation>BOM</a:DepartureStation>
<a:PassengerNumber>0</a:PassengerNumber>
<a:SSRCode>VGML</a:SSRCode>
<a:SSRNumber>0</a:SSRNumber>
<a:SSRDetail i:nil="true" />
<a:FeeCode i:nil="true" />
<a>Note i:nil="true" />
<a:SSRValue>0</a:SSRValue>
<a:IsInServiceBundle>false</a:IsInServiceBundle>
</a:PaxSSR>

```



```

<a:PaxSSR>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
  <a:ActionStatusCode>NN</a:ActionStatusCode>
  <a:ArrivalStation>PAT</a:ArrivalStation>
  <a:DepartureStation>BOM</a:DepartureStation>
  <a:PassengerNumber>0</a:PassengerNumber>
  <a:SSRCode>INFT</a:SSRCode>
  <a:SSRNumber>0</a:SSRNumber>
  <a:SSRDetail i:nil="true" />
  <a:FeeCode i:nil="true" />
  <a:Note i:nil="true" />
  <a:SSRValue>0</a:SSRValue>
  <a:IsInServiceBundle>false</a:IsInServiceBundle>
</a:PaxSSR>
<a:PaxSSR>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
  <a:ActionStatusCode>NN</a:ActionStatusCode>
  <a:ArrivalStation>PAT</a:ArrivalStation>
  <a:DepartureStation>BOM</a:DepartureStation>
  <a:PassengerNumber>0</a:PassengerNumber>
  <a:SSRCode>XBPA</a:SSRCode>
  <a:SSRNumber>0</a:SSRNumber>
  <a:SSRDetail i:nil="true" />
  <a:FeeCode i:nil="true" />
  <a:Note i:nil="true" />
  <a:SSRValue>0</a:SSRValue>
  <a:IsInServiceBundle>false</a:IsInServiceBundle>
</a:PaxSSR>
<a:PaxSSR>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
  <a:ActionStatusCode>NN</a:ActionStatusCode>
  <a:ArrivalStation>DEL</a:ArrivalStation>
  <a:DepartureStation>BOM</a:DepartureStation>
  <a:PassengerNumber>1</a:PassengerNumber>
  <a:SSRCode>VGML</a:SSRCode>
  <a:SSRNumber>0</a:SSRNumber>
  <a:SSRDetail i:nil="true" />
  <a:FeeCode i:nil="true" />

```

```

<a:Note i:nil="true" />
<a:SSRValue>0</a:SSRValue>
<a:IsInServiceBundle>false</a:IsInServiceBundle>
  </a:PaxSSR>
</a:PaxSSRs>
</a:SegmentSSRRequest>
</a:SegmentSSRRequests>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:CancelFirstSSR>false</a:CancelFirstSSR>
<a:SSRFeeForceWaiveOnSell>false</a:SSRFeeForceWaiveOnSell>
<a:SellSSRMode>NonBundle</a:SellSSRMode>
  </a:SSRRequest>
<a:OptimizationInputParameterList i:nil="true" />
  </a:SellSSR>
<a:SellFee i:nil="true" />
  </SellRequestData>
</SellRequest>
</s:Body>
</s:Envelope>



```

8.10.6 Connecting Flight Logic for SSRRequest

- In Case of Connecting flight, there are possibly having more than one segment hence every segment need to be entered for SSR(s), For Example, a booking as DEL – GOI Conn BOM then segments should be DEL – BOM and BOM – GOI.
- In case of Connecting flight Meal is available on both segments of the journey i.e. DEL – BOM and BOM - GOI. If Passenger wants meal on both segment then Meal should be added on both segments else it's optional. Meal should be charged segment wise.
- In case of Connecting flight Baggage can be enter only on first segment of the journey i.e. DEL – BOM and then later it can be pushed to entire journey at our end.
- In case of Connecting flight INFT should be enter on both segments, i.e. DEL – BOM and BOM - GOI.
- Only one type of Baggage can be availed in one journey for one passenger.

SSR Association matrix on Connecting Flight

SSRType	Segment /Flight Leg example for SSR Association	Reservation screen						
INFT	As per above mentioned example INFT should be enter on both segments, i.e. DEL – BOM and BOM - GOI.	Reserved SSRs <table><tr><td></td><td>6E 179 DEL-BOM</td><td>6E5924 BOM-GOI</td></tr><tr><td>▶</td><td>1:INFT</td><td>1:INFT</td></tr></table>		6E 179 DEL-BOM	6E5924 BOM-GOI	▶	1:INFT	1:INFT
	6E 179 DEL-BOM	6E5924 BOM-GOI						
▶	1:INFT	1:INFT						

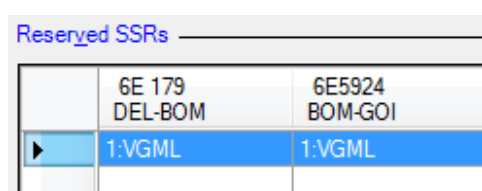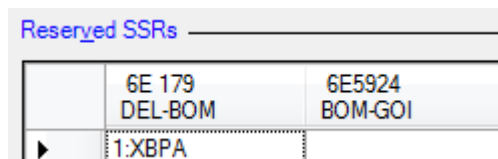Meal	As per above mentioned example Meal is available on both segments of the journey i.e. DEL – BOM and BOM - GOI. If Passenger wants meal on both segment then Meal should be added on both segments else it's optional. Meal should be charged segment wise.	
Baggage	As per above mentioned example Baggage can be enter only on first segment of the journey i.e. DEL – BOM and then later it can be pushed to entire journey at our end.	

Request

(If a PNR having 1PAX and you want to add INFT, VGML and XBPA for passenger. Below is the Request/Response XMLs for same scenario.)

```
<?xml version="1.0" encoding="UTF-8" ?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
<s:Header>
<h:ContractVersion
  xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
<h:EnableExceptionStackTrace
  xmlns:h="http://schemas.navitaire.com/WebServices">>false</h:EnableExceptionStackTrace>
<h:MessageContractVersion i:nil="true" xmlns:h="http://schemas.navitaire.com/WebServices"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
<h:Signature xmlns:h="http://schemas.navitaire.com/WebServices">PuVY/49kBTh:Signature>
</s:Header>
<s:Body>
<SellRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
<SellRequestData xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
<a:SellBy>SSR</a:SellBy>
<a:SellJourneyByKeyRequest i:nil="true" />
<a:SellJourneyRequest i:nil="true" />
<a:SellSSR>
<a:SSRRequest>
<a:SegmentSSRRequests>
```

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

```

<a:SegmentSSRRequest>
<a:FlightDesignator
  xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
<b:CarrierCode>6E</b:CarrierCode>
<b:FlightNumber>993</b:FlightNumber>
<b:OpSuffix i:nil="true" />
</a:FlightDesignator>
<a:STD>2018-11-10T00:00:00</a:STD>
<a:DepartureStation>DEL</a:DepartureStation>
<a:ArrivalStation>BOM</a:ArrivalStation>
<a:PaxSSRs>
<a:PaxSSR>
<State
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
>
<a:ActionStatusCode>NN</a:ActionStatusCode>
<a:ArrivalStation>BOM</a:ArrivalStation>
<a:DepartureStation>DEL</a:DepartureStation>
<a:PassengerNumber>0</a:PassengerNumber>
<a:SSRCode>VGML</a:SSRCode>
<a:SSRNumber>0</a:SSRNumber>
<a:SSRDetail i:nil="true" />
<a:FeeCode i:nil="true" />
<a>Note i:nil="true" />
<a:SSRValue>0</a:SSRValue>
<a:IsInServiceBundle>false</a:IsInServiceBundle>
</a:PaxSSR>
<a:PaxSSR>
<State
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
>
<a:ActionStatusCode>NN</a:ActionStatusCode>
<a:ArrivalStation>BOM</a:ArrivalStation>
<a:DepartureStation>DEL</a:DepartureStation>
<a:PassengerNumber>0</a:PassengerNumber>
<a:SSRCode>INFT</a:SSRCode>
<a:SSRNumber>0</a:SSRNumber>
<a:SSRDetail i:nil="true" />
<a:FeeCode i:nil="true" />
<a>Note i:nil="true" />
<a:SSRValue>0</a:SSRValue>
<a:IsInServiceBundle>false</a:IsInServiceBundle>
</a:PaxSSR>
</a:PaxSSR>

```

```

<State
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
  <a:ActionStatusCode>NN</a:ActionStatusCode>
  <a:ArrivalStation>BOM</a:ArrivalStation>
  <a:DepartureStation>DEL</a:DepartureStation>
  <a:PassengerNumber>0</a:PassengerNumber>
  <a:SSRCode>XBPA</a:SSRCode>
  <a:SSRNumber>0</a:SSRNumber>
  <a:SSRDetail i:nil="true" />
  <a:FeeCode i:nil="true" />
  <a>Note i:nil="true" />
  <a:SSRValue>0</a:SSRValue>
  <a:IsInServiceBundle>false</a:IsInServiceBundle>
  </a:PaxSSR>
  </a:PaxSSRs>
  </a:SegmentSSRRequest>
  <_a:SegmentSSRRequest>
  <_a:FlightDesignator
    xmlns:b="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <b:CarrierCode>6E</b:CarrierCode>
  <b:FlightNumber>179</b:FlightNumber>
  <b:OpSuffix i:nil="true" />
  </a:FlightDesignator>
  <a:STD>2018-11-10T00:00:00</a:STD>
  <a:DepartureStation>BOM</a:DepartureStation>
  <a:ArrivalStation>GOI</a:ArrivalStation>
  <_a:PaxSSRs>
  <_a:PaxSSR>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
    >
    <a:ActionStatusCode>NN</a:ActionStatusCode>
    <a:ArrivalStation>GOI</a:ArrivalStation>
    <a:DepartureStation>BOM</a:DepartureStation>
    <a:PassengerNumber>0</a:PassengerNumber>
    <a:SSRCode>VGML</a:SSRCode>
    <a:SSRNumber>0</a:SSRNumber>
    <a:SSRDetail i:nil="true" />
    <a:FeeCode i:nil="true" />
    <a>Note i:nil="true" />
    <a:SSRValue>0</a:SSRValue>
    <a:IsInServiceBundle>false</a:IsInServiceBundle>
    </a:PaxSSR>

```

```

<a:PaxSSR>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</State
  >
  <a:ActionStatusCode>NN</a:ActionStatusCode>
  <a:ArrivalStation>GOI</a:ArrivalStation>
  <a:DepartureStation>BOM</a:DepartureStation>
  <a:PassengerNumber>0</a:PassengerNumber>
  <a:SSRCode>INFT</a:SSRCode>
  <a:SSRNumber>0</a:SSRNumber>
  <a:SSRDetail i:nil="true" />
  <a:FeeCode i:nil="true" />
  <a:Note i:nil="true" />
  <a:SSRValue>0</a:SSRValue>
  <a:IsInServiceBundle>false</a:IsInServiceBundle>
</a:PaxSSR>
</a:PaxSSRs>
</a:SegmentSSRRequest>
</a:SegmentSSRRequests>
<a:CurrencyCode>INR</a:CurrencyCode>
<a:CancelFirstSSR>false</a:CancelFirstSSR>
<a:SSRFeeForceWaiveOnSell>false</a:SSRFeeForceWaiveOnSell>
<a:SellSSRMode>NonBundle</a:SellSSRMode>
</a:SSRRequest>
<a:OptimizationInputParameterList i:nil="true" />
</a:SellSSR>
<a:SellFee i:nil="true" />
</SellRequestData>
</SellRequest>
</s:Body>
</s:Envelope>

```

8.11 UpdatePassengers

Update passenger data for the booking in state. This method does a replace of the passenger data so it is necessary to provide all passenger data when calling the method. Set the MessageState property to be modified.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- PassengerNumber (Passenger Index Started from 0)

- State(New)
- Names
 - Firstname
 - Lastname
 - Title
- Infant(Infant details needs to enter under this block)
 - DOB
 - Gender
 - Names
 - Firstname
 - Lastname
- PassengerInfo
 - Gender
 - WeightCategory
- PassengerTypeInfo
 - PaxType

As recommended please use the below mentioned mandatory Pax titles in Capital letter for bookings:-

PAX TYPE CODE	GENDER	TITLE	Weight Category
ADT	Male	MR	Male
ADT	Female	MRS	Female
ADT	Female	MS	Female
CHD	Male	MSTR	Child
CHD	Female	MISS	Child
NA (Infant)	Male	(No Title)	(No WC)
NA (Infant)	Female	(No Title)	(No WC)

Field Names and DataType:-

S. No.	Field Name	Data type	Max Length	Technical Description
1.	ContractVersion			
2.	Signature			
3.	PassengerNumber			
4.	FirstName	PersonName	32	First name for the name in the current record. The first name can be up to

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

				32 unicode characters.
5.	LastName	PersonName	32	Last name for the name in the current record. The last name can be up to 32 unicode characters.
6.	Title	Title	6	Title code for the name in the current record. The title code is defined in the Title table and only below title allowed. (in UPPER CASE) Male – MR Female – MS
7.	Gender	Enumeration	2	Gender associated with the current record. The gender is an enumerated value. The valid values for Gender are: 1 - Male and 2 - Female. Valid Values: 1=Male 2=Female
8.	PaxType			

Request

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">false</h:EnableExceptionStack
      Trace>
    <h:MessageContractVersion i:nil="true"
      xmlns:h="http://schemas.navitaire.com/WebServices"
```



```

xmlns:i="http://www.w3.org/2001/XMLSchema-
instance"></h:MessageContractVersion>
<h:Signature
xmlns:h="http://schemas.navitaire.com/WebServices">yJX0mwBThUM=|o9YRu4Vwy
Qm0o1ZJf37MulF+K40aBW/9QUfcAkHG3b22fVXhUVhBPIgi1tuFbwCUiKTik+kNLpLEw
FOPVmiQSMGkUNRMkzudvEvg1kNLj/Uo9/3uFKstJmTq59WixkMsBAG26qG7OE=</h:Si
gnature>
</s:Header>
<s:Body>
<UpdatePassengersRequest
xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService"
>
  <updatePassengersRequestData
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
    <a:Passengers>
      <a:Passenger>
        <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</
State>
          <a:PassengerPrograms i:nil="true"></a:PassengerPrograms>
          <a:CustomerNumber i:nil="true"></a:CustomerNumber>
          <a:PassengerNumber>0</a:PassengerNumber>
          <a:FamilyNumber>0</a:FamilyNumber>
          <a:PaxDiscountCode i:nil="true"></a:PaxDiscountCode>
          <a:Names>
            <a:BookingName>
              <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New
</State>
                <a:FirstName>Mohan</a:FirstName>
                <a:MiddleName i:nil="true"></a:MiddleName>
                <a:LastName>Sharma</a:LastName>
                <a:Suffix i:nil="true"></a:Suffix>
                <a>Title>MR</a>Title>
              </a:BookingName>
            </a:Names>
            <a:Infant i:nil="true"></a:Infant>
            <a:PassengerInfo>
              <State
xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New
</State>
                <a:BalanceDue>0</a:BalanceDue>
                <a:Gender>Male</a:Gender>

```

```

    <a:Nationality i:nil="true"></a:Nationality>
    <a:ResidentCountry i:nil="true"></a:ResidentCountry>
    <a:TotalCost>0</a:TotalCost>
    <a:WeightCategory>Male</a:WeightCategory>
  </a:PassengerInfo>
  <a:PassengerProgram i:nil="true"></a:PassengerProgram>
  <a:PassengerFees i:nil="true"></a:PassengerFees>
  <a:PassengerAddresses i:nil="true"></a:PassengerAddresses>
  <a:PassengerTravelDocuments i:nil="true"></a:PassengerTravelDocuments>
  <a:PassengerBags i:nil="true"></a:PassengerBags>
  <a:PassengerID>0</a:PassengerID>
  <a:PassengerTypeInfo>
    <a:PassengerTypeInfo>
      <a:State>New</a:State>
      <a:DOB>0001-01-01T00:00:00</a:DOB>
      <a:PaxType>ADT</a:PaxType>
    </a:PassengerTypeInfo>
  </a:PassengerTypeInfo>
  <a:PassengerInfos i:nil="true"></a:PassengerInfos>
  <a:PassengerInfants i:nil="true"></a:PassengerInfants>
  <a:PseudoPassenger>false</a:PseudoPassenger>
  <a:PassengerTypeInfo i:nil="true"></a:PassengerTypeInfo>
  <a:PassengerEMDCouponList i:nil="true"></a:PassengerEMDCouponList>
</a:Passenger>
</a:Passengers>
  <a:WaiveNameChangeFee>false</a:WaiveNameChangeFee>
</updatePassengersRequestData>
</UpdatePassengersRequest>
</s:Body>
</s:Envelope>

```

Response

```

<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header></s:Header>
  <s:Body>
    <UpdatePassengerResponse
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService"
    >
      <BookingUpdateResponseData
        xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <Success>
          <RecordLocator></RecordLocator>

```

```

        <PNRAmount>
          <BalanceDue>4075.00000</BalanceDue>
          <AuthorizedBalanceDue>4075.00000</AuthorizedBalanceDue>
          <SegmentCount>1</SegmentCount>
          <PassiveSegmentCount>0</PassiveSegmentCount>
          <TotalCost>4075.00000</TotalCost>
          <PointsBalanceDue>0</PointsBalanceDue>
          <TotalPointCost>0</TotalPointCost>
          <AlternateCurrencyCode></AlternateCurrencyCode>
          <AlternateCurrencyBalanceDue>0</AlternateCurrencyBalanceDue>
        </PNRAmount>
      </Success>
      <Warning i:nil="true"></Warning>
      <Error i:nil="true"></Error>
      <OtherServiceInformations i:nil="true"
xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common"></Ot
herServiceInformations>

    </BookingUpdateResponseData>
  </UpdatePassengerResponse>
</s:Body>
</s:Envelope>

```

8.12 GetSeatAvailability

The booking state must be populated with booking data, the seat request must refer to flights in state. If not the request will return no seat in the SeatAvailability Response or in some cases an exception. GetSeatAvailability usage depends upon how you intend to assign seats. The SeatAssignmentMode field determines how the availability request will be handled.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- STD
- CollectedCurrencyCode
- DepartureStation
- ArrivalStation
- CarrierCode
- IncludeSeatFees
- SeatAssignmentMode
- FlightNumber

- PassengerIDs
- CollectedCurrencyCode

Request

```
- <GetSeatAvailabilityRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
- <SeatAvailabilityRequest
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <STD>2019-09-03T13:55:00</STD>
  <DepartureStation>DIB</DepartureStation>
  <ArrivalStation>DEL</ArrivalStation>
  <IncludeSeatFees>true</IncludeSeatFees>
  <SeatAssignmentMode>PreSeatAssignment</SeatAssignmentMode>
  <FlightNumber>6646</FlightNumber>
  <CarrierCode>6E</CarrierCode>
  <OpSuffix i:nil="true" />
  <CompressProperties>false</CompressProperties>
  <EnforceSeatGroupRestrictions>false</EnforceSeatGroupRestrictions>
  <PassengerIDs xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
  <a:long>0</a:long>
  </PassengerIDs>
  <PassengerSeatPreferences i:nil="true" />
  <SeatGroup>0</SeatGroup>
  <SeatGroupSettings i:nil="true"
    xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
  <EquipmentDeviations i:nil="true" />
  <IncludePropertyLookup>false</IncludePropertyLookup>
  <OverrideCarrierCode i:nil="true" />
  <OverrideFlightNumber i:nil="true" />
  <OverrideOpSuffix i:nil="true" />
  <OverrideSTD>0001-01-01T00:00:00</OverrideSTD>
  <OverrideDepartureStation i:nil="true" />
  <OverrideArrivalStation i:nil="true" />
  <CollectedCurrencyCode>INR</CollectedCurrencyCode>
  <ExcludeEquipmentConfiguration>false</ExcludeEquipmentConfiguration>
  <SeatAvailabilityFilter i:nil="true" />
  <OptimizationInputParameterList i:nil="true" />
  </SeatAvailabilityRequest>
  </GetSeatAvailabilityRequest>
```

Response

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
```

```

- <s:Body>
- <GetSeatAvailabilityResponse
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
- <SeatAvailabilityResponse
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <OtherServiceInfoList i:nil="true"
    xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
- <EquipmentInfos>
- <EquipmentInfo>
  <ArrivalStation>JAI</ArrivalStation>
  <DepartureStation>DEL</DepartureStation>
  <EquipmentType>320</EquipmentType>
  <EquipmentTypeSuffix />
  <AvailableUnits>161</AvailableUnits>
- <Compartments>
- <CompartmentInfo>
  <CompartmentDesignator>Y</CompartmentDesignator>
  <Deck>1</Deck>
  <Length>72</Length>
  <Width>16</Width>
  <AvailableUnits>161</AvailableUnits>
  <Orientation>0</Orientation>
  <Sequence>1</Sequence>
- <Seats>
- <SeatInfo>
  <Assignable>true</Assignable>
  <CabotageLevel>0</CabotageLevel>
  <CarAvailableUnits>0</CarAvailableUnits>
  <CompartmentDesignator>Y</CompartmentDesignator>
  <SeatSet>59</SeatSet>
  <CriterionWeight>0</CriterionWeight>
  <SeatSetAvailableUnits>0</SeatSetAvailableUnits>
  <SSRSeatMapCode />
  <SeatAngle>0</SeatAngle>
  <SeatAvailability>Restricted</SeatAvailability>
  <SeatDesignator>1A</SeatDesignator>
  <SeatType>NS</SeatType>
  <X>1</X>
  <Y>6</Y>
- <PropertyList>
- <EquipmentProperty>
  <TypeCode>LEGROOM</TypeCode>
  <Value>True</Value>

```

```

</EquipmentProperty>
- <EquipmentProperty>
  <TypeCode>RESTRICT</TypeCode>
  <Value>True</Value>
</EquipmentProperty>
- <EquipmentProperty>
  <TypeCode>TCC</TypeCode>
  <Value>Y</Value>
</EquipmentProperty>
- <EquipmentProperty>
  <TypeCode>WINDOW</TypeCode>
  <Value>True</Value>
</EquipmentProperty>
- <EquipmentProperty>
  <TypeCode>SRVZONE</TypeCode>
  <Value>1</Value>
</EquipmentProperty>

```

8.13 AssignSeat

When assigning seats using the AssignSeats methods for a booking, the booking must exist in booking state or unpredictable errors occur. The values used for the SeatAssignmentMode field are determined by when the seat assignments are made.

Required Parameters:-

- Signature
- Contractversion
- EnableExceptionStackTrace(default False)
- SeatAssignmentMode
- CarrierCode
- FlightNumber
- STD
- CollectedCurrencyCode
- DepartureStation
- ArrivalStation
- UnitDesignator(SeatNumber)
- PassengerNumbers

Request

```

- <AssignSeatsRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">

```

```
- <SellSeatRequest xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <BlockType>Session</BlockType>
  <SameSeatRequiredOnThruLegs>false</SameSeatRequiredOnThruLegs>
  <AssignNoSeatIfAlreadyTaken>false</AssignNoSeatIfAlreadyTaken>
  <AllowSeatSwappingInPNR>false</AllowSeatSwappingInPNR>
  <WaiveFee>false</WaiveFee>
  <ReplaceSpecificSeatRequest>false</ReplaceSpecificSeatRequest>
  <SeatAssignmentMode>PreSeatAssignment</SeatAssignmentMode>
  <IgnoreSeatSSRs>false</IgnoreSeatSSRs>
- <SegmentSeatRequests>
- <SegmentSeatRequest>
- <FlightDesignator
  xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <a:CarrierCode>6E</a:CarrierCode>
  <a:FlightNumber>6646</a:FlightNumber>
  <a:OpSuffix i:nil="true" />
  </FlightDesignator>
  <STD>2019-09-01T13:55:00</STD>
  <DepartureStation>DIB</DepartureStation>
  <ArrivalStation>DEL</ArrivalStation>
- <PassengerNumbers
  xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
  <a:short>0</a:short>
  </PassengerNumbers>
  <UnitDesignator>12A</UnitDesignator>
  <CompartmentDesignator i:nil="true" />
  <PassengerSeatPreferences i:nil="true" />
  <PassengerIDs i:nil="true"
    xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
  <RequestedSSRs i:nil="true"
    xmlns:a="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
  </SegmentSeatRequest>
  </SegmentSeatRequests>
  <EquipmentDeviations i:nil="true" />
  <CollectedCurrencyCode>INR</CollectedCurrencyCode>
  <IncludeSeatData>false</IncludeSeatData>
  <OptimizationInputParameterList i:nil="true" />
```

Response

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
```

```

- <s:Body>
- <AssignSeatsResponse
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
- <BookingUpdateResponseData
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
- <Success>
  <RecordLocator />
- <PNRAmount>
  <BalanceDue>3425.00000</BalanceDue>
  <AuthorizedBalanceDue>3425.00000</AuthorizedBalanceDue>
  <SegmentCount>1</SegmentCount>
  <PassiveSegmentCount>0</PassiveSegmentCount>
  <TotalCost>3425.00000</TotalCost>
  <PointsBalanceDue>0</PointsBalanceDue>
  <TotalPointCost>0</TotalPointCost>
  <AlternateCurrencyCode />
  <AlternateCurrencyBalanceDue>0</AlternateCurrencyBalanceDue>
  </PNRAmount>
  </Success>
  <Warning i:nil="true" />
  <Error i:nil="true" />
  <OtherServiceInformations i:nil="true"
    xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
  </BookingUpdateResponseData>
- <AssignedSeatInfo
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <JourneyList i:nil="true" />
  </AssignedSeatInfo>
</AssignSeatsResponse>
</s:Body>
</s:Envelope>

```

8.14 AddPaymentToBooking

Adds the given payment to the booking currently in state. A booking must exist in the booking state before you add a payment to a booking or unpredictable errors occur.

If the payment data provided fails validation the PaymentAddedToState property in the response is set to false and specific information about the failure is under the PaymentValidationErrors collection.

Payment fields can also cause validation errors. The payment fields that are defined in the Management Console and associated to the payment method and set as required must be provided with the payment request, otherwise the payment will not pass validation.

Required Parameters:-

- Signature
- ContractVersion
- EnableExceptionStackTrace(default False)
- PaymentMethodType
- PaymentMethodCode
- QuotedAmount
- QuotedCurrencyCode
- AccountNumber
- Status (New)
- Installments (1)

Field Names and DataType:-

S. No.	Field Name	Data Type	Max Length	Technical Description
1.	ContractVersion			
2.	Signature			
3.	PaymentMethodType (must match the payment type)	Enumeration	2	Payment method type associated with the current record. The payment method type is an enumerated value Valid Values: 0=PrePaid 2=AgencyAccount
4.	PaymentMethodCode	char	2	Business Description: Identifies a payment method. For example, MC=MasterCard, VI=Visa, VO=Voucher. This is used in conjunction with PaymentMethodType to uniquely identify a form of payment.
5.	QuotedAmount	money	8	

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

6.	QuotedCurrencyCode	CurrencyCode	3	
7.	AccountNumber	nvarchar	24	Account number for this form of payment.
8.	Installments		1	Value Should be 1 for AG and Card FOP

Request

```

- <AddPaymentToBookingRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
- <addPaymentToBookingReqData
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <MessageState>New</MessageState>
  <WaiveFee>false</WaiveFee>
  <ReferenceType>Default</ReferenceType>
  <PaymentMethodType>AgencyAccount</PaymentMethodType>
  <PaymentMethodCode>AG</PaymentMethodCode>
  <QuotedCurrencyCode>INR</QuotedCurrencyCode>
  <QuotedAmount>600</QuotedAmount>
  <Status>New</Status>
  <AccountNumberID>0</AccountNumberID>
  <AccountNumber>XXXXX</AccountNumber>
  <Expiration>0001-01-01T00:00:00</Expiration>
  <ParentPaymentID>0</ParentPaymentID>
  <Installments>1</Installments>
  <PaymentText i:nil="true" />
  <Deposit>false</Deposit>
  <PaymentFields i:nil="true" />
  <PaymentAddresses i:nil="true" />
  <AgencyAccount i:nil="true" />
  <CreditShell i:nil="true" />
  <CreditFile i:nil="true" />
  <PaymentVoucher i:nil="true" />
  <ThreeDSecureRequest i:nil="true" />
  <MCCRequest i:nil="true" />
  <AuthorizationCode i:nil="true" />
</addPaymentToBookingReqData>
</AddPaymentToBookingRequest>

```


Response

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  <s:Body>
  - <AddPaymentToBookingResponse
    xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
  - <BookingPaymentResponse
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
    xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
    <OtherServiceInfoList
      xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
  - <ValidationPayment>
  - <Payment>
    <State
      xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</Sta
      te>
    <ReferenceType>Booking</ReferenceType>
    <ReferenceID>0</ReferenceID>
    <PaymentMethodType>AgencyAccount</PaymentMethodType>
    <PaymentMethodCode>AG</PaymentMethodCode>
    <CurrencyCode>INR</CurrencyCode>
    <PaymentAmount>3425</PaymentAmount>
    <CollectedCurrencyCode>INR</CollectedCurrencyCode>
    <CollectedAmount>3425</CollectedAmount>
    <QuotedCurrencyCode>INR</QuotedCurrencyCode>
    <QuotedAmount>3425</QuotedAmount>
    <Status>Pending</Status>
    <AccountNumber>TESTAPI</AccountNumber>
    <AccountNumberID>0</AccountNumberID>
    <Expiration>2024-01-04T00:00:00Z</Expiration>
    <AuthorizationCode />
    <AuthorizationStatus>Pending</AuthorizationStatus>
    <ParentPaymentID>0</ParentPaymentID>
    <Transferred>false</Transferred>
    <ReconciliationID>0</ReconciliationID>
    <FundedDate>1800-01-01T00:00:00Z</FundedDate>
    <Installments>1</Installments>
    <PaymentText />
    <ChannelType>API</ChannelType>
    <PaymentNumber>1</PaymentNumber>
    <AccountName />
  - <SourcePointOfSale
    xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
```

```

<a:State>New</a:State>
<a:AgentCode>AG</a:AgentCode>
<a:OrganizationCode>TESTAPI</a:OrganizationCode>
<a:DomainCode>WWW</a:DomainCode>
<a:LocationCode>OBTA</a:LocationCode>
</SourcePointOfSale>
- <PointOfSale xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
  <a:State>Clean</a:State>
  <a:AgentCode>TESTAPI</a:AgentCode>
  <a:OrganizationCode>TESTAPI</a:OrganizationCode>
  <a:DomainCode>WWW</a:DomainCode>
  <a:LocationCode>OBTA</a:LocationCode>
</PointOfSale>
<PaymentID>0</PaymentID>
<Deposit>>false</Deposit>
<AccountID>0</AccountID>
<Password />
<AccountTransactionCode />
<VoucherID>0</VoucherID>
<VoucherTransactionID>0</VoucherTransactionID>
<OverrideVoucherRestrictions>>false</OverrideVoucherRestrictions>
<OverrideAmount>>false</OverrideAmount>
<RecordLocator />
<PaymentAddedToState>>true</PaymentAddedToState>
- <DCC>
  <DCCRateID>00000000-0000-0000-0000-000000000000</DCCRateID>
  <DCCStatus>DCCNotOffered</DCCStatus>
  <ValidationDCCApplicable>>false</ValidationDCCApplicable>
  <ValidationDCCRateValue>0</ValidationDCCRateValue>
  <ValidationDCCCurrency />
  <ValidationDCCAmount>0</ValidationDCCAmount>
  <ValidationDCCPutInState />
</DCC>
- <ThreeDSecure>
  <BrowserUserAgent />
  <BrowserAccept />
  <RemoteIpAddress />
  <TermUrl />
  <ProxyVia />
  <ValidationTDSApplicable>>false</ValidationTDSApplicable>
  <ValidationTDSPaReq />
  <ValidationTDSAcUrl />
  <ValidationTDSPaRes />
  <ValidationTDSSuccessful>>false</ValidationTDSSuccessful>

```

```

<ValidationTDSAuthResult />
<ValidationTDSCavv />
<ValidationTDSCavvAlgorithm />
<ValidationTDSEci />
<ValidationTDSXid />
</ThreeDSecure>
<PaymentFields />
<PaymentAddresses />
<CreateDate>9999-12-31T00:00:00Z</CreateDate>
<CreatedAgentID>0</CreatedAgentID>
<ModifiedDate>9999-12-31T00:00:00Z</ModifiedDate>
<ModifiedAgentID>0</ModifiedAgentID>
<BinRange>0</BinRange>
<ApprovalDate>9999-12-31T00:00:00Z</ApprovalDate>
<BookingID>0</BookingID>
</Payment>
<PaymentValidationErrors />
</ValidationPayment>
</BookingPaymentResponse>
</AddPaymentToBookingResponse>
</s:Body>
</s:Envelope>

```

8.15 BookingCommit

Within a transaction, BookingCommit updates the booking in state in the database and validates the commit request. This method prepares the booking in state for the commit and then processes the commit. It then generates the delta for the return value, clears the booking in state, and runs the commit synchronization.

Required Parameters:-

- Signature
- ContractVersion
- EnableExceptionStackTrace(default False)
- State
- CurrencyCode
- PaxCount
- SourcePOS
- BookingContacts
 - TypeCode
 - FirstName

- LastName
- Title
- CompanyName (should be your Company name)
- EmailAddress
- HomePhone
- AddressLine1
- AddressLine2
- City
- ProvinceCode
- PostalCode
- CountryCode
- CultureCode (en-GB)
- DistributionOption (Email)
- SourceOrganization
- DistributeToContacts – True (to send the itinerary to passenger)

Field Names and Data Type:-

S. No.	Field Name	Data Type	Max Length	Technical Description
1.	ContractVersion			
2.	Signature			
3.	CurrencyCode			
4.	PaxCount	int	4	
5.	AgentCode			
6.	OrganizationCode			
7.	DomainCode			
8.	TypeCode	char	1	Indicates whether the contact information is for the person travelling (Primary) or for a person/place at the destination of the passenger (Destination).
9.	FirstName	PersonName	32	First name for the name in the current record. The first name can be up to 32

				unicode characters.
10.	LastName	PersonName	32	Last name for the name in the current record. The last name can by up to 32 unicode characters.
11.	Title	Title	6	Title code for the name in the current record. The title code is defined in the Title table and only below title allowed. (in UPPER CASE) Male – MR Female – MS
12.	EmailAddress	EMail	266	Email address of booking contact.
13.	HomePhone	PhoneNumber	20	Home phone number of booking contact.
14.	CompanyName	LongName	64	Name of the company with which the booking contact is employed
15.	AddressLine1	Address	52	First line of an address. There are 2 other lines that are available. Each line can have 52 unicode characters
16.	AddressLine2 (if required)	Address	52	Second line of an address. There are 2

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

				other lines that are available. Each line can have 52 unicode characters
17.	AddressLine3 (if required)	Address	52	Third line of an address. There are 2 other lines that are available. Each line can have 52 unicode characters
18.	City	ShortName	32	Name of the city for the address associated with the current record. The city can be 32 unicode characters in length.
19.	PostalCode	PostalCode	10	Postal code for the current records address
20.	CountryCode	CountryCode	2	Country code associated with the current record. The country code is a 2 character country code.
21.	CultureCode	CultureCode	17	Culture code associated with the current record. The culture codes should be obtained from the Culture table and use like en-GB

22.	DistributionOption	Enumeration	2	Itinerary distribution method. For example, Mail, Email, Fax, Hold, and so on. Valid Values: 0=None 1=Mail 2=Email 3=Fax 4=MailFax 5=Airport 6=Hold 7=Print
23.				
24.	SourceOrganization (AgentName used in LogonRequest)	OrganizationCode	10	
25.	DistributeToContacts			

Request

```

- <BookingCommitRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
- <BookingCommitRequestData
  xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <State>New</State>
  <RecordLocator> </RecordLocator>
  <CurrencyCode>INR</CurrencyCode>
  <PaxCount>1</PaxCount>
  <SystemCode i:nil="true" />
  <BookingID>0</BookingID>
  <BookingParentID>0</BookingParentID>
  <ParentRecordLocator i:nil="true" />
  <BookingChangeCode i:nil="true" />
  <GroupName i:nil="true" />
  <SourcePOS
    xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
    <a:State>New</a:State>
    <a:AgentCode>AG</a:AgentCode>
    <a:OrganizationCode>TESTAPI</a:OrganizationCode>
    <a:DomainCode>WWW</a:DomainCode>
    <a:LocationCode i:nil="true" />

```

```

</SourcePOS> <BookingHold i:nil="true" />
<ReceivedBy i:nil="true" />
<RecordLocators i:nil="true"
  xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
<Passengers i:nil="true" />
<BookingComments i:nil="true" />
- <BookingContacts>
- <BookingContact>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</Sta
    te>
  <TypeCode>P</TypeCode>
- <Names>
- <BookingName>
  <State
    xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">New</S
    tate>
  <FirstName>Mohan</FirstName>
  <MiddleName i:nil="true" />
  <LastName>Sharma</LastName>
  <Suffix i:nil="true" />
  <Title>MR</Title>
</BookingName>
</Names>
<EmailAddress>api.support@goindigo.in</EmailAddress>
<HomePhone>999999999</HomePhone>
<WorkPhone i:nil="true" />
<OtherPhone i:nil="true" />
<Fax i:nil="true" />
<CompanyName>IndiGo</CompanyName>
<AddressLine1>Gurgaon</AddressLine1>
<AddressLine2 i:nil="true" />
<AddressLine3 i:nil="true" />
<City>Gurgaon</City>
<ProvinceState>HR</ProvinceState>
<PostalCode>122002</PostalCode>
<CountryCode>IN</CountryCode>
<CountryCode>en-GB</CountryCode>
<DistributionOption>Email</DistributionOption>
<CustomerNumber i:nil="true" />
<NotificationPreference>None</NotificationPreference>
<SourceOrganization>XXXXXXX</SourceOrganization>
</BookingContact>
</BookingContacts>

```

```
<NumericRecordLocator i:nil="true" />
<RestrictionOverride>false</RestrictionOverride>
<ChangeHoldDateTime>false</ChangeHoldDateTime>
<WaiveNameChangeFee>false</WaiveNameChangeFee>
<WaivePenaltyFee>false</WaivePenaltyFee>
<WaiveSpoilageFee>false</WaiveSpoilageFee>
<DistributeToContacts>true</DistributeToContacts>
<SourceBookingPOS i:nil="true"
  xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
</BookingCommitRequestData>
</BookingCommitRequest>
```

Response

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  - <s:Body>
    - <BookingCommitResponse
      xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
      - <BookingUpdateResponseData
        xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        - <Success>
          <RecordLocator>FN4PNE</RecordLocator>
          - <PNRAmount>
            <BalanceDue>0</BalanceDue>
            <AuthorizedBalanceDue>0</AuthorizedBalanceDue>
            <SegmentCount>0</SegmentCount>
            <PassiveSegmentCount>0</PassiveSegmentCount>
            <TotalCost>2456.00000</TotalCost>
            <PointsBalanceDue>0</PointsBalanceDue>
            <TotalPointCost>0</TotalPointCost>
            <AlternateCurrencyCode />
            <AlternateCurrencyBalanceDue>0</AlternateCurrencyBalanceDue>
          </PNRAmount>
        </Success>
        <Warning i:nil="true" />
        <Error i:nil="true" />
        <OtherServiceInformations i:nil="true"
          xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
        </BookingUpdateResponseData>
        </BookingCommitResponse>
      </s:Body>
    </s:Envelope>
```

8.16 GetBooking

Retrieves a booking by its record locator. A simple way to get a booking is to provide a signature and a record locator. If the matching PNR is found this method replaces the booking data in booking state with the retrieved booking. Bookings may be retrieved by Record Locator, BookingID or a Third Party Record Locator. An enumeration specifies which data will be used to retrieve bookings. The GetBooking method retrieves the requested booking from the database.

Required Parameters:-

- Signature
- ContractVersion
- EnableExceptionStackTrace(default False)
- GetBookingBy
- RecordLocator (If GetBookingBy.RecordLocator)

Request

```
- <GetBookingRequest
  xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
- <GetBookingReqData
  xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <a:GetBookingBy>RecordLocator</a:GetBookingBy>
- <a:GetByRecordLocator>
  <a:RecordLocator>XXXXXX</a:RecordLocator>
</a:GetByRecordLocator>
- <a:GetByThirdPartyRecordLocator>
  <a:SystemCode i:nil="true" />
  <a:RecordLocator i:nil="true" />
</a:GetByThirdPartyRecordLocator>
- <a:GetByID>
  <a:BookingID>0</a:BookingID>
  <a:RetrieveFromArchive>false</a:RetrieveFromArchive>
</a:GetByID>
</GetBookingReqData>
</GetBookingRequest>
</s:Body>
</s:Envelope>
```

Response

```
<?xml version="1.0" encoding="UTF-8" ?>
- <s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header />
  <s:Body>
  - <GetBookingResponse
    xmlns="http://schemas.navitaire.com/WebServices/ServiceContracts/BookingService">
  - <Booking xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Booking"
    xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
    <OtherServiceInfoList
      xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common" />
    <State>Clean</State>
    <RecordLocator>FN4PNE</RecordLocator>
    <CurrencyCode>INR</CurrencyCode>
    <PaxCount>1</PaxCount>
    <SystemCode />
    <BookingID>251053214</BookingID>
    <BookingParentID>0</BookingParentID>
    <ParentRecordLocator />
    <BookingChangeCode />
    <GroupName />
  - <BookingInfo>
    <State
      xmlns="http://schemas.navitaire.com/WebServices/DataContracts/Common">Clean</Sta
      te>
    <BookingStatus>Confirmed</BookingStatus>
    <BookingType />
    <ChannelType>API</ChannelType>
    <CreatedDate>2019-07-19T07:38:24.497Z</CreatedDate>
    <ExpiredDate>2019-12-02T02:10:00Z</ExpiredDate>
    <ModifiedDate>2019-07-19T09:15:49.807Z</ModifiedDate>
    <PriceStatus>Valid</PriceStatus>
    <ProfileStatus>KnownIndividual</ProfileStatus>
    <ChangeAllowed>true</ChangeAllowed>
    <CreatedAgentID>7440845</CreatedAgentID>
    <ModifiedAgentID>18</ModifiedAgentID>
    <BookingDate>2019-07-19T07:38:24.497Z</BookingDate>
    <OwningCarrierCode>6E</OwningCarrierCode>
    <PaidStatus>OverPaid</PaidStatus>
    <ActivityDate>2019-07-19T09:15:54.403</ActivityDate>
    </BookingInfo>
  - <POS xmlns:a="http://schemas.navitaire.com/WebServices/DataContracts/Common">
    <a:State>Clean</a:State>
    <a:AgentCode>TESTAPI</a:AgentCode>
```

```
<a:OrganizationCode>TESTAPI</a:OrganizationCode>
<a:DomainCode>WWW</a:DomainCode>
<a:LocationCode>OBTA</a:LocationCode>
</POS>
```

Identifier for Terminal Information in GetBooking Response API call

- Same could be get in tag namely ArrivalTerminal and DepartureTerminal under Legs in GetBooking Response.

Booking -> Journeys -> Segments -> Legs -> LegInfo -> ArrivalTerminal

Booking -> Journeys -> Segments -> Legs -> LegInfo ->

DepartureTerminal

Identifier for Code Share flights in GetBooking Response

- **BookingType** you will get value as 'L' for Code Sharing flights under **BookingType**.
Eg. Booking -> BookingInfo -> <BookingType>L</BookingType>
- **SegmentType** you will get value as 'L' for Code Share flights under **SegmentType**.
Eg. Journeys -> Segments -> SegmentType>L</SegmentType>.
- **RecordLocators** you can get the Code Share flight **PNR** in **RecordLocators** tag.
Eg. **BookingData** ->

```
<a:RecordLocator>
<a:State>Clean</a:State>
<a:SystemDomainCode>IST</a:SystemDomainCode>
<a:SystemCode>TK</a:SystemCode> // Code share System Code
<a:RecordCode>T5FI7D</a:RecordCode> // Code share PNR
<a:InteractionPurpose>MC</a:InteractionPurpose>
<a:HostedCarrierCode>6E</a:HostedCarrierCode> // Hosted Carrier Code
</a:RecordLocator>
```
- **ActionStatusCode** – In **ActionStatusCode** you can check whether PNR is confirmed or not on Code Share flight. Please find below details for same.

Eg. Journeys -> Segments -><ActionStatusCode>HP</ActionStatusCode> //HP means ticket is not confirmed yet.

Eg. Journeys -> Segments -><ActionStatusCode>HK</ActionStatusCode> // Once ticket confirmed you will get HK status.

Note :- Itinerary should not issue if the action status code is not as HK,

- **XrefFlightDesignator** you will get Code Share flightnumber and carriercode under **XrefFlightDesignator** only in case of Code share flights.

Eg. Journeys -> Segments -> XrefFlightDesignator -> FlightNumber.

Eg. Journeys -> Segments -> XrefFlightDesignator -> CarrierCode.

- **PaxTickets** you will get generate Pax tickets under PaxTickets tag. **PaxTickets** will be generated Per Passenger per segments.
Eg. Journeys -> Segments -> <PaxTickets>
- **CodeShareIndicator** - You will get value as 'L' for Code Share flights under **CodeShareIndicator**.
Eg. Journeys -> Segments -> Legs -> LegInfo -> <CodeShareIndicator>L</CodeShareIndicator>
- **ETicket** you will get value as "true" under **ETicket** tag.
Eg. Journeys -> Segments -> Legs -> LegInfo <ETicket>true</ETicket>
- **OperatingFlightNumber** – You will get Code Share Operating FlightNumber under **OperatingFlightNumber** tag.
Eg. Journeys -> Segments -> Legs -> LegInfo -> <OperatingFlightNumber>XXX</OperatingFlightNumber>
- **OperatingCarrier** - You will get Code Share Operating carrier under **OperatingCarrier** tag.
Eg. Journeys -> Segments -> Legs -> LegInfo -> <OperatingCarrier>TK</OperatingCarrier>

9 Content Management

ContentManagerClient service is used to get FareRule Information.

9.2 ContentManagerClient Service and Method

ContentManager Web Service URL

<https://6etestr4xapi.navitaire.com/ContentManager.svc>

Method Name

- GetFareRuleInfoRequest

9.3 GetFareRuleInfo

The GetFareRuleInfo new skies API provides fare restriction and rules information for either a single fare or multiple fares.

When the request is properly submitted, it returns the following information:

Detailed fare restrictions and fare rules for the requested FareBaseCode

Although used separately from other New Skies APIs and GetFareRuleInfo will return response into the Richtext format and for the same you have to convert into plan text as required.

Required Filed:

- FareBasisCode
- ClassOfService
- CarrierCode
- RuleNumber
- CultureCode

Request

```
<?xml version="1.0" encoding="UTF-8" ?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ContractVersion
      xmlns:h="http://schemas.navitaire.com/WebServices">420</h:ContractVersion>
    <h:EnableExceptionStackTrace
      xmlns:h="http://schemas.navitaire.com/WebServices">>false</h:EnableExceptionStack
      Trace>
    <h:MessageContractVersion i:nil="true"
      xmlns:h="http://schemas.navitaire.com/WebServices"
      xmlns:i="http://www.w3.org/2001/XMLSchema-instance" />
    <h:Signature
      xmlns:h="http://schemas.navitaire.com/WebServices">dHD4gAJwJqs=|bRrT0xkGzbFXt
      p+NKoLxnIC/xfVYcSd/YEjZPdIB/9NdpGnmvRVuz8S3zdO0670meVjRZICNkMcmZMZorCOjA
      cNLy0BWTBQIR2M2Viv2R+d+3GHBE5nYicm0XlaOye+kXkZ/haLqbQU=</h:Signature>
  </s:Header>
  <s:Body>
    <FareRuleRequest xmlns="http://schemas.navitaire.com/WebServices/S/ContentService">
      <fareRuleReqData xmlns="http://schemas.navitaire.com/WebServices/ /">
        <a:FareBasisCode>N0IP</a:FareBasisCode> ----- Get value from
          GetAvailabilityResponse
        <a:ClassOfService>N</a:ClassOfService> ----- ---Get value from
          GetAvailabilityResponse
        <a:CarrierCode>6E</a:CarrierCode> ----- Get value from
          GetAvailabilityResponse
        <a:RuleNumber>1059</a:RuleNumber> ----- Get value from
          GetAvailabilityResponse
        <a:RuleTariff i:nil="true" />
        <a:CultureCode>en-GB</a:CultureCode> -----use fixed value en-GB
      </fareRuleReqData>
    </FareRuleRequest>
```

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved


```

DataSet ds = new DataSet();
ds.ReadXml(filepath);
string RTF = string.Empty;
if (ds != null && ds.Tables["FareRuleInfo"] != null &&
ds.Tables["FareRuleInfo"].Rows.Count>0)
{
    RTF = ds.Tables["FareRuleInfo"].Rows[0]["Data"].ToString();
    byte[] decodedBytes = Convert.FromBase64String(RTF);
    string decodedText = Encoding.UTF8.GetString(decodedBytes);
    string ConvertedText = ConvertToText(decodedText);
    WriteTextFile(ConvertedText);
}

```

10 Get 6E City Pairs API

10.2 OnD API Method and Integration Process.

Overview

This service provides real time all sellable OnD of IndiGo for our API partners and it will help to remove manual dependency of current OnD which is shared by IndiGo team over email. Service will provide complete list of City pairs that is required to call on every day's basis and update at partners end to get 6E City pairs on respective booking portal.

API URL

<https://6eapiservices.goindigo.in/api/OTA/GetODDetails>

Communication type: **Post**

API Request & Response type: **JSON (Rest)**

API Input Parameters & Description

S. No.	Field Name	Data Type	Max Length	Technical Description
1	UserName	String	20	UserId to access the service.
2	Password	String	10	Password to access the service.
3	AccountId	String	15	Your Account Id which will be shared for access.

API Request Sample.

```
{
  "UserName": "xxxxxxx", "Password": "xxxxxxxxx",
  "AccountId": "xxxxxxxxxx"
}
```

API Response Sample.

```
{
  "Message":
  [{"SectorList":
  [
    [{"CityPair": "AGRAMD"}, {"CityPair": "AGRATQ"}, {"CityPair": "AGRAUH"}, {"CityPair": "AGRBBI"}, {"CityPair": "AGRBDQ"},
    {"CityPair": "AGRBHO"}, {"CityPair": "AGRBKK"}, {"CityPair": "AGRBLR"}, {"CityPair": "AGRBOM"}, {"CityPair": "AGRCCU"},
    {"CityPair": "AGRCJB"}, {"CityPair": "AGRCMB"}, {"CityPair": "AGRCNN"}],
  ],
  "Disclaimer":
  [{"Note": "This list is latest as on [18 Feb 2020 ] 00.00 hr."}]
}
```

Description of usual API Response

401 **Unauthorized** - authentication failed or user doesn't have permissions for requested operation.

400 **Bad Request** - the request could not be understood or was missing required parameters.

405 **Method Not Allowed** - requested method is not supported for resource.

200 **OK** - the request was successful (some API calls may return 201 instead).

404 **Not Found** - resource was not found.

412 **Precondition Failed** - Max hit limit exceeded for the today.

Frequently Asked Questions.

- How frequently the list is updated on the API.
It's updated 4 times a day at 12:00, 15:00, 18:00 and 21:00 hrs.
- How many request is allowed in a day?
API Max hit limit allowed 8 times a day.

Contact Us for Integration Support.

To: api.support@goindigo.in

CC: kamal.singh@goindigo.in

11 OSI Types

Possible OSI Types:

- **Unknown:** Unknown OSI type code.
- **InvalidPriceStatus:** Invalid price status.
- **PromotionNotApplied:** Promotion could not get applied on a given Journey.
- **PaymentSystemDown:** Communications with the payment system was unable to be established.
- **PaymentSystemException:** Communication with the payment system resulted in an exception condition
- **PaymentValidationError:** The payment did not conform to edits.
- **DistributelitineraryException:** An exception was thrown in post commit during itinerary distribution
- **FailedFareRestriction:** One of the fares requested failed the fare restriction check of one of the
- **DuplicateRecordLocatorSystemCode:** A record-locator was added with a record code and a system-code that already.
- **ArchivedBookingCommitted:** As a consequence, only.
- **FailedToReinstateJourney:** While performing UndoCancel (reinstatement), a journey failed to sell.
- **FailedToReinstateSSR:** While performing UndoCancel (reinstatement), an SSR failed to sell.
- **FailedToReinstateSeat:** While performing UndoCancel (reinstatement), a Seat failed to sell.
- **AddBookingCommentsFailed:** While performing AddBookingComments the method had a problem.
- **AdditionalChargebackPaymentsRequired:** If a payment is chargebacked and has related transfers or refunds.
- **MinimumTimeBetweenJourneys:** If two journeys are too close between arrival of the first and departure.
- **CancelUnsupported:** Cancel unsupported in this state.
- **FailedSeatSSRValidation:** Seat-dependent SSRs did not pass validation.
- **FailedToRetrieveSSRFeePrice:** The call to GetSSRFeePrice was unsuccessful (no

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

passenger exists on the booking.

- **SeatNotEquivalent:** Old and new seat assignments are not equivalent (numbers, properties, SSRs).
- **FailedToAssignAllSeats:** Failed to assign one or more seats.
- **FlightTimeOverlap:** Times of flights overlap each other.
- **UnpaidBalance:** Booking not fully paid (or payment not yet authorized).
- **MaxNumberOfPassengersExceeded:** Max. number of passengers exceeded.
- **TAFormOfPaymentIncluded:** TA form of payment included.
- **NoQualifyingSegmentsFound:** No qualifying segments.
- **NoPaymentsFound:** No qualifying segments.
- **MaxNumberOfCouponsPerPaxExceeded:** Maximum number of coupons per passenger exceeded.
- **CommitETicketFailed:** Failed to commit E-ticket/s.
- **UncommittedChangesDetected:** Uncommitted changes detected.
- **ExternalSystemError:** Uncommitted changes detected.
- **ETicketQueuingError:** Error in ETicketQueuing Sink.
- **FailedToIssueNewETicket:** New Issue failure.
- **DisallowedActionStatusInBooking:** Disallowed Segment Status in booking.
- **ETicketingDisabled:** ETicketing is not enabled for the account.
- **SSRIsUnavailable:** SSR is unavailable on the new flight.
- **CannotAddBaggageAllowanceAfterBagsAreChecked:** Cannot add Baggage Allowance after bags are checked.
- **BaggageProcessingFailed:** Baggage processing has failed.
- **HoldDateChanged:** The commit process has changed the hold date.
- **FailedToUnassignAllSeats:** Failed to un-assign one or more seats.
- **ExceededSeatAssignmentTimeLimit:** Exceeded the seat assignment time limit period.
- **FailedTravelDocValidation:** Failed Travel Doc Validation.
- **InvalidCollectedAmount:** The collected amount provided by the UI for an MCC payment is incorrect.
- **InvalidOperationOnCheckedPassenger:** Operation is not allowed on checked pax.
- **FewerSeatPreferencesMetOnNewSeat:** There are fewer seat preferences met on the new seat.
- **SSRNotSupportedOnNewSeat:** Seat-dependent SSR is not supported on the new seat.
- **InvalidReferenceNumber:** Reference Number is an invalid value.
- **AgentActionNotPermitted:** Agent does not have the required permissions.
- **RecordNotFound:** The desired record was not found.
- **NoUpdateRequired:** Update was not performed on specified record.
- **ClearingCustomerProgram:** Clearing Customer Program.
- **SSRInfantAgeViolation:** SSR is unavailable, infant age violation.

12 GST and UIN number

Unique Identification Number, UIN, is a special class of GST registration for foreign diplomatic missions and embassies

13 Test Cases

Booking Scenarios (With GST/UIN or Without GST/UIN)

- One Way _ 1 ADT
- One Way _ 9 Pax (5 ADT _ 4 CHD)
- Via _ 4 ADT _ 2CHD
- Connecting _ 4 ADT _ 2CHD
- Return Trip _ 5 ADT _ 2CHD
- Special Round Trip _ 4 ADT _ 4CHD

SSR Scenarios

- One Way _ 2 ADT _ 2 CHD _ INFT _ Meal_Baggage
- Via _ 2 ADT _ 2 CHD INFT _ Meal_Baggage
- Connecting _ 2 ADT _ 2 CHD INFT _ Meal _Baggage
- Return Trip _ 2 ADT _ 2 CHD INFT _ Meal _Baggage
- Special Round Trip _ 2 ADT _ 2 CHD _ INFT _ Meal _Baggage

Assign Seat

- One Way _ 1 ADT
- One Way _ 9 Pax (5 ADT _ 4 CHD)
- Return Trip _ 5 ADT _ 2CHD
- Connecting _ 4ADT _ 2CHD
- Via _ 5ADT _ 4CHD

Change/Cancellation scenarios

- Cancel a PNR with single segment and single passenger
- Cancel a PNR with single segment and multiple passengers
- Cancel a PNR with multiple segments and multiple passengers
- Cancel a PNR with any of the SSR-(special service request) like, Infant, Meal, Excess baggage

Journey-Date Change scenarios

This document of InterGlobe Aviation Ltd is for restricted circulation. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the written permission of InterGlobe Aviation Ltd.

©Copyright 2019. All rights reserved

- Change the date of a reservation with one segment and one passenger
- Change the onwards date of a reservation in a round trip PNR for single passengers
- Change the flight with the same date for the return segment of a reservation in a round trip PNR for multiple passengers
- Cancel anyone of the segment in a round trip PNR
- Change the date of a segment with any of the SSR for single passenger-(special service request) like Infant, Meal and Excess baggage
- Change the date of a segment in a PNR that has multiple passenger and one of the passenger has infant associated with him/her

Booking Test Cases for Codeshare flights with GST/UIN or Without GST/UIN: -

Booking Scenarios

- OneWay_2ADT
- OneWay_2ADT_2CHD
- RoundTrip_2ADT
- RoundTrip_2ADT_2CHD

SSR's Scenarios

- OneWay_2ADT_INFT
- OneWay_2ADT_2CHD_INFT
- RoundTrip_2ADT_INFT
- RoundTrip_2ADT_2CHD_INFT

Note: - For latest update and fees visit IndiGo (www.goindigo.in) website.