

NDC 18.6 API

Technical Documentation



Disclaimer

This 18.6 API Technical Documentation is protected by TPConnects Technologies LLC (“TPC”) copyright and, no part of it may in any form or by any means (e.g. electronic, mechanical, photocopying or otherwise) be reproduced, stored in a retrieval system or transmitted without prior written permission of TPC. Unauthorized reproductions, in whole or in part of this document, are infringements of TPC’s copyright and authorize the latter to pursue actively any kind of breach.

All the data of this 18.6 API Technical Documentation (e.g. illustrations, text, specifications and data) are based on the latest information available and every care has been taken in compilation of the contents herein and in verification of its accuracy. TPC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice.

Every reasonable care is taken to ensure that this document contains accurate information however, TPC makes no representations or warranties with respect to the contents of this 18.6 API Technical Documentation, or with respect to the products described herein and further, disclaims any responsibility whatsoever, for misrepresentation by any person of the information contained in this 18.6 API Technical Documentation or any error or omission therein, and expressly disclaims all and any liability and responsibility to any person, whether a reader of this 18.6 API Technical Documentation or not, in respect of claims, losses or damage or any other matter, either direct, indirect or incidental, consequential or special, arising out of or in relation to or connection with the use and reliance or for any action taken, whether wholly or partially, upon any information contained or products referred to in this 18.6 API Technical Documentation. If you find that some technical features or interface of your product differ from the ones inserted in this document, please contact your TPC Account Manager.

Table of Contents

1	What is IATA NDC	8
2	About this 18.6 API Technical Reference.....	9
3	Shopping Workflows	10
3.1	Shopping flow without seat selection (Instant Payment)	10
3.2	Shopping flow with seat selection	10
4	Servicing Workflows	11
4.1	Retrieve and Order Cancel/Void Flow	11
4.2	Retrieve and Order Cancel Flow	11
4.3	Retrieve an Order, Reshop and Update.....	11
5	18.6 API Technical Reference	13
5.1	18.6 AirShopping Overview.....	13
5.1.1	Introduction.....	13
5.1.2	AirShopping Webservice.....	13
5.1.3	Mandatory Headers	13
5.1.4	Endpoints.....	14
5.1.5	Samples.....	14
5.1.6	18.6 AirShoppingRQ	14
5.1.7	18.6 AirShoppingRS	23
5.1.8	18.6 AirShopping Error Codes.....	41
5.2	18.6 OfferPrice - Overview	85
5.2.1	Introduction.....	85
5.2.2	OfferPrice Endpoint.....	86
5.2.3	18.6 OfferPriceRQ	86
5.2.4	18.6 OfferPrice RS.....	91
5.2.5	18.6 OfferPrice Error Codes.....	111
5.3	18.6 OrderCreate Overview	114
5.3.1	Introduction.....	114
5.3.2	OrderCreate Endpoint.....	115

5.3.3	Web Service URLs.....	115
5.3.4	Test URL - WSDL.....	116
5.3.5	18.6 OrderCreateRQ.....	116
5.3.6	18.6 OrderCreateRS - OrderViewRS	131
5.3.7	18.6 OrderCreate Error Codes	176
5.4	18.6 SeatAvailability Overview	180
5.4.1	18.6 SeatAvailabilityRQ.....	181
5.4.2	18.6 SeatAvailabilityRS	190
5.4.3	18.6 SeatAvailability Error Codes.....	200
5.4.4	18.6 SeatAvailabilityRS Codes.....	213
5.5	18.6 OrderCancel Overview.....	224
5.5.1	18.6 OrderCancelRequest (OrderCancelRQ).....	225
5.5.2	18.6 OrderCancelRS - OrderViewRS.....	230
5.5.3	18.6 OrderCancel Error Codes	266
5.6	18.6 OrderReshop Overview.....	268
5.6.1	18.6 OrderReshopRQ	268
5.6.2	18.6 OrderReshop Response (OrderReshopRS)	283
5.7	18.6 OrderChange Overview.....	344
5.7.1	18.6 OrderChange Request (OrderChangeRQ).....	345
5.7.2	18.6 OrderChangeRS - OrderViewRS.....	366
5.7.3	18.6 OrderChange Error Codes.....	406
5.8	18.6 OrderRetrieve Overview.....	413
5.8.1	Introduction.....	413
5.8.2	OrderRetrieve Webservice.....	413
5.8.3	OrderRetrieve Endpoint	413
5.8.4	18.6 OrderRetrieveRQ	414
5.8.5	18.6 OrderRetrieveRS - OrderViewRS.....	417
5.8.6	18.6 OrderRetrieve Error Codes	491
5.9	18.6 ServiceList Overview	492
5.9.1	Introduction.....	492

5.9.2	ServiceList Endpoints	493
5.9.3	18.6 ServiceListRQ	493
5.9.4	18.6 ServiceListRS	501
5.10	Appendix A: Full API Examples	507
5.10.1	Primary Workflow Samples	507
5.10.2	Servicing Workflow Samples	509
5.11	Appendix B: Glossary	509
6	Common Schemas	511
7	DataLists	569
7.1	BaggageAllowanceList	569
7.2	BaggageDisclosureList	584
7.3	ContactInfoList	591
7.4	FareList	609
7.5	OriginDestList	627
7.6	PaxJourneyList	633
7.7	PaxList	639
7.8	PaxSegmentList	654
7.9	PriceClassList	701
7.10	ServiceDefinitionList	712
8	IATA 18.6 - Assets	727



The TPC 18.6 API Technical Reference is a comprehensive resource for airline customers looking to navigate and integrate various air shopping-related functionalities. This documentation provides in-depth details of multiple endpoints, each tailored to meet specific needs. Users can look at overviews, request-response structures, sample usages, and potential error codes within each endpoint section to ensure a seamless development and integration experience. This reference will assist you with obtaining prices, determining seat availability, and creating and managing orders.

TPC 18.6 API Technical Reference			
AirShopping 18.6 AirShopping Overview 18.6 AirShopping RQ 18.6 AirShopping RS 18.6 AirShopping Error Codes	OfferPrice 18.6 OfferPrice Overview 18.6 OfferPrice RQ 18.6 OfferPrice RS 18.6 OfferPrice Error Codes	OrderCreate 18.6 OrderCreate Overview 18.6 OrderCreate RQ 18.6 OrderCreate - OrderViewRS 18.6 OrderCreate Error Codes	SeatAvailability 18.6 SeatAvailability Overview 18.6 SeatAvailability RQ 18.6 SeatAvailability RS 18.6 SeatAvailability Error Codes 18.6 SeatAvailabilityRS Codes
OrderRetrieve 18.6 OrderRetrieve Overview 18.6 OrderRetrieve RQ 18.6 OrderRetrieve RS 18.6 OrderRetrieve Error Codes	OrderCancel 18.6 OrderCancel Overview 18.6 OrderCancel RQ 18.6 OrderCancel RS 18.6 OrderCancel Error Codes	OrderReshop 18.6 OrderReshop Overview 18.6 OrderReshop RQ 18.6 OrderReshop RS	OrderChange 18.6 OrderChange Overview 18.6 OrderChange RQ 18.6 OrderChange RS 18.6 OrderChange Error Codes

TPC 18.6 API Technical Reference

ServiceList

18.6 ServiceList
Overview
18.6 ServiceList RQ
18.6 ServiceListRS

Common Schemas

Common Schemas

DataLists

DataLists
BaggageAllowanceList
BaggageDisclosureList
ContactInfoList
FareList
OriginDestList
PaxJourneyList
PaxList
PaxSegmentList
PriceClassList
ServiceDefinitionList

Appendices

Appendix A: Full API Examples
Appendix B: Glossary

IATA 18.6 - Assets

IATA 18.6 Assets

1 What is IATA NDC

The Distribution Capability (NDC) is an IATA-initiated program that aims to transform the travel industry's data transmission standards using an XML protocol. This NDC Standard facilitates communication between airlines and travel agents and is available to any third party, intermediary, IT supplier, or non-IATA member. NDC transforms the selling of air products for companies, leisure, and business travellers, ensuring product differentiation, faster time-to-market, access to full air content, and a transparent buying environment.

2 About this 18.6 API Technical Reference

The TPC 18.6 API Technical Reference is a comprehensive resource for airline customers looking to navigate and integrate various air shopping-related functionalities. This documentation provides in-depth details of multiple endpoints, each tailored to meet specific needs. Users can look at overviews, request-response structures, sample usages, and potential error codes within each endpoint section to ensure a seamless development and integration experience. This reference will assist you with obtaining prices, determining seat availability, and creating and managing orders.



Prerequisite:

- Ensure that a native PDF viewer application is installed and configured on your device for seamless viewing of PDF documents. This could include applications like Adobe Acrobat Reader, Preview on macOS, or any other native PDF viewer specific to your operating system.
- A standard JSON viewer or editor should be available to open and inspect API samples.

3 Shopping Workflows


Airline reservation booking and issuance of tickets for customer travel involves multiple web services that have to be executed in sequential order. Primarily there are four business processes listed below, which can be executed independently or combined together depending upon the business requirements.

To initiate the authentication process, supply the elements required for the AirShoppingRQ. The system will respond with the available offers through AirShoppingRS. It may contain multiple offers along with ancillary offers, bundled offers. Based on customer selection, AirDocIssueRQ has to be submitted to the system for the creation of an Order. Below is the basic flow with the optional seat selection service. Additionally, it may include Ancillary service Order as well.

- Shopping flow without seat selection (Instant Payment)
- Shopping flow with seat selection

3.1 Shopping flow without seat selection (Instant Payment)

Shopping for flight offers and the creation of a booking:

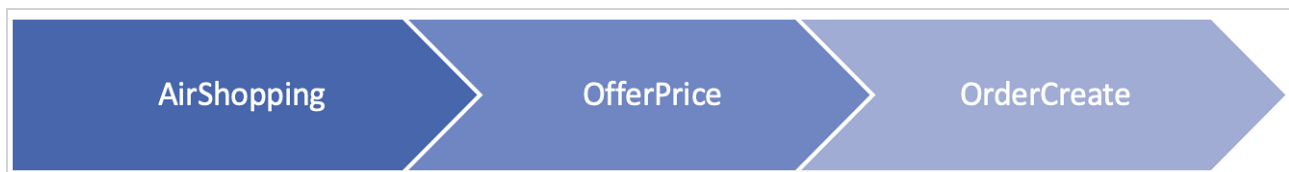

3.2 Shopping flow with seat selection

Shopping for flight offers and the creation of a booking:



4 Servicing Workflows

Airline reservation booking and issuance of tickets for customer travel involves multiple web services that have to be executed in sequential order. Primarily there are four business processes listed below, which can be executed independently or combined together depending upon the business requirements.

To initiate the authentication process, supply the elements required for the AirShoppingRQ. The system will respond with the available offers through AirShoppingRS. It may contain multiple offers along with ancillary offers, bundled offers. Based on customer selection, AirDocIssueRQ has to be submitted to the system for the creation of an Order. Below is the basic flow with the optional seat selection service. Additionally, it may include Ancillary service Order as well.

- Retrieve and Order Cancel/Void Flow
- Retrieve and Order Cancel Flow
- Retrieve an Order, Reshop and Update

4.1 Retrieve and Order Cancel/Void Flow


This is the process flow for cancelling an Order as Void.



4.2 Retrieve and Order Cancel Flow

This is the process flow for canceling an Order which may or may not involve two sub-processes. In case the order has not been ticketed, the booking can be canceled. However, if the order has been ticketed, a call must be made to determine the refundability and value to be refunded.

Retrieve and cancel a booking:

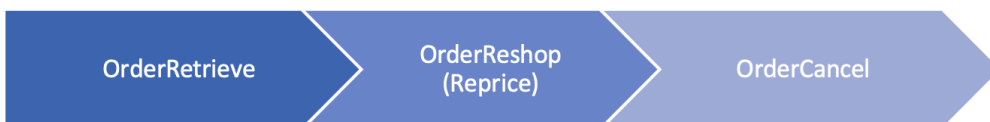

4.3 Retrieve an Order, Reshop and Update

To modify an existing booking itinerary, use the following process.

Retrieve a booking, change the itinerary, and update:



5 18.6 API Technical Reference

5.1 18.6 AirShopping Overview

- [Introduction](#)
- [AirShopping Webservice](#)
- [Mandatory Headers](#)
- [Endpoints](#)
- [Samples](#)

5.1.1 Introduction

The service enables a search via NDC APIs and returns information on the available offers with or without ancillary services. Offers include a high-level price breakdown of offer, cabin class, and flight segment information. This service has been extensively improved to include the services such as BaggageAllowance, BaggageList, and BaggageCharges.

5.1.2 AirShopping Webservice

The web service is called with the following parameters:

- Flight Origin and Destination
- Requested cabin
- Requested flight origin date
- Number of passengers with passenger types

5.1.3 Mandatory Headers

In order to access our API, you will need to pass the following two headers on each call

```
{
  "Header": {
    "SecurityHeader": {
      "agent": 123,
      "apiKey": "xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx",
      "secretKey": "xxxxxxxx-xxxxx-xxxxx-xxxx-xxxxxxxxxxxxxxxx"
    }
  }
}
```



Note: The `apiKey` and `secretKey` fields are mandatory in the `Header` and `SecurityHeader` headers in each call.

<https://tpcsupport.atlassian.net/wiki/spaces/TCADG/pages/943816731> to download XSD files for all APIs.

5.1.4 Endpoints



Please request this information from your TPConnects Account Manager.

5.1.5 Samples



For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.1.6 18.6 AirShoppingRQ

Introduction

AirShoppingRQ service checks for flight availability and associated price offers, for a given origin-destination pair, with the associated dates. The service set supports both demanding and flexible shopping experiences for anonymous or personalised shopping. The combination of functionally-rich attributes and affinity shopping, supports date range or specific month (calendar) shopping as an example. The offer response may include a) branded offers or b) itinerary-priced offers with or without ancillary services. It also returns applicable rules for the fares offered as well as for each service. The response also returns multi-media content at the message level as well as media references at the individual offer level.

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.6. The following are the element checklist to be passed in order to create a request. The elements which are marked “**M**” are mandatory to be passed in the request. The parameters passed as “**O**” are optional, it is well and good if implemented.

- ☐ To initiate the AirShopping flow, the seller must provide the necessary input parameters according to the AirShopping search criteria.

Input Parameters	API Flow	Output Parameters for Transitioning to OfferPriceRQ
DestArrivalCriteria	AirShoppingRQ ➡ AirShoppingRS	OfferID
OriginDepCriteria		OfferItemID
Pax		OwnerCode
Date		PaxJourneyID
		PaxID
		ShoppingResponseID
		TotalAmount
		EchoTokenText

AirShoppingRQ constitutes the below structure:

- MessageDoc
- Party
- PayloadAttributes
- PointOfSale
- AugmentationPoint
- Request

Request Parameters

MessageDoc		
Elements	Description	Optional/ Mandatory
MessageDoc	Message Document information	O
Party		
Elements	Description	Optional/ Mandatory
Party	Party and Sender definition	M
PayloadAttributes		
Elements	Description	Optional/ Mandatory
PayloadAttributes	IATA standard payload attributes.	O
PointOfSale		
Elements	Description	Optional/ Mandatory
PointOfSale	Point of Sale information.	O

i The purpose of the `ActiveSuppliers` element is to allow the user to specify the suppliers to be returned in AirShoppingRS. This will allow the user to specify only 1 or 2 suppliers, even if more are enabled in the POS. If the user chooses to return all the suppliers enabled in their POS, then the following `AugmentationPoint` elements are not needed in the AirShoppingRQ.

AugmentationPoint

Elements	Description	Optional/ Mandatory
AugmentationPoint	The implementer-augmented structure.	O
Extension		O
Shopping		O
ActiveSuppliers	This is a comma separated list of suppliers requested to be returned in AirShoppingRS.	O

Request

Elements	Description	Optional/Mandatory
Request	The AirShoppingRQ payload information.	M
FlightCriteria	Choice of Affinity, Origin Destination, or Journey flight information for this shopping request.	M
OriginDestCriteria	The origin and destination airport and city pair which confines a passenger journey or an aircraft flight.	M
DestArrivalCriteria	A customer's requested destination arrival time and location.	M
IATALocationCode	An IATA defined code identifying a city or station. Example: BNE	M
StationName	This will be either a City or Airport. The values will be either 'C' for City or 'A' or null for Airport. Example: C	O

OriginDepCriteria	A customer's requested origin departure time and location.	M
Date	The customer's requested departure date. Example: 2023-12-30	M
IATALocationCode	An IATA defined code identifying a city or station. Example: ADL i For <code>OriginDestCriteria</code>, if the <code>IATALocationCode</code> is a city code (e.g.- CHI), then <code>StationName</code> should be passed as "C" which is mandatory. In case where <code>IATALocationCode</code> is an airport code, it is expected to pass <code>StationName</code> as either "A", or field can be empty as default.	M
StationName	This will be either a City or Airport. The values will be either 'C' for City or 'A' or null for Airport. Example: C	O
Paxs	The passenger and passenger group information.	M
Pax	Any person except members of the crew carried or to be carried with the consent of the carrier, on board of any transport vehicle such as aircraft, train, bus, ship. Holds the attributes specific to a one booking, from shopping. i We have the ability to handle frequent flyer numbers that comes under loyalty program. This will be providing more information in the document.	M
PaxID	The unique identifier of a passenger. Example: PAX1	O
PTC	The passenger type code that applies to the passenger. Available codes are ADT, CHD, and INF.	M
ResponseParameters	The information related to how shopping results should be returned in the response.	O

PricingParameter	The pricing parameters, including simple pricing, award travel, auto exchange, override currency, and tax exemption.	O
OverrideCurCode	The override currencies currency code. Example: GBP	O
ShoppingCriteria	Further qualifies the flight request by influencing which results are returned in the shopping response, including preferred or required filter criteria.	O
CabinTypeCriteria	The type of compartment of an aircraft, offering specific services. Example: First class, Business class, and Economy class.	O
CabinTypeCode	The cabin type code as defined by the PADIS codeset. Example: Y For British Airways (BA), <code>CabinTypeCode</code> is mandatory (M).	O
CabinTypeName	The name given to a cabin compartment Example: Business, First, and Economy.	O
CarrierCriteria	The airline preferences for a shopping request. i It's possible to have multiple criteria, for multiple payments. In this case, <code>PrefLevelCode</code> will be marked as 'X'.	O
Carrier	The carrier that is issuing the ticket.	O
AirlineDesigCode	An airline code assigned to a carrier. Either an IATA defined 2-character code, and ICAO defined 3-character code. Example: QF	O
DuplicateDesigInd	Indicates that the IATA Airline Designator is a duplicate code shared by multiple airlines.	O
Name	The name of the airline or carrier. Example: Qantas Airways	O

PrefLevel	The information about a preference including a preference level code. Examples: • Preferred • Required • Exclude • Other	O
PrefLevelCode	The preference level code. Examples: • Preferred • Required • Exclude • Other	O
ConnectionCriteria	The customer's requested connection information.	O
ConnectionPRefID	The unique identifier assigned to this connection preference.	O
StationCriteria	The customer's requested station criteria.	O
PrefLevel	The information about a preference including a preference level code. Examples: • Preferred • Required • Exclude • Other	O
PRefContextText	The preference level context reference. Example: MyContext	O

PRefLevelCode	The preference level code. Examples: • Preferred • Required • Exclude • Other	O
Station	The location or facility where air or surface transportation originates, stops and or terminates. Where passengers and or cargo can be taken on or off.	O
IATALocationCode	An IATA defined code identifying a city or station. Example: ADL i For <code>OriginDestCriteria</code>, if the <code>IATALocationCode</code> is a city code (e.g.- CHI), then <code>StationName</code> should be passed as "C" which is mandatory. In case where <code>IATALocationCode</code> is an airport code, it is expected to pass <code>StationName</code> as either "A", or field can be empty as default.	O
MaximumConnectionQty	The maximum number of connections	O
value	The value of <code>MaximumConnectionQty</code> .	O
MaximumConnectionTime	The maximum connection time preference.	O
value	The value of <code>MaximumConnectionTime</code> .	O
FareCriteria	The fare criteria used to filter shopping results.	O

FareTypeCode	The fare type code. Based on the Encoding Scheme: PADIS codeset element 9910 - Fare Qualifier. Examples: • 70J-Published Fares • 749-Negotiated Fares • 756-One Way Fare • 758-Private Fares	O
PricingMethodCriteria	A form of procedure for the payment of goods or services, plus any transactional information specific to the payment method other than the amount.	O
BestPricingOptionText	The best available fare pricing method. Examples: • Y (Best fare in same cabin class) • C (Best fare across all cabin classes) • N (Price accordingly to other designated pricing parameters)	M
ProgramCriteria	The filtering based on the program.	O
CompanyIndexText	The company profile index associated with this special fare. Example: COM1234	O
ProgramAccount	The account associated to a program.	O
AccountID	The unique identifier of an account.	O
ProgramOwner	The program owner information. This is the corporate number specified under AccountID .	O
Org	An organised structure set up for a particular purpose, such as a business, government body, department, charity, or financial institution.	O
OrgID	The unique identifier of an organisation.	O

TypeCode	The tour or program type code. Examples: • Discount Program • Incentive Program • Pre-paid Program • TourCode	O
----------	--	---



Note: In `OriginDestCriteria`, if the `IATALocationCode` is a city code (example: CHI), then `StationName` should be passed as "C" which is mandatory. In case of `IATALocationCode` is an airport code, the is expected to pass `StationName` as either "A" or we need not fill the field with any value.



For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.1.7 18.6 AirShoppingRS

Introduction

The AirShoppingRS is a system response for AirShopping Request (AirShoppingRQ). The response may include branded offers or itinerary-priced offers with or without ancillary services. It also returns applicable rules for the integrated fares as well for each service. The response also returns multi-media content at the message level as well as media references at the individual offer level. It is up to the consuming system to display all in their UI or pick and choose the offers for display and select the offers.

Implementation

Use the IATA NDC schema version 18.6 for the air shopping response. Following the schema, build the API ensuring to include mandatory "Elements" and "Attributes" (identified with a plain border in the NDC Schema Diagram). The rest of the elements mentioned in the schema are optional but recommended to include to receive the best, personalised offers if any from the suppliers. For more details refer to the IATA standards on the [link](#).

Our AirShopping Response follows the below structure:

- [MessageDoc](#)
- [PayloadAttributes](#)

- [Error](#)
- [OffersGroup](#)
- [ShoppingResponse](#)
- [DataLists](#)



Note: Please use the sample attached and pass the elements accordingly.

MessageDoc

Element	Description	Optional/Mandatory
MessageDoc	Message Document information	M

PayloadAttributes

Element	Description	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M

Error

Element	Description	Optional/Mandatory
Error	Contains information related to errors detected during processing of the preceding request.	O
Code	The code corresponding to the processing error as defined by PADIS 9321.	O
DescText	Free text description of the provided error.	O

StatusText	Document processing status. Recommended values are NotProcessed , Incomplete , Complete , and Unknown .	O
OwnerName	The name of the organisation owning the error codelist. e.g. 1S , TPC , 1A	O

JSON SAMPLE -ERROR

```
{
  "IATA_AirShoppingRS": {
    "Error": [
      {
        "Code": "505",
        "DescText": "No Flights Available",
        "StatusText": "Unknown", //Optional
        "OwnerName": "1S" // Optional
      }
    ]
  }
}
```

Response Definition

OffersGroup		
Elements	Details	Optional/Mandatory
OffersGroup	Offers grouped by carrier.	O
CarrierOffers	Grouping of offers returned by a single ORA.	O
CarrierOffersSummary	Offer summary that includes highest, lowest, and number of matched offers included in the response.	O

HighestOfferPrice	The amount of money expected, required, or given in payment for something. This will be highest priced offer that comes under a <code>CarrierOffers</code> .	O
TotalAmount	A summary of all fee amounts.	O
value	The numerical value of <code>TotalAmount</code> .	O
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP	O
LowestOfferPrice	The lowest priced offer.	O
LoyaltyUnitName	The name of the loyalty unit used by the loyalty unit amount (e.g. miles or points)	O
TotalAmount	A summary of all fee amounts.	O
value	The value of <code>TotalAmount</code> .	O
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP	O
MatchedOfferQty	The total number of available Offers.	O
value	The value of <code>MatchedOfferQty</code> .	O
Offer	A proposal to sell a specific set of products or Services under specific conditions, for a certain price. Can be the response to a shopping request.	O

BaggageAllowance	The amount of checked or carry-on luggage the airline will allow per passenger.	O
BaggageAllowanceRefID	Reference to a bag allowance ID within this message. Example: XbgaOf00b638bea71	O
PaxJourneyRefID	Reference to a passenger journey ID within this message. Example: Iflt0200b638bea71	M
PaxRefID	Reference to a passenger ID within this message. Example: PAX1	O
Desc	The description of the offer.	O
DescText	Description text value of an offer. Example: SeatsLeft_VA218	O
MarkupStyleText	Mark-up style of the description text. Example: 2	O
JourneyOverview	Summary of proposed journey information in the context of this specific offer.	O
JourneyPriceClass	Price class information per journey.	O
PaxJourneyRefID	Reference to a passenger journey ID within this message. Example: FLT-SEG~VA218~VA218~202312291140~202312291330~OSEG~VA359~VA359~202312292150~202312292300~O	M
PriceClassRefID	Reference to a PriceClassID within a message. Example: VA_CHOICE	O
PriceClassRefID	Reference to a PriceClassID within a message. Example: VA_CHOICE	O

OfferExpirationDateTime	The date by which an offer must be converted into an order. Example: 2023-12-28T00:00:00	O
MatchAppText	Specifies which flight request type relates to the match information. Example: Journey	O
MatchTypeCode	The match type code of the offer based on the shopping criteria type. Example: Full, Partial, None, and Other.	O
OfferID	Carrier assigned ID which uniquely identifies a specific offer across several messages. Example: XE4C9F14C-AE5C-4E6C-B49A-1	M
OfferItem	A priced grouping of one or more services within an offer.	O
FareDetail	The amount charged by the carrier for the carriage of a passenger and his allowable free baggage.	O
FareComponent	A portion of an itinerary between two consecutive fare construction points. If the journey has only one fare component, the points of origin and destination are the only fare construction points.	O
CabinType	Type of compartment of an aircraft, offering specific services (e.g. Business Class, Economy).	O
CabinTypeCode	Cabin type code as defined by PADIS codeset (e.g. 1, 2, 3, etc.). Example: Economy (Y), Premium Economy (W), Business (C) and First (F)	O
CabinTypeName	Name given to a cabin compartment. Example: Business, First, Economy	O

FareBasisCityPairText	Identified published fare. Origin and destination city codes and two character designator of fare owning airline associated with Fare Basis Code. Example: MIANCEDL	O
FareBasisCode	Fare basis code. Example: Y26	O
PaxSegmentRefID	Reference to a Pax Segment ID. Example: lsgm0100b738beab5	O
PriceClassRefID	Reference to a PriceClassID within this message. Example: Xpc0600b738beab5	O
RBD	Reservation Booking Designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. E.g. 'J' for Business Class Premium, 'D' for Business Disc	O
RBDCode	Code used to identify a particular RBD (e.g. P, J, W, M, etc.).	O
value	The value of RBD . Example: V	O
FareIndCode	The fare indicator code. Example: 70J	O
FarePriceType	The type of fair price applied to a Fare Detail (e.g. filed amount, net amount, or a sell amount).	O
FarePriceTypeCode	Indicates if the fare price provided is a filed amount, net amount, or a sell amount. Example: Filed Amount ADT	O
Price	Price information about a fare.	O

BaseAmount	Total Base Fare Amount. Example: 200000	O
value	The value of <code>BaseAmount</code> .	O
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP	O
EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the currency indicator code.	O
value	The value of <code>EquivAmount</code> .	O
CurCode	The currency code for <code>EquivAmount</code> . Example: USD, GBP	O
TaxSummary	The sum of all tax amounts applied on a given price.	O
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts. i Note: For 1TF, <code>TotalTaxAmount</code> for <code>AirshoppingRS</code> and <code>OfferPriceRQ</code> may not be the same but the total price will be the same.	O
value	The value of <code>TotalTaxAmount</code> .	O

CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP	O
TotalAmount	Total monetary price amount, including all tax, surcharge, and fee amounts.	O
value	The value of <code>TotalAmount</code> .	O
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP	O
FareRefText	Fare reference key. Example: PQ123456	O

OfferItemID	Carrier assigned ID which exists uniquely within an offer. Example: GDS-OfferID-11~VA~GDS~CH~249.90_ADT Note: Under one <code>Offer</code>, there can be multiple offer items. <code>OfferItems</code> are created based on the pax category. This is a standard format given by all the suppliers. E.g. If there are 2 adults+ 1 child + 1 infant. One <code>OfferItem</code> will be created for adult category, second offer item for child category, third offer item for infant category. Hence, maximum of 3 x <code>OfferItems</code> can be expected under a <code>PricedOffer</code>.	M
Price	The price of the <code>OfferItemID</code> .	O
BaseAmount	The total base fare amount.	O
value	The value of <code>BaseAmount</code> . Example: 200000	O
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP	O

EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the currency indicator code.	O
value	The value of <code>EquivAmount</code> . Example: 200000	O
CurCode	The currency code for <code>EquivAmount</code> . Example: USD, GBP	O
Markup	The markup applied to an offer or fare.	O
MarkupData	The primary source which contains all the markup data.	O
baseAmount	The original base amount without any markup value applied. Example: 416.43	O
invisibleMarkup	The determined amount of invisible markup or discount for a specific type of passengers.	O
invisibleMarkupPerPax	The calculated invisible markup or discount amount per passenger for a particular type of passenger.	O
markupPerPax	The calculated markup or discount for both invisible and visible markups per passenger.	O
newBaseAmount	The new base amount after discounts/markups are applied. Example: 416.43	O
newTotalAmount	The new total amount after discounts/markups are applied. Example: 509.5	O
noOfPax	The number of passengers of a particular pax type. Example: 2	O

taxAmount	The tax amount to be added to the overall discount/markup. Example: 93.07	O
totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5	O
totalMarkup	The total discount/markup amount. Example 2	O
visibleMarkup	The calculated amount of visible markup or discount for a specific type of passenger. Example: 34.6	O
visibleMarkupPerPax	The calculated visible markup or discount amount per passenger for that particular type of passenger. Example: 20.9	O
paxType	The type of passenger. Example: ADT	O
maxMarkupForInvisibleRules	The maximum markup/discount limit for invisible rules.	O
maxMarkupForVisibleRules	The maximum markup/discount limit for visible rules.	O
minMarkupForInvisibleRules	The minimum markup/discount limit for invisible rules.	O
minMarkupForVisibleRules	The minimum markup/discount limit for visible rules.	O
TaxSummary	The sum of all tax amounts applied on a given price.	O
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts	O

value	The value of <code>TotalTaxAmount</code> . Example: 20000	O
CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP	O
TotalAmount	Total monetary price amount, including all tax, surcharge, and fee amounts.	O
value	The value of <code>TotalAmount</code> .	O
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP	O
Service	The instance of a specific flight or Service Definition as it has been offered (and eventually ordered and consumed) in the context of a specific Offer and/or Order.	O
PaxRefID	Reference to a Passenger ID within this message. The Passenger is the recipient entitled to receive/consume the Service(s) offered by the Airline, whether the Service(s) are flight-related or not. Example: PAX1	O
ServiceAssociations	References to the details of this Service. May include either Passenger Journeys, a Service Definition, or a Selected Seat.	O

PaxJourneyRefID	Reference to one journey in the <code>DataLists</code> that is being sold as part of this <code>OfferItem / Service</code>. Example: FLT-SEG-VA218~VA218~202312291140~202312291330~OSEG-VA359~VA359~202312292150~202312292300~O	M
ServiceID	The service ID assigned by the carrier. Example: SERVICE-ADT	O
Commission	An amount of money, typically a set percentage of the value involved, paid to an agent in a commercial transaction.	O
CommissionCode	The commission code. Example: BSP Commission, TotalCommission	O
Percentage	The commission percentage value. Example: 11	
OwnerCode	Airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: 1A	O
PaymentTimeLimitDateTime	The date by which a complete payment must be made for the confirmed items in an offer. Examples: 2015-01-13T13:59:38Z	O
Penalty	The penalty applied to a fare, based on changes to or cancellations of a fare.	O

AppCode	Penalty application type. Examples: • ADE (After departure) • NOS (No show) • PDE (Prior to departure)	O
ChangeFeeInd	When TRUE, Change of Itinerary fee(s) may apply.	O
DescText	The description of the applicable penalty.	O
TypeCode	Penalty type information. Examples: • Cancellation • Change • NoShow • Upgrade • Other	O
PTC_OfferParameters	Passenger Type summary information for an offer.	O
PricedPaxNumber	Number of Passenger(s) for associated passenger type. Example: 2	O
PTC_PricedCode	Actual passenger type code used for pricing. Example: ADT	O
TotalPrice	The amount of money expected, required, or given in payment for something. This will be total amount of an offer, including any surcharges, if any.	O
BaseAmount	The total base fare amount.	O
value	The value of <code>BaseAmount</code> . Example: 200000	O

CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP	O
Markup	The markup applied to an offer or fare.	O
MarkupData	The primary source which contains all the markup data.	O
baseAmount	The original base amount without any markup value applied. Example: 416.43	O
taxAmount	The tax amount to be added to the overall discount/markup. Example: 93.07	O
totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5	O
newBaseAmount	The new base amount after discounts/markups are applied. Example: 416.43	O
newTotalAmount	The new total amount after discounts/markups are applied. Example: 509.5	O
visibleMarkup	The calculated amount of visible markup or discount for a specific type of passenger. Example: 34.6	O
invisibleMarkup	The determined amount of invisible markup or discount for a specific type of passengers.	O
totalMarkup	The total discount/markup amount. Example 2	O
markupPerPax	The calculated markup or discount for both invisible and visible markups per passenger.	O

visibleMarkupPerPax	The calculated visible markup or discount amount per passenger for that particular type of passenger. Example: 20.9	O
invisibleMarkupPerPax	The calculated invisible markup or discount amount per passenger for a particular type of passenger.	O
maxMarkupForInvisibleRules	The maximum markup/discount limit for invisible rules.	O
maxMarkupForVisibleRules	The maximum markup/discount limit for visible rules.	O
minMarkupForInvisibleRules	The minimum markup/discount limit for invisible rules.	O
minMarkupForVisibleRules	The minimum markup/discount limit for visible rules.	O
TaxSummary	The sum of all tax amounts applied on a given price.	O
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	O
value	The value of <code>TotalTaxAmount</code> . Example: 47.61	O
CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP	O
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.	O

value	The value of <code>TotalAmount</code> . Example: 47.61	O
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP	O
ValidatingCarrierCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: VA	O
ShoppingResponse		
Elements	Details	Optional/Mandatory
ShoppingResponse	Facilitates the tracking of what was Offered and contains an identifier unique to the source Airline for a set of product Offers returned in response to a shopping request.	O
ShoppingResponseID	Unique shopping session response ID. Example: 42136096-927d-4c4b-8e9f-e41bbe40cb	M
DataLists		
Elements	Details	Optional/Mandatory
BaggageAllowanceList	Baggage allowance data list definition.	M
ContactInfoList	Contact Info data list definition.	O
FareList	Fare list datalist definition.	O
OriginDestList	Origin destination data list definition.	M
PaxJourneyList	Journey data list definition.	M

DataLists		
Elements	Details	Optional/Mandatory
PaxList	Passenger data list definition.	M
PaxSegmentList	Segment data list definition.	M
PriceClassList	Price class data list definition.	M

For more details [click here](#) to view the complete schema



For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.1.8 18.6 AirShopping Error Codes

Error Code	Error Message
911	Unable to process - system error
	Supplier Error - Target office id not found
402	There are no results available for the specified search criteria
403	The User ID provided in Request.Party.Sender.TravelAgency.TravelAgent.TravelAgentID does not exist
496	No offers
304	System Temporarily unavailable
368	Not authorized
314	Name element data invalid
717	Missing and/or invalid travel agent and/or system identification
912	Incomplete message - data missing in query
75G	Agency not authorized to sell this fare

Error Code	Error Message
404	No Service Between Requested Cities/Airports
	NDC_AIRSHOPPING_9004 - We do not offer availability for this route
76H	Unable to process requested option
492	Invalid passenger selection
486	Unknown
505	No Flights Available
	Service unavailable
68	Max number of passenger per request exceeded
112	Requestor Identification Required
145	Number in Party Exceeds Maximum
143	Invalid or Ineligible Passenger Type Code
78	Invalid or missing fare data
1	Unexpected system error.
0	Success.
2	System temporarily unavailable.
3	Cannot find service:
4	No locator codes available.
5	SERVICELOCATOR.getHome()caughtIllegalAccessException. Check nested exception.
6	Internal exception occurred during rule engine processing.
7	Vendor connection is down.
8	A timeout occurred while communicating with vendor.

Error Code	Error Message
9	Connection with vendor is experiencing problems.
10	Transaction failure.
11	Host temporarily unavailable.
14	Unsuccessful host transaction causing partial failure.
15	DCC service error
16	Invalid Supplier URL.
19	Specified Encryption Key is unsupported in this environment.
299	Unable to unmarshall host response
38	Unable to open host session.
39	Unexpected error while retrieving cache entry.
40	Unexpected error while deleting cache entry.
45	Unable to Update Cache from Gws
43	Error message from supplier.
121	Unexpected system error related to binary serialization.
2000	An internal processing error occurred.
123	Unknown host error encountered.
-1	Test error.
124	Invalid Cache Name.
255	Something went wrong with binary data serialization
256	Service is retired
257	Accessed by another transaction.Retry later

Error Code	Error Message
258	Flex shopping options not provisioned.
259	Connection with provider unavailable.
260	No availability for this request.
2611	Use GDSNextonQueue/QueueContinue= "True" to continue to the top of Queue or GDSQueueExit to exit out of the Queue.
2612	Combination of either Queue Selector or Remove Current ="True" with GDSQueueContinue="True" is not allowed.
2613	Combination of either Queue Selector or Remove Current ="False" with GDSQueueContinue="True" is not allowed.
9001	MONTH PROHIBITED AS DISCOUNT CODE
9002	DISPLAY TOO LONG - PLEASE REOPTION TO SHOW LESS RATES
9003	SUPERLINER ACCESSBILE BEDROOM
9004	NOTHING FOUND FOR REQ COUNTRY
9005	NOTHING FOUND FOR REQ CITY
9006	** STANDARD ACCESS BOOKING **
9007	TRANS DOES NOT ALLOW OPTION
9008	TIME/DTE RESTRICTION MAY APPLY
9009	INVALID BKG SOURCE FOR TRANS.
9010	AIRLINE CODE MISMATCH BETWEEN LOTA AND LOCN
9011	AIRLINE CODE MISMATCH BETWEEN LOTM AND LOCN
9012	RESTRICTED TO TYPE OF TERMINAL
9013	DISPLAY TOO LONG - PLEASE REOPTION TO SHOW LESS ROOMS
9014	INVALID TICKETING DEFAULT, MUST BE E OR P

Error Code	Error Message
9015	RESTRICTED : NOT ALLOWED AFTER GROUP NAME CHANGE
9016	PNR MODIFICATION RESTRICTED WITH GROUP NAME CHANGE
9017	WAIT FOR CHECK-IN/REVALIDATION PROCESS TO FINISH
9018	CLEAR PRINTER
9019	GROUP NAME CHANGE RESTRICTED ON A MODIFIED PNR
9020	WARNING : GROUP NAME CHANGE WILL FORCE ET - REENTER INPUT
9023	**** SORAT HOTELS ****
9024	USE RTY
9025	FREQUENT FLYER NUMBER NOT VALIDATED
9026	ALTERNATIVE DATE VALIDATION DISALLOWED FOR MARKET
9027	PAST DATE FUNCTION NOT PERMITTED - CHECK DATES
9028	FUTURE DATE FUNCTION NOT PERMITTED - CHECK DATES
9029	RESTRICTED - FA/ET EXISTS
9030	WARNING - FA/ET EXISTS
9031	OPTION MUST BE C, P, I OR S
9032	INDEPENDENT ACCESS BOOKING-CF TO BE RETURNED BY PROPERTY
9033	SOURCE OFFICE ID NOT FOUND
9034	TARGET OFFICE ID ALREADY EXISTS
9035	PNR(S) FOUND IN SOURCE OFFICE. OFFICE ID CHANGE NOT ALLOWED.
9036	BOOKING ALREADY CONFIRMED FOR SAME GUEST-PLEASE CHANGE NAME
9037	AMOUNT TOO LONG FOR DISPLAY

Error Code	Error Message
9038	INVALID * CHAR USED IN LOCS FIELD
9039	TARGET OFFICE ID NOT FOUND
9040	TARGET OFFICE ID MUST BE DEACTIVATED
9041	NEED AGENT SIGN OR RECORD LOCATOR
9042	FARE CALCULATION TOO LONG - MODIFY DATA
9043	XT TOTAL FOR 3RD AND SUBSEQUENT TAXES EXCEEDS 9 DIGITS
9044	XT TOTAL FOR MULTIPLE TAXES EXCEEDS 7 DIGITS
9045	ACCOMP. BY PNC - CHECK IN WITHIN 30 MINS
9046	NON REFUNDABLE NON MODIFIABLE
9047	VERIFY FH - NUMBER OF DOCUMENTS LISTED IS INCORRECT
9048	LOCN FIELD REQUIRED
9049	INVALID SECURITY LEVEL. MUST BE ASA, 2HD, 1HD OR NONE.
9050	FH VALIDATING CARRIER AND STOCK PROVIDER DO NOT MATCH
9051	SECURITY LEVEL NOT YOUR RESPONSIBILITY
9052	REMOTE OFFICE MODE COMPLETED. ERROR ON PRINTER SET UP.
9053	INVALID OA RECLOC
9054	FARE - FQP
9055	ATTRIBUTE IDENTIFIER MUST BE 3 CHARACTERS LONG
9056	ATTRIBUTE DESCRIPTION MUST BE 1 TO 30 CHARACTERS LONG
9057	ATTRIBUTE SECTION MUST BE S, R OR P
9058	LSA ACCESS RIGHTS MUST BE B, R, N

Error Code	Error Message
9059	PASSWORD OFFICER ACCESS RIGHTS MUST BE B, R, N
9060	AGENT ACCESS RIGHTS MUST BE B, R, N
9061	ALIGNMENT MUST BE C, R OR L
9062	POSITION WITHIN DISPLAY MUST BE BETWEEN 1 AND 999
9063	APPEARANCE IN JGD AND JTD MUST BE Y OR N
9064	APPEARANCE IN JGD/SECTION AND JTD/SECTION MUST BE Y OR N
9065	APPEARANCE IN JCD/SECTION MUST BE Y OR N
9066	APPEARANCE IN JCD MUST BE Y OR N
9067	LIST ATTRIBUTE INDICATOR MUST BE Y OR N
9068	MODIFICATION ALLOWED IN PR. TRAINING INDICATOR MUST BE Y OR N
9069	MANUAL UPDATE ALLOWED INDICATOR MUST BE Y OR N
9070	SPECIFIC DISPLAY ALLOWED INDICATOR MUST BE Y OR N
9071	ATTRIBUTE DISPLAYED AT SIGN CREATION TIME MUST BE Y OR N
9072	ATTRIBUTE IS PART OF SIGN INDICATOR MUST BE Y OR N
9073	PARAMETER TYPE MUST BE V, T OR A
9074	INVALID ATTRIBUTE KEYCODE :
9075	MASTER PREFERENCE TABLE IS EMPTY
9076	DUPLICATE ATTRIBUTE KEYCODE :
9077	PLEASE SPECIFY ATTRIBUTE PARAMETER VALUE
9078	MUST SPECIFY AN ATTRIBUTE PARAMETER
9079	INVALID ATTRIBUTE PARAMETER :

Error Code	Error Message
9080	DUPLICATE ATTRIBUTE PARAMETER :
9081	NEW ATTRIBUTE : PLEASE SPECIFY IDENTIFIER, SECTION, DESCRIPT.
9082	NO ATTRIBUTE DEFINED FOR SECTION :
9083	YOU CAN NOT PROCESS MORE THAN 9 VENDORS AT A TIME
9084	NOT A VENDOR PREFERENCE TABLE PARAMETER :
9085	AT LEAST ONE PARAMETER MUST BE SPECIFIED OR KEYWORD ALL
9086	DUPLICATE VENDOR CODE :
9087	NO SPECIAL SETTING IN ANY VENDOR
9088	VENDOR PREFERENCE TABLE IS NOT YOUR RESPONSIBILITY :
9089	PARAMETER CAN NOT BE MAINTAINED IN PRACTICE TRAINING :
9090	NO SPECIAL ATTRIBUTE SETTING IN VENDOR :
9091	NO SPECIAL SETTING IN SOURCE VENDOR FOR ATTRIBUTE :
9092	FREQUENT GUEST NUMBER REQUIRED
9093	NO PRINT ID & ST ON SAME INPUT
9094	CANNOT PRINT TO THIS NETWORK
9095	DESTINATION OFFICE IS INVALID
9096	DESTINATION IATA NO. INVALID
9097	CANNOT PRINT TO OTHER NETWORK
9098	NO PRINT TO NON-ATB PRINTER
9099	NO EOS AGREEMENT FOR PRINT
9100	NO PREVIOUS DISPLAY -REDISPLAY

Error Code	Error Message
9101	AVAILABILITY
9102	CABIN AVAILABILITY
9103	BOOKING - SS
9104	AVAILABILITY - CAB
9105	TIME TABLE - TD
9106	RECALL - RT
9107	CANCEL - XE
9108	RECALL - RFU
9109	UPDATE - UP
9110	UPDATE - UR
9111	END OF TRANSACTION
9112	TICKETING - TKT
9113	BOOKING - STK
9114	TO BOOK, USE F-XXX/SS...
9115	PLEASE SELECT NEW DEPARTURE INFORMATION
9116	PLEASE SELECT NEW CABIN TYPE INFORMATION
9117	AVL:AVAILABILITY * C/B:CABIN/BERTH
9118	TO CONFIRM, TYPE F-XXX/ER
9119	CABIN/ONLY SALABLE AS ONE UNIT * BERTH/SALABLE INDIVIDUALLY
9120	OPTIONAL BOOKING - OB
9121	LINKED NEGO SPACE NOT ALLOWED BY HOSTING CARRIER

Error Code	Error Message
9122	CONX FIELD REQUIRED
9123	FA / ET CANCELLED FOR AIRLINE -
9124	VOID RESTRICTED FOR 1S ETKT - CALL HELPDESK
9125	ETKT DISALLOWED - NEED AIRLINE R/LOC
9126	ETKT DISALLOWED - NEED ET INDICATOR
9127	ETKT DISALLOWED - MORE THAN ONE CARRIER
9128	INFANT NOT ALLOWED FOR ETKT
9129	ETKT DISALLOWED IN TY MODE
9130	ETKT DISALLOWED - TOO MANY PASSENGERS
9131	ETKT DISALLOWED - PASSIVE SEGMENTS EXIST
9132	ETKT DISALLOWED - GHOST SEGMENTS EXIST
9133	COMBINATION ENTRY NOT ALLOWED FOR ETKT
9134	GROUP TICKET DISALLOWED FOR ETKT
9135	ET DISALLOWED FOR CARRIER - MULTIPLE FOP'S
9136	ETKT DISALLOWED - MULTIPLE TOUR CODES
9137	ETKT DISALLOWED - DIFFERENT ITINERARIES
9138	ETKT DISALLOWED FOR FREE/NOFARE/CHARTER
9139	BULK ETKT DISALLOWED FOR THIS CARRIER
9140	IT/BT ETKT DISALLOWED FOR THIS CARRIER
9141	ET DISALLOWED FOR CARRIER - OPEN SEGMENTS
9142	ET DISALLOWED FOR CARRIER - ABP EXISTS

Error Code	Error Message
9143	ETKT DISALLOWED FOR OPEN ITINERARY
9144	TRANSACTION NOT ALLOWED - TEMPORARY NAME ITEMS PRESENT IN PNR
9145	**** WALT DISNEY WORLD RESORTS ****
9146	SECURED PNR - USE DIRECT ACCESS PNR RETRIEVAL
9147	EXPIRY DATE REQUIRED
9148	UPDATES ALSO AFFECT LINKED NEGOTIATED SPACE RECORDS *
9149	XX PARTICIPATES IN PNR CLAIM
9150	YOU MAY IGNORE THIS TRANSACTION AND CLAIM PNR FROM XX
9151	NO INTERLINE CONNECTIONS PERMITTED
9152	FOR COMPLETE ACCESS DISPLAYS, PLEASE REMOVE 1XX PREFIX
9153	UNABLE TO PROCESS INVOICE OR ITINERARY
9154	**** PB INTERNATIONAL ****
9155	**** MICROTEL INNS ****
9156	DISPLAY SCHEDULE FOR NOTES ON CERTAIN FLIGHTS
9157	NEED AIR SEQUENCE NUMBER
9158	INVALID AIR SEQUENCE NUMBER FOR PNR
9159	AIR SEQUENCE NUMBER NOT AVAILABLE
9160	NOT A VALID FB ELEMENT FOR COUPON REGENERATION
9161	INVALID STOCK TYPE FOR ATB COUPON REGENERATION
9162	NEED STOCK REF FOR ATB COUPON REGENERATION
9163	TNB - AMADEUS DEFAULT NOT FOUND - CONTACT HELP DESK

Error Code	Error Message
9164	INVALID OPTION /RT - NO PNR IN AAA
9165	STP/STOCK REF COMBINATION NOT ALLOWED
9166	PASSENGER NOT PREVIOUSLY TICKETED
9167	NO PASSENGERS IN AIR PREVIOUSLY TICKETED
9168	PASSENGER DOES NOT EXIST IN AIR
9169	INVALID TICKET TYPE FOR COUPON REGENERATION
9170	INVALID TICKETING OPTION FOR ATB COUPON REGENERATION
9171	FUNCTION NOT SUPPORTED FOR TICKETING SYSTEM PROVIDER
9172	AUDIT CPN NOT IN DPR - CPN TYPE U NOT VALID
9173	OK ETKT RECORD UPDATED
9174	AIRLINE PROHIBITS ETKT
9175	AIRLINE PROHIBITS INTERLINE ETKT
9176	SEGMENTS DO NOT MATCH CORRESPONDING FH ELEMENT
9177	LINE NUMBER SELECTED IS NOT FA/FH ELEMENT
9178	ETKT FUNCTION NOT SUPPORTED FOR THIS CARRIER
9179	ONLY ONE ETKT MAY BE SELECTED FOR REVALIDATION
9180	TICKET NUMBER DOES NOT MATCH LAST ETKT DISPLAY
9181	ETKT COUPONS SELECTED NOT AVAILABLE FOR REVALIDATION
9182	INVALID SEGMENTS SELECTED
9183	SEGMENTS NOT ELIGIBLE FOR ETKT REVALIDATION
9184	NUMBER OF SEGS/ETKT CPNS DO NOT MATCH

Error Code	Error Message
9185	SEG NUMBERS SELECTED NOT IN ASCENDING ORDER
9186	ETKT CPN NUMBERS SELECTED NOT IN ASCENDING ORDER
9187	ROUTING OF SEGMENT DOES NOT MATCH ETKT COUPON
9188	SYS PROVIDER DOES NOT SUPPORT ETKT ON VAL CARRIER
9189	ETKT FUNCTION NOT SUPPORTED FOR SYSTEM PROVIDER
9190	EXCHANGE DOC IN FO DOES NOT MATCH ETKT RECORD
9191	EXCHANGE CPN IN FO DOES NOT MATCH ETKT RECORD
9192	NOT ALL REMAINING CPNS AVAILABLE IN ETKT RECORD
9193	ONE OR MORE TST'S NOT ELIGIBLE FOR ETKT
9194	USE SEGMENT/TST SELECT FOR ETKT(S)
9195	INVALID COMBINATION OF VALIDATING CARRIERS FOR ETKT
9196	ATB STOCK TYPE REQUIRED FOR ETKT
9197	PNR IN AAA NOT ASSOCIATED TO ETKT RECORD
9198	PNR MUST BE UNMODIFIED FOR ETKT VOID
9199	DOCUMENT NOT AVAILABLE FOR VOID REQUEST
9200	DOCUMENT NOT AVAILABLE FOR PRINT REQUEST
9201	DOCUMENT NOT AVAILABLE FOR REFUND REQUEST
9202	NOT ALL REMAINING COUPONS OPEN FOR USE WITH STATUS -O-
9203	COUPONS NOT AVAILABLE FOR PRINT REQUEST
9204	LINK DOWN NO REFUND STATUS CHANGE SENT
9205	TIME OUT - VERIFY ETKT REFUND STATUS

Error Code	Error Message
9206	REQUEST MORE LATER FLIGHTS
9207	C/A NOT AVAILABLE-PLEASE RETRY LATER
9208	TICKETING AIR VERSION DOES NOT SUPPORT ELECTRONIC TICKETING
9209	CHECK ENTRY IN MKTD/MKTI
9210	INVALID PRINTER MNEMONIC
9211	PRINTER NOT YOUR RESPONSIBILITY
9212	USE OPTION M TO SPECIFY PRINTER MNEMONIC
9213	USE OPTION P TO SPECIFY PRINTER ADDRESS
9214	/VT- ON REQUEST-CHK IN 24 HRS
9215	8 DIGIT IATA/ARC NBR REQUIRED IN FO FOR ETKT
9216	TTR ONLY VALID AT LOCATION THAT DID ORIGINAL TTP
9217	MULTIPLE TARGET AIRLINES EXIST - USE SEGMENT/TST SELECT
9218	ETKT TRANSACTION OR OPTION DISALLOWED
9219	ETKT COUPON SELECTION DISALLOWED
9220	PRINTER SELECTION DISALLOWED FOR ETKT PRINT
9221	TNB - DUPLICATE OVERRIDE SECTION ID
9222	TNB - INVALID OVERRIDE SECTION ID
9223	OFFICE ID ACTIVATED OR ALREADY ACTIVATED.
9224	OFFICE ID DEACTIVATED OR ALREADY DEACTIVATED.
9225	OFFICE ID DELETION COMPLETED.
9226	OFFICE ID MUST BE DEACTIVATED.

Error Code	Error Message
9227	INVALID. SOURCE AND TARGET OFFICE ID ARE THE SAME.
9228	FAX
9229	PNR MUST BE UNMODIFIED FOR ETKT PRINT
9230	PNR MUST BE UNMODIFIED FOR ETKT REFUND
9231	INVALID TOUR OPERATOR PREFERENCE
9232	INVALID BROADCAST MESSAGE INDICATOR. MUST BE Y OR N
9233	AGENT SIGNED-OUT. PLEASE SIGN-IN.
9234	UNABLE TO REPLICATE - PASSIVE INFORMATION SEGMENT
9235	**** STAYBRIDGE SUITES BY HOLIDAY INN ****
9236	CANNOT MOVE - RECEIVING QUEUE IS OUT OF STOCK
9237	**** HOMESTEAD VILLAGE ****
9238	**** HOTELINK INTL ****
9239	FLIGHT COUPON MISSING FOR TDO LOCATION
9240	INVALID ATTRIBUTE IDENTIFIER :
9241	NO ALTERNATE QUEUE PRINT
9242	WARNING:REPEATING THE ENTRY WILL DELETE ALL UNUSED TKT NUMBERS
9243	FOR ALL OFFICES FOR THIS SUPPLIER
9244	FOR THIS SUPPLIER (THE WHOLE BSP/ARC/CARRIER RANGE)
9245	FOR THIS OFFICE
9246	FUTURE RANGE EMPTY
9247	**** DOYLE HOTELS ****

Error Code	Error Message
9248	**** RING HOTELS ****
9249	DUPLICATE INDEX
9250	DUPLICATE COMPANY NAME
9251	COMPANY NAME NOT FOUND
9252	TRAVELLER NAME NOT FOUND
9253	FREQUENT FLYER NUMBER NOT FOUND
9254	INDEX NOT FOUND
9255	RECORD LOCATOR NOT FOUND
9256	DEACTIVATED COMPANY PROFILE
9257	DEACTIVATED TRAVELLER PROFILE
9258	ALREADY ACTIVE
9259	SOURCE PROFILE NOT FOUND
9260	RECEIVING PROFILE NOT FOUND
9261	DEACTIVATED RECEIVING PROFILE
9262	NO TRAVELLER PROFILE FOUND
9263	NO COMPANY PROFILE FOUND
9264	NO FOLLOW-UP LIST
9265	NO DEACTIVATED PROFILES LIST
9266	NO PROFILE FOUND MATCHING THIS SEARCH CRITERIA
9267	OFFICE DELETION NOT ALLOWED - PROFILES EXIST
9268	ACCESS IN READ MODE ONLY

Error Code	Error Message
9269	SELECTED ITEM NOT PNR
9270	PRIORITY PROCESS RUNNING
9271	FOR GROUP BOOKINGS PLEASE BOOK G/CL
9272	RESTRICTED FOR RC DUTY CODE
9273	NO AGREEMENT TO CHANGE MARRIAGE CONDITION FOR AIRLINE
9274	NO MARRIAGE AGREEMENT FOR AIRLINE
9275	CHECK MARRIAGE CONDITIONS FOR SEGMENT
9276	INVALID TDO SITE OFFICE IDENTIFICATION
9277	CRT/MINI ITINERARY CROSS REFERENCE MISSING OR INVALID
9278	INVALID NUMBER IN PARTY
9279	UNABLE TO PROCESS NAME CHANGE
9280	UNABLE TO CANCEL-UNMATCHED RESERVATION
9281	INVALID LOCATION FOR AGENT COUPON
9282	TNB - INVALID OVERRIDE LENGTH
9283	TC - TARGET TEMPLATE NOT FOUND IN THE TCX
9284	TC - TTN COMPONENT NOT FOUND IN THE TCR
9285	DP - INVALID TEMPLATE INSTRUCTION
9286	RESTRICTED DAY/TIME (LOCAL SECURITY)
9287	RESTR IN TEMPORARY TICKET MODE
9288	NEED DATE FROM TO-SURNAME/FIRSTNAME
9289	NEED FLT/DATE FROM TO-SURNAME/FIRSTNAME

Error Code	Error Message
9290	NEED FQTV NBR/DATE
9291	NEED PHONE/DATE-SURNAME/FIRSTNAME
9292	NEED CC NBR/DATE-SURNAME/FIRSTNAME
9293	PLEASE SPECIFY SEGMENT NUMBER
9294	CA* HAS BEEN REPLACED ENTER MD
9295	LOC DOES NOT HAVE INVENTORY
9296	TICKETING PROHIBITED - CHECK DPR LOCATIONS
9297	FUNCTIONALITY DISALLOWED IN PRACTICE TRAINING
9298	INVALID VALUE - ATB CATEGORY INDICATOR
9299	INVALID VALUE - TIME INITIATED TICKETING INDICATOR
9300	INVALID VALUE - CONFIRMED/WAITLISTED PROCESS INDICATOR
9301	INVALID - "ACCOUNTING OFFICE" AND "SEC A.I.R. GENERATION" = NO
9302	INVALID VALUE - COMMISSION CONTROL INDICATOR
9303	*** ADVANTAGE ***
9304	CLAIM REQUEST REJECTED - DISPLAY PNR FIRST
9305	NO NAME OR SECURED
9306	ADD.COLL.PRESENT - TKT MANUALLY
9307	INVALID IATA NUMBER
9308	NEED IATA NUMBER
9309	**** EXTRA HOLIDAYS ****
9310	INVALID STAT/PROVINCE POS CODE

Error Code	Error Message
9311	CHECK CREDIT CARD CODE
9312	C/A TIMEOUT
9313	FLIGHT INFORMATION
9314	**** GLOBAL RESOURCES ****
9315	**** DESTINATION HOTELS AND RESORTS****
9316	INVALID EXCLUDE AIRLINE OPTION
9317	AIRLINE CANNOT BE AT THE SAME TIME INCLUDED AND EXCLUDED
9318	FLIGHT NUMBER NOT ALLOWED IN EXCLUDE AIRLINE OPTION
9319	TIME NOT ALLOWED IN EXCLUDE CONNECTION POINT OPTION
9320	CLASS AND CABIN OPTION CANNOT BE COMBINED
9321	AT LEAST ONE CABIN MUST BE SPECIFIED
9322	INVALID CABIN CODE
9323	EXCLUDE OPTION NOT ALLOWED
9324	SAME CITY/AIRPORT CODE CANNOT BE INCLUDED AND EXCLUDED
9325	NON-STOP CANNOT BE REQUESTED WITH CONNECTION POINT OPTION
9326	POS COUNTRY NOT SUPPORTED
710	Supplier Error - No available flight found for the requested segment 1
	Supplier Error - NO FARE FOUND FOR REQUESTED ITINERARY
	Supplier Error - NO ITINERARY FOUND FOR REQUESTED SEGMENT 1
	Supplier Error - NO FARE FOUND FOR REQUESTED FARE FAMILY
	Supplier Error - No available flight found for the requested segment 2

Error Code	Error Message
	Supplier Error - Error occurred while processing AirShopping.
	Supplier Error - Too many requested segments
	Supplier Error - OPTION NOT PERMITTED WITH COMPLEX ITINERARIES
	Supplier Error - Unable to build itinerary information.
	Supplier Error - Overlapping origin/destination segment 2
	Supplier Error - NO ITINERARY FOUND FOR REQUESTED SEGMENT 2
	Supplier Error - Overlapping origin/destination segment 1
	Supplier Error - No traveller information retrieved from input.
	Supplier Error - NO JOURNEY FOUND FOR REQUESTED ITINERARY
	Supplier Error - NO ITINERARY FOUND FOR REQUESTED SEGMENT 3
	Supplier Error - No available flight found for the requested segment 3
	Supplier Error - NO ITINERARY FOUND FOR REQUESTED SEGMENT 4
	Supplier Error - No available flight found for the requested segment 1
	Supplier Error - NO FARE FOUND FOR REQUESTED ITINERARY
	Supplier Error - Past date/time not allowed
	Supplier Error - NO FARE FAMILY FOUND FOR REQUESTED COMMERCIAL FARE FAMILY
	Supplier Error - NO FARE FOUND FOR REQUESTED ITINERARY
	Supplier Error - NO ITINERARY FOUND FOR REQUESTED SEGMENT 1
	Supplier Error - NO FARE FOUND FOR REQUESTED FARE FAMILY
	Supplier Error - No available flight found for the requested segment 1
	Supplier Error - Overlapping origin/destination segment 2

Error Code	Error Message
	Supplier Error - NO ITINERARY FOUND FOR REQUESTED SEGMENT 2
	Supplier Error - Past date/time not allowed
	Supplier Error - Unable to build itinerary information.
	Supplier Error - Error occurred while processing AirShopping.
	Supplier Error - CORPORATE NAME NOT FOUND
	Supplier Error - INVALID PASSENGER TYPE CODE
	Supplier Error - Overlapping origin/destination segment 1
	Supplier Error - UNABLE TO FARE - PRICE MANUALLY - (60019 / 65)
	Supplier Error - No traveller information retrieved from input.
	Supplier Error - No available flight found for the requested segment 2
	Supplier Error - Transaction unable to process : CB (711 / 301)
	Supplier Error - No available flight found for the requested segment 4
	Supplier Error - NO JOURNEY FOUND FOR REQUESTED ITINERARY
	Supplier Error - The number of infants exceeds the number of adults.
	Supplier Error - Too many requested segments
	Supplier Error - Overlapping origin/destination segment 3
	Supplier Error - no response
	Supplier Error - Target office id not found
	Supplier Error - 17ISessionINo agreement on destination
	Supplier Error - No available flight found for the requested segment 3
soap:Server	Supplier Error - Fault occurred while processing.

Error Code	Error Message
soap:Client	Supplier Error - Unmarshalling Error: null
soap:Client	Supplier Error - 12IPresentationIsoap message header incorrect
soap:Client	Supplier Error - 17ISessionINo agreement on destination

Application Error	Error Message
1	Invalid date
2	Invalid time
3	Invalid transfer sequence
4	Invalid city/airport code
5	Invalid time mode
6	Invalid operational suffix
7	Invalid period of schedule validity
8	Invalid days of operation
9	Invalid frequency rate
10	Invalid service type code
11	Invalid aircraft type coded
12	Invalid product details qualifier coded
13	Invalid aircraft configuration/version coded
14	Invalid meal service note coded
15	Invalid UTC/local time variation
16	Invalid date variation

Application Error	Error Message
17	Invalid terminal coded
18	Invalid on-time performance indicator
19	Invalid type of call at port coded
20	Invalid government action coded
21	Invalid facility type coded
22	Invalid traffic restriction coded
23	Invalid traffic restriction type coded
24	Invalid traffic restriction qualifier coded
25	Invalid transport stage qualifier coded
26	No block space agreement
27	Exchange/reissue not allowed
28	Operating Carrier flight data required – block space code share
700001	General PNR error
700002	Invalid PNR locator
700003	Invalid request
700004	Invalid request format
700005	Invalid request view
700101	No PNR was found with the specified record locator
700102	Viewership is restricted for the PNR
700103	No data for the PNR in DB
700104	Error parsing PNR

Application Error	Error Message
700201	PNR Connector unknown
700202	PNR Connector communication error
700203	PNR Connector communication timeout error
700204	JAXB marshalling error
700205	JAXB unmarshalling error
700206	Unexpected request type
700207	MOM messaging error
700208	PNRC service invocation error
700209	Error response from PNRC reaccommodation search service
700210	Unknown response format
700211	OTA parsing error
700212	Cannot unpack request from request root element
700213	Cannot pack response to response root element
700214	Error response from PNRC reaccommodation retrieve service
700215	TPPDF parsing exception
700216	No ATH
700217	Invalid ICE Session
700218	Broken ICE Session
700219	FIT parsing exception
700220	Invalid ICE credentials
700221	Access restricted to flight data

Application Error	Error Message
700222	Cannot search past flight data
700223	Access restricted to PNR data
700224	Flight not found
700225	Invalid search options
700226	PNR not found
700227	TVL version not supported
700301	PNR unknown error
700302	PNR communication error
700303	PNR communication timeout error
700404	Unable to read terminal
700405	Unable to Find AAA
700406	Agent not signed in
700407	PNR Locator error
700408	No PNR in AAA
700409	PNR Retrieval error
700410	PSS invalid request
700411	The PNR in the AAA has been modified
700412	Agent is active on a PNR queue
700414	Unable to process in PSS
700415	Parsing error
700418	Access restricted to flight data

Application Error	Error Message
700419	Access restricted to PNR data
700420	PSS Communication error
700421	PSS Communication timeout
700422	Access restricted to PNR data
700423	PNR Restricted
700424	PNR Not Found
700425	PNRC Timeout Error code
700426	PNR Database unavailable
700427	Link Down Error code
700428	Max message size exceeded
700429	System not in NORM state Error code
700430	Unable to Process error code
700431	Invalid subject area
700432	Reservation Orchestration Error
1400	Reservation is currently being updated by another process.
1401	Invalid reservation.
1402	Provider information not found.
1403	Target Provider Code not found.
1404	Target Provider Locator code not found.
1405	Import of a ReadOnly record is not allowed.
1406	PNR XXX is ReadOnly

Application Error	Error Message
1407	This service is deprecated.
1408	Please check service endpoint.
1409	Action Status date is past dated.
1410	Reservation has been created ignoring rule name.
1411	Invalid length for Provider Locator Code.
1412	Invalid length for City. The response has been truncated.
5124	Provider supports only one hotel loyalty card for the primary passenger. The following loyalty card(s) were not included in the request:
5125	Provider supports only one air loyalty card for the primary passenger. The following loyalty card(s) were not included in the request:
18077	Invalid Account ID.
17	Provider Locator Code does not exist.
18	PNR does not exists.
20	Error in retrieving the PNR.
22	Universal Record Locator for the specified Provider Locator could not be found.
23	Loyalty card information is allowed for primary passenger only.
31	Status UC - Unable to confirm or waitlist
32	Status SS - Sell message sent to the carrier
315	Origin Application is required in the request.
3004	Minimum Connect-time Threshold violated.
3006	Authorization on at least one credit card failed.
3111	Credit card has no funds.

Application Error	Error Message
3112	Credit card Expiry Date is past dated.
3113	Invalid credit card number format.
3115	Invalid credit card vendor.
3117	Credit card was denied.
3118	This credit card is not supported for address verification.
3119	Credit card security code verification failure.
3121	Credit card has an invalid expiration date.
3122	Credit card has an invalid effective date.
3124	Credit card has an invalid authorization amount.
3339	Invalid Credit Card
3106	Passenger name not found in the database.
3130	Record locator not found.
3148	Reservation has expired.
3157	Duplicate loyalty card. A passenger can only have one loyalty card for each carrier.
3403	Invalid host
3899	Remarks have been truncated. Host does not support remark text of more than 69 characters
3068	Additional details like Billing Address, Phone Number is saved locally for the requested provider.
3725	Updates for the given product is not supported by provider.
3757	Child Age information not supported for the requested provider
3625	NextResultReference is not supported by the Provider.

Application Error	Error Message
5625	The Next Result Reference is not associated with a valid session.
3644	Customer ID is not supported by the requested provider.
3915	Invalid Supplier Locator code.
3919	PNRBFRetrieve element not found in response.
4579	Only first three of the street address is being considered
4580	Tax Information for Exempted Taxes not available for the provider
4581	All Taxes may not be exempted for the provider
4582	The modifier would not be supported by the Provider
4583	Seat assignment request not mapped for Traveler Type - INF (Infant-In-Lap).
4584	Only infant date Of birth name remark could be sent.
4585	Due to provider limitation, only the first name remark could be sent
4586	An SSR DOCS item is required for each passenger with an SSR DOCO with an 'R' Redress Number
4587	Ticketless booking requires special processing.
4588	The first BookingCode is considered in the request as only one permitted booking code is supported per air segment for the requested provider.
4589	Osi Input truncated to 57 characters due to Provider restriction
4590	Plating Carrier XX is used for booking
4591	1P does not support the request modifier - IncludeSurcharges
4592	The requested modifier - FareBasis is not supported for the requested Provider.
4593	The requested modifier - Ticketing Date is only supported for historical fares for provider \$?

Application Error	Error Message
4594	When requesting availability by Arrival Time, provider only selects flights departing on the requested date. If the display involves a flight that crosses midnight, the date change is not considered and the flight is displayed as if it arrives on the requested date.
4595	Specific Time could not be mapped to provider
4596	Time Range could not be mapped to provider
4597	Search By Arrival Time not supported by Provider. Arrival Date has been considered as Departure Date in Provider request. A default time window of 6AM - 2359Am have been used.
4598	Requested provider has a restriction of 30 characters for Address (Street and City). Only Zip Code submitted to Provider
4599	Maximum of 6 SearchOrigins/SearchDestinations supported for requested Provider
4600	Alternate Origins and/or Destinations from the First SearchAirLeg are considered
4601	Search By Arrival Time not supported by Provider. Arrival Date has been considered as Departure Date in Provider request. A default time window of 6AM - 2359Am have been used.
4602	Booking Traveler Info provided in the new product request should match with the Booking Traveler Info in the existing reservation.
4603	No response from host.
4604	Invalid response from host.
4605	Postscript note has been truncated. Host does not support postscript note of more than 63 characters.
4606	Postscript Note already exists in PNR and is being ignored. Use modify to change Postscript Note.
4607	CustomerID already exists in PNR and is being ignored. Use modify to change CustomerID.
3223	Postscript is not supported by the provider
3225	SSR Foramt is not correct. Check the Format

Application Error	Error Message
3270	Provider supports max 25 characters per Billing Address field.
3271	Could not delete FormOfPayment as it is associated with one or more payment elements
4152	ProviderCode and ProviderLocatorCode is required if either is present in the request.
4173	Provider Code must be SDK for third party supplier.
4181	Provider only supports Update of BookingSource post booking.
4197	Not Implemented.
5018	Rate category 'Negotiated' is not supported for 1G.
5019	Invalid value in NegotiatedRateCode.
5020	Maximum 3 Negotiated Rate Codes allowed.
4736	A time out occurred while waiting for the first Response.
4737	No response came from any provider.
5021	No Hotel Rates found for the request.
5022	Max of 20 characters corporate discount id is supported for this host.
5023	Provide unique search order in each hotel search criteria for the requested provider.
5024	No Matching Rate Plan found.
4902	Universal record NULL. This should be created at provider.
8116	The Host Provider Info is invalid.
8259	Host Connection Credentials not available
8261	Agent not provisioned for Cryptic entries
1326	Provider supports AccountingRemark with TypeInGDS - Account, Other, Endorsement and TourCode only.

Application Error	Error Message
1366	Attribute RetrieveProviderReservationDetails is ignored as this is not supported for this provider
17029	Couldn't find optional services for the Itinerary and Credentials.
21602	Unable to perform sync.
3514	Credit Card has not been charged.
3527	PhoneNumber of Type Agency is only supported for AgencyContactInfo phone numbers
4008	Provider code is invalid.
7402	Provide either credit card info or Other Guarantee Info, not both.
7406	This form of Guarantee/Deposit is not supported by the Provider
7407	This form of Deposit do not support text data by the provider
7408	Name in Credit Card is not supported by the provider
7409	Billing Reference Number should have maximum 25 characters.
7410	No images available from provider based on the request info.
7411	No image available from provider for the requested car type.
7412	VehicleSpecialRequest already exists against segment. Only one can be added. Please delete the existing record to add a new request or update the existing information.
7413	No VehicleSpecialRequest available against reservation for update.
7414	No VehicleSpecialRequest available against reservation for delete.
7415	Voucher does not exist. Use Vehicle Add to add new voucher information.
7416	Payment info does not exist. Use Vehicle Add to add new Payment information.
7417	Return Location Type and Number both must be supplied with Return Location.
7418	Provider does not support indexing by reference point.

Application Error	Error Message
7420	SubKey word is not supported. Only KeyWord info is supported by the provider
4203	ProviderCode and ProviderLocatorCode both are required.
5123	Price requested and Price received do not match.
1509	Payment with Key = \$? not found.
1510	Phone location can't be more than 3 characters.
1511	General Price Error.
1512	Unable to process the request.
1513	Deprecated request data is not allowed
1514	Please provide atleast one SegmentRef inside ThirdPartyInformation.
1515	The first Third Party Supplier Element was applied to the reservation.
1516	Loyalty cards already exists in booking traveler
1517	Unable to retrieve reservation
1518	Travel Compliance cannot be modified
1519	Booking Traveler Reference is required
1520	Segment reference is required
1521	Every Travel Compliance 'key' should be numeric :
1522	SegmentRef is mandatory for Air, Passive, and Rail Travel Compliance fields. If no SegmentRef exists, the travel compliance entry will be ignored.
1526	Unknown rail location: \$?
21608	Unable to sync PNR @ with host. Host error returned: 'Unable to process the request.'
21611	Incorrect payment amount. Please re-price before payment addition

Application Error	Error Message
21612	Problem in re-price, payment amount could not be validated
21613	Override Carrier is not supported for requested provider.
21614	Destination must be specified for Air type passive segment.
21615	Provider \$? is not authorized, please use default; leave Permitted Provider blank, and send the request again.
21616	Free text is required for this type of SSR [\$?]
21617	Free text is not required for this type of SSR [\$?]
21618	Provider is not supported for attaching custom check rule
21619	Invalid Agent Sine.
21620	Agent Sine more than 2 characters, first 2 characters of Agent Sine used.
21621	Unable to sync PNR @ with host. Host error returned: ' \$? '
21622	Multiple HostReservation present. All bookings must be created by one IATA agency for Merchandising optional services to be returned.
21623	Failed to get Booking IATA from GDS retrieve
21624	Invalid SSR text. [\$?]
21625	EMD number required for detail retrieve
21626	EMD is not associated to the provided PNR
21627	The FNAME ' \$? ' has been truncated to ' \$? '
21628	The LNAME ' \$? ' has been truncated to ' \$? '
21629	No configuration value found for \$?
21630	Invalid EventOriginator type specified: \$?
21631	Not yet implemented.

Application Error	Error Message
21632	validation failed
21634	Could not find a payment information for key \$?
21635	Could not find a traveler with id \$?
21636	No EMD information available for display
21637	No associated PNR is available for this EMD. Security validation failed
21638	EMD synchronization failed
21639	String must either be 'Y' or 'N'
138	Invalid data for form of payment type
21641	Invalid data for form of payment type \$?
21662	Reference to the requested form of payment not found in the associated reservation
21663	Emd no does not exist under the given pnr
21664	AssociatedRemark in Passive segment is not supported for requested provider: ['\$?'].
21665	Requested Fop type does not match applied profile fop type
21668	Ticket modifier key should be specified
127	Invalid Payment Method key
129	Frequent Flyer Numbers application failed: \$?
130	Frequent Flyer Cross Accrual Numbers application failed: \$?
131	Phone application failed: \$?
132	Street Address application failed: \$?
133	Travel Order Number application failed: \$?
134	End Mark application failed: \$?

Application Error	Error Message
135	Please provide comma (,) separated tables names as input. Empty input not accepted. Here is the list of table names \$?
136	Invalid field length for \$? [Expected: \$? , Actual: \$?]
137	Media Item not assigned.
21679	Unable to decrypt the password . Please correct the Host password for Provider = \$? and Supplier = \$?
139	Invalid data for form of payment type :: No Credit Card specified
140	Invalid data for form of payment type :: No Debit Card specified
141	Invalid data for form of payment type :: No Certificate specified
142	Invalid data for form of payment type :: No Ticket specified
143	Invalid data for form of payment type :: No Check specified
144	Invalid data for form of payment type :: No Requisition specified
145	Invalid data for form of payment type :: If formOfPayment type is cash , you cannot specify other form of payment element
146	Invalid data for form of payment type :: If formOfPayment type is invoice , you cannot specify other form of payment element
147	Invalid data for form of payment type :: If formOfPayment type is UnitedNations , you cannot specify other form of payment element
148	Invalid data for form of payment type :: If formOfPayment type is DirectPayment , you cannot specify other form of payment element
149	Invalid data for form of payment type :: If formOfPayment type is AgentVoucher, you cannot specify other form of payment element
150	Invalid data for form of payment type :: No Miscellaneous formOfPayment specified
154	Invalid SSR Format..
155	Invalid Passport/TravelerID code \$? in SSR FreeText..

Application Error	Error Message
156	Invalid Visa code \$? in SSR FreeText..
157	Visa Expiry Date is required field..
158	Modifications to reservations with Optional Charges are not supported for carrier \$? Contact the carrier directly to make changes
160	Passenger name(s) has changed. Contact the carrier \$? directly to make changes.
161	Carrier \$? flights have been cancelled or are past date. Contact carrier \$? directly for further details or to make changes.
162	Only one unit of distance - KM or MI is allowed for the requested provider
163	Duplicate key error; Object: Agency ContactInfo.Phone Number Key: \$?
164	Bad time format: \$?
165	Bad date format: \$?
166	Number of airsegment in request does not match for carrier \$?
172	Duplicate key error; object:ThirdPartySupplierLocator key: \$?
173	Host Access Code is blank for \$?
174	Duplicate provider info
175	Host Provider Code is blank
176	\$? is not a valid provider code.
177	No validator configured for DefaultAirPricingEditor
178	Passegner Remark cannot be null
179	Passenger Remark cannot be empty
180	Cannot assign role to a disabled entity.
181	Cannot assign role as branch of the entity is disabled.

Application Error	Error Message
182	Role Name cannot be blank
183	Role [\$?] with id [\$?] already exists. Role names must be unique within its hierarchical context.
184	3rd Party resources are not yet supported in Kestrel.
185	Cannot delete role because it is the requester's only assigned role.
186	Invalid AssignerCategory (\$?) Specified
187	Invalid Agent Code passed in Assignable Resources RetrieveReq.
189	Invalid Agent Code passed in AgentAssignable RolesRetrieveReq.
190	Duplicate key error; object:BookingTraveler key: \$?
191	Invalid response from host \$?
192	Missing/Invalid departing airport in request
193	Missing/Invalid arriving airport in request
194	US Territory departing airport in request
195	US Territory arriving airport in request
196	Cannot leave and arrive at the same airpoint in a segment!
197	Missing/Invalid Base Fare in request
198	\$? to \$? has no special tax factor.
199	Unable to build Fare Calc Line.
200	Ticket number is invalid: '\$?
201	Could not find Universal Record
202	More than one Provider Reservation found for Provider Code: \$? Provider Locator Code: \$? and HostCreateDate: \$?

Application Error	Error Message
205	Please specify number of records to be purged.
206	Reference data already exists for code : \$?
207	Reference data not available for code : \$?
208	Update is not supported for active REF PUB Reference data, code : \$?
209	Invalid Account [?] supplied
210	Account [\$?] does not belong to agency supplied
211	Invalid Agent [\$?] supplied
212	Agent [\$?] does not belong to agency supplied
213	Invalid Branch [\$?] supplied
214	Branch [\$?] does not belong to agency supplied
215	Duplicate key error; object:UniversalRecordCmd key: \$?
216	Existing Restriction should be deleted when changing the existing data type of a field.
217	When deleting Restriction for previous data type, one and only one new Restriction needs to be added for Field [\$?].
218	Restriction with Action=\ "Add\" is not compatible with the new Type : \$?
219	Restriction can not be deleted if Type is not changed for Field [\$?].
220	Action='Add' can not be provided with Restriction if Type is not changed for Field [\$?].
221	Value [\$?] specified for Field [\$?] is not in accordance to the field data type. [\$?]. Please specify a correct
222	Value for Field[\$?] should be from enumerated list\$?
223	Value \$? for Field[\$?] is beyond maximum limit acceptable.
224	Field [\$?] should have compatible Restriction with Type.

Application Error	Error Message
225	No Restriction is allowed for Field [\$?] with Type Boolean.
226	No Restriction is allowed for Field [\$?] with Type Date Day Month Year.
227	No Restriction is allowed for Field [\$?] with Type Date Day Month Year Time.
228	No Restriction is allowed for Field [\$?] with Type Date Month Year.
229	No Restriction is allowed for Field [\$?] with Type Date Year.
230	No Restriction is allowed for Field [\$?] with Type Time in Milliseconds with Time Zone.
231	No Restriction is allowed for Field [\$?] with Type Time in Hour & Minute.
232	No Restriction is allowed for Field [\$?] with Type Time in Minutes.
233	MinLength, MaxLength cannot be applied with Enumerations.
234	In field [\$?], each field enumerations must be unique.
235	In field [\$?] the default value must be a value from the enumerated list.
236	Min Length for \$? cannot be more than the Max Length specified.
237	Default value [\$?] specified for \$? is not in accordance to the min/max value applicable for the field. Please specify a correct Default value.
238	Min Value for \$? cannot be more than the Max Value specified.
239	Default value [\$?] specified is not in accordance to the field data type. [\$?]. Please specify a correct Default value.
240	Restriction is not compatible with Type for Field [\$?].
241	Value [\$?] specified for field [\$?] is not in accordance to the min/max value applicable for the field. Please specify a correct value.
242	\$?MiscTravel = \$? and \$?RefCategory = \$? combination is not valid.
243	Other Preference data does not exist for [Key=\$?].
244	The \$?EndDate can not be before the \$?Startdate.

Application Error	Error Message
245	The \$?EndDate and \$?Startdate can not be the same date.
246	\$?Preference Key is mandatory for Update and Delete.
247	\$?Preference data does not exist for [Key=\$?].
248	\$?TypeCRS = \$? and \$?TypeSSR = \$? combination is not valid.
249	CRSCode = \$? and SSRCode = \$? combination is not valid.
250	Credit Card Number must be provided
251	Debit Card Number must be provided
252	Invalid Tag Name
253	Invalid Tag Description
261	Invalid tag description.
1525	Invalid schema version found.
21669	Associated Remark in Passive segment is not supported for requested provider.
21670	PassiveSegmentRef \$? is not present in the universal record.
1202	This function is not supported.
21	The code [\$?] for [\$?] is deprecated.
12	No default location for city/ airport.
19066	Only Brand data Add/Delete is supported in Universal Record Modify with Session Context.
42	System Admins not allowed to perform the search.
44	Service not implemented.
122	Invalid Url.

Application Error	Error Message
316	Invalid data entered.
3517	No service defined for the request.
41	Error responses from multiple hosts.
19034	Unexpected system error.
19040	Provider Reservation [\$?] Retrieve failed.
19041	Error from host .Description:
19049	System is unable to start session
19050	Session information not provided
19051	The AreaCode exceeded the maximum length of 10 characters.
19052	Invalid Session key provided or Session has expired.
19053	Provider Error - Some of the elements could not be added.
19054	Session already bound to Universal Record \$?. Generate new session token.
19055	Session has been closed and the key is no longer valid.
4780	Record not found.
19057	Request contains a Policy Reference. But is not setup in uPolicy System!
19058	Universal Policy is not supported prior to version 15.4 (hotel.xsd v34).
19059	Universal Policy is not applied to one or more response options. Please check your response.
19060	PNR: \$? - UNABLE TO RETRIEVE - CALL HELP DESK
19063	Agent ID is invalid and override is ignored
19065	Be aware that this response may include items that are marked as Excluded (@PolicyExclusion= "true") based on the associated Universal Policy settings.

Application Error	Error Message
19067	Unable to find Booking Traveler. SSR added to UR.
19064	Universal Policy was not applied. The chain code (HotelChain) or Hotel Property ID (HotelCode) was not recognized by Universal Policy.
19069	AirRefundQuote using the ticket number is not supported for this provider.
2400	No Legs specified in search request.
2401	The Arrival or Departure Time Window is either empty or negative.
2402	No airport specified/matched for origin.
2403	No airport specified/matched for destination.
2404	Invalid city or airport code.
2405	An airport appeared more than once in the itinerary.
2406	A bad availability specification was found.
2408	Either AutoSeat Assignment or SpecificSeat Assignment can be provided for an air segment for the requested provider.
2409	SpecificSeat Assignments for all passengers except Infants should to be provided for an AirSegment for the requested Provider.
2410	AutoSeat Assignment is applicable for all Booking Travelers for the requested Provider.
2413	Not a valid Gender Type.
2414	Contract Codes not supported in LFS AirExchangeModifiers.
2415	This Manual Fare Adjustment option is not supported by the requested provider.
2416	The Duplicate PassengerRef is found for Manual Fare Adjustment and first one is considered.
2417	Manual Fare Adjustment is not supported by the requested provider.
2418	The Manual Fare Adjustment modifier is not supported for this request.

Application Error	Error Message
2419	PassengerRef is not applicable for requested provider.
2420	Manual Fare Adjustment@PassengerRef is required for the requested provider.
2421	Decimal value for Manual fare Adjustment is not supported by the requested provider and decimal portion is truncated.
2422	Manual Fare Adjustment Type@FareType is required for requested provider.
2423	@FareType , @Ticket Designator attribute are not applicable for the requested provider.
2424	This Manual Fare Adjustment option is not supported by the requested provider.
2425	Multiple ManualFareAdjustment is not supported for requested Provider. Send only one
2426	Either one of these options AirPricingModifiers@FaresIndicator, AirPricing Modifiers@AccountCodeFaresOnly, AirPricing Modifiers/AccountCodes@AccountCode and ManualFareAdjustment cannot supported together for the requested provider. Send only one
2427	Decimal value for Manual fare Adjustment is not supported by the requested provider and decimal portion is truncated.
2428	The more than 2 characters FareTye code is not supported by requested provider.
2429	Decimal value with Percentage Adjustment Type for Manual fare Adjustment is not supported by the requested provider and decimal portion is truncated.
2430	Seat assignments are required for all passengers, excluding infants without seats, for Provider 1V.
0	Requested provider supports only 1 cabin class for permitted cabins. Only the first cabin class has been mapped.
2432	Requested provider supports only 1 cabin class for preferred cabins. Only the first cabin class has been mapped.
14065	Personal Geography is not supported by the requested provider.
14066	City code is not supported for location pricing for the requested provider.
14067	Country code is not supported for employee location pricing for the requested provider.

Application Error	Error Message
14068	Only US state codes are supported for location pricing for the requested provider.
14069	First available Personal Geography information in Pricing Group \$? has been applied.
14070	Only US state codes are supported for location pricing for the requested provider.
14071	First available Personal Geography information has been applied.
14072	Residency Type is not a supported modifier for the requested provider.
14073	PutUapiInitialLfsRequest_exception
14075	Account Code has an invalid code.
14076	Traveller type should not be null.

5.2 18.6 OfferPrice - Overview

5.2.1 Introduction

The OfferPrice web service provides the ability to quote the price for flights for the selected itinerary as per IATA NDC schema standards. It returns price quotes for the selected flights, fare rules for each fare component, and product attributes. It also returns Cabin Upsell (upgrade to the next available cabin) options, if applicable.

TPConnects Gateway Offer Management converts GDS, and LCC Pricing data to OfferID in accordance with NDC Aggregation in NDC 18.2 schema.

Scenarios for the OfferPrice web service:

- It is used for repricing of offers selected during shopping.
- It is used to reprice an EMD/ancillary offer based on the quantity selected.
- It is used as part of OB Fee calculation for Credit Card FOPs during instant ticketing.

OfferID:

This component value is the unique offer instance ID.

Owner:

This component value indicates the airline that owns the offer.

ResponseID:

This component value is the unique ID for the shopping session. It allows orders to include offers from unrelated shopping responses.

OfferItemID

This component value is the airline-assigned ID for the item being offered. Individual offer items from one or more offers (Passenger or Ancillaries Services) are referenced in an OrderCreate request message via the unique values that identify them in the original response message (AirShoppingRS, SeatAvailabilityRS, and ServiceList).

5.2.2 OfferPrice Endpoint

<https://api.tpconnects.online/rest/offerPrice>

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.2.3 18.6 OfferPriceRQ

Introduction

The OfferPriceRQ service is used for requesting the price offers for the selected itinerary.

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.6. The following is the element checklist to be passed in the offer price request. The elements which are marked “**M**” are mandatory to be passed in the request. The parameters passed as “**O**” are optional, it is well and good if implemented.

 To transition from AirShopping to an OfferPrice request, the seller must provide the necessary input parameters based on the available offers from the AirShopping response.

Input parameters to be transitioned from AirShoppingRS	API Flow	Output parameters for transitioning to OrderCreateRQ
OfferRefID	OfferPriceRQ  OfferPriceRS	OfferID
OfferItemRefID		OfferItemID
OwnerCode		ShoppingResponseID
PaxJourneyRefID		TotalAmount
PaxRefID		PaxID
ShoppingResponseRefID		OwnerCode
TotalOfferPriceAmount		TotalAmount
EchoTokenText		EchoTokenText

The OfferPriceRQ service comprises of the following structure:

- [MessageDoc](#)
- [Party - Participant](#)
- [Party - Sender](#)
- [PayloadAttributes](#)
- [PointOfSale](#)
- [Request](#)

Request Parameters

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	Message Document information	O

Party - Participant		
Elements	Details	Optional/Mandatory
Participant	Message Participant(s).	M
Party - Sender		
Elements	Description	Optional/Mandatory
Sender	Information related to the party sending this message.	M
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M
PointOfSale		
Elements	Details	Optional/Mandatory
PointOfSale	Point of Sale information.	O
Request		
Elements	Details	Optional/Mandatory
Request	OfferPrice request information.	M
OfferPriceParameters	Information related to how response results should be returned.	O
CurParameter	Currency related parameters intended to influence which currency the shopping results are displayed in.	O

Request		
Elements	Details	Optional/Mandatory
AppCode	Currency Code Usage. Examples: Actual, Displayed, Requested, Converted, Alternative	O
CurCode	Currency Code according to ISO 4217 standard.	O
DecimalsAllowedNumber	Determines the number of digits to be displayed after the decimal point for currency amounts.	O
PricingParameter	Pricing Parameters, featuring Basic Pricing, Reward Travel, Automatic Exchange, Alternative Currency and Tax Exemption.	O
SimplePricingInd	When TRUE, simple pricing is requested for returned offers.	O
PricedOffer	The chosen offer by the passenger for creating an order request. Multiple offers can be simultaneously requested, each possibly stemming from different shopping responses (each having unique ResponseIDs).	M
SelectedOffer	Offer selected by the Passenger for requesting an Order to be created. Multiple Offers can be requested at the same time, each of which could originate from different shopping responses (each with their own ResponseIDs). Each Offer selected could reference (via the OfferID) either standard Offers from an AirShoppingRS message (potentially with Flight-related services) or A-La-Carte Offers (containing optional ancillary services). These standard Offers and A la Carte Offers would need to be consistent with the applicability rules defined by their relations (passengers or segments eligible for the enclosed OfferItems) and would be combined to produce a single Order, returned by the OrderViewRS message.	M

Request		
Elements	Details	Optional/Mandatory
OfferRefID	The reference to the OfferID of the selected Offer (either a standard Offer or an a-la-carte Offer) returned in a previous shopping response.	M
OwnerCode	Designator of Airline that owns/ assigned these IDs. Examples: BA	M
SelectedOfferItem	OfferItem selected by the Passenger for inclusion in the requested Order. Repeat occurrence of OfferItem (once per passenger) if different passengers want to select different service options, different quantities of a-la-carte items or different seat loc	M
OfferItemRefID	Reference to the OfferItemID of the selected OfferItem (contained in either a standard Offer or an a-la-carte Offer) returned in a previous shopping response.	M
PaxRefID	Reference to passenger(s) for which this OfferItem and selected Services (in case of Service Bundles) applies.	M
SelectedALaCarteOfferItem	Use to select the quantity of Offer Items from the A La Carte Offer Items.	O
FlightAssociations	Eligibility of this offer item to the following segments or journeys.	O
PaxJourneyRefID	Reference to the journeys for which this Offer Item can be provided.	O
Qty	Quantity to allow the ordering of more than one instances of the related a la carte OfferItem.	O
Value	The value of Qty . Example: 1	M

Request		
Elements	Details	Optional/Mandatory
ShoppingResponseRefID	Reference to unique shopping session response ID, as provided in the airline's previous shopping response.	M
TotalOfferPriceAmount	The total price for all selected Offer Items (and respective quantities) for all passengers and segments associated with the respective Offer(s), as calculated by the seller system. Without adding any optional Offer Items, the value of this TotalOfferPrice.	O
Value	The value of <code>TotalOfferPriceAmount</code> . Example: 1610000	O

For more details [click here](#) to view the complete schema

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.2.4 18.6 OfferPrice RS

Introduction

The OfferPriceRS is the system response for OfferPriceRQ and may return two different content sets. In the first set, the response provides the offers/offer items for the requested itinerary. In the second set, additional ancillary offers that are available and applicable to the relevant itinerary are provided.

Implementation

The following is the element checklist received in the offer price response. The elements which are marked “M” are mandatory to be passed in the response. The parameters passed as “O” are optional and may or may not be available based on the supplier's response.

OfferPriceRS constitutes the below structure:

- [MessageDoc](#)
- [PayloadAttributes](#)

- [Commission](#)
- [PricedOffer](#)
- [Shopping Response](#)
- [PaymentFunctions](#)
- [DataLists](#)



Note: Please use the sample attached and pass the elements accordingly.

Response Parameters

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	Message Document information	O
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M

Response Definition



Note: A response API's optional and mandatory fields are determined by which elements are used in the corresponding request API.

Commission		
Elements	Details	Optional/Mandatory
Commission	An amount of money, typically a set percentage of the value involved, paid to an agent in a commercial transaction.	O

Amount	The commission amount. Example: 20 USD	O
value	The value of <code>TotalAmount</code> .	O
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP	O

PricedOffer		
Elements	Details	Optional/Mandatory
BaggageAllowance	The amount of checked or carry-on luggage the airline will allow per passenger.	O
BaggageAllowanceRefID	Reference to a Bag Allowance ID within this message.	M
PaxJourneyRefID	Reference to a Passenger Journey ID within this message.	O
PaxRefID	Reference to a Passenger ID within this message.	O
JourneyOverview	Summary of proposed Journey information in the context of this specific Offer.	O
JourneyPriceClass	Price class information per Journey.	O
PaxJourneyRefID	Reference to a Passenger Journey within the context of this message.	M
PriceClassRefID	The itinerary level price class reference identifier.	O
OfferExpirationDateTime	The date by which an offer must be converted into an order. Example: 2015-01-13T13:59:38Z	O

OfferID	Carrier assigned ID which uniquely identifies a specific Offer across several messages.	M
OfferItem	A priced grouping of one or more services within an Offer.	O
FareDetail	The amount charged by the carrier for the carriage of a passenger and his allowable free baggage.	O
FareComponent	A portion of an itinerary between two consecutive fare construction points. If the journey has only one fare component, the points of origin and destination are the only fare construction points	O
CabinType	Type of compartment of an aircraft, offering specific services (e.g. business class, economy).	O
CabinTypeCode	Cabin Type Code as defined by PADIS codeset (e.g. 1, 2, 3, etc.)	O
CabinTypeName	Name given to a cabin compartment (e.g. Business, First, Economy).	O
FairBasisCityPairText	Identified published fare. Origin and destination city codes and two character designator of fare owning airline associated with Fare Basis Code. Example: MIANCEDL	O
FareBasisCode	Fare basis code. Example: Y26	O
FareRule	Special purchasing rules and restrictions used to differentiate fare levels from one another.	O
Remark	Any additional and supplementary information about the applicable fare rule.	O

RemarkText	The text information of a fare rule.	O
PaxSegmentRefID	Reference to a Pax Segment ID.	O
PriceClassRefID	A price point within a particular Cabin Type (sometimes referred to as 'Fare Families'). Example: CLASSIC	O
RBD	Reservation Booking Designator. A categorization used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. E.g. 'J' for Business Class Premium, 'D' for Business Disc	O
RBDCode	The code used to identify a particular RBD.	O
value	The value of <code>RBDCode</code> . Example; V	O
FarePriceType	The type of fair price applied to a Fare Detail (e.g. filed amount, net amount, or a sell amount).	O
FarePriceTypeCode	Indicates if the fare price provided is a filed amount, net amount, or a sell amount.	O
Price	The amount of money expected, required, or given in payment for something.	O
BaseAmount	Currency of the total Base Fare Amount. Example: 200000	O
value	The numerical value of <code>BaseAmount</code> .	O

CurCode	The currency code of BaseAmount . Example: USD, GBP	O
CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	O
ConversionRate	Defines the rate used to convert the local currency into the billing currency.	O
value	The numerical value of ConversionRate .	O
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	O
EquivAmount	Currency of the entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	O
value	The numerical value of EquivAmount .	O
CurCode	The currency code of EquivAmount .	O
TaxSummary	The sum of all tax amounts applied on a given price.	O
Tax	Information of all taxes applied to a priced offer.	O
Amount	The tax amount. Example: 15000 USD	O
value	The numerical value of Amount .	O

CurCode	The currency code of Amount .	O
CurConversion	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the currency indicator code.	O
Amount	The amount and currency specified in the converted currency. Example: 15000 USD	O
value	The numerical value of Amount .	O
CurCode	The currency code of Amount .	O
LocalAmount	The amount and currency as specified by the local country.	O
value	The numerical value of LocalAmount .	O
CurCode	The currency code of LocalAmount .	O
Country	The country information where the tax was applied.	O
CountryCode	The country code of the country where the tax was applied.	O
TaxCode	IATA TTBS Tax Code. Example: AY, GB	O
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	O

value	The numerical value of <code>TotalTaxAmount</code> .	O
CurCode	The currency code of the <code>TotalTaxAmount</code> .	O
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.	O
value	The numerical value of <code>TotalAmount</code> .	O
CurCode	The currency code of the <code>TotalAmount</code> .	O
FareRefText	The fare reference key. Example: PQ123456	O
PaxRefID	Reference to a Passenger ID	O
OfferItemID	Carrier assigned ID which exists uniquely within an Offer.	M
Price	The amount of money expected, required, or given in payment for something.	O
BaseAmount	Total Base Fare Amount. Example: 200000	O
value	The numerical value of <code>BaseAmount</code> .	O
CurCode	The currency code of the <code>BaseAmount</code> .	O
EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the currency indicator code.	O

value	The numerical value of <code>EquivAmount</code> .	O
CurCode	The currency code of the <code>EquivAmount</code> .	O
Markup	The markup applied to an offer or fare.	O
MarkupData	The primary source which contains all the markup data.	O
offerItemId	The offer item unique identifier which the markup is applied to. Example: P2C5165E-7CD1-416C-96B01cyl7q38kcw8l-1-1	O
baseAmount	The original base amount without any markup value applied. Example: 416.43	O
invisibleMarkup	The determined amount of invisible markup and or discount for a specific type of passengers.	O
invisibleMarkupPerPax	The calculated invisible markup and or discount amount per passenger for a particular type of passenger.	O
markupPerPax	The calculated markup and or discount for both invisible and visible markups per passenger.	O
newBaseAmount	The new base amount after discounts and or markups are applied. Example: 56.01	O
newBaseAmountPreRoundOff	The rounding off of the <code>newBaseAmount</code> to make the <code>newTotalAmount</code> a whole number. Example: 56.00	O

newTotalAmount	The new total amount after discounts and markups are applied. If a rounding-off rule is applied, the total amount will always be a whole number. Else, the total amount can have a decimal value. For example, if a rounding-off rule is applied, the total amount will be rounded off to the next whole number such as 83.0. Else, the total amount can be 82.99.	O
newTotalAmountPreRoundOff	The value of <code>newTotalAmount</code> before it was rounded off to a whole number. Example: 82.99.	O
noOfPax	The number of passengers the markup and or discount applies to. Example: 2	O
taxAmount	The tax amount to be added to the overall discount/markup. Example: 26.99	O
totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 77.99	O
totalMarkup	The total discount and or markup amount.	O
visibleMarkup	The calculated amount of visible markup and or discount for a specific type of passenger.	O
visibleMarkupPerPax	The calculated visible markup and or discount amount per passenger for that particular type of passenger.	O
rules	An overview of rules applied to an offer when reshopping and or repricing an existing order.	O

ruleId	A rules identifier. Example: a536de20-04b6-4aba-9591-7fdbdcb8b472	O
uniqueId	An unique identifier of a rule that is required for downstream integration. Example: P0000AO	O
ruleName	The unique name of a rule. Example: PerPax - (DOM) Discount %10/7/2 Visible	O
applyOnFareType	The fare type the markup or discount is applied to. Example: BASE or TOTAL	O
adjustmentType	Calculates the fixed or percentage of an adult fare. Example: PERCENTAGE	O
adjustmentValue	The value of <code>adjustmentType</code> . Example: 5.23	O
adjustmentTypeChild	Calculates the fixed or percentage of a child fare. Example: PERCENTAGE	O
adjustmentValueChild	The value of <code>adjustmentTypeChild</code> . Example: 5.23	O
adjustmentTypeInfant	Calculates the fixed or percentage of an infant fare. Example: PERCENTAGE	O
adjustmentValueInfant	The value of <code>adjustmentTypeInfant</code> . Example: 5.23	O
isVisible	Determines whether the calculated markup is visible to a customer. 1: visible and 0: hidden. Example: 1	O

markupCalculated	The calculated markup. This is determined by the <code>applyOnFareType</code> and <code>adjustmentType</code> fields. Example: 14.14	O
isMaxApplicable	Determines whether the markup cap is applied or not to an offer. If the markup is 10 and the min/max values are 5 - 8, the markup is replaced with an 8 and not a 10. Example: 1	O
paxType	The type of passenger. Example: ADT	O
TaxSummary	The sum of all tax amounts applied to an offer.	O
Tax	The tax information that is applied to an offer	O
Amount	The tax amount.	O
value	The numerical value of <code>Amount</code> .	O
CurCode	The currency code of the <code>Amount</code> .	O
Country	The country where the tax is applicable.	O
CountryCode	The country code. Example: SE	O
TaxCode	The IATA TTBS Tax Code. Example: AY, GB	O
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	O

value	The numerical value of <code>TotalTaxAmount</code> .	O
CurCode	The currency code of the <code>TotalTaxAmount</code> .	O
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.	O
value	The value of <code>TotalAmount</code> . Example: 509.5	O
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP, AUD.	O
Service	The instance of a specific flight or service definition as it has been offered (and eventually ordered and consumed) in the context of a specific offer and or order.	O
InterlineSettlementInfo	Information related to the value of a product or service as it pertains to interline transactions.	O
Commission	An amount of money, typically a set percentage of the value involved, paid to an agent in a commercial transaction.	O
Percentage	The commission percentage value. Example: 20	O
PaxRefID	Reference to a Passenger ID within this message. The Passenger is the recipient entitled to receive/consume the Service(s) offered by the Airline, whether the Service(s) are flight-related or not.	O

ServiceAssociations	References to the details of this Service. May include either Passenger Journeys, a Service Definition, or a Selected Seat.	O
PaxJourneyRefID	Reference to one Journey in the Datalists that are being sold as part of this OfferItem/Service.	M
ServiceID	Service ID assigned by the carrier.	O
Commission	An amount of money, typically a set percentage of the value involved, paid to an agent in a commercial transaction.	O
CommissionCode	The commission code. Example: BSP Commission, OverrideCommission, and TotalCommission.	O
Percentage	The percentage value of commission. Example: 4.5	O
OwnerCode	The airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code.	O
OwnerTypeCode	Indicates whether or not the owner of this Offer is the ORA or POA.	O
PaymentTimeLimitDateTime	The date by which a complete payment must be made for the confirmed items in an offer. Examples: 2015-01-13T13:59:38Z Note: <code>PaymentTimeLimit</code> <code>DateTime</code> is optional (O) in split ticketing scenarios.	O

Penalty	Information related to a monetary penalty imposed for changing or cancelling a booking.	O
AppCode	Penalty application type. Examples: ADE (After departure), NOS (No show), and PDE (Prior to departure).	O
ChangeFeeInd	When TRUE, Change of Itinerary fee(s) may apply.	O
DescText	Description of the applicable penalty.	O
PenaltyAmount	Penalty monetary value amount and currency code.	O
value	The numerical value of <code>PenaltyAmount</code> .	O
CurCode	The currency code of the <code>PenaltyAmount</code> . Example: USD, GBP, AUD.	O
TypeCode	The penalty type code information. Examples: Cancellation, Change, NoShow, Upgrade, and Other.	O
UpgradeFeeInd	Indicates whether an upgrade fee applies. Example: TRUE	O
TotalPrice	The total price information of a priced offer.	O
BaseAmount	The total base fare amount. Example: 200000	O
value	The value of <code>BaseAmount</code> . Example: 200000	O

CurCode	The currency code of BaseAmount . Example: USD, GBP	O
EquivAmount	The entire amount of the transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	O
value	The value of EquivAmount . Example: 0.5542515889330287	O
CurCode	The currency code of EquivAmount . Example: USD, GBP, AUD.	O
Markup	The markup applied to an offer or fare.	O
MarkupData	The primary source which contains all the markup data.	O
baseAmount	The original base amount without any markup value applied. Example: 416.43	O
taxAmount	The tax amount to be added to the overall discount/markup. Example: 93.07	O
totalAmount	The previous totalAmount before the taxAmount is added. Example: 509.5	O
newBaseAmount	The total discount or markup amount. Example: 2	O
newTotalAmount	The new total amount after discounts/markups are applied. Example: 509.5	O

visibleMarkup	The calculated amount of visible markup or discount for a specific type of passenger. Example: 34.6	O
invisibleMarkup	The determined amount of invisible markup or discount for a specific type of passenger.	O
totalMarkup	The total discount or markup amount. Example: 2	O
maxMarkupForInvisibleRules	The maximum markup/discount limit for invisible rules.	O
maxMarkupForVisibleRules	The maximum markup/discount limit for visible rules.	O
minMarkupForInvisibleRules	The minimum markup/discount limit for invisible rules.	O
minMarkupForVisibleRules	The minimum markup/discount limit for visible rules.	O
rulesAmount	Information about the rule and its amounts.	O
ruleName	The name of the rule. Example: BA - 10 Fixed ADT 5%CHD-Total	O
isVisible	Determines whether the calculated markup is visible to a customer. 1: visible and 0: hidden. Example: 1	O
markupCalculated	The calculated markup. This is determined by the <code>applyOnFareType</code> and <code>adjustmentType</code> fields. Example: 14.14	O

isMaxApplicable	Determines whether the markup cap is applied or not to an offer. If the markup is 10 and the min/max values are 5 - 8, the markup is replaced with an 8 and not a 10. Example: 1	O
TaxSummary	The summary of all tax amounts applied on a priced offer.	O
Tax	Information of all taxes applied to a priced offer.	O
Amount	The tax amount. Example: 15000 USD	O
value	The value of <code>Amount</code> . Example: 200000	O
CurCode	The currency code of <code>Amount</code> . Example: USD, GBP, AUD.	O
Country	The country where the tax is applicable.	O
CountryCode	The country code. Example: SE	O
TaxCode	The IATA TTBS Tax Code. Example: AY, GB	O
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	O
value	The numerical value of <code>TotalTaxAmount</code> .	O
CurCode	The currency code of the <code>TotalTaxAmount</code> .	O

TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.	O
value	The value of <code>TotalAmount</code> . Example: 200000	O
CurCode	The currency code of the <code>TotalAmount</code> . Example: USD, GBP, AUD.	O
ValidatingCarrierCode	The airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code.	O

Shopping Response		
Elements	Description	Optional/Mandatory
ShoppingResponse	Facilitates the tracking of what was Offered and contains an identifier unique to the source Airline for a set of product Offers returned in response to a shopping request.	M
ShoppingResponseID	Unique shopping session response ID.	M

PaymentFunctions		
Elements	Details	Optional/Mandatory
PaymentFunctions	The form of payment information.	O

PaymentSupportedMethod	The payment method accepted by an airline that is used during an OfferPrice request.	O
PaymentTypeCode	The payment type code of the payment method as determined by the ATS Codeset PAYT. Example: On Account With Agency	O
PaymentMethodAddInfo	Additional information of the payment method.	O
PaymentOtherMethodAddInfo	Additional information of the other payment method.	O
Remarks	Remark information about the payment method.	O
RemarkText	The text value of the payment method. Examples: • On Account with Agency • Credit/Debit Card • Universal Air Travel Plan	O

DataLists		
Elements	Details	Optional/Mandatory
BaggageAllowanceList	Baggage allowance data list definition	O
BaggageDisclosureList	Baggage disclosure data list definition.	O
FareList	Fare list data list definition	O

OriginDestList	Origin Destination data list definition.	O
PaxJourneyList	A passengers journey data list definition.	O
PaxList	Passenger data list definition.	O
PaxSegmentList	Segment data list definition.	O
PriceClassList	Price Class data list definition.	O

For more details, [click here](#) to view the complete schema.

5.2.5 18.6 OfferPrice Error Codes



The following error codes are the supplier versions of the error codes from Altea NDC and SabreSonic GDS web services.

Error Code	Error Message
911	Supplier Error - UNABLE TO RETRIEVE OFFER
911	Supplier Error - INTERNAL PROCESSING ERROR
soap:Server	Supplier Error - Java heap space
soap:Server	Supplier Error - 42!Transport!Temporary network error:unable to reach targeted application
soap:Server	Supplier Error - org.hibernate.exception.GenericJDBCException: could not prepare statement
soap:Server	Supplier Error - org.hibernate.exception.GenericJDBCException: Unable to acquire JDBC Connection
soap:Server	Supplier Error - Could not send Message.

<faultstring>Could n't send message	Supplier Error - Couldn't send message
soap:Client	Supplier Error - 96!Session!Too many opened conversations
soap:Client	Supplier Error - 11!Session!

Generic Error Codes

Error Code	Error Message
190	Invalid Processing Indicator
200	Advance Seat Selection Not Available for this Flight
260	Invalid Frequent Traveler Number
304	System Temporarily unavailable
314	Name element data invalid
368	Not authorized
402	Offer has been expired, Please try another offer  This error is applicable to OfferPriceRS .
486	Unknown
490	Unable to retrieve offer
492	Invalid passenger selection
68	Max number of passenger per request exceeded
711	Warning message : The amount has been changed due to the inclusion of GST for Infant.


Error Code	Error Message
717	Missing and/or invalid travel agent and/or system identification
73	Invalid age for PTC
75G	Agency not authorized to sell this fare
75K	Check travel day/time
78	Invalid or missing fare data
911	Supplier Error - UNABLE TO PROCESS SYSTEM ERROR
	Supplier Error - UNABLE TO RETRIEVE OFFER
	Supplier Error - INTERNAL PROCESSING ERROR
	Supplier Error - UNABLE TO RETRIEVE OFFER
	Supplier Error - INTERNAL PROCESSING ERROR
912	Incomplete message - data missing in query
112	Requester Identification Required
132	Exceeds Maximum Number of Segments
143	Invalid or Ineligible Passenger Type Code
145	Number in Party Exceeds Maximum
0	Supplier Error - UNABLE TO RETRIEVE OFFER
soap:Server	Supplier Error - Fault occurred while processing.
soap:Client	Supplier Error - 12IPresentationIsoap message header incorrect


5.3 18.6 OrderCreate Overview

5.3.1 Introduction

The OrderCreate Webservice enables the creation of an Order, or the Passenger Name Record (PNR) in the airline reservation system, and obtain confirmation from the airline. In case flights of multiple airlines are selected for the passenger itinerary, the system will create the PNR in all the participating airline systems. Additionally, the service may include orders for ancillary service, seat reservation, and any other special requests of passengers.

[Click here for the Sequence Diagram](#)

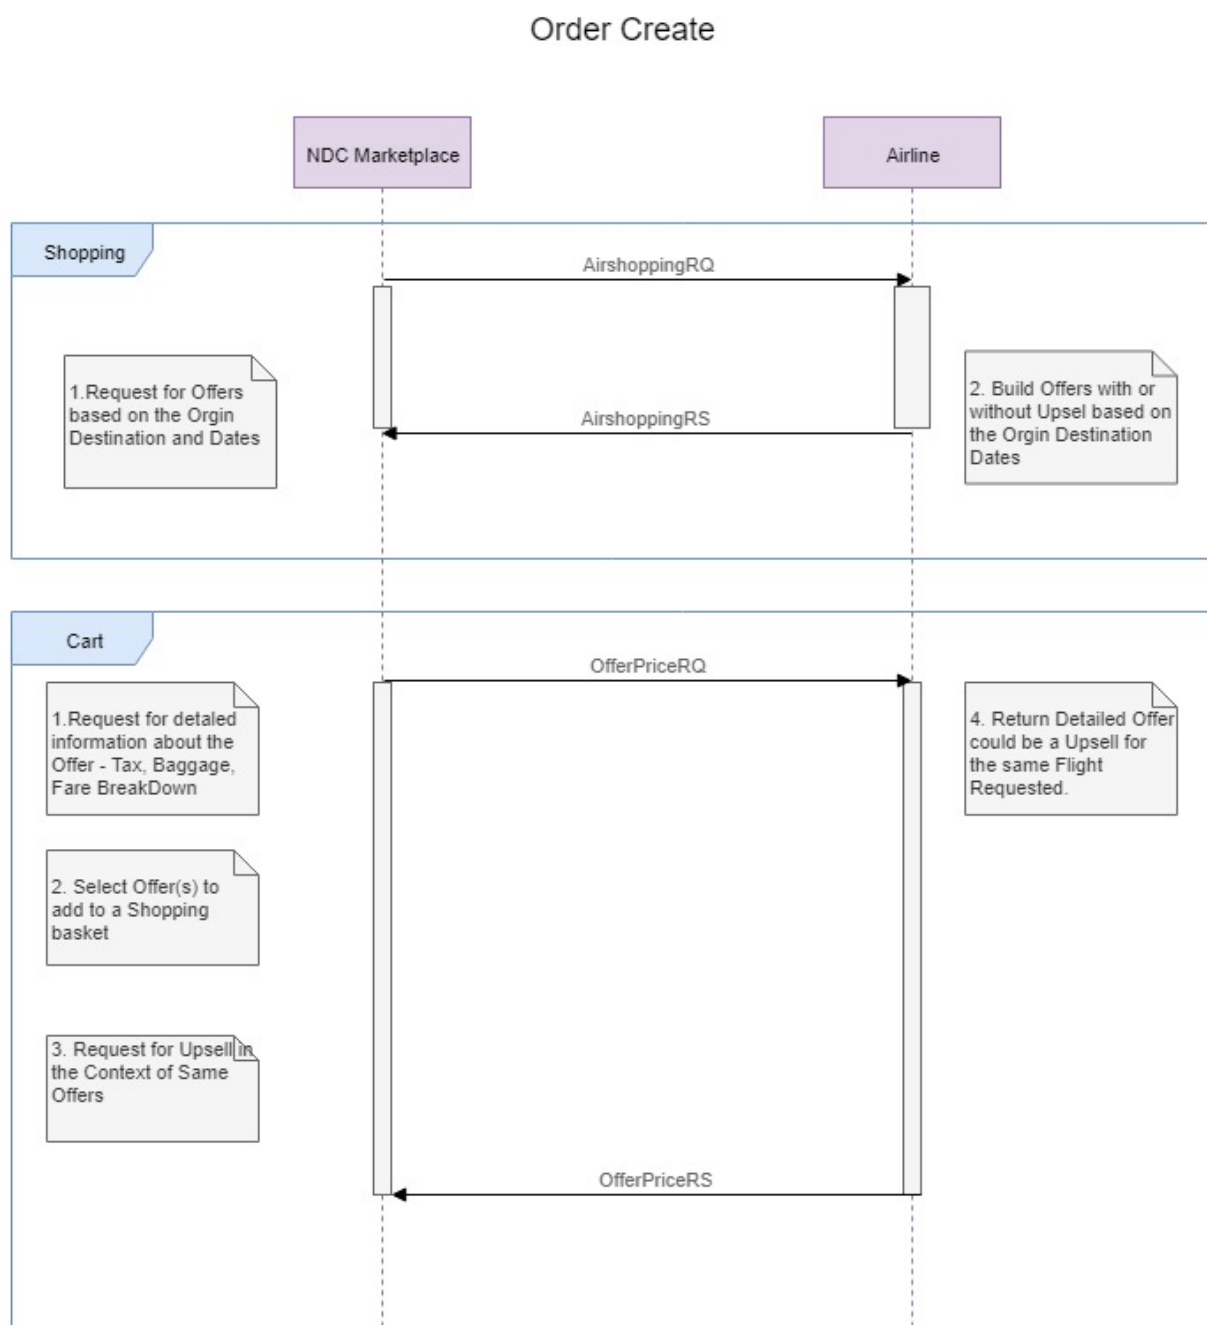

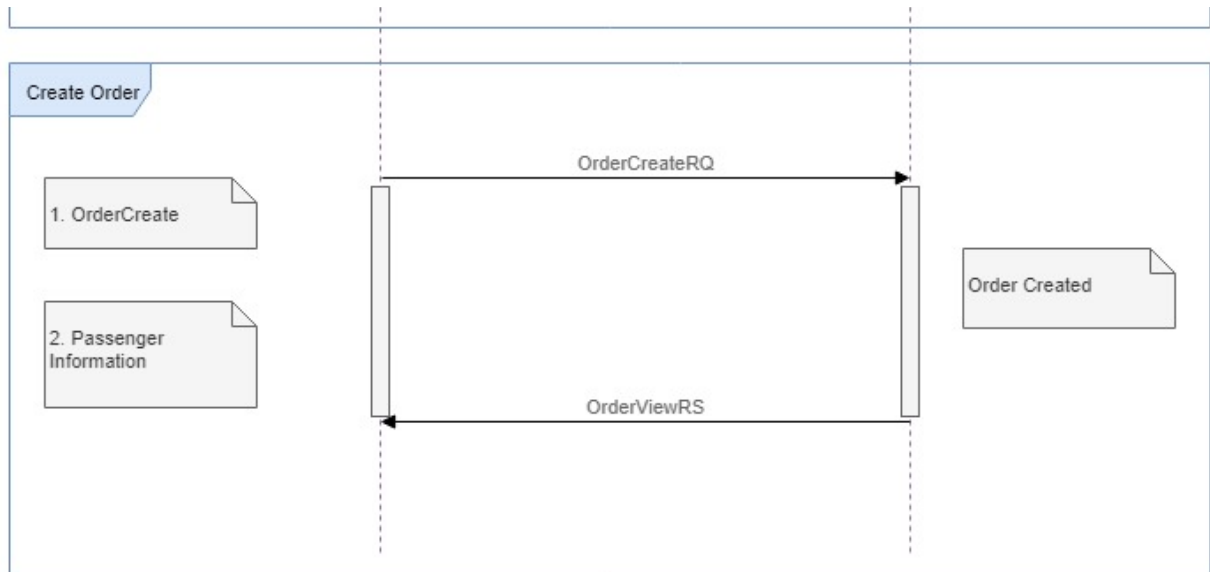

5.3.2 OrderCreate Endpoint

<https://api.tpconnects.online/rest/orderCreate>

5.3.3 Web Service URLs



Live URLs

- NDC Marketplace <https://api.ndcmarketplace.com/>
- Flight Center: <https://api.tpconnects.flightcentre.co.uk/>
- TP Connects API: <https://api.tpconnects.com/>
- Aggregator API: <https://api.website.com/>



Test URL

- <https://api.tpconnects.online/>

5.3.4 Test URL - WSDL

SOAP	https://api.tpconnects.online/soap	
REST	https://api.tpconnects.online/rest/airShop https://api.tpconnects.online/rest/lazyAirShop https://api.tpconnects.online/rest/offerPrice https://api.tpconnects.online/rest/seatAvail https://api.tpconnects.online/rest/serviceList https://api.tpconnects.online/rest/orderRules https://api.tpconnects.online/rest/orderCreate https://api.tpconnects.online/rest/orderCancel https://api.tpconnects.online/rest/orderRetrieve https://api.tpconnects.online/rest/orderChange https://api.tpconnects.online/rest/orderReprice https://api.tpconnects.online/rest/orderReshop	



To be able to access this URL you will need to register for the Sandbox Environment. [Click here](#) to register.



For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.3.5 18.6 OrderCreateRQ

Introduction

The OrderCreateRQ service is a multi-function message that may:

- Request specified inventory to be held (and returns a reference to the held inventory).
- Request that an order to be created (returning the complete view of the Order).
- Request additions to order data elements (e.g. add frequent flyer data).

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.6. The following are the element checklist to be passed in order to create a request. The elements which are

marked “M” are mandatory to be passed in the request. The parameters passed as “O” are optional, it is well and good if implemented.

F To transition from an OfferPrice request to an OrderCreate request, the seller must provide the necessary input parameters based on the selected offer from the OfferPrice response.

Input parameters to be transitioned from OfferPriceRS	API Flow	Output parameters for transitioning to OrderRetrieveRQ
OfferRefID	OrderCreateRQ  OrderViewRS (OrderCreateRS)  ContactInfo Variable to be added and not transitioned from OfferPriceRS.	BookingID
OfferItemRefID		OrderID
ShoppingResponseRefID		OwnerCode
TotalOfferPriceAmount		EchoTokenText
PaxRefID		
OwnerCode		
PaymentInfo		
EchoTokenText		

The OrderCreateRQ service comprises of the following structure:

- [MessageDoc](#)
- [Party - Participant](#)
- [Party - Sender](#)
- [PayloadAttributes](#)
- [PointOfSale](#)
- [CreateOrder](#)
- [OrderCreateParameters](#)
- [DataLists](#)

Request Parameters

MessageDoc		
Elements	Details	Optional/ Mandatory
MessageDoc	Message Document information	O
Party - Participant		
Elements	Details	Optional/ Mandatory
Participant	Message Participant(s).	O
Party - Sender		
Elements	Details	Optional/ Mandatory
Sender	Message sender information.	M
PayloadAttributes		
Elements	Details	Optional/ Mandatory
PayloadAttributes	IATA standard payload attributes.	M
PointOfSale		
Elements	Details	Optional/ Mandatory
PointOfSale	Point of Sale information.	O

Request Definition

CreateOrder		
Elements	Details	Optional/ Mandatory
Request	Order create request.	M
CreateOrder	Order to be created. Two methods are provided for specifying shopping Offer Items that are to be converted into Order Items: 1) Specifying OfferItems from one or more Offers (whether standard Offers or Offers) by referencing respective	M
SelectedOffer	Offer selected by the Passenger for requesting an Order to be created. Multiple Offers can be requested at the same time, each of which could originate from different shopping responses (each with their own ResponseIDs). Each Offer selected could reference (via the OfferID) either standard Offers from an AirShoppingRS message (potentially with Flight-related services) or A-La-Carte Offers (containing optional ancillary services). These standard Offers and a-la-carte Offers would need to be consistent with the applicability rules defined by their relations (passengers or segments eligible for the enclosed OfferItems) and would be combined to produce a single Order, returned by the OrderViewRS message.	O
OfferRefID	Reference to the OfferID of the selected Offer (either a standard Offer or an a-la-carte Offer) returned in a previous shopping response.	M
OwnerCode	Airline designator or CRS code of the owner/ assigner of the Offer ID, typically used for offer ordering purposes. Example: UA, BA Encoding Scheme: IATA/ A4A (two or three character) Airline or CRS Designator Code	M

SelectedOfferItem	OfferItem selected by the Passenger for inclusion in the requested Order. Repeat occurrence of OfferItem (once per passenger) if different passengers want to select different service options, different quantities of items or different seat location.	O
OfferItemRefID	Reference to the OfferItemID of the selected OfferItem (contained in either a standard Offer or an Offer) returned in a previous shopping response.	O
PaxRefID	Reference to passenger(s) for which this OfferItem and selected Services (in case of Service Bundles) applies.	O
pricingOverrideMargin	The Margin Override information which was captured for an offer during <code>OfferPriceRQ</code> and <code>OfferPriceRS</code>. Note: This element is only present when the Margin Override feature has been enabled and Visible and Invisible Override Margin amounts are added to booking during shopping. See Margin Override for more information.	O
newOverrideVisibleMarkup	The visible Override Margin markup amount information that was added during <code>OfferPriceRQ</code> and <code>OfferPriceRS</code>. Note: This element is only present when the Margin Override feature has been enabled and Visible Override Margin amounts are added to booking during shopping. See Margin Override for more information.	O

value	The value of <code>newOverrideVisibleMarkup</code> which was added. Example: 10 Note: This element is only present when the Margin Override feature has been enabled and Visible Override Margin amounts are added to booking during shopping. See Margin Override for more information.	O
newOverrideInvisibleMarkup	The invisible Override Margin markup amount information that was added during <code>OfferPriceRQ</code> and <code>OfferPriceRS</code>. Note: This element is only present when the Margin Override feature has been enabled and Invisible Override Margin amounts are added to booking during shopping. See Margin Override for more information.	O
value	The value of <code>newOverrideInvisibleMarkup</code> which was added. Example: 5 Note: This element is only present when the Margin Override feature has been enabled and Invisible Override Margin amounts are added to booking during shopping. See Margin Override for more information.	O
SelectedALaCarteOfferItem	Use to select the quantity of Offer Items from the A La Carte Offer Items. Note: <code>SelectedALaCarteOfferItem</code> is only applicable to multi-city scenarios.	O

FlightAssociations	Eligibility of this offer item to the following segments or journeys. <i>i</i> Note: <code>FlightAssociations</code> is only applicable to multi-city scenarios.	O
PaxSegmentRefID	Reference to the flight segments on which this Offer Item can be provided. <i>i</i> Note: <code>PaxSegmentRefID</code> is only applicable to multi-city scenarios.	O
Qty	Quantity to allow the ordering of more than one instances of the related a la carte OfferItem. <i>i</i> Note: <code>Qty</code> is only applicable to multi-city scenarios.	O
value	The value of <code>Qty</code>. <i>i</i> Note: <code>value</code> is only applicable to multi-city scenarios.	M
SelectedSeat	Selection of specific seat location, as provided in seat availability messages. When used, only a single Passenger must be referenced for a single Segment. <i>i</i> Note: <code>SelectedSeat</code> is only applicable to multi-city scenarios.	M

ColumnID	Seat column to identify a particular seat position on an aircraft. <i>i</i> Note: <code>ColumnID</code> is only applicable to multi-city scenarios.	O
SeatRowNumber	The seat row number in a cabin. Example: 2 <i>i</i> Note: <code>SeatRowNumber</code> is only applicable to multi-city scenarios.	O
PaxRefID	A reference to a Passenger ID. <i>i</i> Note: <code>PaxRefID</code> is only applicable to multi-city scenarios.	O
ShoppingResponseRefID	A reference to unique shopping session response ID, as provided in the airline's previous shopping response.	O
TotalOfferPriceAmount	The total price for all selected Offer Items (and respective quantities) for all passengers and segments associated with the respective Offer(s), as calculated by the seller system. Without adding any optional Offer Items, the value of this <code>TotalOfferPrice</code>.	O
CurCode	The currency code <code>TotalOfferPriceAmount</code>. Example: USD, GBP.	O
value	The value of <code>TotalOfferPriceAmount</code>.	O

OrderCreateParameters		
Elements	Details	Optional/Mandatory
OrderCreateParameters	Information related to how response results should be returned.	O
Remark	Additional, supplementary information about the document or service.	O
RemarkText	Additional, supplementary information about the document or service.	O
TypeCode	The remark type code. For example: COMPLEAT_OVERRIDE	O

PaymentInfo		
Elements	Details	Optional/Mandatory
PaymentInfo	Information related to the settlement of a transaction through monetary or other compensations. For example, a payment may be applied to an entire Order or individual Order Items.	O
Amount	The amount applied to the associated payment method. Example: 300 USD  Note: Amount is optional (O) in multi-city and split ticketing scenarios.	M

PaymentInfo		
CurCode	The currency code of Amount . Example: USD, GBP.  Note: CurCode is optional (O) in multi-city and split ticketing scenarios.	M
value	The value of Amount .	O
Desc	An account or representation of the certain or major aspects, characteristics, or features of a person, object, or event.	O
DescText	Description text value.	O
Merchant	A person or company that sells goods or services.	O
Carrier	The organisation which carries the passenger, baggage, or goods, and/or commits to delivering the carriage as well as any related services such as issuance of ticket, creation of Order, etc.	O
AirlineDesigCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	O
PaymentInfoID	Uniquely identifies payment information within a message. Example: PAYMENT	O

PaymentInfo		
PaymentMethod	A form of procedure for the payment of goods or services, plus any transactional information specific to the payment method other than the amount.	O
OtherPaymentMethod	Information relating to non-standard forms of payment which may be used in exchange for goods or services.	O
Remark	Additional, supplementary information about the document or service.	O
RemarkText	Additional, supplementary information about the document or service. Example: CREDIT/DEBIT CARD	O
PaymentCard	The information of the debit or credit card used when a booking is created.  Note: PaymentCard is only visible when a credit or debit card is used as the form of payment when creating a booking.	O

PaymentInfo		
CardHolderName	The card holders name as displayed on the credit or debit card. By default this information is masked in the <code>OrderCreateRQ</code> request.  Note: <code>CardHolderName</code> is only visible when a credit or debit card is used as the form of payment when creating a booking.	O
CardNumber	The card number of the debit or credit used when creating a booking. By default this information is masked in the <code>OrderCreateRQ</code> request.  Note: <code>CardNumber</code> is only visible when a credit or debit card is used as the form of payment when creating a booking.	O

PaymentInfo		
ExpirationDate	The expiration date of the credit or debit card. By default this information is masked in the <code>OrderCreateRQ</code> request. Note: <code>ExpirationDate</code> is only visible when a credit or debit Card is used as the form of payment when creating a booking.	O
CardBrandCode	The credit or debit card's brand code. By default this information is masked in the <code>OrderCreateRQ</code> request. Note: <code>CardBrandCode</code> is only visible when a credit or debit card is used as the form of payment when creating a booking.	O

PaymentInfo		
CardTypeText	The description of the card type. By default this information is masked in the <code>OrderCreateRQ</code> request.  Note: <code>CardTypeText</code> is only visible when a credit or debit card is used as the form of payment when creating a booking.	O
CardApprovalCode	The card's approval code. This element only appears when using the Credit Card Authorization feature. If the Pre Authorization checkbox is checked during payment, this value is captured as an empty value. If manual authorization is used and the Approval Code is entered in the Approval Code field, the value is captured here.  Note: <code>CardApprovalCode</code> is only visible when a credit or debit card is used as the form of payment and the Credit Card Authorization feature is enabled for the POS and Supplier that was used when creating a booking.	O

PaymentInfo		
TypeCode	The form of payment type. Examples: Credit Card, Cash. Encoding Scheme: IATA PADIS code list data element [9888] Form of Payment Identification.	O
VerificationInd	Identifies whether the used credit or debit card's Approval Code has been verified by the card's issuer or bank. Examples: <code>true</code> or <code>false</code>. This element only appears when using the Credit Card Authorization feature. Note: <code>VerificationID</code> is only visible when a credit or debit card is used as the form of payment and the Credit Card Authorization feature is enabled for the POS and Supplier that was used when creating a booking.	O
Merchant	The merchant information of the merchant used when creating a booking.	O
Carrier	The carrier information of the carrier used when creating a booking.	O
AirlineDesigCode	The airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF	O

DataLists		
Elements	Details	Optional/Mandatory
ContactInfoList	Contact info data list definition.  Note: <code>ContactInfoList</code> is optional (O) in multi-city scenarios.	M
PaxList	Passenger data list definition.  Note: <code>PaxList</code> is optional (O) in multi-city scenarios.	M

For more details [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.3.6 18.6 OrderCreateRS - OrderViewRS

Introduction

The OrderCreateRS - OrderViewRS is the system response for OrderCreateRQ service.

Implementation

This section describes the message based on the NDC schema version 18.6. The following are the element checklist to be received in order to view the response. The elements which are marked “**M**” are mandatory and elements marked as “**O**” are optional, it is well and good if implemented.

It constitutes the below structure:

- [MessageDoc](#)
- [Party - Sender](#)
- [PayloadAttributes](#)

- [PaymentInfo](#)
- [PaymentFunctions](#)
- [Order](#)
- [Warning](#)
- [DataLists](#)

 **Note:** Please use the sample attached and pass the elements accordingly.

Response Parameters

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	Message Document information.  Note: MessageDoc is optional (O) in split ticketing scenarios.	M
Party - Sender		
Elements	Details	Optional/Mandatory
Party	Party and Sender definition	M
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M

Response Definition



Note: A response API's optional and mandatory fields are determined by which elements are used in the corresponding request API.

PaymentInfo		
Elements	Details	Optional/Mandatory
PaymentInfo	Information related to the settlement of a transaction through monetary or other compensations. For example, a payment may be applied to an entire order or individual order Items.	M
Amount	The amount applied to the associated payment method. Example: 300 USD	M
value	The value of <code>Amount</code> .	M
CurCode	The currency code of <code>Amount</code> . Example: USD, GBP, AUD.	M
OrderRefID	The Order reference unique identifier. Example: 54BL77  Note: <code>OrderRefID</code> is optional (O) in split ticketing scenarios.	M
PaymentInfoID	The payment information's unique identifier. Example: PAYMENT	O
PaymentMethod	The information of the payment method used when an order was created.	O

OtherPaymentMethod	Information relating to non-standard forms of payment.	O
Remark	Additional and supplementary information about the non-standard form of payment used.	O
RemarkText	The value of <code>Remark</code> . Example: Credit/Debit CardXXXXXXXXXXXXXXXXXXXXXX	O
PaymentCard	The information about the card used during payment.	O
CardBrandCode	The branch code of the card used during payment. Example: AX	O
CardHolderName	The card holder's name. Example: John Doe	O
CardNumber	The card number of the card used during payment. Example: XXXXXX****XX00	O
CardTypeText	Additional information about the card type.	O
ExpirationDate	The expiration date of the card used during payment. Example: 0125	O
Voucher	A document that entitles the holder to a discount or that may be exchanged as the payment method when paying for an order.	O
RemainingAmount	The remaining amount leftover if the total voucher amount isn't used when paying for an order.	O

TypeCode	The form of payment type as per the IATA PADIS code list data element [9888] Form of Payment Identification encoding Scheme. Examples: Credit Card, Cash. CA.	O
Desc	The description of <code>PaymentInfo</code> .	O
DescText	Description text value of <code>PaymentInfo</code> .	O
Merchant	A person or company that sells goods or services.  For 1TF, <code>Merchant</code> is not returned.	O
Carrier	An organisation which carries the passenger, baggage, or goods, and/or commits to delivering the carriage as well as any related services such as issuance of ticket, creation of order, etc.	O
AirlineDesigCode	The Airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code.	O

PaymentFunctions		
Elements	Details	Optional/Mandatory
PaymentFunctions	The form of payment information.	O

PaymentSupportedMethod	The payment method accepted by an airline that is used during an OfferPrice request.	O
PaymentTypeCode	The payment type code of the payment method as determined by the ATS Codeset PAYT. Example: On Account With Agency	O

Order		
Elements	Details	Optional/Mandatory
Order	A uniquely identified record of the agreement of one party with another to receive products and services under specified terms and conditions. Order supports the sale of a flexible range of airline products and services that are not necessarily Journey b	M
BookingRef	Information related to a booking or reservation.	M
BookingID	Existing booking reference Identifier. Example: TPC13478127232D27122023	M
BookingRefTypeCode	Booking Reference Type. Example: 6 (Passenger confirmation number) Encoding Scheme: IATA Padis Codeset - List for data element [1153] Reference Qualifier. Example: TPC	M
BookingEntity	An airline or organisation assigning the booking information.	M

Carrier	The organisation which carries the passenger, baggage, or goods, and/or commits to delivering the carriage as well as any related services such as issuance of ticket, creation of order, etc.	M
AirlineDesigCode	The Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF	M
OrderID	A carrier assigned ID which uniquely identifies a specific order across several messages. Example: 54JWYL	M
OrderItem	An individually priced item within an Order, made up of one or more Services. May or may not be a selected Offer Item (e.g. non-chargeable Services available on request such as a wheelchair).	M
OrderItemID	The unique identifier of the OrderItem. Example: ORDERITEM-4	O
Price	The price information of an order.	O
TotalAmount	The total amount information of an order.	O
value	The value of <code>TotalAmount</code> .	O
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP,AUD.	O

Service	The instance of a specific flight or service definition as it has been offered (and eventually ordered and consumed) in the context of a specific offer and or order.	O
PaxRefID	The passenger reference unique identifier. Example: PAX1	O
ServiceAssociations	References to the details of this Service. May include either passenger journeys, a service definition, or a selected seat.	O
PaxSegmentRefID	The reference to a passenger segment ID in a message. Example: S4	O
SelectedSeat	The selected sitting place or seat for a passenger or crew, in a cabin compartment on a dated operating leg.	O
Seat	A sitting place for a passenger located in the cabin.	O
ColumnID	An alphabetic character identifying a seat within a row. Example: F	O
RowNumber	An ordinal number identifying a seat row in an aircraft. Example: 14	O
ServiceDefinitionRef	An airline specific definition of a product or service (excluding flights) that can be separately sold and delivered. Example: Bag, seat, or meal on a flight.	O
PaxSegmentRefID	The reference to a passenger segment ID in a message. Example: S4	O
ServiceDefinitionRefID	References a Service Definition ID within this message. Example: A-OC-oB5-SA	O

ServiceID	The Service ID assigned by the carrier. Example: SERVICE-ADT	O
StatusCode	The status of the service instance. See the PADIS Codelist 4405 for possible values. Example: HK	O
StatusCode	The status of the service instance. See the PADIS Codelist 4405 for possible values. Example: ONHOLD	O
FareDetail	The amount charged by the carrier for the carriage of a passenger and his allowable free baggage.	M
AccountCode	The corporate unique identifier used when pricing special fares. Example: PAG20	O
FareCalculationInfo	Information related to the calculation of the fare amount by applying various rules to determine a final fare for an airline ticket. Note: <code>FareCalculationInfo</code> is optional (O) in split ticketing scenarios.	M
AddlInfoText	The fare calculation text required in the fare calculation area of an electronic ticket.	O

PricingCodeText	Primary identifier reflecting the method of pricing for a transaction.  Note: PricingCodeText is optional (O) in split ticketing scenarios.	M
ReportingCodeText	The secondary identifier reflecting the method of pricing for a created order. It's also used in the reporting process. Example: 650.75END ZPCVGATLXNAATL XFCVG4.5ATL4.5XNA4.5ATL4.5	O
FareComponent	A portion of an itinerary between two consecutive fare construction points. If the journey has only one fare component, the points of origin and destination are the only fare construction points.	M
CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy.	M
CabinTypeCode	The Cabin Type Code as defined by PADIS codeset. Examples: Economy (Y), Premium Economy (W), Business (C), and First (F).	M
CabinTypeName	The name given to a cabin compartment (e.g. Business, First, Economy). Examples: Economy (Y), Premium Economy (W), Business (C), and First (F).	M

FareBasisCityPairText	The identified published fare. A combination of the origin and destination city codes and two character designators of the fare owning airline associated with a Fare Basis Code. Example: MIANCEDL	M
FareBasisCode	The fare basis code. Example: Y26	M
FareRule	Special purchasing rules and restrictions used to differentiate fare levels from one another.  Note: FareRule is optional (O) in split ticketing scenarios.	M
PaxSegmentRefID	The reference to a Pax Segment ID. Example: S2	M
PriceClassRefID	A price point within a particular cabin type, sometimes referred to as 'Fare Families'. Example: REDeDeal-1	O
RBD	The Reservation Booking Designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. Examples: 'J' for Business Class Premium, 'D' for Business Disc.	O
RBDCode	The code used to identify a particular RBD. Example: P, J, W, and M.	O
value	The value of RBDCode . Example: N	O

Price	The amount of money expected, required, or given in payment for something.	M
BaseAmount	Total Base Fare Amount. Example: 200000	M
value	The value of <code>BaseAmount</code> .	M
CurCode	The currency code of <code>BaseAmount</code> . Example: USD, GBP	M
CurConversion	The result of converting one currency into another currency. E.g. local currency to USD, air miles to monetary. Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M
ConversionRate	Defines the rate used to convert the local currency into the billing currency. Note: <code>ConversionRate</code> is optional (O) in split ticketing scenarios.	M
value	The value of <code>ConversionRate</code>. Example: 0.5542515889330287 Note: <code>value</code> is optional (O) in split ticketing scenarios.	M

BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP  Note: BaseUnitCode is optional (O) in split ticketing scenarios.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	A compulsory contribution to state revenue, levied by the government on workers' income and business profits or added to the cost of some goods, services, and transactions.	M
Amount	The tax amount. Example: 15000 USD	M
value	The value of Amount . Example: 5.49	M
CurCode	The currency code of Amount . Example: USD, GBP	M
CurConversion	The result of converting one currency into another currency. E.g. local currency to USD, air miles to monetary.  Note: CurConversion is optional (O) in split ticketing scenarios.	M

Amount	Amount and currency specified in the converted currency. Example: 15000 USD  Note: Amount is optional (O) in split ticketing scenarios.	M
value	The value of Amount . Example: 5.49  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of Amount . Example: USD, GBP  Note: CurCode is optional (O) in split ticketing scenarios.	M
LocalAmount	Amount and currency as specified by the local country.  Note: LocalAmount is optional (O) in split ticketing scenarios.	M

value	The value of <code>LocalAmount</code> . Example: 9.89  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of <code>Amount</code> . Example: USD, GBP  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
DescText	Free text description of the provided warning. Example: PASSENGER SERVICE CHARGE DOMESTIC DEPARTURE	M
TaxCode	IATA TTBS Tax Code. Example: AY, GB	M
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M
value	The value of <code>TotalTaxAmount</code> . Example: 32.89	M
CurCode	The currency code of <code>TotalTaxAmount</code> . Example: USD, GBP	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.	M

value	The value of <code>TotalAmount</code> . Example: 176.43	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP	M
PriceClassRefID	A price point within a particular cabin type, sometimes referred to as 'Fare Families'. Example: REDeDeal-1  Note: <code>PriceClassRefID</code> is optional (O) in split ticketing scenarios.	M
RBD	The Reservation Booking Designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. Examples: 'J' for Business Class Premium, 'D' for Business Disc.	M
RBDCode	The code used to identify a particular RBD. Example: P, J, W, and M.	M
value	The value of <code>RBDCode</code> . Example: N	M
Name	The name of the <code>RBDCode</code> Example: RED eDeal  Note: Name is optional (O) in split ticketing scenarios.	M

FarePriceType	The type of fair price applied to a fare detail. Example: • Filed amount • Net amount • Sell amount	M
FarePriceTypeCode	Indicates if the fare price provided is a filed amount, net amount, or a sell amount. Note: <code>FarePriceTypeCode</code> is mandatory (M) in split ticketing scenarios.	O
Price	The price of the fair.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 416.43	M
CurCode	The currency code of <code>BaseAmount</code> . Example: USD, GBP	M
CurConversion	The result of converting one currency into another currency. E.g. local currency to USD, air miles to monetary. Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M

ConversionRate	Defines the rate used to convert the local currency into the billing currency.  Note: ConversionRate is optional (O) in split ticketing scenarios.	M
value	The value of ConversionRate . Example: 0.5542515889330287  Note: value is optional (O) in split ticketing scenarios.	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP  Note: BaseUnitCode is optional (O) in split ticketing scenarios.	M
EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of EquivAmount . Example: 751.32	M
CurCode	The currency code of EquivAmount . Example: USD, GBP	M

Markup	The markup applied to an offer or fare.	M
MarkupData	The primary source which contains all the markup data.	M
offerItemId	The offer item unique identifier which the markup is applied to. Example: P2C5165E-7CD1-416C-96B01cyl7q38kcw8l-1-1	M
baseAmount	The original base amount without any markup value applied. Example: 416.43	M
invisibleMarkup	The determined amount of invisible markup or discount for a specific type of passenger.	M
invisibleMarkupPerPax	The calculated invisible markup or discount amount per passenger for a particular type of passenger.	M
markupPerPax	The calculated markup or discount for both invisible and visible markups per passenger.	M
newBaseAmount	The new base amount after discounts/markups are applied. Example: 416.43	M
newTotalAmount	The new total amount after discounts/markups are applied. Example: 509.5	M
noOfPax	The number of passengers of a particular pax type. Example: 2	M
taxAmount	The tax amount to be added to the overall discount/markup. Example: 93.07	M

totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5	M
totalMarkup	The total discount or markup amount. Example: 2	M
visibleMarkup	The calculated amount of visible markup or discount for a specific type of passenger. Example: 34.6	M
visibleMarkupPerPax	The calculated visible markup or discount amount per passenger for that particular type of passenger. Example: 20.9	M
paxType	The type of passenger. Example: ADT	M
maxMarkupForInvisibleRules	The maximum markup/discount limit for invisible rules.	M
maxMarkupForVisibleRules	The maximum markup/discount limit for visible rules.	M
minMarkupForInvisibleRules	The minimum markup/discount limit for invisible rules.	M
minMarkupForVisibleRules	The minimum markup/discount limit for visible rules.	M

newOverrideVisibleMarkup	The visible Override Margin markup amount information that was added to an offer.  Note: This element is only present when the Margin Override feature has been enabled and a Visible Override Margin amount has been added to a booking during shopping. See Margin Override for more information.	M
newOverrideTotalMarkup	The combined amount of the <code>newOverrideVisibleMarkup</code> and <code>newOverrideInvisibleMarkup</code> amounts.  Note: This element is only present when the Margin Override feature has been enabled and Visible and Invisible Override Margin amounts has been added to a booking during shopping. See Margin Override for more information.	

newOverrideInvisibleMarkup	The invisible Override Margin markup amount information that was added to an offer.  Note: This element is only present when the Margin Override feature has been enabled and a Invisible Override Margin amount has been added to a booking during shopping. See Margin Override for more information.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	A compulsory contribution to state revenue, levied by the government on workers' income and business profits or added to the cost of some goods, services, and transactions.	M
Amount	The tax amount. Example: 15000 USD	M
value	The value of Amount . Example: 15000	M
CurCode	The currency code of Amount . Example: USD, GBP, AUD.	M

CurConversion	The result of converting one currency into another currency. E.g. local currency to USD, air miles to monetary.  Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M
Amount	The amount and currency specified in the converted currency. Example: 15000 USD  Note: <code>Amount</code> is optional (O) in split ticketing scenarios.	M
value	The value of <code>Amount</code>. Example: 5.49  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of <code>Amount</code>. Example: USD, GBP, AUD.  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M

LocalAmount	The amount and currency as specified by the local country.  Note: LocalAmount is optional (O) in split ticketing scenarios.	M
value	The value of LocalAmount . Example: 8.44  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of LocalAmount . Example: USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M
DescText	The tax short description. Example: \$4 per flight segment, per passenger (U.S. domestic segment tax)	M
TaxCode	IATA TTBS Tax Code. Example: AY, GB	M
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M

value	The value of <code>TotalTaxAmount</code> . Example: 93.07	M
CurCode	The currency code of <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts. Example: 509.5	M
value	The value of <code>TotalAmount</code> . Example: 509.5	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP, AUD.	M
FareRefText	The fare reference key. Example: FO1  Note: <code>FareRefText</code> is optional (O) in split ticketing scenarios.	M
PaxRefID	The passenger reference unique identifier. Example: PAX1	M
Commission	An amount of money, typically a set percentage of the value involved, paid to an agent in a commercial transaction.	O
CommissionCode	The commission code. Example: BSP Commission, OverrideCommission, and TotalCommission	O
Percentage	The commission percentage value. Example: 3	O

OrderItemID	The carrier assigned Order Item ID.  During <code>OrderCreateRS</code> - <code>OrderViewRS</code> , we are creating NDC response just based on supplier response, while it will be different in <code>OrderRetrieve</code> - <code>OrderViewRS</code> . It isn't mandatory that all the fields should have matching values in two different APIs.	M
-------------	---	---

OwnerCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Codes: • ONHOLD - OrderCreateRQ with no FOP results in OVS with OnHold Status • CONFIRMED - Ticketed Booking (First Issue) • EXCHANGED - Ticketed Booking (Reissue) • CANCELLED - Cancelled Booking (no Ticket) • VOIDED - OrderStatus post ticket void • REFUNDED - OrderStatus post ticket refund • DISRUPTED - When segments have been disrupted • TICKETRETAINED/ UNCONFIRMED - Not applicable for this supplier	M
Penalty	The penalty applied to a fare, based on changes to or cancellations of a fare.  Note: Penalty is optional (O) in split ticketing scenarios.	M

AppCode	The penalty application type code. Examples: ADE (After departure) NOS (No show) PDE (Prior to departure), S2IPAX1I PDE  Note: AppCode is optional (O) in split ticketing scenarios.	M
CancelFeeInd	The cancel fee indicator. If TRUE, cancellation fee(s) may apply.  Note: CancelFeeInd is optional (O) in split ticketing scenarios.	M
ChangeFeeInd	The change fee indicator. If TRUE, change of Itinerary fee(s) may apply.  Note: ChangeFeeInd is optional (O) in split ticketing scenarios.	M
DescText	The description of the applicable penalty. Example: Not Allowed  Note: DescText is optional (O) in split ticketing scenarios.	M

TypeCode	The penalty type information. Examples: • Cancellation • Change • NoShow • Upgrade • Other  Note: TypeCode is optional (O) in multi city and split ticketing scenarios.	M
PenaltyAmount	The penalty monetary value amount and currency code.  Note: PenaltyAmount is optional (O) in split ticketing scenarios.	M
value	The value of PenaltyAmount . Example: 99  Note: value is optional (O) in split ticketing scenarios.	M

CurCode	The currency code of <code>PenaltyAmount</code> . Example: USD, GBP, AUD.  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
TypeCode	The penalty type information. Examples: • Cancellation • Change • NoShow • Upgrade • Other  Note: <code>TypeCode</code> is optional (O) in multi city and split ticketing scenarios.	M
Price	The price of the fare or offer.	M
BaseAmount	The total base fare amount.	M
value	The value of <code>BaseAmount</code> . Example: 416.43	M
CurCode	The currency code of <code>BaseAmount</code> . Example: USD, GBP, AUD.	M

CurConversion	The result of converting one currency into another currency. E.g. local currency to USD, air miles to monetary.  Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M
ConversionRate	Defines the rate used to convert the local currency into the billing currency.  Note: <code>ConversionRate</code> is optional (O) in split ticketing scenarios.	M
value	The value of <code>ConversionRate</code>. Example: 0.5542515889330287  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP  Note: <code>BaseUnitCode</code> is optional (O) in split ticketing scenarios.	M

EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of <code>EquivAmount</code> . Example: 0.5542515889330287	M
CurCode	The currency code of <code>EquivAmount</code> . Example: USD, GBP, AUD.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	The tax summary of all taxes applied to a fare or offer.	M
Amount	The tax amount. Example: 17.71 GBP	M
value	The value of <code>Amount</code> . Example: 17.71	M
CurCode	The currency code of <code>Amount</code> . Example USD, GBP, AUD.	M
CurConversion	The result of converting one currency into another currency. E.g. local currency to USD, air miles to monetary.  Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M

Amount	The amount and currency specified in the converted currency. Example: 15000 USD  Note: Amount is optional (O) in split ticketing scenarios.	M
value	The value of Amount . Example: 5.49  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of Amount . Example USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M
Country	The country where the tax is applicable.  Note: Country is mandatory (M) in split ticketing scenarios.	O
CountryCode	The country code. Example: SE  Note: CountryCode is mandatory (M) in split ticketing scenarios.	O

LocalAmount	The amount and currency as specified by the local country.  Note: LocalAmount is optional (O) in split ticketing scenarios.	M
value	The value of LocalAmount . Example: 8.44  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of LocalAmount . Example USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M
DescText	The tax short description Example: Taxes	M
TaxCode	IATA TTBS Tax Code. Example: AY, GB	M
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts. Example: 93.07	M
value	The value of TotalTaxAmount . Example: 93.07	M

CurCode	The currency code of <code>TotalTaxAmount</code> . Example USD, GBP, AUD.	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts. Example: 509.5	M
value	The value of <code>TotalAmount</code> . Example: 509.5	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP, AUD.	M
Service	The instance of a specific flight or Service Definition as it has been offered (and eventually ordered and consumed) in the context of a specific Offer and/or Order.	M
PaxRefID	The passenger reference unique identifier. Example: PAX1	M
ServiceAssociations	References to the details of this Service. May include either Passenger Journeys, a Service Definition, or a Selected Seat.	M
PaxSegmentRefID	The reference to a passenger segment ID in a message. Example: S2	M
SelectedSeat	The selected sitting place or seat for a passenger or crew, in a cabin compartment on a dated operating leg.	M
Seat	A sitting place for a passenger located in the cabin.	M
ColumnID	An alphabetic character identifying a seat within a row. Example: F	M

RowNumber	An ordinal number identifying a seat row in an aircraft. Example: 14	M
ServiceDefinitionRef	An airline specific definition of a product or service (excluding flights) that can be separately sold and delivered. Example: Bag, seat, or meal on a flight.	M
PaxSegmentRefID	The reference to a passenger segment ID in a message. Example: S4  Note: During <code>OrderCreateRS</code> - <code>OrderViewRS</code>, we are creating NDC response just based on supplier response, while it will be different in <code>OrderRetrieve</code> - <code>OrderViewRS</code>. It is not mandatory that all the fields should have matching values in two different APIs.	M

ServiceDefinitionRefID	References a Service Definition ID within this message. Example: BASRV2D67A650  Note: During <code>OrderCreateRS</code> - <code>OrderViewRS</code>, we are creating NDC response just based on supplier response, while it will be different in <code>OrderRetrieveRS</code> - <code>OrderViewRS</code>. It isn't mandatory that all the fields should have matching values in two different APIs.	M
ServiceID	The Service ID assigned by the carrier. Example: SERVICE-ADT	M
StatusCode	The status of the service instance. See the PADIS Codelist 4405 for possible values. Example: HK	M
StatusCode	The status of the service instance. See the PADIS Codelist 4405 for possible values. Example: ONHOLD	M
OrderKeys	Order Keys contains one Order ID with an associated Order Item ID(s).  Note: These are Orders that were created from Offers that have already been purchased, booked and/or are being held for a Traveler.	M

OrderRefID	The carrier assigned ID which uniquely identifies a specific order across several messages. Example: T2F6VH	M
OrderItem	An individually priced item within an order, made up of one or more services. May or may not be a selected offer item (e.g. non-chargeable Services available on request such as a wheelchair).	M
OrderItemRefID	The carrier assigned Order Item ID. Example: P2C5165E-7CD1-416C-96B01cyl7q38kcw8l-1-1_T1	M
OwnerCode	An Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
OwnerCode	An Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
OriginalOrder	Used when an Order has been sub-divided into associated Orders and serves as a reference to the original Order ID.	M
OrderRefID	The carrier assigned ID which uniquely identifies a specific order across several messages. Example: T2F6VH	M
OwnerCode	An Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
OwnerCode	An Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M

PaymentTimeLimitDateTime	The date by which a complete payment must be made for the confirmed items in an offer. Example: 2023-12-27T23:59:00	M
StatusCode	The status of the service instance. See the PADIS Codelist 4405 for possible values. Example: ONHOLD	M
TotalPrice	The total price of the fare/offer.	M
BaseAmount	The Total Base Fare Amount. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 416.43	M
CurCode	The currency code of <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
CurConversion	The result of converting one currency into another currency. E.g. local currency to USD, air miles to monetary. Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M
ConversionRate	Defines the rate used to convert the local currency into the billing currency. Note: <code>ConversionRate</code> is optional (O) in split ticketing scenarios.	M

value	The value of <code>ConversionRate</code> . Example: 0.5542515889330287  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP  Note: <code>BaseUnitCode</code> is optional (O) in split ticketing scenarios.	M
EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of <code>EquivAmount</code> . Example: 0.5542515889330287	M
CurCode	The currency code of <code>EquivAmount</code> . Example: USD, GBP, AUD.	M
Markup	The markup applied to an offer or fare.	M
MarkupData	The primary source which contains all the markup data.	M
baseAmount	The original base amount without any markup value applied. Example: 416.43	M

taxAmount	The tax amount to be added to the overall discount/markup. Example: 93.07	M
totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5	M
newBaseAmount	The new base amount after discounts/markups are applied. Example: 416.43	M
newTotalAmount	The new total amount after discounts/markups are applied. Example: 509.5	M
visibleMarkup	The calculated amount of visible markup or discount for a specific type of passenger. Example: 34.6	M
invisibleMarkup	The determined amount of invisible markup or discount for a specific type of passengers.	M
totalMarkup	The total discount/markup amount. Example 2	M
markupPerPax	The calculated markup or discount for both invisible and visible markups per passenger.	M
visibleMarkupPerPax	The calculated visible markup or discount amount per passenger for that particular type of passenger. Example: 20.9	M
invisibleMarkupPerPax	The calculated invisible markup or discount amount per passenger for a particular type of passenger.	M
maxMarkupForInvisibleRules	The maximum markup/discount limit for invisible rules.	M

maxMarkupForVisibleRules	The maximum markup/discount limit for visible rules.	M
minMarkupForInvisibleRules	The minimum markup/discount limit for invisible rules.	M
minMarkupForVisibleRules	The minimum markup/discount limit for visible rules.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	The tax summary of all taxes applied to a fare or offer.  Note: Tax is mandatory (M) in split ticketing scenarios.	O
Amount	The tax amount. Example: 17.71 GBP  Note: Amount is mandatory (M) in split ticketing scenarios.	O
value	The value of Amount . Example: 17.71  Note: value is mandatory (M) in split ticketing scenarios.	O

CurCode	The currency code of Amount . Example USD, GBP, AUD.  Note: CurCode is mandatory (M) in split ticketing scenarios.	O
Country	The country where the tax is applicable.  Note: Country is mandatory (M) in split ticketing scenarios.	O
CountryCode	The country code. Example: SE  Note: CountryCode is mandatory (M) in split ticketing scenarios.	O
DescText	The tax short description Example: Taxes  Note: DescText is mandatory (M) in split ticketing scenarios.	O
TaxCode	IATA TTBS Tax Code. Example: AY, GB  Note: TaxCode is mandatory (M) in split ticketing scenarios.	O

TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts. Example: 93.07	M
value	The value of <code>TotalTaxAmount</code> . Example: 93.07	M
CurCode	The currency code of <code>TotalTaxAmount</code> . Example USD, GBP, AUD.	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts. Example: 509.5	M
value	The value of <code>TotalAmount</code> . Example: 509.5	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP, AUD.	M

Warning		
Elements	Details	Optional/Mandatory
Warning	Contains information related to potential business errors detected during processing of the preceding request.	M

Warning		
Code	The code corresponding to the processing warning as defined by PADIS 9321. Example: 325  Note: Code is only applicable in split ticketing scenarios.	O
DescText	The free text description of the provided warning. Example: Qantas Frequent Flyers could earn Qantas Points and Status Credits for this booking. -Terms and conditions apply.--	M
OwnerName	The name of the organization owning the warning codelist. Example: QF	M

DataLists		
Elements	Details	Optional/Mandatory
BaggageAllowanceList	Baggage allowance data list definition	M
BaggageDisclosureList	Baggage disclosure data list definition.  Note: BaggageDisclosureList is optional (O) in split ticketing scenarios.	M

DataLists		
Elements	Details	Optional/Mandatory
ContactInfoList	Contact info data list definition.	M
FareList	Fare List definition	M
OriginDestList	Origin Destination data list definition.	M
PaxJourneyList	Journey data list definition.	M
PaxList	Passenger data list definition.	M
PaxSegmentList	Passenger segment data list definition.	M
PriceClassList	Price Class data list definition.	M
ServiceDefinitionList	Service Definition data list definition.	M

For more details [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.3.7 18.6 OrderCreate Error Codes

Error Code	Error Message
61	Invalid system update association/disassociation
73	Invalid age for PTC
78	Invalid or missing fare data
79	Form of payment missing or invalid for carrier fee
112	Requester Identification Required

Error Code	Error Message
132	Exceeds Maximum Number of Segments
158	No Action Taken - Simultaneous Changes to the Same Passenger Record
190	Invalid Processing Indicator
193	API pax data required
252	Invalid Flight Number in Advance Seat Request
272	Number of Seats Requested Does Not Equal the Number in Party
288	Unable to Satisfy, Need Confirmed Flight Status
289	Unable to Retrieve PNR, Database Error
294	Invalid Format
303	Credential is not active for given airline  This error is applicable to <code>OrderViewRS</code> .
304	System temporarily unavailable
310	Ticket arrangement data missing
313	Name element data missing
314	Name element data invalid
316	Contact element (phone and/or address) missing
317	Contact element (phone and/or address) invalid
327	Invalid segment data in itinerary
330	Invalid loading type
361	PNR is secured

Error Code	Error Message
368	Not authorized
381	Record locator required
400	Error occurred while processing the request  This error is applicable to <code>OrderViewRS</code> . Order create has been failed.  This error is applicable to <code>OrderViewRS</code> .
401	Ticket/document number not found
404	No Service Between Requested Cities/Airports
418	Flight has Departed
424	Card number does not match with name for FQTV
461	Ineligible for Requested Action -Group PNR not allowed
466	Form of payment missing or invalid for ticket/document
467	Flight segment not found in carrier's PNR
474	Cannot find passenger details
484	The requested flight details are not associated with this PNR
485	Cannot find baggage item details
486	Unknown
490	Unable to retrieve offer
492	Invalid passenger selection

Error Code	Error Message
495	Order not created
496	No offers
708	Incorrect credit card information
717	Missing and/or invalid travel agent and/or system identification
727	Invalid amount
727	Invalid amount
764	Unable to process - system error
794	Invalid or missing fare calculation
902	Prior message being processed or already processed
911	Unable to process - system error
911	Unable to process - system error
911	Air sell from recommendation failed  This error is applicable to <code>OrderViewRS</code> .
912	Incomplete message - data missing in query
913	Item/data not found or data not existing in processing host
1004	Booking already found. Please find the Booking ID: XXXXXXXXXXXX and OrderID: XXXXXX  This error is applicable to <code>OrderViewRS</code> .
701	Unable to find fare for mixed passenger type code/fare type
71P	Taxes for booked itinerary/country not in tariff database

Error Code	Error Message
72G	Invalid point of sale option
73Q	Invalid/missing flight segment data VO.4 IMPRO
74W	Electronic paper ticket record not found
75G	Agency not authorized to sell this fare
75K	Check travel day/time
75P	Check Surcharges
75V	Base fare and total ticket/document amounts incorrect
76H	Unable to process requested option
76H	Unable to process requested option
Error Code	Error Message
ORDER_CREATE	Supplier Error - INVALID PASSENGER CONTACT
ORDER_CREATE	Supplier Error - INVALID NAME FORMAT: INVALID FORMAT/NOT ENTERED/
ORDER_CREATE	Supplier Error - PROPERTY ALREADY USING THIS CURRENCY CODE: CORPORATE ACCOUNT NOT FOUND
ORDER_CREATE	Supplier Error - UNABLE TO CREATE ORDER

5.4 18.6 SeatAvailability Overview

The SeatAvailability Webservice provides IATA Accredited Travel Agents, new retailers, and Service Providers the ability to retrieve seat map for one or more flight segments as per IATA NDC schema standards.

The Seat Availability API:

- Returns the information required to build a priced seat map, including seat numbers, prices, exit rows and galley for your requested cabin.
- Is stateless but can be called in prime or post-sale.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.4.1 18.6 SeatAvailabilityRQ

Introduction

The SeatAvailabilityRQ service returns data used to construct respective seat maps with fully integrated fees for any identified premium seats. The message also returns multi-media content at the message level with media content references at the individual service level.

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.6. The following are the element checklist to be passed in seat availability request. The elements which are marked “**M**” are mandatory to be passed in request. The parameters passed as “**O**” are optional, it is well and good if implemented.

Post Seat Availability Transition

 To transition from an OrderView to a SeatAvailability request for a post-seat availability addition, the seller must provide the below input parameters based on the available offers from the OrderView response.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

Input parameters to be transitioned from OrderViewRS to SeatAvailabilityRQ	API Flow	Output parameters for transitioning from OrderViewRS (SeatAvailabilityRS) to ???
OrderDetails: - BookingID - BookingRefTypeCode - OrderID - OwnerCode - PaxSegmentRefID	SeatAvailabilityRQ → OrderViewRS (SeatAvailabilityRS)	

Input parameters to be transitioned from OrderViewRS to SeatAvailabilityRQ	API Flow	Output parameters for transitioning from OrderViewRS (SeatAvailabilityRS) to ???
PaxSegmentDetails: - Arrival: - AircraftScheduledDateTime - IATALocationCode - StationName - TerminalName - CabinType: - CabinTypeCode - CabinTypeName - Dep: - AircraftScheduledDateTime - IATALocationCode - StationName - TerminalName - Duration - MarketingCarrierInfo: - CarrierDesignCode - CarrierName - MarketingCarrierFlightNumberText - RBDCode - Pax: - PaxID		

Input parameters to be transitioned from OrderViewRS to SeatAvailabilityRQ	API Flow	Output parameters for transitioning from OrderViewRS (SeatAvailabilityRS) to ???
PTC		

The SeatAvailabilityRQ service comprises of the following structure:

- [MessageDoc](#)
- [PayloadAttributes](#)
- [PointOfSale](#)
- [Party - Sender](#)
- [CoreRequest](#)
- [Pax](#)
- [ShoppingResponse](#)

User Guidance - Service Input Parameters

Input Parameters	Type	Optional/Mandatory
Request Object	SeatAvailRQ	M

Request Parameters

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	MessageDoc Type	O
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M

PointOfSale		
Elements	Details	Optional/Mandatory
PointOfSale	Point of Sale information.	O
Party - Sender		
Elements	Details	Optional/Mandatory
Party	NDC Message/ Transaction Party(s) information. <i>Note:</i> Information about parties is intended for business use, it's not intended for transaction authentication and routing of the message.	M

Request Definition

CoreRequest		
Elements	Details	Optional/Mandatory
Request	SeatAvailability request information.	M
ResponseParameters	Information related to how shopping results should be returned in the response.	O
CurParameter	Requested search processing and results currency information.	O
RequestedCurCode	Currency Code as per ISO 4217.	O
CoreRequest	Core Service List request including choice of Journey information, Offer, or Order references.	M

Offer	A proposal to sell a specific set of products or Services under specific conditions, for a certain price. Can be the response to a shopping request.	M
OfferID	Carrier assigned ID which uniquely identifies a specific Offer across several messages.	M
OwnerCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	M
PaxSegment	Transportation of a passenger on a Dated Operating Segment.	O
Arrival	The action or process of arriving of a transport vehicle in any place or location.	M
AircraftScheduledDateTim e	The Scheduled Date and Time of Arrival of the aircraft at the terminal or departure gate at an airport.	O
IATALocationCode	IATA defined code identifying a city or station.	O
CabinType	Type of compartment of an aircraft, offering specific services (e.g. business class, economy).	O
CabinTypeCode	Cabin Type Code as defined by PADIS codeset (e.g. 1, 2, 3, etc.)	O
CabinTypeName	Name given to a cabin compartment (e.g. Business, First, Economy).	O
DatedOperatingLeg	The nonstop operation of a transport vehicle between the departure station and the arrival station. Can be used for aircrafts as well as other transport vehicles such as train or bus etc.	O

IATAAircraftType	Grouping of aircrafts with the same form, function and specification, currently flown, or soon to be flown. Possible types are defined in the IATA SSIM.	O
IATAAircraftTypeCode	Code assigned to an aircraft type in IATA SSIM.	O
Dep	The action or process of leaving of a transport vehicle from any place or location.	M
AircraftScheduledDateTim e	The Scheduled Date and Time of Departure of the aircraft at the terminal or departure gate at an airport.	O
IATALocationCode	IATA defined code identifying a city or station.	O
TerminalName	The name of the terminal.	O
Duration	Total segment time including the combined air time and connection times of any legs.	O
MarketingCarrierInfo	The commercial designation under which a Dated Operating Segment can be booked, either under the operating carrier's designator or that of another carrier (codeshare).	O
CarrierDesigCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	O
CarrierName	Commercial name of the carrier.	O
MarketingCarrierFlightNum berText	The numerical designation of a flight as it is marketed by a carrier.	O
RBDCode	Code used to identify a particular RBD (e.g. P, J, W, M, etc.).	O
Value	The value of RBD . Example: S	O

OperatingCarrierInfo	An operation between board point and any subsequent off point within the same flight designator. Could be one or more legs. Could also be used for other transport vehicles such as train or bus etc.	O
CarrierDesigCode	An Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	O
OperatingCarrierFlightNumberText	The numerical designation of a flight as it is operated by a carrier. Example: 0106	O
PaxSegmentID	Uniquely identifies a Passenger Segment within the context of one message. Note: If you are passing OfferID, then you need to pass PaxSegmentID also. There are three ways to use Seatmap: 1. Prime Booking Flow - You will need OfferID and PaxSegmentID. 2. Post Booking Flow - OrderID, OrderitemID and PaxSegmentID. 3. Pass Flight Data - Carrier, Flight number and Date. (Not recommended)	O

Pax		
Elements	Details	Optional/Mandatory

Pax	Any person except members of the crew carried or to be carried with the consent of the carrier, on board of any transport vehicle such as aircraft, train, bus, ship. Holds the attributes specific to a one booking, from shopping.  Note: We have the ability to handle frequent flyer numbers that comes under loyalty program. This will be providing more information in the document.	O
Individual	A single human being as distinct from a group, class, or family.	O
GivenName	A personal name given to the individual at birth and used before a family name. Also called first name. Example: JOHN.	O
MiddleName	Individual's middle name or initial. Example: G, GEORGE.	O
Surname	Individual's hereditary name(s) common to all members of a family. Also known as family name or last name. Example: SMITH. Excludes any potential suffix.	O
TitleName	A word such as Mr., Mrs., Miss or Dr that is used before an individual's name to indicate the gender, profession or marital status.	O
PaxID	Uniquely identifies a Passenger within the context of one message.	O
PTC	Type code applying to the Passenger which typically drives pricing Example: ADT, CHD.	O
Birthdate	The date on which an individual was born.	O

ShoppingResponse		
Elements	Details	Optional/Mandatory
ShoppingResponse	Shopping session (message response) ID.	O
ShoppingResponseID	Unique shopping session response ID. Example: ac2.tx-pl-ae9c60fd-f118-4e7a-86ab-a2ca4a1e52df	O

For more details [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.4.2 18.6 SeatAvailabilityRS

Introduction

The Seat Availability transaction set returns data used to construct respective seat maps with fully integrated fees for any identified premium seats. The message also returns multi-media content at the message level with media content references at the individual service level.

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.6. The following are the element checklist to be received in seat availability response. The elements which are marked “**M**” are mandatory to be passed in request. The parameters passed as “**O**” are optional, it is well and good if implemented.

Our SeatAvailability Response constitutes the below structure:

- [MessageDoc](#)
- [PayloadAttributes](#)
- [ALaCarteOffer](#)
- [DataLists](#)
- [SeatMap](#)
- [ShoppingResponse](#)
- [PaymentFunctions](#)

Note: Please use the sample attached and pass the elements accordingly.

User Guidance - Service Input Parameters

Input Parameters	Type	Optional/Mandatory
Response Object	SeatAvailRS	M
MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	Message document information. Note: MessageDoc is optional (O) in split ticketing scenarios.	M
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M

Response Definition

Note: A response API's optional and mandatory fields are determined by which elements are used in the corresponding request API.

ALaCarteOffer		
Elements	Details	Optional/Mandatory
ALaCarteOffer	A proposal to sell a specific set of products or services under specific conditions, for a certain price. Can be a response to a shopping request.	M
ALaCarteOfferItem	Contains one service (excluding flights) or service bundle which is priced per unit. A La Carte Offer items are optional, and the quantities of these can be selected for any of the eligible passengers and segments.	M
Eligibility	Refers to the passengers, price class or segments for which this offer item is eligible.	M
FlightAssociations	Eligibility of this offer item to the following segments or journeys.	M
PaxSegmentRefID	The reference to the flight segments which this offer item provides. Example: S1	M
PaxRefID	The reference to the passengers who are eligible for this offer item. Example: PAX1	M
OfferItemID	Uniquely identifies an offer within the context of one message. Example: W380A3268-7F91-4F52-BD60-1-1	M
UnitPrice	The price per unit for an offer	M
CurConversion	The result of converting one currency into another currency. E.g. local currency to USD, air miles to monetary.	M

ALaCarteOffer		
Elements	Details	Optional/Mandatory
Amount	The amount and currency specified in the converted currency. Example: 15000 USD	M
value	The value of <code>Amount</code> . Example: 23.7	M
CurCode	The currency code of <code>Amount</code> . Example: USD, GBP, AUD.	M
ConversionRate	Defines the rate used to convert the local currency into the billing currency.	M
value	The value of <code>ConversionRate</code> . Example: 5542515889330287	M
LocalAmount	The amount and currency as specified by the local country.	M
value	The value of <code>LocalAmount</code> . Example: 234.5	M
CurCode	The currency code of <code>LocalAmount</code> . Example: USD. GBP, AUD.	M
TotalAmount	Total monetary price amount, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 234.5	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD. GBP, AUD.	M

ALaCarteOffer		
Elements	Details	Optional/Mandatory
OfferID	A carrier assigned ID which uniquely identifies a specific offer across several messages. Example: W380A3268-7F91-4F52-BD60-1	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF	M

DataLists		
Elements	Details	Optional/Mandatory
PaxSegmentList	Segment data list definition.	M
PaxList	Passenger data list definition.	M

SeatMap		
Elements	Details	Optional/Mandatory
SeatMap	Returns a list of cabins and the seats within in. This information can be used by the seller to render a graphical seat map.	M
CabinCompartment	A physical aircraft compartment where passenger seats are installed, classified by a given Cabin Type.	M

SeatMap		
CabinCompartmentID	Identifier assigned by a Carrier which uniquely identifies a Cabin Compartment.  Note: CabinCompartment ID is optional (O) in multi-city scenarios.	M
CabinComponent	Non-seat related cabin feature or facility. Example: • Lavatory • Galley • Closet • Stowage  Note: CabinComponent is optional (O) in split ticketing scenarios.	M
ColumnID	The identifier of the column. Example: AB-EF  Note: ColumnID is optional (O) in split ticketing scenarios.	M

SeatMap		
FirstRowNumber	First row number of the cabin compartment. Example: 5  Note: FirstRowNumber is optional (O) in split ticketing scenarios.	M
LastRowNumber	Last row number of the cabin compartment. Example: 25  Note: LastRowNumber is optional (O) in split ticketing scenarios.	M
CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy.	M
CabinTypeCode	The cabin type code as defined by PADIS codeset. Example: Y	M
CabinTypeName	The name given to a cabin compartment. Example: First Class, Business Class, Economy Class.  Note: CabinTypeName is mandatory (M) in split ticketing scenarios.	O
ColumnID	The identifier of the column. Example: AB-EF	M

SeatMap		
FirstRowNumber	First row number of the cabin compartment. Example: 5	M
LastRowNumber	Last row number of the cabin compartment. Example: 25	M
SeatRow	The row of passenger seats located in the cabin.	M
RowNumber	The ordinal number identifying a seat row in an aircraft. Example: 5	M
Seat	A sitting place for a passenger located in the cabin.	M
ColumnID	The alphabetic character identifying a seat within a row. Example: A	M
OccupationStatusCode	Information related to the availability of a particular seat on leg. Example: F	M
OfferItemRefID	A reference to the price point applicable to an individual seat. Multiple seats can reference the same OfferItem. Example: W380A3268-7F91-4F52-BD60-1-1	M
SeatCharacteristicCode	Characteristic of an aircraft seat. Based on the PADIS code list 9825. Example: 1A, LS, PC, W.	M

SeatMap		
SeatProfileRefID	Assign additional properties of this seat instance by referencing a Seat Profile ID in DataLists. Example: SP3-SEG-QF733~QF733~20231231084 O~202312311015~O  Note: SeatProfileRefID is mandatory (M) in split ticketing scenarios.	O
PaxSegmentRefID	References a Passenger Segment ID from this message or from within the SeatAvailability request. Example: S1  Note: PaxSegmentRefID is optional (O) in split ticketing scenarios.	M

ShoppingResponse		
Elements	Details	Optional/Mandatory

ShoppingResponse		
ShoppingResponse	Facilitates the tracking of what was offered and contains an identifier unique to the source Airline for a set of product offers returned in response to a shopping request.  Note: ShoppingResponse is optional (O) in split ticketing scenarios.	M
ShoppingResponseID	Unique shopping session response ID. Example: W380A3268-7F91-4F52-BD60  Note: ShoppingResponse ID is optional (O) in split ticketing scenarios.	M

PaymentFunctions		
Elements	Details	Optional/Mandatory
PaymentFunctions	The payment function information.	O
PaymentSupportedMethod	The payment method accepted by an airline that is used during a SeatAvailability request.	O

PaymentTypeCode	The payment type code of the payment method as determined by the ATS Codeset PAYT. Example: On Account With Agency	O
PaymentBrandCode	The form of payment brand code as determined by the ATS Codeset PAYB. Example: VI	O
PaymentMethodAddlInfo	Additional information about the payment method	O
PaymentOtherMethodAddlInfo	Additional information about the other form of payment.	O
Remarks	Additional and supplementary information about the form of payment.	O
RemarkText	The value of the Remarks . Example: Credit/Debit Card	O

For more details [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.4.3 18.6 SeatAvailability Error Codes

Error Code	Error Message
461	Ineligible for Requested Action -Group PNR not allowed
272	Number of Seats Requested Does Not Equal the Number in Party
474	Cannot find passenger details
486	Unknown
492	Invalid passenger selection
68	Max number of passenger per request exceeded

Error Code	Error Message
73	Invalid age for PTC
75G	Agency not authorized to sell this fare
294	Invalid Format
368	Not authorized
129	No PNR Match Found
132	Exceeds Maximum Number of Segments
143	Invalid or Ineligible Passenger Type Code
146	Unequal Number of Names/Number in Party
190	Invalid Processing Indicator
200	Advance Seat Selection Not Available for this Flight
201	Advance Seat Selection Not Available for this Class/Compartment/Zone
208	Advance Seat Selection Not Available, Flight Already Departed
219	Advance Seat Request on Code Share Carrier Flight Restricted
260	Invalid Frequent Traveler Number
467	Flight segment not found in carrier's PNR
76H	Unable to process requested option
911	Unable to process - system error
490	Unable to retrieve offer
368	Not authorized
73Q	Invalid/missing flight segment data
290	Unable to Process Advance Seat Request

Error Code	Error Message
526	This is currently unavailable (526). Please try again by selecting an alternate seat or contact your local administrator.
525	An error during seat selection has occurred (525). Please contact your local administrator.
210	Advance Seat Selection Not Available, Flight Does.
211	Advance Seat Selection Not Available, Flight Does.
212	Advance Seat Selection Not Available, Flight Does.
213	Advance Seat Selection Not Available, Flight Does.
214	Advance Seat Assignment Cancelled, Re-request Seat.
215	Advance Seat Request Code Share Carrier Flight - S.
216	Advance Seat Request is not Within Minimum/Maximum.
217	Advance Seat Request is not Within Minimum/Maximum.
218	Advance Seat Request is not Within Minimum/Maximum.
219	Advance Seat Request on Code Share Carrier Flight.
22	Invalid traffic restriction coded.
220	Bassinet Seat has been Reserved.
221	Bassinet/Non-Film Viewing Seat has been Reserved.
222	Boarding Pass Request on Code Share Carrier Flight.
223	Boarding Pass Request is not Within Minimum/Maximu.
224	Boarding Pass Request is not Within Minimum/Maximu.
225	Boarding Pass Request is not Within Minimum/Maximu.
226	Boarding Pass Request Denied, Airport Check-In Act.

Error Code	Error Message
227	Boarding Pass Request Denied, Maintenance In Progr.
228	Boarding Pass Request Denied, For this Flight.
229	Boarding Pass Request Denied, This Class/Compartme.
23	Invalid traffic restriction type coded.
230	Boarding Pass Request Denied, This Carrier.
231	Boarding Pass Request Denied, Authorized for Full.
232	Boarding Pass Request Temporarily Not Available, S.
233	Boarding Pass Request Temporarily Not Available, O.
234	Boarding Pass Request Temporarily Not Available, A.
235	Boarding Pass Request Temporarily Not Authorized t.
236	Boarding Pass Request Not Available, Flight Ahead.
237	Boarding Pass Request Not Available, Flight Does N.
238	Boarding Pass Request Not Available, Flight Does N.
239	Boarding Pass Request Not Available, Flight Does N.
24	Invalid traffic restriction qualifier coded.
240	Boarding Pass Request Not Available, Flight Does N.
241	Boarding Pass Request Not Available, Flight Does N.
242	Handicap Seat has been Reserved.
243	Invalid Boardpoint and/or Off Point in Boarding Pa.
247	Invalid Flight Number in Boarding Pass Request.
248	Invalid Boardpoint in Boarding Pass Request.

Error Code	Error Message
249	Invalid Offpoint in Boarding Pass Request.
25	Invalid transport stage qualifier coded.
250	Invalid Flight Date for Advance Seat Request.
251	Invalid Boardpoint and/or Offpoint in Advance Seat.
252	Invalid Flight Number in Advance Seat Request.
253	Invalid Boardpoint in Advance Seat Request.
254	Invalid Offpoint in Advance Seat Request.
255	Invalid Seat Number, for this Class/Compartment.
256	Invalid Seat Number for Aircraft Type.
257	Invalid Seat Number Format.
258	Invalid Generic Seat Characteristic Code.
259	Invalid Combination of Generic Codes.
260	Invalid Frequent Traveler Number.
261	Invalid Row Number, For this Class/Compartment.
262	Invalid Row Number, For this Aircraft Configuratio.
263	Invalid Row Number Format.
264	Invalid Row Request, Number of Seats Required Exce.
265	Invalid Seat Facility/Characteristic for the Seat.
266	Limited Recline Seat has been Reserved.
267	Name in the Request Does Not Match Name in Reserva.
268	Need Names, Passenger Name Information Required to.

Error Code	Error Message
269	Indicates that Additional Data for this Message Re.
270	Non-Film Viewing Seat has been Reserved.
271	Number of Seats Requested Exceeds Maximum Allowed.
272	Number of Seats Requested Does Not Equal the Numbe.
273	Request Specific Seat Number, Generic Request Inhi.
274	Request Specific Seat Number for Bassinet Seat.
275	Request Specific Seat Number for Non-Film Viewing.
276	Requested Seat Type Not Available.
277	Seat Request Includes Duplicate Seat Numbers/Codes.
278	Seat Request Restricted During Divided PNR.
279	Seat Request Restricted During Name Change.
280	Seat Request Restricted During Reduce Number in Pa.
281	Specific Seat Requested Not Available.
282	Specific Seat Requested Not Available, Only One In.
283	Specific Seat Requested Not Available - Restricted.
284	Specific Seat Requested Not Available for Unaccomp.
285	Simultaneous Changes to PNR, Related to Boarding P.
286	Through Seat Not Available.
287	Unable to Satisfy, Need Smoking/No-Smoking Code.
288	Unable to Satisfy, Need Confirmed Flight Status.
289	Unable to Retrieve PNR, Database Error.

Error Code	Error Message
290	Unable to Process Advance Seat Request.
291	Unable to Process Boarding Pass Request.
292	Segment Sells Restricted.
293	Unable to Sell Due to Sales Limit being Reached.
294	Invalid Format.
295	No Flights Requested.
3	Invalid transfer sequence.
301	Application Suspended.
302	Invalid Length.
303	Flight Cancelled.
304	System Temporarily Unavailable.
305	Security/Audit Failure.
306	Invalid Language Code.
307	Received from data missing.
308	Received from data invalid.
309	Received from data missing or invalid.
310	Ticket arrangement data missing.
311	Ticket arrangement data invalid.
312	Ticket arrangement data missing or invalid.
313	Name element data missing.
314	Name element data invalid.

Error Code	Error Message
315	Name element data missing or invalid.
316	Contact element (phone and/or address) missing.
317	Contact element (phone and/or address) invalid.
318	Contact element (phone and/or address) missing or.
319	Name element order error (e.g.:corp name must be f.
320	Invalid segment status.
321	Duplicate flight segment.
322	Segment continuity error.
323	Invalid itinerary order (e.g.: ARNK segment cannot.
324	Number of infants exceeds maximum allowed per adul.
325	Related system reference error.
326	Sending system reference error.
327	Invalid segment data in itinerary.
328	Invalid aircraft registration.
329	Invalid hold version.
330	invalid loading type.
331	Invalid ULD type.
332	Invalid serial number.
333	Invalid contour/height code.
334	Invalid tare weight.
335	Unit code unknown.

Error Code	Error Message
336	Invalid category code.
337	Invalid special load reference.
338	Invalid weight status.
339	Weight/volume exceeded.
340	Invalid PCS/WGT/QTY.
341	UN vs PSN error.
342	Not suitable for passenger aircraft.
343	Not suitable for cargo aircraft.
344	Not suitable for hold.
345	Not suitable for compartment.
346	Not suitable for position.
347	Incompatible loads.
348	Invalid flight status.
349	Invalid application/product identification.
350	Flight under airport control.
351	Invalid cancel - married connection single leg(s).
352	Link to inventory system is unavailable.
353	Exceeds number of flights for inventory system boo.
354	Invalid product status.
356	Query control tables full.
357	Declined to process interactively-default to backu.

Error Code	Error Message
360	Invalid PNR file address.
361	PNR is secured.
362	Unable to display PNR and/or name list.
363	PNR too long.
364	Invalid ticket number.
365	Invalid responding system in-house code.
366	Name list too long.
367	No active itinerary.
368	Not authorized.
369	No PNR is active, redisplay PNR required.
370	Simultaneous changes to PNR.
371	Prior PNR display required.
372	PNR has already been claim.
373	Ineligible for claim - all open/auxiliary itinerar.
374	Ineligible for claim - ticket by mail/PTA present/.
375	Requestor not authorized for this function for thi.
376	Pricing/ticketing error, text information specifie.
377	Unable to price, multiple discounts apply.
378	No rule pricing error, text information specified.
379	Joint fare pricing error, text information specifi.
380	Ineligible for claim in current form-an update mus.

Error Code	Error Message
381	Record locator required.
382	PNR status value not equal.
383	Invalid chagne to status code.
384	Multiple Name Matches.
385	Mutually exclusive optional parameters.
386	Invalid minimum/maximum connect time specified.
387	Blackout for this date.
388	Invalid cancel due married connection; remaining s.
389	Invalid cancel due married connection; remaining s.
390	Unable to reformat.
391	PNR contains non air segments.
392	Invalid block type/name.
393	Block sell restricted-request block name change.
394	Segment not valid for electronic ticketing.
395	Already ticketed.
396	Invalid ticket/coupon status.
397	Maximum ticket limit reached.
398	Advance Boarding Pass already exists.
399	Duplicate Name.
4	Invalid city/airport code.
400	Duplicate ticket number.

Error Code	Error Message
401	Ticket number not found.
403	Requested Data Not Sorted.
404	No Service Between Requested Cities/Airports.
405	No Service Between Requested Cities/Airports for P.
406	No Service Between Requested Cities/Airports for P.
407	No Service Between Requested Cities/Airports for P.
408	No More Data Available.
409	Request is Outside System Date Range.
410	Flight does not operate due to weather, mechanical.
411	Flight Does Not Operate on Date Requested.
412	Flight Does Not Operate Between Requested Cities.
413	Requested Flight Not Active.
414	Need Prior Availability Request.
415	Need Prior Schedule Request.
416	Need Prior Timetable Request.
417	Repeat Request Updating in Progress.
418	Flight has Departed.
419	Flight is Boarding.
420	Not Available but Waitlist is Open.
421	Not Available and Waitlist is Closed.
422	Not Available Due to Traffic Restrictions.

Error Code	Error Message
423	Free ticket request rejected; not enough points fo.
424	Card number does not match with name for FQTV.
425	Discount not applicable on the company for FQTV.
426	Card expiry date is returned for FQTV.
427	Ticket issuance not authorized; number not verifie.
428	Verification restricted for this requestor for FQT.
429	Product/account number verification denied for FQT.
430	Invalid product/account number for FQTV.
431	Invalid discount code for FQTV.
432	Returned discount code is different for FQTV.
433	Returned company code is different for FQTV.
434	Additional product is returned for FQTV.
435	Unable - flight operated by another carrier code s.
436	Not available due to mixed fare class.
437	Carrier must be in separate PNR.
438	Request is outside system date range for this carr.
439	Waitlisting not allowed for this carrier within th.
440	Void request on already voided or printed coupons.
441	Invalid Priority Number.
442	System in control of device is unknown.
443	Device address is unknown.

Error Code	Error Message
444	Part number is out of sequence.
445	Security indicator requires originator ID.
446	Device cannot handle this material.
447	Ineligible for claim-PNR available for display.
5	Invalid time mode.
6	Invalid operational suffix.
7	Invalid period of schedule validity.
8	Invalid days of operation.
9	Invalid frequency rate.
900	Inactivity Time Out Value Exceeded.
901	Communications Line Unavailable.
902	Prior Message Being Processed.
911	Unable to process - system error.
912	Incomplete message - data missing in query.
913	Item/data not found or data not existing in process.
914	Invalid format/data - data does not match EDIFACT.
915	No action - processing host cannot support functio.
916	EDIFACT version not supported.
917	EDIFACT message size exceeded.

5.4.4 18.6 SeatAvailabilityRS Codes

The SeatAvailRS message contains several coded fields, and it's important to correctly interpret them.

SeatAvailability

The most important coded field is `OccupationStatusCode` (/IATA_SeatAvailRS/Response/SeatMap/CabinCompartment/SeatRow/Seat/OccupationStatusCode) which indicates whether the seat can be chosen, and if not why it cannot be chosen.

This follows PADIS codeset 9865, and for almost all cases only 'F' should be treated as available for selection and every other value treated as unavailable for selection. The most commonly returned values are F (free), O (occupied), and R (restricted by airline) since airlines rarely tell travel agencies why a seat is unavailable, and many are only used within the Departure Control window. The full set of codes is as follows:

Code	Description
1	Seat waitlist open
2	Seat waitlist closed
3	Seat available on request to airline
9	Premium reserved seat - not checked in
B	Advanced boarding pass seat
C	Check-in reserved seat
D	Seat blocked for dead-load
E	Extra seat
F	Seat is free
G	Seat reserved for group pre-allocation
H	Courtesy reserved seat
I	Seat not available for interline through check-in
M	Seat occupied for medical reasons
N	Seat not designated for specified RBD
O	Seat is occupied

Code	Description
Q	No seat here
R	Reserved seat generic
S	Seat protected for code-sharing
T	Seat occupied by transit passenger/load
U	Upline protected seat
V	Downline protected seat
X	Seat not available for partner use
Y	Advanced selection seat
Z	Seat blocked for other reasons

Seat and row characteristics

The second important coded field is use to describe the characteristics of individual seats, and entire rows.

Seat characteristics (in /IATA_SeatAvailRS/Response/SeatMap/CabinCompartment/SeatRow/Seat/SeatCharacteristicCode) are defined by PADIS codeset 9825. Row characteristics (/IATA_SeatAvailRS/Response/SeatMap/CabinCompartment/SeatRow/RowCharacteristicCode) by PADIS codeset 9864. Columns characteristics are defined by PADIS codeset 9882, but not returned until later versions of NDC.

The values are consistent across codesets, with the seat characteristics including all of the values that are in row and column characteristics. If characteristics are interpreted on a seat by seat basis, then it is important to process both the per-seat characteristic and the characteristic of the it belongs to.

The row characteristics, which apply to rows in `RowCharacteristicCode` are as follows with the most useful ones shaded blue

Code	Description
10	Row designated for RBD A
11	Row designated for RBD B
12	Row designated for RBD C

Code	Description
13	Row designated for RBD D
14	Row designated for RBD F
15	Row designated for RBD H
16	Row designated for RBD J
17	Row designated for RBD K
18	Row designated for RBD L
19	Row designated for RBD M
20	Row designated for RBD P
21	Row designated for RBD Q
23	Row designated for RBD S
24	Row designated for RBD T
25	Row designated for RBD V
26	Row designated for RBD W
27	Row designated for RBD Y
A	Extra leg room
B	Buffer row
C	Row with cabin facilities in designated column
CC	Row with cabin facilities in undesignated column
CH	Chargeable seat
D	Seat restrictions apply in this row
E	Exit row

Code	Description
EC	Exit row with cabin facilities in designated column
EL	Exit left
ER	Exit right
FC	Front of cabin/class compartment
I	Indifferent row
K	Over-wing row
L	Lower-deck row
M	Main-deck row
MV	Row with movie screen
N	Non-smoking row
S	Smoking row
U	Upper-deck row
X	Not over-wing row (rarely used)
XC	Exit row with cabin facilities in undesignated column
Z	Row does not exist



For historic reasons, there is no code 22, and no codes for a row being designated for RBDs E, G, I, N, O, R, U, X, or Z.

The seat characteristics, used in `SeatCharacteristicCode` are as follows with the most useful ones for passengers choosing seats shaded blue, the ones indicating other cabin items shaded yellow, special restrictions on which passengers can sit there in shaded red.

Code	Description
1	Restricted seat - general

Code	Description
2	Leg rest available
3	Individual video screen - with choice of movies
4	Not a window seat (even though in window column)
6	Near galley
7	Near toilet
8	No seat at this location
9	Centre seat (not aisle or window)
10	Row designated for RBD A
11	Row designated for RBD B
12	Row designated for RBD C
13	Row designated for RBD D
14	Row designated for RBD F
15	Row designated for RBD H
16	Row designated for RBD J
17	Row designated for RBD K
18	Row designated for RBD L
19	Row designated for RBD M
20	Row designated for RBD P
21	Row designated for RBD Q
23	Row designated for RBD S
24	Row designated for RBD T

Code	Description
25	Row designated for RBD V
26	Row designated for RBD W
27	Row designated for RBD Y
1A	Seat not suitable for infant
1B	Seat not suitable for medical
1C	Seat not suitable for un-accompanied minor
1D	Restricted recline seat
1E	Seat with airbag in seatbelt
1M	Seat with movie view
1W	Window seat without window
3A	Individual video screen - no choice of movie
3B	Individual video screen - choice of movie, games etc
33	Seat designated for tier 1
34	Seat designated for tier 2
35	Seat designated for tier 3
36	Seat designated for tier 4
37	Seat designated for neighbour-free seating
38	Seat block designated for reservation agents
39	Seat block designated for reservation or airport agents
40	Seat block designated for airport agents
61	Seat designated for fare 1

Code	Description
62	Seat designated for fare 2
63	Seat designated for fare 3
64	Seat designated for fare 4
65	Seat designated for fare 5
66	Seat designated for fare 6
70	Individual video screen, unspecified services
71	Not a seat - access to handicapped lavatory
72	Undesirable seat
73	Conditional chargeable seat
6A	In front of galley seat
6B	Behind galley seat
7A	In front of toilet seat
7B	Behind toilet seat
AW	All available window seats
B	Seat with bassinet facility
BA	Not a seat - bar
BK	Blocked for preferential passenger in adjacent seat
BC	Seat blocked for codeshare partner
BE	Seat block designated for basic economy
BR	Seat is broken - not available for use
BS	Business class suite

Code	Description
C	Crew seat
CC	Centre section seat
CH	Chargeable seat
CL	Not a seat - closet
D	Not a seat - exit door
DE	Deportee
E	Exit and emergency exit
EA	Not an exit seat (in otherwise exit row)
EC	AC power outlet
EK	Economy comfort seat
ES	Suite
EX	Not a seat - emergency exit
F	Added seat
FC	Front of cabin/class compartment
FS	First class suite
G	Seat at forward end of cabin
GF	General facility
GN	Not a seat - galley
GR	Group allocation seat
H	Seat with facilities for handicapped passenger
I	Seat suitable for adult with an infant

Code	Description
IA	Inside aisle seat
IE	Seat not suitable for a child
IF	Seat suitable for forward-facing child restraint
IK	Adjacent seat blocked for infant
IR	Seat suitable for rear-facing child restraint
J	Rear-facing seat
JS	Seat designated for additional jump seat
K	Bulkhead seat
KA	Bulkhead seat, with movie screen
L	Leg space seat
LA	Not a seat - lavatory
LB	Rear-facing lie-flat seat
LE	Left-facing lie-flat seat more angle
LF	Lie-flat seat
LG	Not a seat - luggage storage
LH	Restricted seat - long haul segments
LL	Lie-flat left-facing seat
LR	Lie-flat right-facing seat
LS	Left side of aircraft
LT	Right-facing lie-flat seat more angle
M	Seat without a movie view

Code	Description
MA	Medically OK to travel
ML	Suitable for large musical instrument
MS	Middle seat
MX	Suitable for extra-large musical instrument
N	No smoking seat
O	Preferential seat
OW	Over-wing seat
P	Extra seat for comfort - arm rest can be raised
PC	Pet cabin
PE	Premium economy suite
Q	Seat in quiet zone
RS	Right side of aircraft
S	Smoking seat
SC	Skycouch
SO	Not a seat - storage space
ST	Not a seat - stairs to upper deck
T	Rear/tail section of aircraft
TA	Not a seat - table
U	Seat suitable for un-accompanied minors
UP	Upper deck
US	USB power port

Code	Description
V	Seat to be left vacant or offered last
W	Window seat
WA	Wing and aisle together
X	No facility seat
Z	Buffer zone seat

5.5 18.6 OrderCancel Overview

The OrderCancel web service provides the ability to cancel the booking created by the participant when the customer decides that they no longer require the services that are booked. Primarily the service cancels the booking. Additionally, if the tickets are already issued, the service can process the void/refund depending upon the fare rules and conditions attached to the ticket by the supplier.

If required, the ticket issuing agent can void the issued tickets using the same service. However, the void feature is governed by local regulations as well as supplier rules. Generally, the ticket should be voided before 23.59h local time, or the ticket issuance date advances to the next day. In some parts of the world, a 24hours cooling period is permitted. The final decision rests with the ticketing airline, which will respond to the OrderCancelRQ. Whenever void is permitted, 100% of the ticket value will be refunded.

In case the cooling period expiry or void is not permitted, a refund request has to be processed using this web service. Depending upon the fare rules communicated at the time of ticketing (non-refundable, refundable with charges, refundable without charges, etc.), the ticket may qualify for a refund.

Order is managed by OrderID provided by TPConnects. It is linked to the Airline PNR as well as GDS PNR, if any.

Order ID (TPConnects TripID)




Note: If you have an Airline / GDS PNR Record Locator, the best practice is to use the Order ID and Owner Code field (not the BookingRef structure). Note that the Order ID is Provided by TPConnects Gateway and communicated through OrderRetrieve, OrderList web services. In the case of Split PNRs, additional Order IDs are provided.

Order Cancel

If the passenger wishes to cancel the booking, the seller can then send an Order Cancellation request to the Airline. The Airline will reply with a confirmation in an Order Cancellation response.

The OrderCancel service can only be used to cancel bookings that were originally made by the seller using the TPConnects Shopping and Order APIs.

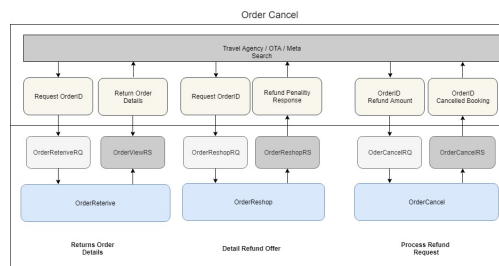

For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.5.1 18.6 OrderCancelRequest (OrderCancelRQ)

Introduction

The OrderCancelRQ transaction set requests the cancellation of specified orders and returns confirmation of cancellation.

Implementation

This section describes the implementation of the request message based on the NDC schema version 18.6. The following are the element checklist passed in the order cancel request of TPC. The elements that are marked “M” are mandatory, and elements marked “O” are optional.

To transition from OrderRetrieveRS to an OrderCancelRQ request, the seller must provide the necessary input parameters from the OrderRetrieveRS - OrderViewRS response.

Required Input parameters for the OrderCancelRQ request from OrderRetrieveRS - OrderViewRS response	API Flow	Output parameters from OrderCancelRS - OrderViewRS
AgencyID	OrderCancelRQ  OrderViewRS (OrderCancelRS)	RemarkText
IATANumber		OrderRefID
Name		Name
PseudoCityID		RefVersionNumber
TravelAgentID		EchoTokenText
EchoTokenText		VersionNumber
BookingID		
OrderID		
OwnerCode		
OrderCancelProcessing		
ReasonCode : Enter Cancel to cancel a deferred (Book and Hold) booking or enter Void to cancel a confirmed (ticketed) booking.		

Required Input parameters for the OrderCancelRQ request from OrderRetrieveRS - OrderViewRS response	API Flow	Output parameters from OrderCancelRS - OrderViewRS
ExpectedRefundAmount - TotalAmount - value : Get this value from the TotalAmount element in the OrderRetrieveRS - OrderViewRS response.		



Note: Please use the sample attached and pass the elements accordingly.

Below is the structure of the service:

- MessageDoc
- Party - Sender
- PayloadAttributes
- PointOfSale
- BookingRef
- Order
- OrderCancelProcessing

Request Parameters

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	MessageDoc Type	O

Party - Sender		
Elements	Details	Optional/Mandatory
Party	NDC Message/ Transaction Party(s) information. Note that information about parties is intended for business use, it is not intended for transaction authentication and routing of the message.	M
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M
PointOfSale		
Elements	Details	Optional/Mandatory
PointOfSale	Point of sale information.	O

Request Definition

BookingRef		
Elements	Details	Optional/Mandatory
Request	OrderCancelRQ payload information.	M
BookingRef	Information related to a booking or reservation.	O
BookingEntity	Airline or Organization assigning the booking information.	O
BookingID	Existing booking reference Identifier.	O

BookingRefTypeCode	Booking Reference Type. Example: 6 (Passenger confirmation number) Encoding Scheme: IATA Padis Codeset - List for data element [1153] Reference Qualifier	O
--------------------	---	---

Order		
Elements	Details	Optional/Mandatory
Order	A uniquely identified record of the agreement of one party with another to receive products and services under specified terms and conditions. Order supports the sale of a flexible range of airline products and services that are not necessarily Journey.	M
OrderID	Carrier assigned ID which uniquely identifies a specific Order across several messages.	O
OwnerCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	M
OwnerTypeCode	Indicates whether the owner is the ORA or POA.	O

OrderCancelProcessing		
Elements	Details	Optional/Mandatory
OrderCancelProcessing	Information related to how response results should be returned.	O
ReasonCode	Reason for cancellation.	M

For more details [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.5.2 18.6 OrderCancelRS - OrderViewRS

Introduction

The OrderCancelRS - OrderViewRS transaction set is the system response to OrderCancelRQ, which returns the confirmation of a cancellation.

Implementation

This section describes the implementation of the response message based on the NDC schema version 18.6. The following are the element checklist available in the Order cancel response of TPC. The elements which are marked “**M**” are mandatorily included, and elements marked “**O**” are optional. Depending upon the supplier response, these optional elements may have value or not. Please use and review the samples attached.

OrderCancelRS - OrderViewRS constitutes the below structure:

- [MessageDoc](#)
- [Party - Sender](#)
- [PayloadAttributes](#)
- [Error](#)
- [PaymentInfo](#)
- [Order](#)
- [Processing](#)
- [TicketDocInfo](#)
- [Warning](#)
- [DataLists](#)



Note: For successful order cancellation, the response element will be passed. If there is a failure in the order cancellation, the error element will be passed.



Note: The update of the optional and mandatory information for `OrderCancelRS - OrderViewRS` in split ticketing reshop, reprice, and reissue scenarios is in progress.

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	Message document information.  Note: MessageDoc is optional (O) in split ticketing scenarios.	M
Party - Sender		
Elements	Details	Optional/Mandatory
Party	Party and Sender definition	M
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA Payload standard attributes.	M
Error		
Elements	Details	Optional/Mandatory
Error	Contains information related to errors detected during processing of the preceding request.	O
Code	The code corresponding to the processing error as defined by PADIS 9321.	O
DescText	Free text description of the provided error.	O

StatusText	Document processing status. Recommended values are: • NotProcessed • Incomplete • Complete • Unknown	O
------------	--	---

PaymentInfo		
Elements	Details	Optional/Mandatory
PaymentInfo	Information related to the settlement of a transaction through monetary or other compensations. For example, a payment may be applied to an entire Order or individual Order Items.	M
Amount	The amount applied to the associated payment method. Example: 300 USD	M
value	The value of Amount . Example: 231.4	M
CurCode	The currency of Amount . Example: USD, GBP, AUD.	M
Desc	The description of the payment information.  Note: Desc is optional (O) in split ticketing scenarios.	M

DescText	The payment information description text value. Example: FOP text  Note: DescText is optional (O) in split ticketing scenarios.	M
OrderRefID	The cancelled Order's Order ID reference. Example: 54JWYL  Note: OrderRefID is optional (O) in split ticketing scenarios.	M
PaymentMethod	The payment method used when cancelling the order.  Note: PaymentMethod is optional (O) in split ticketing scenarios.	M
OtherPaymentMethod	Information relating to non-standard forms of payment.  Note: OtherPaymentMethod is optional (O) in split ticketing scenarios.	M

Remark	Additional, supplementary information about the document or service. Example:  Note: Remark is optional (O) in split ticketing scenarios.	M
RemarkText	Additional, supplementary information about the document or service. Example: On Account With Agency  Note: RemarkText is optional (O) in split ticketing scenarios.	M
Voucher	A document that entitles the holder to a discount or that may be exchanged for goods or services.  Note: Voucher is optional (O) in split ticketing scenarios.	M
RemainingAmount	The remaining amount left on a voucher, if used during paying for an offer.  Note: RemainingAmount is optional (O) in split ticketing scenarios.	M

TypeCode	The form of payment type. Examples: Credit Card, Cash. Encoding Scheme: IATA PADIS code list data element [9888] Form of Payment Identification.  Note: TypeCode is optional (O) in split ticketing scenarios.	M
----------	--	---

Response Definition

 **Note:** A response API's optional and mandatory fields are determined by which elements are used in the corresponding request API.

Order		
Elements	Details	Optional/Mandatory
Order	The cancelled orders details.	M
BookingRef	Reference information about a booking.	M
BookingID	The existing booking unique identifier. Example: TPC13478127220D27122023	M
BookingRefTypeCode	The booking reference type code. Example: TPC	M
BookingEntity	The airline or organization assigning the booking information.	M

Carrier	The organisation which carries the passenger, baggage, or goods, and/or commits to delivering the carriage. Including any related services such as the issuance of a ticket or the creation of an order.	M
AirlineDesigCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF	M
OrderID	The carrier assigned ID which uniquely identifies a specific order. Example: T2F6VH	M
OrderItem	An individually priced item within an order, made up of one or more services. May or may not be a selected offer item. Example: Non-chargeable services available on request such as a wheelchair.	M
FareDetail	The fare details section.	M
FareCalculationInfo	Information related to the calculation of the fare amount by applying various rules to determine a final fare for an airline ticket. Note: <code>FareCalculationInfo</code> is optional (O) in split ticketing scenarios.	M

PricingCodeText	The primary identifier reflecting the method of pricing for a transaction. Example: NO8EJWN~MVB8GDQ~MNR9G~ MpB8PD~MpN8@BK~MqB9@MC ~MDB8PBP? ~MAW80230~MMB88.~MBB80.0 7~MRO8OSAJ~MPM8P2/.~MPN8 8786~MPO8WMW~MNP9/ ~MNW8@BS~MQ@960~MCR9/1/ 8/ ~MRL81147~MAA877~MDC8N@~ M?L813644~MBS9?TB~MQD87/ ~MPS82.1~MER91/O~MPQ87~MD @9W~MGC8110010/O// ~MMH81100151/OO~M@Q8P<i>sxxk</i> <i>8lc/CIeqflxKey</i>  Note: <i>PricingCodeText</i> is optional (O) in split ticketing scenarios.	M
FareComponent	A portion of an itinerary between two consecutive fare construction points. If the journey has only one fare component, the points of origin and destination are the only fare construction points.	M
CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy Class.	M
CabinTypeCode	The cabin type code as defined by PADIS codeset. Example: Y	M
CabinTypeName	The name given to a cabin compartment. Example: First, Business, and Economy.	M

FareBasisCityPairText	The identified published fare. Contains the origin and destination city codes and a two character designator of fare owning airline associated with the fare basis code. Example: ADLBNE	M
FareBasisCode	The fare basis code. Example: QDQA	M
FareRule	Special purchasing rules and restrictions used to differentiate fare levels from one another.  Note: FareRule is optional (O) in split ticketing scenarios.	M
PaxSegmentRefID	A reference to a Pax Segment ID. Example: SEG-QF733~QF733~20231231084 O~202312311015~O	M
Price	The price of the order.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of BaseAmount . Example: 143.55	M
CurCode	The currency code of BaseAmount . Example: USD, GBP, AUD.	M
CurConversion	The result of converting one currency into another currency. E.g. local currency to USD, air miles to monetary.	M
ConversionRate	The conversion rate used to convert a currency to another. Example: 0.5542515889330287	M

value	The value of ConversionRate . Example: 0.5542515889330287	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	A compulsory contribution added to a fare	M
Amount	The tax amount added to a fare.	M
value	The value of Amount : Example: 5.49	M
CurCode	The currency code for Amount . Example: USD, GBP, AUD.	M
CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M
Amount	The amount and currency specified in the converted currency. Example: 15000 USD	M
value	The value of Amount . Example: 5.49	M
CurCode	The currency code for Amount . Example: USD, GBP, AUD. Example: GBP	M
LocalAmount	The amount and currency as specified by the local country.	M

value	The value of <code>LocalAmount</code> . Example: 9.89	M
CurCode	The currency code for <code>LocalAmount</code> . Example: USD, GBP, AUD.	M
DescText	A free text description of the provided warning. Example: PASSENGER SERVICE CHARGE DOMESTIC DEPARTURE	M
TaxCode	The IATA TTBS Tax Code. Example: AY, GB	M
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M
value	The value of <code>TotalTaxAmount</code> . Example: 33.73	M
CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 176.43	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP	M

PriceClassRefID	A price point within a particular cabin type, sometimes referred to as 'Fare Families'. Example: RedeDeal-1	M
RBD	The Reservation Booking Designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. E.g. 'J' for Business Class Premium, 'D' for Business Disc.	M
RBDCode	The code used to identify a particular RBD Example: P, J, W, M.	M
value	The value of RBDCode . Example: W	M
Name	The name of the RBDCode . Example: Red eDeal	M
FarePriceType	The type of fair price applied to a Fare Detail. Example: Filed amount, net amount, and or a sell amount.	M
Price	The price of the fair.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of BaseAmount . Example: 416.43	M
CurCode	The currency code for BaseAmount . Example: USD, GBP, AUD.	M

CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M
ConversionRate	The conversion rate used to convert a currency to another. Example: 0.5542515889330287	M
value	The value of <code>ConversionRate</code> . Example: 0.5542515889330287	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
EquivAmount	The entire amount of the transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of <code>EquivAmount</code> . Example: 751.32	M
CurCode	The currency code for <code>EquivAmount</code> . Example: USD, GBP, AUD.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	A compulsory contribution added to a fare.	M
Amount	The tax amount added to a fare.	M
value	The value of <code>Amount</code> : Example: 5.49	M
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP, AUD.	M

CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M
Amount	The amount and currency specified in the converted currency. Example: 15000 USD	M
value	The value of <code>Amount</code> . Example: 5.49	M
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP, AUD.	M
LocalAmount	The amount and currency as specified by the local country.	M
value	The value of <code>LocalAmount</code> . Example: 8.44	M
CurCode	The currency code for <code>LocalAmount</code> . Example: USD, GBP, AUD.	M
DescText	The tax short description. Example: \$4 per flight segment, per passenger (U.S. domestic segment tax)	M
TaxCode	The IATA TTBS Tax Code. Example: AY, GB	M
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M
value	The value of <code>TotalTaxAmount</code> . Example: 93.07	M

CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts. Example: 509.5	M
value	The value of <code>TotalAmount</code> . Example: 509.5	M
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP, AUD.	M
FareRefText	The fare reference key. Example: FO1	M
PaxRefID	The reference to a passenger ID. Example: PAX1	M
OrderItemID	The carrier assigned Order Item ID.	M

OwnerCode	The airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Codes: • ONHOLD - OrderCreateRQ with no FOP results in OVS with OnHold Status • CONFIRMED - Ticketed Booking (First Issue) • EXCHANGED - Ticketed Booking (Reissue) • CANCELLED - Cancelled Booking (no Ticket) • VOIDED - OrderStatus post ticket void • REFUNDED - OrderStatus post ticket refund • DISRUPTED - When segments have been disrupted • TICKETRETAINED/ UNCONFIRMED - Not applicable for this supplier	M
Penalty	The penalty applied to a fare, based on changes to or cancellations of a fare.	M
AppCode	The penalty application type code. Examples: • ADE (After departure) • NOS (No show) • PDE (Prior to departure) • S2IPAX1IPDE	M
CancelFeeInd	The cancel fee indicator. If TRUE, cancellation fee(s) may apply.	M

ChangeFeeInd	The change fee indicator. If TRUE, change of Itinerary fee(s) may apply.	M
DescText	The description of the applicable penalty. Example: Not Allowed.	M
PenaltyAmount	The penalty monetary value amount and currency code.	M
value	The value of <code>PenaltyAmount</code> . Example: 99.	M
CurCode	The currency code for <code>PenaltyAmount</code> . Example: USD, GBP, AUD.	M
TypeCode	The penalty type information. Examples: • Cancellation • Change • NoShow • Upgrade • Other	M
Price	The price of the fare or offer.	M
BaseAmount	The total base fare amount.	M
value	The value of <code>BaseAmount</code> . Example: 416.43	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M

ConversionRate	The conversion rate used to convert a currency to another. Example: 0.5542515889330287	M
value	The value of ConversionRate . Example: 0.5542515889330287	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of EquivAmount . Example: 675.9	M
CurCode	The currency code for EquivAmount . Example: USD, GBP, AUD.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	A compulsory contribution added to a fare.	M
Amount	The tax amount added to a fare.	M
value	The value of Amount : Example: 5.49	M
CurCode	The currency code for Amount . Example: USD, GBP, AUD.	M
CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M

Amount	The amount and currency specified in the converted currency. Example: 15000 USD	M
value	The value of <code>Amount</code> . Example: 5.49	M
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP, AUD.	M
LocalAmount	The amount and currency as specified by the local country.	M
value	The value of <code>LocalAmount</code> . Example: 8.44	M
CurCode	The currency code for <code>LocalAmount</code> . Example: USD, GBP, AUD.	M
DescText	The tax short description Example: Taxes	M
TaxCode	The IATA TTBS Tax Code. Example: AY, GB	M
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts. Example: 93.07	M
value	The value of <code>TotalTaxAmount</code> . Example: 93.07	M
CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M

TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts. Example: 509.5	M
value	The value of <code>TotalAmount</code> . Example: 509.5	M
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP, AUD.	M
Service	The instance of a specific flight or service definition as it has been offered (and eventually ordered and consumed). In the context of a specific offer and or order.	M
PaxRefID	The unique identifier of a passenger. Example: PAX1	M
ServiceAssociations	The references to the details of this Service. May include either passenger journeys, a service definition, or a selected seat.	M
PaxSegmentRefID	The reference to a passenger segment ID in a message. Example: S2	M
ServiceDefinitionRef	The airline specific definition of a product or service (excluding flights) that can be separately sold and delivered. Example: Bag, seat, or meal on a flight.	M
PaxSegmentRefID	References a Passenger Segment ID within this message. Example: S4	M
ServiceDefinitionRefID	References a Service Definition ID within this message. Example: BASRV2D67A650	M

ServiceID	The Service ID assigned by the carrier. Example: SERVICE-ADT	M
StatusCode	The status of the service instance. See PADIS Codelist 4405 for possible values. Example: HK	M
OrderKeys	Order Keys contains one Order ID with an associated Order Item ID(s).  Note: These are orders that were created from offers that have already been purchased, booked, and or are being held for a traveler.	M
OrderRefID	The carrier assigned ID which uniquely identifies a specific order across several messages. Example: T2F6VH	M
OrderItem	An individually priced item within an order, made up of one or more services. May or may not be a selected offer item. Example: Non-chargeable services available on request such as a wheelchair.	M
OrderItemRefID	The carrier assigned Order Item ID. Example: P2C5165E-7CD1-416C-96B01cyl7q38kcw8l-1-1_T1	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M

OriginalOrder	Used when an order has been sub-divided into associated orders and serves as a reference to the original order ID.	M
OrderRefID	The carrier assigned ID which uniquely identifies a specific order across several messages. Example: T2F6VH	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
PaymentTimeLimitDateTime	The date by which a complete payment must be made for the confirmed items in an offer. Example: 2023-12-27T23:59:00	M
StatusCode	The status of the service instance. See PADIS Codelist 4405 for possible values. Example: ONHOLD	M
TotalPrice	The total price of the fare and or offer.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 416.43	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M

CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M
ConversionRate	The conversion rate used to convert a currency to another. Example: 0.5542515889330287	M
value	The value of <code>ConversionRate</code> . Example: 0.5542515889330287	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of <code>EquivAmount</code> . Example: 0.5542515889330287	M
CurCode	The currency code for <code>EquivAmount</code> . Example: USD, GBP, AUD.	M
Markup	The markup applied to an offer or fare.	M
MarkupData	The primary source which contains all the markup data.	M
baseAmount	The original base amount without any markup value applied. Example: 416.43	M
taxAmount	The tax amount to be added to the overall discount/markup. Example: 93.07	M

totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5	M
newBaseAmount	The new base amount after discounts and or markups are applied. Example: 416.43	M
newTotalAmount	The new total amount after discounts and or markups are applied. Example: 509.5	M
visibleMarkup	The calculated amount of visible markup and or discount for a specific type of passenger. Example: 34.6	M
invisibleMarkup	The determined amount of invisible markup and or discount for a specific type of passengers.	M
totalMarkup	The total discount and or markup amount. Example 2	M
markupPerPax	The calculated markup and or discount for both invisible and visible markups per passenger.	M
visibleMarkupPerPax	The calculated visible markup and or discount amount per passenger for that particular type of passenger. Example: 20.9	M
invisibleMarkupPerPax	The calculated invisible markup and or discount amount per passenger for a particular type of passenger.	M
maxMarkupForInvisibleRules	The maximum markup and or discount limit for invisible rules.	M
maxMarkupForVisibleRules	The maximum markup and or discount limit for visible rules.	M
minMarkupForInvisibleRules	The minimum markup and or discount limit for invisible rules.	M

minMarkupForVisibleRules	The minimum markup and or discount limit for visible rules.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts. Example: 93.07	M
value	The value of <code>TotalTaxAmount</code> . Example: 93.07	M
CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts. Example: 509.5	M
value	The value of <code>TotalAmount</code> . Example: 509.5	M
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP, AUD.	M

Processing		
Elements	Details	Optional/Mandatory
Processing	Information related to how response results should be returned.	M

Processing		
MarketingMessage	Additional and or supplementary information about the document or service.	M
Desc	The description of the MarketingMessage .	M
DescText	The description text value. Example: updated to false	M

TicketDocInfo		
Elements	Details	Optional/Mandatory
TicketDocInfo	Information corresponding to a group of one to four tickets for a single origin destination and a single passenger.	M
BookingRef	Information related to a booking or reservation.	M
BookingID	An existing booking reference identifier. Example: TPC13478127253D27122023	M
BookingRefTypeCode	The booking reference type. Example: TPC	M

TicketDocInfo		
FareDetail	The amount charged by the carrier for the carriage of a passenger and their allowable free baggage. Note: For a service, <code>OrderItem</code> representing seats and or ancillaries, the <code>FareDetail</code> element is optional (O).	M
FarePriceType	The type of fair price applied to a fare detail. Example: • Filed amount • Net amount • Sell amount	M
Price	The price of the ticket.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 416.43	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M

TicketDocInfo		
ConversionRate	The conversion rate used to convert a currency to another. Example: 0.5542515889330287	M
value	The value of ConversionRate . Example: 0.5542515889330287	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the currency indicator code.	M
value	The value of EquivAmount . Example: 751.32	M
CurCode	The currency code for EquivAmount . Example: USD, GBP, AUD.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	A compulsory contribution added to a fare.	M
Amount	The tax amount added to a fare.	M
value	The value of Amount : Example: 5.49	M
CurCode	The currency code for Amount . Example: USD, GBP, AUD.	M

TicketDocInfo		
CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M
Amount	The tax amount. Example: 15000 USD	M
value	The value of <code>Amount</code> . Example: 17.71	M
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP, AUD.	M
LocalAmount	The local currency amount that equates to the converted currency amount.	M
value	The value of <code>LocalAmount</code> . Example: 17.71	M
CurCode	The currency code for <code>LocalAmount</code> . Example: USD, GBP, AUD.	M
DescText	The description text value. Example: PASSENGER SERVICE CHARGE DOMESTIC ARRIVAL	M
TaxCode	The IATA TTBS Tax Code used for the applied tax. Example: AY, GB.	M
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M

TicketDocInfo		
value	The value of <code>TotalTaxAmount</code> . Example: 17.71	M
CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 17.71	M
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP, AUD.	M
PaxRefID	The unique identifier for a passenger reference. Example: PAX1	M
OriginalIssueInfo	The issuing carrier and issuing location of a ticket.	M
IssueDate	The date that the document was originally issued. Example: 2023-12-27T22:26:00	M
IssuingAirlineDesigCode	The airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF	M
IssuingCarrier	The organisation which carries the passenger, baggage, or goods, and/or commits to delivering the carriage as well as any related services such as issuance of ticket, and the creation of an order.	M

TicketDocInfo		
AirlineDesigCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF	M
Name	The name of the airline or carrier. Example: Qantas Airways	M
TicketNumber	The ticket number comprised of the airline code, form code, and serial number. Example: 0815751410974	M
OriginDest	The origin and destination airport/city pair which confines a passenger journey or an aircraft flight.	M
DestCode	An IATA defined code identifying a city or station. Example: ADL	M
OriginCode	An IATA defined code identifying a city or station. Example: BNE	M
PaxRefID	The unique identifier for a passenger reference. Example: PAX1	M
PricingDate	The booked itinerary pricing date. Example: 2017-01-13  Note: This is the date the booked itinerary was priced.	M

TicketDocInfo		
RefdOrder	An uniquely identified record of the agreement of one party with another to receive products and services under specified terms and conditions. Order supports the sale of a flexible range of airline products and services that are not necessarily included in a journey.	M
OrderRefID	References the cancelled Order's Order ID.	M
OrderItem	An individually priced item within an order, made up of one or more services. May or may not be a selected offer item. Example: Non-chargeable services available on request such as a wheelchair.	M
OrderItemRefID	The carrier assigned Order Item ID. Example: P2C5165E-7CD1-416C-96B01cyl7q38kcw8l-1-1.T1	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
Ticket	The accountable document issued by or on behalf of a carrier which includes notices and the flight and passenger coupons contained therein.	M
ConnectedDocNumber	The ticket or document number to which the document is connected. Example: 0815751410672	M

TicketDocInfo		
Coupon	The portion of the Passenger Ticket and Baggage Check or Excess Baggage Ticket that indicates particular places between which the coupon is good for carriage.	M
BaggageAllowanceRefID	A reference to a <code>BaggageAllowanceID</code> .	M
ConnectedCouponNumber	The coupon number to which this document is connected.	M
CouponNumber	The number assigned to the issued coupon.	M
CouponStatusCode	The current status of the flight and or value coupon. Example: E (Exchanged/Reissued)	M
RFIC	The reason for issuance code. Examples: • A (Air Transportation) • C (Baggage) • E (Airport Services) • F (Merchandise) • G (In-flight Services)	M
RFISC	The reason for issuance sub code. Examples: • OCC (First Checked Bag) • OB1 (In-flight Entertainment) • OBX (Lounge)	M
RFISC_Desc	The corresponding description for the reason for issuance subcode. Example: CHANGE FEE	M

TicketDocInfo		
ServiceRefID	A reference to a service ID. Example: SRVES13585290	M
CouponValidityPeriod	The date range a coupon is valid for with an optional time component.	M
EffectiveDate	The start date for when a coupon is valid. Example: 2023-12-30T11:59:00	M
ExpirationDate	The end date for when a coupon is valid. Example: 2023-04-30T11:59:00	M
FareBasisCode	The ticketed fare basis code. Example: QDQA	M
SoldAirlineInfo	The transportation of a passenger on a dated operating segment.	M
PaxSegmentRefID	A reference to a <code>PaxSegmentID</code> . Example: S2	M

TicketDocInfo		
TicketDocTypeCode	The document type code as defined by PADIS 1001 (Document/Message Name, coded): • 1 - Ticketless • 700 - All other document types • 701 - Ticket (paper) • 703 - Stock control number • E - Excess baggage • J - EMD-A (Associated) • M - Miscellaneous charge order • O - Tour order • S - Special service ticket • T - Ticket • Y - EMD-S (Standalone) • INF - Infant ticket ETicket or EMD coupon status codes.The status will be returned as defined in IATA Codeset 4405: ----- Code Description ----- AL Airport control ----- B Flown/used ----- BD Boarded ----- CK Checked in ----- E Exchanged/reissued ----- OPE Open ----- RF Refunded ----- M	

TicketDocInfo		
	----- V Void -----	
TicketNumber	The document number comprised of the airline code, form code, and serial number.	M

Warning		
Elements	Details	Optional/Mandatory
Warning	Contains information related to potential business errors detected during processing of the preceding request.	O
DescText	The free text description of the provided warning. Example: Seat 14E is pending	O
OwnerName	The name of the organization owning the warning codelist. Example: QF	O
DescText	The free text description of the provided warning. Example: Status is pending for Service W234B6564-4CD4-4F49-824E-1-5 and Document is not Issued-230000079	O
DataLists		
Elements	Details	Optional/Mandatory
BaggageAllowanceList	Baggage allowance data list definition	M

DataLists		
BaggageDisclosureList	Baggage disclosure data list definition.	M
ContactInfoList	Contact info data list definition.	M
FareList	Fare data list definition.	M
OriginDestList	Origin destination data list definition.	M
PaxJourneyList	Journey data list definition.	M
PaxList	Passenger data list definition.	M
PaxSegmentList	Segment data list definition.	M
PriceClassList	Price Class data list definition.	M
ServiceDefinitionList	Service definition data list definition.	M

For more details, [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.5.3 18.6 OrderCancel Error Codes

 The following error codes are the supplier versions of the error codes from Altea NDC and SabreSonic GDS web services.

Error Code	Error Message
403	Requested client is not authorized to perform the API.
911	FILE MAINTENANCE CYCLING: UNABLE TO CANCEL THIS BOOKING

368	ELEMENT CANCELLATION NOT ALLOWED: CHECK SEGMENT NUMBER, CHECK ITINERARY/INACTIVE SEGMENT
368	NOT AUTHORIZED BY IATA
911	CONTRACT(S) NOT ELIGIBLE FOR VOID
911	UNABLE TO RETRIEVE PNR: UNABLE TO PROCESS
912	ERROR AT END OF TRANSACTION TIME: IGNORE AND RE-ENTER, TICKET RECONCILIATION NEEDED
911	UNABLE TO RETRIEVE PNR: OK
368	ELEMENT CANCELLATION NOT ALLOWED
368	ELEMENT CANCELLATION NOT ALLOWED: NOT ALLOWED : MARRIED SEGMENTS
911	INVALID REFUND AMOUNT
368	ELEMENT CANCELLATION NOT ALLOWED: CHECK SEGMENT NUMBER
368	ELEMENT CANCELLATION NOT ALLOWED: CHECK SEGMENT NUMBER, RESTRICTED - PAX(S) CHECKED-IN ON
911	REFUND INCOMPLETE - SOME ITEMS COULD NOT BE REFUNDED
912	ERROR AT END OF TRANSACTION TIME: RESTRICTED ENTRY - PNR RETRIEVED IN READ MODE
368	ELEMENT CANCELLATION NOT ALLOWED: RESTRICTED - PAX(S) CHECKED-IN ON
912	ERROR AT END OF TRANSACTION TIME: SIMULTANEOUS CHANGES TO PNR - USE WRA/RT TO PRINT OR IGNORE, TICKET RECONCILIATION NEEDED, WARNING : SERVICE DELETED - TSM MAY BE DELETED IF ET/ER
368	ELEMENT CANCELLATION NOT ALLOWED: CHECK ITINERARY/INACTIVE SEGMENT
911	PROMOTION CODE INVALID
911	UNABLE TO DISPLAY E-TICKET
911	RESERVATION PREVIOUSLY CANCELLED
911	UNABLE TO RETRIEVE EMD

368	ATC REFUND NOT AUTHORIZED
912	ERROR AT END OF TRANSACTION TIME: SIMULTANEOUS CHANGES TO PNR - USE WRA/RT TO PRINT OR IGNORE, TICKET RECONCILIATION NEEDED

5.6 18.6 OrderReshop Overview

The OrderReshop web service provides the ability to change/upgrade the bookings or orders created using the TPC combined API. The user can retrieve the booking using the OrderReshop and change the booking, perform a search for new flights, get the offers, select the new itinerary, and identify the additional amount to be paid. On confirmation from the user, the system will be able to update the order, exchange the old tickets, and issue new tickets.

Pre-requisites for a successful Reshop request are:

- The order was originally created in the NDC platform.
- The order is for a future date and is available on the NDC platform.
- Only the agent who created the order can execute this service.
- The Airline/supplier shouldn't modify the order at the customer's request.

On successful retrieval of the order, the agent can perform the following services:

- Select the flight segments eligible services for change, and shop for availability on the desired dates.
- The service will reprice the itinerary and quote the fare for the customer's acceptance.
- In the case of ticketed orders, the difference in fare and taxes that are to be paid will be quoted for the customer's acceptance.
- Without the customer's acceptance of the new offer, order modification won't be performed.
- On the customer's acceptance, the order will be modified, and existing tickets will be exchanged for new tickets.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.6.1 18.6 OrderReshopRQ

Introduction

The OrderReshopRQ transaction set passes new availability search requests by passing the context of the ticketed order. For instance in the case of partial reshop scenario, it is expected that the OrderReshop API response returns offers which are combinable with the fare-family and RBD of the bound not requested for reshop. There is no change to the Order or Order Items in response to a reshop request. In the response,

the Airline can provide exact instructions as to what actions can finally be executed as a solution to the initially requested action.

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.6. The following is the element checklist to be passed in ReshopRQ. The elements marked “M” are mandatory, while parameters marked “O” are optional. Implementing them will enable to receive personalised offers, if any, from airlines.

Note: Please use the sample attached and pass the elements accordingly.

User Guidance - Service Input Parameters

Input Parameters	Type	Optional/Mandatory
Request Object	OrderReshopRQ	M

Note: `AugmentationPoint` is only applicable in repricing scenarios.

OrderReshopRQ constitutes the below structure:

- [AugmentationPoint](#)
- [MessageDoc](#)
- [Party](#)
- [PayloadAttributes](#)
- [PointOfSale](#)
- [Request](#)

Request Definition

Note: The update of the optional and mandatory information for `OrderReshopRQ` in split ticketing reshop, reprice, and reissue scenarios is in progress.

AugmentationPoint

Elements	Details	Optional/Mandatory
----------	---------	--------------------

AugmentationPoint		
AugmentationPoint	Implementer-Augmented Structure.	• OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):M
Extension		• OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):M
Reshop		• OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):M
SelectedOffers		• OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):M
OfferId	The unique identifier of an offer.	• OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):M

AugmentationPoint		
OwnerCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code.	• OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):M
SelectedOfferItems	<i>i</i> Note: SelectedOfferItems is mandatory (M) in OrderReshopRQ(Reprice) one-way scenarios.	• OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O
OfferItemId	A unique identifier of an offer item.	• OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O
PaxIds	Passenger unique identifiers.	• OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	MessageDoc Type	- OrderReshopRQ(Reshop)):O - OrderReshopRQ(Repric e):O
Party		
Elements	Details	Optional/Mandatory
Party	NDC Message/ Transaction Party(s) information. Note: The information about parties is intended for business use, it is not intended for transaction authentication and routing of the message. Note: Party is optional (O) in OrderReshopRQ(Reshop) multi-city scenarios.	- OrderReshopRQ(Reshop)):M - OrderReshopRQ(Repric e):M

PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	• OrderReshopRQ(Reshop):M • OrderReshopRQ(Repric e):M
PointOfSale		
Elements	Details	Optional/Mandatory
PointOfSale	Point of Sale information.	• OrderReshopRQ(Reshop):O • OrderReshopRQ(Repric e):O
Request		
Elements	Details	Optional/Mandatory
Request	The IATA standard payload attributes.	• OrderReshopRQ(Reshop):M • OrderReshopRQ(Repric e):M

BookingRef	Information related to a booking or reservation.	• OrderReshopRQ(Reshop)): M • OrderReshopRQ(Repric e) : M
BookingEntity	An airline or organisation assigning the booking information.	• OrderReshopRQ(Reshop)): O • OrderReshopRQ(Repric e) : O
BookingID	An existing booking reference identifier.	• OrderReshopRQ(Reshop)): M • OrderReshopRQ(Repric e) : M
BookingRefTypeCode	The booking reference type. Example: 6 (Passenger confirmation number) Encoding Scheme: IATA Padis Codeset - List for data element [1153] Reference Qualifier.	• OrderReshopRQ(Reshop)): M • OrderReshopRQ(Repric e) : M
OrderActionContextText	A reference to PADIS codeset REA. When used, provides context for the change being requested.	• OrderReshopRQ(Reshop)): M • OrderReshopRQ(Repric e) : M

OrderRefID	A reference to existing order to which the seller wants to add, update, delete an order item.  Note: OrderRefID is mandatory (M) in OrderReshopRQ(Reprice) one-way scenarios.	• OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : O
ReshopParameters	The information related to how shopping results should be returned in the response.	• OrderReshopRQ(Reshop) : O • OrderReshopRQ(Reprice) : O
CurParameter	The requested search processing and results currency information.	• OrderReshopRQ(Reshop) : O • OrderReshopRQ(Reprice) : O
AppCode	The currency code application. Examples: Actual, Display, Requested, Conversion, and Other	• OrderReshopRQ(Reshop) : O • OrderReshopRQ(Reprice) : O
Name	The currency name. Example: US Dollars.	• OrderReshopRQ(Reshop) : O • OrderReshopRQ(Reprice) : O

RequestedCurCode	The currency code as per ISO 4217.	• OrderReshopRQ(Reshop)):O • OrderReshopRQ(Reprice)):O
PricingParameter	The pricing parameters, including Simple Pricing, Award Travel, Auto Exchange, Override Currency and Tax Exemption.	• OrderReshopRQ(Reshop)):O • OrderReshopRQ(Reprice)):O
AutoExchInd	When TRUE, this request is to be handled by an auto-exchange process.  Note: AutoExchInd is mandatory (M) in OrderReshopRQ(Reprice) round-trip scenarios.	• OrderReshopRQ(Reshop)):O • OrderReshopRQ(Reprice)):O
UpdateOrder	The option to reshop or reprice an order.	• OrderReshopRQ(Reshop)):M • OrderReshopRQ(Reprice)):O

RepriceOrder	The function to reprice an entire order (only if the order ID is supplied within the request) or specific order items (if defined in nested order item elements). Note: For resshopping and repricing the selected offer. Note: <code>RepriceOrder</code> is mandatory (M) in <code>OrderReshopRQ(Reshop)</code> one-way scenarios.	• <code>OrderReshopRQ(Reshop)</code> : O • <code>OrderReshopRQ(Reprice)</code> : O
OrderItemRefID	Optionally specify which order item needs to be repriced. Note: For resshopping and repricing the selected offer. Note: • <code>OrderItemRefID</code> is mandatory (M) in <code>OrderReshopRQ(Reshop)</code> one-way scenarios. • <code>OrderItemRefID</code> is mandatory (M) in <code>OrderReshopRQ(Reprice)</code> round-trip scenarios	• <code>OrderReshopRQ(Reshop)</code> : O • <code>OrderReshopRQ(Reprice)</code> : O

ReshopOrder	The function used to reshop items within an order. Example: Adding ancillaries, canceling order items, or replacing order items.	• OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : O
ServiceOrder	Functions to allow a seller to request additions, replacement or deletions of order items in an order.	• OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : O
AddOfferItems	The action to request new offer items for the specified order. If used in conjunction with a function, the intention is to replace the deleted item with whatever has been requested in this add function shopping query.	• OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : O
FlightCriteria	The choice of affinity, origin destination, or journey flight information for a shopping request.	• OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : O
OriginDestCriteria	The origin and destination airport/city pair which confines a passenger journey or an aircraft flight.	• OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : O

DestArrivalCriteria	A customer's requested destination arrival time and location. Note: DestArrivalCriteria is optional (O) in OrderReshopRQ(Reshop) one-way scenarios.	- OrderReshopRQ(Reshop) : M - OrderReshopRQ(Reprice) : O
IATALocationCode	An IATA defined code identifying a city or station. Note: IATALocationCode is optional (O) in OrderReshopRQ(Reshop) one-way scenarios.	- OrderReshopRQ(Reshop) : M - OrderReshopRQ(Reprice) : O
StationName	The name of the station. Example: George Bush Intercontinental Airport.	- OrderReshopRQ(Reshop) : O - OrderReshopRQ(Reprice) : O

OriginDepCriteria	A customer's requested origin departure time and location. Note: OriginDepCriteria is optional (O) in OrderReshopRQ(Reshop) one-way scenarios.	- OrderReshopRQ(Reshop) : M - OrderReshopRQ(Reprice) : O
Date	The customer's requested departure date. Note: Date is optional (O) in OrderReshopRQ(Reshop) one-way scenarios.	- OrderReshopRQ(Reshop) : M - OrderReshopRQ(Reprice) : O
IATALocationCode	An IATA defined code identifying a city or station. Note: IATALocationCode is optional (O) in OrderReshopRQ(Reshop) one-way scenarios.	- OrderReshopRQ(Reshop) : M - OrderReshopRQ(Reprice) : O
StationName	The name of the station. Example: George Bush Intercontinental Airport.	- OrderReshopRQ(Reshop) : O - OrderReshopRQ(Reprice) : O

OriginDestID	The unique identifier of an origin destination.	• OrderReshopRQ(Reshop)):O • OrderReshopRQ(Repric e):O
PreferredCabinType	The type of compartment of an aircraft, offering specific services. Example: Business class, Economy.	• OrderReshopRQ(Reshop)):O • OrderReshopRQ(Repric e):O
CabinTypeCode	The cabin type code as defined by the PADIS codeset. Example: 1,2,3.	• OrderReshopRQ(Reshop)):O • OrderReshopRQ(Repric e):O
Paxs	The passenger and passenger group information.	• OrderReshopRQ(Reshop)):M • OrderReshopRQ(Repric e):O
Pax	Any person except members of the crew carried or to be carried with the consent of the carrier, on board of any transport vehicle such as aircraft, train, bus, ship. Holds the attributes specific to a one booking, from shopping.	• OrderReshopRQ(Reshop)):O • OrderReshopRQ(Repric e):O

PaxID	The unique identifier a passenger.	• <code>OrderReshopRQ(Reshop):O</code> • <code>OrderReshopRQ(Reprice):O</code>
PTC	The type code applying to the passenger which typically drives pricing. Example: ADT, CHD, and INF. Note: PTC is mandatory (M) in <code>OrderReshopRQ(Reprice)</code> multi-city scenarios.	• <code>OrderReshopRQ(Reshop):O</code> • <code>OrderReshopRQ(Reprice):O</code>
ShoppingCriteria	Further qualifies the flight request by influencing which results are returned in the shopping response, including preferred or required criteria.	• <code>OrderReshopRQ(Reshop):O</code> • <code>OrderReshopRQ(Reprice):O</code>
CabinTypeCriteria	The type of compartment of an aircraft, offering specific services. Example: Business class, economy.	• <code>OrderReshopRQ(Reshop):O</code> • <code>OrderReshopRQ(Reprice):O</code>
CabinTypeCode	The cabin type code as defined by the PADIS codeset. Example: 1,2,3,4.	• <code>OrderReshopRQ(Reshop):O</code> • <code>OrderReshopRQ(Reprice):O</code>

CabinTypeName	The name given to a cabin compartment. Example: Business, First, and Economy.	• OrderReshopRQ(Reshop)): O • OrderReshopRQ(Repric e) : O
DeleteOrderItem	The function to request the removal of Order Items from this specific Order. If used alone (without a shopping query from the function), the response will assume a cancellation is desired for the Order Items specified and will return incurred fees/ refund.	• OrderReshopRQ(Reshop)): M • OrderReshopRQ(Repric e) : O
OrderItemRefID	A reference to the Pax Segment ID requested for deletion.	• OrderReshopRQ(Reshop)): O • OrderReshopRQ(Repric e) : O

For more details, [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.6.2 18.6 OrderReshop Response (OrderReshopRS)

Introduction

The OrderReshopRS service is the system response to OrderReshopRQ. The airline responds with eligible product offers for modified date/s within the context of the existing order. There is no change to the order or order items in the ReshopRS. An agent has to review the ReshopRS and commit the changes required by executing either an OrderChangeRQ or OrderCancelRQ transaction. In the response, the Airline can include exact instructions as to what actions can finally be executed as a solution to the initially requested action.

Implementation

Following is the element checklist to be received in OrderReshopRS. The elements that are marked “M” are mandatory, and the parameters marked “O” are optional.

The OrderReshopRS constitutes the below structure:

- ReshopResults
- IssuedData
- ShoppingResponse
- PaymentFunctions
- PayloadAttributes
- DataLists

User Guidance - Service Input Parameters

Input Parameters	Type	Optional/Mandatory
Response Object	OrderReshopRS	M

Response Definition



Note: The update of the optional and mandatory information for OrderReshopRS in split ticketing reshop, reprice, and reissue scenarios is in progress.



Note: A response API's optional and mandatory fields are determined by which elements are used in the corresponding request API.

ReshopResults

Elements	Details	Optional/Mandatory
ReshopResults	The results of the OrderReshop request including reshopped offers or a repriced offer.	• OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M

ReshopOffers	The reshopped carrier offers.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
Offer	A proposal to sell a specific set of products or services under specific conditions, for a certain price. Can be the response to a shopping or reshopping request.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
AddOfferItem	A priced grouping of one or more services within an offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
DifferentialAmountDue	An amount that contains the original order amount, a new offer amount, penalty details, and fees or dues by details. It also contains tax information.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
Amount	The amount of DifferentialAmountDue .  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M

value	The value of Amount . Example: 54.89	- OrderReshopRS(Reshop)): M - OrderReshopRS(Repric e) : M
CurCode	The currency code of Amount . Example: USD, GBP, AUD.	- OrderReshopRS(Reshop)): M - OrderReshopRS(Repric e) : M
FareDetail	The amount charged by the carrier for the carriage of a passenger and their allowable free baggage.	- OrderReshopRS(Reshop)): M - OrderReshopRS(Repric e) : M
FareComponent	A portion of an itinerary between two consecutive fare construction points. If the journey has only one fare component, the points of origin and destination are the only fare construction points	- OrderReshopRS(Reshop)): M - OrderReshopRS(Repric e) : M
CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy Class.	- OrderReshopRS(Reshop)): M - OrderReshopRS(Repric e) : M

CabinTypeCode	The cabin type code as defined by the PADIS codeset. Example: Y	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
CabinTypeName	The name given to a cabin compartment. Example: Business, First, Economy.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
FareBasisCityPairText	The identified published fare. Contains the origin and destination city codes and a two character designator of fare owning airline associated with the fare basis code. Example: MIANCEDL	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
FareBasisCode	The fare basis code. Example: NDQA	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
PaxSegmentRefID	A reference to a Pax Segment ID. Example: S1  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M

PriceClassRefID	A price point within a particular cabin type, sometimes referred to as 'Fare Families'. Example: QFRedeDeal-1  Note: Repricing the selected offer.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
RBD	The Reservation Booking Designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. Example: 'J' for Business Class Premium, 'D' for Business Disc.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
RBDCode	The code used to identify a particular RBD. Example: P, J, W, M, N.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
value	The value of RBDCode . Example: N	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M

FarePriceType	The type of fair price applied to a Fare Detail Example: Filed amount, net amount, and or a sell amount. <i>i</i> Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
Price	The price breakdown of the fair. <i>i</i> Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
BaseAmount	The total base fare amount. Example: 200000 <i>i</i> Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
value	The value of BaseAmount . Example: N	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
CurCode	The currency code of BaseAmount . Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M

CurConversion	The conversion rate used to convert a currency to another.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
Amount	The amount of CurConversion .	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
value	The value of Amount . Example: N	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
CurCode	The currency code of Amount . Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
LocalAmount	The local currency amount that equates to the converted currency amount.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M

value	The value of <code>LocalAmount</code> . Example: 17.71	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
CurCode	The currency code for <code>LocalAmount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
Fee	Fee information added to an offer.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
PreciseAmount	The precise amount of the added fee. Example: 12.7 Note: <code>PreciseAmount</code> only displays when Amadeus (1A) offers are returned in the <code>OrderReshopRS</code> response.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M

AmountRangeMaximumAmount	The maximum range amount of the fee for the offer. Note: AmountRangeMaximumAmount only displays when Sabre (1S) offers are returned in the OrderReshopRS response.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
CurCode	The currency code for PreciseAmount . Example: USD, GBP, AUD.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
DescText	The text description of the added fee. Example: OBFee	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
TaxSummary	The sum of all tax amounts applied on a given price. Note: Repricing the selected offer.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M

TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M
value	The value of TotalTaxAmount . Example: 17.71	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M
CurCode	The currency code of Amount . Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M
value	The value of TotalAmount . Example: 17.71	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M

CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):M</code>
FareRefText	The fare reference key. Example: FO1	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):M</code>
Commission	An amount of money, typically a set percentage of the value involved, paid to an agent in a commercial transaction.	• <code>OrderReshopRS(Reprice):O</code>
CommissionCode	The commission code. Example: BSP Commission, OverrideCommission, and TotalCommission	• <code>OrderReshopRS(Reprice):O</code>
Percentage	The commission percentage value. Example: 3	• <code>OrderReshopRS(Reprice):O</code>
PaxRefID	The reference to a passenger ID. Example: PAX1	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):M</code>

NewOfferItemDifferential	Contains the original order amount, the new offer amount, penalty details, and detailed fees and dues. It also contains tax information.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M
Amount	The amount of NewOfferItemDifferential.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M
value	The value of Amount . Example: 17.71	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M
CurCode	The currency code of Amount . Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M
OfferItemID	The carrier assigned offer item ID. Example: RDE5D873A-1EE1-4E96-9C62-7-1  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice) e) : M

OriginalOrderItemDifferential	Contains the original order amount, the new offer amount, penalty details, and detailed fees and dues. It also contains tax information.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
Amount	The amount of OriginalOrderItemDifferential.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
value	The value of Amount . Example: 17.71	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
CurCode	The currency code of Amount . Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M

PenaltyDifferential	Displays the penalty differences between the original order amount and new offer amount during reshopper. It contains the original order amount, the new offer amount, penalty details, and detailed fees and dues. It also contains tax information.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
Amount	The amount of PenaltyDifferential.  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
value	The value of Amount. Example: 54.89	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
CurCode	The currency code of Amount. Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
Price	The price of the reshopped fare or offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M

BaseAmount	The total base fare amount. Example: 200.67	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
value	The value of BaseAmount . Example: 54.89	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
CurCode	The currency code of BaseAmount . Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
CurConversion	The conversion rate used to convert a currency to another.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
Amount	The amount of CurConversion .	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M

value	The value of <code>Amount</code> . Example: 54.89	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
ConversionRate	The conversion rate used to convert a currency to another. Example: 0.5542515889330287	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
value	The value of <code>ConversionRate</code> . Example: 0.5542515889330287	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
LocalAmount	The local currency amount that equates to the converted currency amount.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M

value	The value of <code>LocalAmount</code> . Example: 99	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
CurCode	The currency code for <code>LocalAmount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
TaxSummary	The sum of all tax amounts applied on a given price. <i>i</i> Note: Repricing the selected offer.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts. Example: 93.07 <i>i</i> Note: Repricing the selected offer.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
value	The value of <code>TotalTaxAmount</code> . Example: 99	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M

CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts. Example: 509.5	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
value	The value of <code>TotalAmount</code> . Example: 99	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
MarkupData	The primary source which contains all the markup data.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : O

offerItemId	The offer item unique identifier which the markup is applied to. Example: R718DF287-A444-44A0-BD75-3-1	• OrderReshopRS(Reshop): M • OrderReshopRS(Reprice): O
baseAmount	The original base amount without any markup value applied. Example: 416.43	• OrderReshopRS(Reshop): M • OrderReshopRS(Reprice): O
invisibleMarkup	The determined amount of invisible markup and or discount for a specific type of passengers.	• OrderReshopRS(Reshop): M • OrderReshopRS(Reprice): O
invisibleMarkupPerPax	The calculated invisible markup and or discount amount per passenger for a particular type of passenger.	• OrderReshopRS(Reshop): M • OrderReshopRS(Reprice): O
markupPerPax	The calculated markup and or discount for both invisible and visible markups per passenger.	• OrderReshopRS(Reshop): M • OrderReshopRS(Reprice): O

newBaseAmount	The new base amount after discounts and or markups are applied. Example: 416.43	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
newTotalAmount	The new total amount after discounts and or markups are applied. Example: 509.5	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
noOfPax	The number of passengers of a particular pax type. Example: 2	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
taxAmount	The tax amount to be added to the overall discount/markup. Example: 93.07	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
totalAmount	The previous totalAmount before the taxAmount is added. Example: 509.5	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O

totalMarkup	The total discount and or markup amount. Example 2	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : O
visibleMarkup	The calculated amount of visible markup and or discount for a specific type of passenger. Example: 34.6	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : O
visibleMarkupPerPax	The calculated visible markup and or discount amount per passenger for that particular type of passenger. Example: 20.9	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : O
rules	An overview of rules that are applied to an offer when reshopping and or repricing an existing order.  Note: rules is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	• OrderReshopRS(Reshop) : O • OrderReshopRS(Reprice) : O
ruleId	The rules unique identifier. Example: a277fb98-ba62-4100-98ca-5e6c5bc724ed	• OrderReshopRS(Reshop) : O • OrderReshopRS(Reprice) : O

uniqueId	The rules unique identifier. Required for downstream integration. Example: P00009Z  Note: uniqueId is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):O - OrderReshopRS(Reprice):O
ruleName	The unique name of a rule. Example: AURMT_Catch-ALL = 1S  Note: ruleName is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):O - OrderReshopRS(Reprice):O
applyOnFareType	Where the rule is applied to, either the base amount or total amount. Example: BASE  Note: applyOnFareType is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):O - OrderReshopRS(Reprice):O

adjustmentType	Calculates the fixed or percentage of an adult fare. Example: PERCENTAGE Note: adjustmentType is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):O - OrderReshopRS(Reprice):O
adjustmentValue	The value of adjustmentType. Example: 5.23 Note: adjustmentValue is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):O - OrderReshopRS(Reprice):O
adjustmentTypeChild	Calculates the fixed or percentage of a child fare. Example: PERCENTAGE Note: adjustmentTypeChild is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):O - OrderReshopRS(Reprice):O

adjustmentValueChild	The value of <code>adjustmentTypeChild</code>. Example: 5.23 Note: <code>adjustmentValueChild</code> is mandatory (M) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop) : O</code> • <code>OrderReshopRS(Reprice) : O</code>
adjustmentTypeInfant	Calculates the fixed or percentage of an infant fare. Example: PERCENTAGE Note: <code>adjustmentTypeInfant</code> is mandatory (M) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop) : O</code> • <code>OrderReshopRS(Reprice) : O</code>
adjustmentValueInfant	The value of <code>adjustmentTypeInfant</code>. Example: 5.23 Note: <code>adjustmentValueInfant</code> is mandatory (M) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop) : O</code> • <code>OrderReshopRS(Reprice) : O</code>

isVisible	This determines whether the calculated markup is visible to a customer. 1: visible and 0: hidden. Example: 1  Note: isVisible is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):0 - OrderReshopRS(Reprice):0
markupCalculated	The calculated markup. This is determined by the applyOnFareType and adjustmentType fields. Example: 14.14  Note: markupCalculated is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):0 - OrderReshopRS(Reprice):0
isMaxApplicable	Determines whether the markup cap is applied or not to the offer. If the markup is 10 and the min/max values are 5 - 8, the markup is replaced with an 8 and not a 10. Example: 1  Note: isMaxApplicable is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):0 - OrderReshopRS(Reprice):0

paxType	The type of passenger. Example: ADT	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
maxMarkupForInvisibleRules	The maximum markup and or discount limit for invisible rules.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
maxMarkupForVisibleRules	The maximum markup and or discount limit for visible rules.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
minMarkupForInvisibleRules	The minimum markup and or discount limit for invisible rules.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
minMarkupForVisibleRules	The minimum markup and or discount limit for visible rules.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O

Service	The instance of a specific flight or service definition as it has been offered (and eventually ordered and consumed) in the context of a specific offer and or order.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
PaxRefID	A reference to a passenger ID within this message. The passenger is the recipient entitled to receive and or consume the service(s) offered by the airline, whether the service(s) are flight-related or not.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
ServiceAssociations	References to the details of this service. May include either passenger journeys, a service definition, or a selected seat.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
PaxJourneyRefID	A reference to a Pax Segment ID. Example: F1 F2	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
ServiceID	The service ID assigned by the carrier. Example: R92973F3-37B8-43C9-8857-1-1-1	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
Commission	An amount of money, typically a set percentage of the value involved, paid to an agent in a commercial transaction.	• OrderReshopRS(Reshop) : O

CommissionCode	The commission code. Example: BSP Commission, OverrideCommission, and TotalCommission	OrderReshopRS(Reshop): O
Percentage	The commission percentage value. Example: 3	OrderReshopRS(Reshop): O
BaggageAllowanceRefID	A reference to a baggage allowance ID. Example: BAA1AAB29-CO  Note: Repricing the selected offer.	- OrderReshopRS(Reshop): M - OrderReshopRS(Reprice): M
DeleteOrderItem	The order item which the airline confirms can be deleted in a subsequent OrderChangeRQ. Optionally, a price differential (e.g. refund amounts) can be added to each order item occurrence being deleted. Should not be used for 'replace' type functions.  Note: Repricing the selected offer.	- OrderReshopRS(Reshop): M - OrderReshopRS(Reprice): M
DifferentialAmountDue	Contains the original order amount, the new offer amount, penalty details, and detailed fees due. It also contains tax information.  Note: Repricing the selected offer.	- OrderReshopRS(Reshop): M - OrderReshopRS(Reprice): M

Amount	The amount of <code>DifferentialAmountDue</code>.  Note: Repricing the selected offer.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
value	The value of <code>Amount</code>. Example: 52.27	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
CurCode	The currency code for <code>Amount</code>. Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
NewOfferItemDifferential	Contains the original order amount, the new offer amount, penalty details, and detailed fees due. It also contains tax information.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
Amount	The amount of <code>NewOfferItemDifferential</code>.  Note: Repricing the selected offer.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M

value	The value of <code>Amount</code> . Example: 52.27	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
OrderItemRefID	The carrier assigned Order Item ID. Example: P2C5165E-7CD1-416C-96B01cyl7q38kcw8l-1-1_T1	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
OriginalOrderItemDifferential	Contains the original order amount, the new offer amount, penalty details, and detailed fees due. It also contains tax information.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
Amount	The amount of <code>OriginalOrderItemDifferential</code> .  Note: Repricing the selected offer.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M

value	The value of <code>Amount</code> . Example: 485.24	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
PenaltyDifferential	Displays the penalty differences between the original order amount and new offer amount during reshop. It contains the original order amount, the new offer amount, penalty details, and detailed fees and dues. It also contains tax information.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
Amount	The amount of <code>PenaltyDifferential</code> .  Note: Repricing the selected offer.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
value	The value of <code>Amount</code> . Example: 485.24	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M

CurCode	The currency code for Amount . Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
JourneyOverview	A summary of the proposed journey information in the context of a specific offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
JourneyPriceClass	The price class information per journey in an offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
PaxJourneyRefID	A reference to a Pax Segment ID included in a journey. Example: F1  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
PriceClassRefID	A reference to a price class unique identifier in an itinerary. Example: QFRedeDeal-1	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M

PriceClassRefID	A reference to a price class unique identifier in an itinerary. Example: QFRedeDeal-1  Note: Repricing the selected offer.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
OfferExpirationDateTime	The date and time by which an offer must be converted into an order. Example: 2023-12-27T12:49:45Z	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
OfferID	The carrier assigned ID which uniquely identifies a specific offer. Example: R92973F3-37B8-43C9-8857-1	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
OwnerCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M
PaymentTimeLimitDateTime	The date by which a complete payment must be made for the confirmed items in an offer. Example: 2023-12-27T23:59:00	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): M

Penalty	The penalty applied to a fare, based on changes to or cancellations of a fare.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
AppCode	The penalty application type code. Examples: • ADE (After departure) • NOS (No show) • PDE (Prior to departure) • S2IPAX1IPDE	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
CancelFeeInd	The cancellation fee indicator. If TRUE, cancellation fee(s) may apply.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
DescText	The description text value of the cancellation fee indicator. Example: Not Allowed	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M
TypeCode	The penalty type code information. Examples: • Cancellation • Change • NoShow • Upgrade • Other	• OrderReshopRS(Reshop)): M • OrderReshopRS(Repric e) : M

AppCode	The cancel application type code. Examples: • ADE (After departure) • NOS (No show) • PDE (Prior to departure) • S2IPAX1IPDE	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
ChangeFeeInd	The change fee indicator. If TRUE, change of Itinerary fee(s) may apply.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
DescText	The description text value of the change fee indicator. Example: Allowed-Before Departure	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
PenaltyAmount	The penalty monetary value amount and currency code.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
value	The value of <code>PenaltyAmount</code>. Example: 485.24	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M

CurCode	The currency code for <code>PenaltyAmount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):M</code>
TypeCode	The penalty type code information. Examples: • Cancellation • Change • NoShow • Upgrade • Other	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):M</code>
PTC_OfferParameters	The offer parameters for a passenger type code in an offer.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):M</code>
PricedPaxNumber	The amount of passengers priced in an offer. Example: 1	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):M</code>
PTC_PricedCode	The passenger type code used for pricing. Example: ADT	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):M</code>

TotalPrice	The total price of the fare and or offer. • OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
Fee	The fee information added to an offer.  Note: Fee only displays when offers other than 1A and 1S offers are returned in the OrderReshopRS response.
Amount	The fee amount information.  Note: Amount only displays when offers other than 1A and 1S offers are returned in the OrderReshopRS response.

value	The value of <code>Amount</code> . Example: 54.89  Note: <code>value</code> only displays when offers other than 1A and 1S offers are returned in the <code>OrderReshopRS</code> response.	
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP, AUD.  Note: <code>CurCode</code> only displays when offers other than 1A and 1S offers are returned in the <code>OrderReshopRS</code> response.	
DescText	The text description of the fee. Example: OBFee  Note: <code>DescText</code> only displays when offers other than 1A and 1S offers are returned in the <code>OrderReshopRS</code> response.	

CurConversion	The conversion rate used to convert a currency to another.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
ConversionRate	The conversion rate used to convert a currency to another. Example: 0.5542515889330287	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
Amount	The amount of CurConversion.	• OrderReshopRS(Reshop)):O • OrderReshopRS(Repric e):M
value	The value of Amount. Example: 0.5542515889330287	• OrderReshopRS(Reshop)):O • OrderReshopRS(Repric e):M
CurCode	The currency code for Amount. Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)):O • OrderReshopRS(Repric e):M

LocalAmount	The amount and currency as specified by the local country.	• OrderReshopRS(Reshop)):O • OrderReshopRS(Repric e):M
value	The value of LocalAmount . Example: 0.5542515889330287	• OrderReshopRS(Reshop)):O • OrderReshopRS(Repric e):M
CurCode	The currency code for LocalAmount . Example: USD, GBP, AUD.	• OrderReshopRS(Reshop)):O • OrderReshopRS(Repric e):M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
value	The value of TotalAmount . Example: 52.27	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M

CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP, AUD.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M
MarkupData	The primary source which contains all the markup data.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : O
baseAmount	The original base amount without any markup value applied. Example: 416.43	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : O
taxAmount	The tax amount to be added to the overall discount and or markup. Example: 93.07	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : O
totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : O

newBaseAmount	The new base amount after discounts and or markups are applied. Example: 416.43	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
newTotalAmount	The new total amount after discounts and or markups are applied. Example: 509.5	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
visibleMarkup	The calculated amount of visible markup and or discount for a specific type of passenger. Example: 34.6	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
invisibleMarkup	The determined amount of invisible markup and or discount for a specific type of passengers.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
totalMarkup	The total discount and or markup amount. Example 2	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O

markupPerPax	The calculated markup and or discount for both invisible and visible markups per passenger.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): O
visibleMarkupPerPax	The calculated visible markup and or discount amount per passenger for that particular type of passenger. Example: 20.9	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): O
invisibleMarkupPerPax	The calculated invisible markup and or discount amount per passenger for a particular type of passenger.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): O
maxMarkupForInvisibleRules	The maximum markup and or discount limit for invisible rules.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): O
maxMarkupForVisibleRules	The maximum markup and or discount limit for visible rules.	• OrderReshopRS(Reshop)): M • OrderReshopRS(Reprice)): O

minMarkupForInvisibleRules	The minimum markup and or discount limit for invisible rules.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
minMarkupForVisibleRules	The minimum markup and or discount limit for visible rules.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
rulesAmount	Information about the rule and its amounts.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
ruleName	The name of the rule. Example: BA - 10 Fixed ADT 5%CHD-Total	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O
isVisible	Determines whether the calculated markup is visible to a customer. 1: visible and 0: hidden. Example: 1	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):O

markupCalculated	The calculated markup. This is determined by the <code>applyOnFareType</code> and <code>adjustmentType</code> fields. Example: 14.14	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : O
isMaxApplicable	Determines whether the markup cap is applied or not to an offer. If the markup is 10 and the min/max values are 5 - 8, the markup is replaced with an 8 and not a 10. Example: 1	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : O
ValidatingCarrierCode	The airline code assigned to the validating carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M

IssuedData		
Elements	Details	Optional/Mandatory
IssuedData	An overview of all the data once an offer has been reshopped and or reissued.	• <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : O

IssuedData		
markup	An overview of the markup which has been applied to an offer after it has been reshopped and or reissued.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>
offerItemId	The carrier assigned offer item ID. Example: P2C5165E-7CD1-416C-96B01cyl7q38kcw8l-1-1	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>
baseAmount	The original base amount without any markup value applied. Example: 416.43	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>
invisibleMarkup	The determined amount of invisible markup and or discount for a specific type of passengers. Note: <code>invisibleMarkup</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>

IssuedData		
invisibleMarkupPerPax	The calculated invisible markup and or discount amount per passenger for a particular type of passenger. Note: invisibleMarkupPerPax is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop) : M - OrderReshopRS(Reprice) : O
markupPerPax	The calculated markup and or discount for both invisible and visible markups per passenger. Note: markupPerPax is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop) : M - OrderReshopRS(Reprice) : O
newBaseAmount	The new base amount after discounts and or markups are applied. Example: 416.43 Note: newBaseAmount is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop) : M - OrderReshopRS(Reprice) : O

IssuedData		
newTotalAmount	The new total amount after discounts and or markups are applied. Example: 509.5 Note: newTotalAmount is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O
noOfPax	The number of passengers of a particular pax type. Example: 2 Note: newTotalAmount is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O
taxAmount	The tax amount to be added to the overall discount and or markup. Example: 93.0	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O

IssuedData		
totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5 Note: <code>totalAmount</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>
totalMarkup	The total discount and or markup amount. Example 2 Note: <code>totalMarkup</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>
visibleMarkup	The calculated amount of visible markup and or discount for a specific type of passenger. Example: 34.6 Note: <code>visibleMarkup</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>

IssuedData		
visibleMarkupPerPax	The calculated visible markup and or discount amount per passenger for that particular type of passenger. Example: 20.9 Note: <code>visibleMarkupPerPax</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>
paxType	The type of passenger. Example: ADT	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>
maxMarkupForInvisibleRules	The maximum markup and or discount limit for invisible rules. Note: <code>maxMarkupForInvisibleRules</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>

IssuedData		
maxMarkupForVisibleRules	The maximum markup and or discount limit for visible rules. Note: maxMarkupForVisibleRules is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	• OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):O
minMarkupForInvisibleRules	The minimum markup and or discount limit for invisible rules. Note: minMarkupForInvisibleRules is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	• OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):O
minMarkupForVisibleRules	The minimum markup and or discount limit for visible rules. Note: minMarkupForVisibleRules is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	• OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):O

IssuedData		
amount	An overview of the amount data of an offer after it has been issued.  Note: amount is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : O
baseAmount	The original base amount without any markup value applied. Example: 416.43  Note: baseAmount is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : O
taxAmount	The tax amount to be added to the overall discount and or markup. Example: 93.0  Note: taxAmount is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : O

IssuedData		
totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5 Note: <code>totalAmount</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>
newBaseAmount	The new base amount after discounts and or markups are applied. Example: 416.43 Note: <code>newBaseAmount</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>
newTotalAmount	The new total amount after discounts and or markups are applied. Example: 509.5 Note: <code>newTotalAmount</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	• <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):O</code>

IssuedData		
visibleMarkup	The calculated amount of visible markup and or discount for a specific type of passenger. Example: 34.6 Note: visibleMarkup is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop) : M - OrderReshopRS(Reprice) : O
invisibleMarkup	The determined amount of invisible markup and or discount for a specific type of passengers. Note: invisibleMarkup is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop) : M - OrderReshopRS(Reprice) : O
totalMarkup	The total discount and or markup amount. Example 2 Note: totalMarkup is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop) : M - OrderReshopRS(Reprice) : O

IssuedData		
markupPerPax	The calculated markup and or discount for both invisible and visible markups per passenger. Note: markupPerPax is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O
visibleMarkupPerPax	The calculated visible markup and or discount amount per passenger for that particular type of passenger. Example: 20.9 Note: visibleMarkupPerPax is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O

IssuedData		
invisibleMarkupPerPax	The calculated invisible markup and or discount amount per passenger for a particular type of passenger. Note: invisibleMarkupPerPax is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O
maxMarkupForInvisibleRules	The maximum markup and or discount limit for invisible rules. Note: maxMarkupForInvisibleRules is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O

IssuedData		
maxMarkupForVisibleRules	The maximum markup and or discount limit for visible rules. Note: maxMarkupForVisibleRules is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O
minMarkupForInvisibleRules	The minimum markup and or discount limit for invisible rules. Note: minMarkupForInvisibleRules is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O
minMarkupForVisibleRules	The minimum markup and or discount limit for visible rules. Note: minMarkupForVisibleRules is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	- OrderReshopRS(Reshop):M - OrderReshopRS(Reprice):O

ShoppingResponse

Elements	Details	Optional/Mandatory
ShoppingResponse	Facilitates the tracking of what was offered and contains an identifier unique to the source airline for a set of product offers returned in response to a shopping request.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
ShoppingResponseID	The unique identifier of a shopping response. Example: RDE5D873A-1EE1-4E96-9C62	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M

PaymentFunctions

Elements	Details	Optional/Mandatory
PaymentFunctions	The form of payment information.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M

PaymentSupportedMethod	The payment method accepted by an airline that is used during an OrderChange request.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
PaymentTypeCode	The payment type code of the payment method as determined by the ATS Codeset PAYT. Example: On Account With Agency	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M

PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
DataLists		
Elements	Details	Optional/Mandatory
BaggageAllowanceList	Baggage allowance data list definition	• OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M

DataLists		
FareList	Fare data list definition.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
OriginDestList	Origin Destination data list definition.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
PaxJourneyList	Journey data list definition.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
PaxList	Passenger data list definition.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M
PaxSegmentList	Passenger segment data list definition	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M

DataLists		
PriceClassList	Price Class data list definition.	• OrderReshopRS(Reshop)):M • OrderReshopRS(Repric e):M

For more details, [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)


5.7 18.6 OrderChange Overview

The OrderChange web service provides the ability to modify the existing Order as desired by the customer. In the case of already ticketed Orders, it enables to exchange the old tickets for new tickets.

However, prior to using OrderChange service, the Seller needs to use **OrderReshopRQ service** and receive the Airline response through **OrderReshopRS**. The message will confirm the feasibility of change to Order, offers available for the desired changes, and the additional cost if any. More details are already documented in the earlier pages. These Offers will effectively be a “preview image” of what the resulting Order will look like. If the Customer wishes to proceed with the changes, the OrderChange web service will have to be used.

Order Change Seat Selection

Order Change with Seat

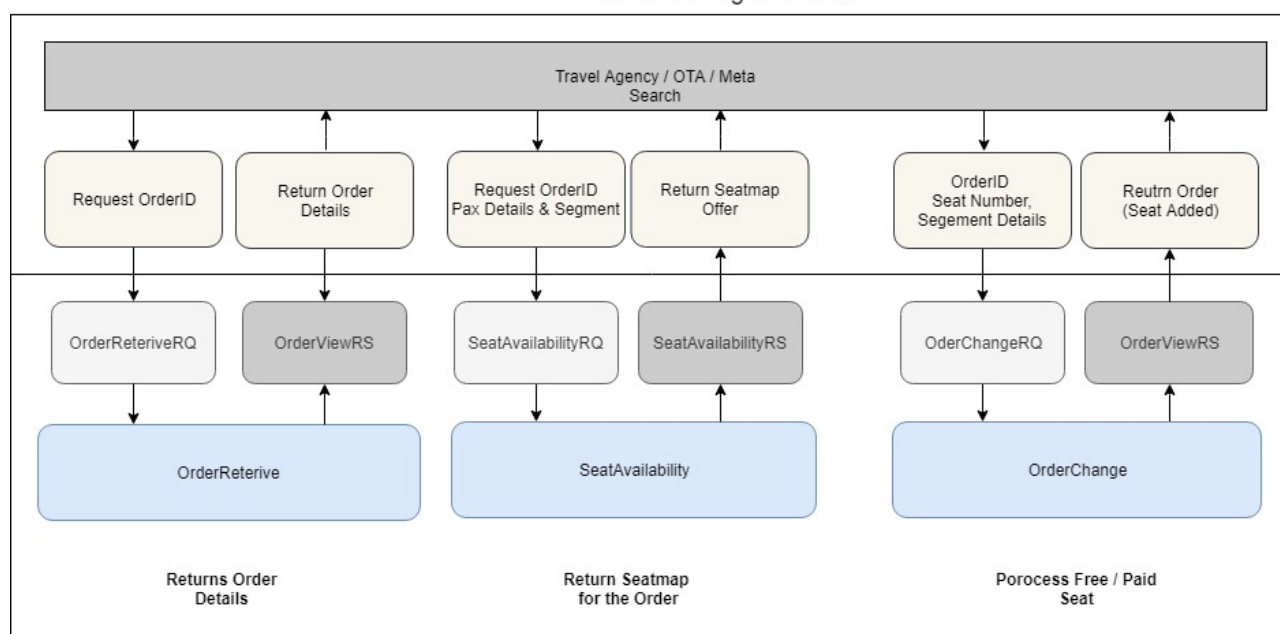

For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.7.1 18.6 OrderChange Request (OrderChangeRQ)

Introduction

The OrderChangeRQ service set requests modifications to an Order by specifying which order items to change and what changes are required. The request is generated based on the offers received via OrderReshopRS. After processing the OrderChangeRQ, the updated view of the Order is returned through OrderChangeRS.

Implementation

This service should be implemented after getting a successful OrderReshopRS. Offers selected from the OrderReshopRS, are coded into OrderChangeRQ along with the mandatory elements, which are marked “M” and optional elements marked with “O”.

Post-Service Transition for Seat Addition

To transition from a SeatAvailability to an OrderChange request for a post-seat availability addition, the seller must provide the below input parameters based on the available offers from the SeatAvailability response.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

Post-Service Transition for Seat Addition

Input parameters to be transitioned from SeatAvailabilityRS to OrderChangeRQ	API Flow	Output parameters for transitioning from OrderViewRS (OrderChangeRS) to ???
--	----------	--

Post-Service Transition for Seat Addition

OfferDetails:

- OfferRefID
- OwnerCode

SelectedOfferItem:

- OfferItemRefID
- PaxRefID

SelectedALaCarteOffer Item:

- PaxSegmentRefID
- Qty

FlightAssociations:

- PaxSegmentRefID
- Qty

SelectedSeat:

- ColumnID
- SeatRowNumber

ContactInfo:

- ContactInfoID
- ContactTypeText

EmailAddress:

- EmailAddressText
- LabelText

OrderChangeRQ 
OrderViewRS
(OrderChangeRS)

Post-Service Transition for Seat Addition

- IndividualID

Phone:

- LabelText

- PhoneNumber

Paxlist:

- Birthdate

- PaxID

- PTC

Individual:

- GenderCode

- GivenName

- IndividualID

- MiddleName

- Surname

- TitleName

PaxSegmentDetails:

- PaxSegmentID

Arrival:

- AircraftScheduledDate
eTime

- IATALocationCode

- TerminalName

CabinType:

Post-Service Transition for Seat Addition

- CabinTypeCode
- CabinTypeName
- Dep:
- AircraftScheduledDate
eTime
- IATALocationCode
- TerminalName
- Duration
- MarketingCarrierInfo:
- CarrierDesignCode
- CarrierName
- MarketingCarrierFlight
NumberText
- Order Details:
- OrderID
- OwnerCode
- OwnerTypeCode
- OrderChangeParameters
- :
- ReasonCode
- PaymentInfo:
- Amount:
 - value

Post-Service Transition for Seat Addition

• CurCode • DescText • PaymentInfoID PaymentMethod: • RemarkText • TypeCode OtherPaymentMethod: • RemarkText • TypeCode		
---	--	--

OrderChangeRQ constitutes the below structure:

- [MessageDoc](#)
- [Party - Sender](#)
- [PayloadAttributes](#)
- [PointOfSale](#)
- [Request](#)
- [DataLists](#)
- [OrderChangeParameters](#)
- [PaymentInfo](#)

User Guidance - Service Input Parameters

Input Parameters	Type	Optional/Mandatory
Request Object	OrderChangeRQ	M

Request Parameters



The update of the optional and mandatory information for [OrderChangeRQ](#) in split ticketing reshop, reprice, and reissue scenarios is in progress.

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	MessageDoc Type	O
Party - Sender		
Elements	Details	Optional/Mandatory
Party	NDC Message/ Transaction Party(s) information. Note that information about parties is intended for business use, it is not intended for transaction authentication and routing of the message.	M
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M
PointOfSale		
Elements	Details	Optional/Mandatory
PointOfSale	Point of Sale information.	M
Request		
Elements	Details	Optional/Mandatory
Request	Order Change Query.	M

BookingRef	Information related to a booking or reservation.  Note: BookingRef is mandatory (M) in one-way scenarios.	O
BookingEntity	The device code from which the request was initiated.	O
BookingID	An existing booking reference Identifier.  Note: BookingID is mandatory (M) in one-way scenarios.	O
BookingRefTypeCode	The booking reference type. Example: 6 (Passenger confirmation number) Encoding Scheme: IATA Padis Codeset - List for data element [1153] Reference Qualifier.  Note: BookingRefTypeCode is mandatory (M) in one-way scenarios.	O

ChangeOrder	Contains a choice of functions to update and Order including Update Order Item, Update Passenger, and Accept Reprice Order. <i>i</i> Note: For ticket re-issuance/exchange. <i>i</i> Note: ChangeOrder is mandatory (M) in one-way scenarios.	O
UpdateOrderItem	Collection of functions used by the seller to request the airline to commit changes to an existing Order. These may be adding, removing or replacing Order Items (with potential refund conditions, in case of cancellations). <i>i</i> Note: For ticket re-issuance/exchange. <i>i</i> Note: UpdateOrderItem is mandatory (M) in one-way scenarios.	O

AcceptOffer	The function to accept a new offer item and adding it to the existing order. Note: For ticket re-issuance/exchange. Note: AcceptOffer is mandatory (M) in one-way scenarios.	O
-------------	---	---

SelectedOffer	The offer selected by the passenger for requesting an order to be created. Multiple offers can be requested at the same time, each of which could originate from different shopping responses (each with their own ResponseIDs). Each Offer selected could reference (via the OfferID) either standard offers from an AirShoppingRS message (potentially with flight-related services) or A-La-Carte Offers (containing optional ancillary services). These standard offers and a-la-carte offers would need to be consistent with the applicability rules defined by their relations (passengers or segments eligible for the enclosed offer items) and would be combined to produce a single order, returned by the OrderViewRS message. Note: For ticket re-issuance/exchange. Note: SelectedOffer is mandatory (M) in one-way scenarios.	O
OfferRefID	Reference to the OfferID of the selected offer (either a standard offer or an a-la-carte Offer) returned in a previous shopping response. Note: For ticket re-issuance/exchange.	M

OwnerCode	The airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code.	M
SelectedOfferItem	The offer item selected by the passenger for inclusion in the requested order. Repeat occurrence of offer item (once per passenger) if different passengers want to select different service options, different quantities of a-la-carte items or different seat location.  Note: For ticket re-issuance/exchange.	M
OfferItemRefID	Reference to the OfferItemID of the selected OfferItem (contained in either a standard Offer or an a-la-carte Offer) returned in a previous shopping response.  Note: For ticket re-issuance/exchange.  Note: OfferItemRefID is mandatory (M) in one-way scenarios.	O

PaxRefID	Reference to passenger(s) for which this OfferItem and selected Services (in case of Service Bundles) applies. Note: For ticket re-issuance/exchange. Note: PaxRefID is mandatory (M) in one-way scenarios.	O
pricingOverrideMargin	The Margin Override information captured for an offer during reshop. Note: This element is only present when the Margin Override feature has been enabled and Visible and Invisible Override Margin amounts are added to booking during reshop. See Margin Override for more information.	O
newOverrideInvisibleMarkup	The invisible Override Margin markup amount information that was added during reshop. Note: This element is only present when the Margin Override feature has been enabled and Invisible Override Margin amounts are added to booking during reshop. See Margin Override for more information.	O

value	The value of <code>newOverrideInvisibleMarkup</code> added during reshop. Example: 10 Note: This element is only present when the Margin Override feature has been enabled and Invisible Override Margin amounts are added to booking during reshop. See Margin Override for more information.	O
newOverrideVisibleMarkup	The visible Override Margin markup amount information that was added during reshop. Note: This element is only present when the Margin Override feature has been enabled and Visible Override Margin amounts are added to booking during reshop. See Margin Override for more information.	O

value	The value of <code>newOverrideVisibleMargin</code> which was added during reshopping. Example: 10  Note: This element is only present when the Margin Override feature has been enabled and Visible Override Margin amounts are added to booking during reshopping. See Margin Override for more information.	O
OwnerCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	M
ShoppingResponseRefID	Reference to unique shopping session response ID, as provided in the airline's previous shopping response.  Note: For seat addition.	M
DeleteOrderItem	Function to accept the deletion of an OrderItem from the existing Order.  Note: For ticket re-issuance/exchange.	O
OrderItemRefID	Carrier assigned Order Item ID.  Note: For ticket re-issuance/exchange.	O

Order	A uniquely identified record of the agreement of one party with another to receive products and services under specified terms and conditions. Order supports the sale of a flexible range of airline products and services that are not necessarily Journey b	M
OrderID	Carrier assigned ID which uniquely identifies a specific Order across several messages.	M
OwnerCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	M
OwnerTypeCode	Indicates whether the owner is the ORA or POA.	O
OrderChangeParameters	Information related to how response results should be returned.	O
ReasonCode	The reason for change. Encoding scheme IATA PADIS REA.	O
PaymentInfo	The information related to the settlement of a transaction through monetary or other compensations. For example, a payment may be applied to an entire order or individual order items.	O
Amount	The amount applied to the associated payment method. Example: 300 USD.  Note: Amount is optional (O) in one-way scenarios.	M

CurCode	The currency code of Amount . Example: USD, GBP, AUD.  Note: CurCode is optional (O) in one-way scenarios.	M
value	The value of Amount . Example: 100.68.  Note: value is optional (O) in one-way scenarios.	M
Desc	The description of the payment information used when reissuing a ticket.	O
DescText	The description text value of the payment information used when reissuing a ticket. Example: BSP Card	O
PaymentInfolD	The unique identifier of the payment information. Example: PAYMENT	O
PaymentMethod	The overview of the payment method used when reissuing a ticket.	O
OtherPaymentMethod	Information relating to non-standard forms of payment which may be used as payments for an offer or offer items.	O
Remark	Additional, supplementary information about the other payment method.	O

RemarkText	Information text value of the other payment method.	O
TypeCode	The form of payment type. Examples: Credit Card, Cash. Encoding Scheme: IATA PADIS code list data element [9888] Form of Payment Identification.	O

DataLists		
Elements	Details	Optional/Mandatory
ContactInfoList	Contact info data list definition.	O
PaxList	Passenger data list definition. <i>i</i> Note: For ticket re-issuance or exchange.	M
PaxSegmentList	Segment data list definition. <i>i</i> Note: For ticket re-issuance or exchange.	O

OrderChangeParameters		
Elements	Details	Optional/Mandatory
OrderChangeParameters	Information related to how response results should be returned.	O

OrderChangeParameters		
Elements	Details	Optional/Mandatory
ReasonCode	The code of the reason for the change. Encoding scheme IATA PADIS REA. Example: MANUAL_TICKETING	O
Remark	Additional, supplementary information about the order change parameters.	O
RemarkText	The remark text information of the order change parameters.	O
TypeCode	The type code of the order change parameter. Examples: • 5000 • 5001 • 5002 • 5003	O

PaymentInfo		
Elements	Details	Optional/Mandatory
PaymentInfo	Information related to how response results should be returned.  Note: PaymentInfo is mandatory (M) for paid issuance, reissuance or EMD/seat addition.	O

Amount	The amount applied to the associated payment method. Example: 300 USD.  Note: Amount is optional (O) in one-way scenarios.	M
CurCode	The currency code for Amount . Example: USD, GBP.  Note: CurCode is optional (O) in one-way scenarios.	M
value	The value of Amount . Example: 23.56  Note: value is optional (O) in one-way scenarios.	M
Desc	The description of the payment information.	O
DescText	The description text value of PaymentInfo . Example: FOP text	O
PaymentInfoID	Uniquely identifies payment information within a message.	O
PaymentMethod	A form of procedure for the payment of goods or services, plus any transactional information specific to the payment method other than the amount.	O

OtherPaymentMethod	Information relating to non-standard forms of payment which may be used in exchange for goods or services.	O
Remark	Additional, supplementary information about the document or service.	O
RemarkText	Additional, supplementary information about the document or service. Example: BSP Card.	O
PaymentCard	A device that enables its owner (the cardholder) to make a payment by electronic funds transfer.	O
CardHolderName	The name of credit card holder. Example: JOHN SMITH	O
CardNumber	The card number indicated on the payment card.	O
CardSecurityCode	The 3-digit number printed on the signature panel on the back of the card and following the last four digits of the Primary Account Number (PAN). For American Express, 4 digits located on the front of the card, above the card number on the right hand side. Examples: • Visa - CVV2 • MasterCard - CVC2 • American Express - CID • Discover - CMID • Union Pay - CVN2 • JCB - CAV2	O
ExpirationDate	The voucher expiration date. Example: 06-17.	O

CardBrandCode	A two-letter code assigned according to IATA Resolution 728. Example: VI for Visa	O
TypeCode	The form of payment type. Encoding Scheme: IATA PADIS code list data element [9888] Form of Payment Identification. Examples: Credit Card, Cash.	O

For more details, [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.7.2 18.6 OrderChangeRS - OrderViewRS

Introduction

The OrderChangeRS - OrderViewRS is a system confirmation response for OrderChangeRQ service.

Implementation

The following is the element checklist to be received in OrderChangeRS - OrderViewRS. The elements which are marked “**M**” are mandatory to be passed in the response. The parameters passed as “**O**” are optional and may contain value or not, depending on the supplier’s response.

OrderChangeRS - OrderViewRS constitutes the below structure:

- [MessageDoc](#)
- [Party - Sender](#)
- [PayloadAttributes](#)
- [PaymentInfo](#)
- [PaymentFunctions](#)
- [Order](#)
- [TicketDocInfo](#)
- [Warning](#)
- [DataLists](#)
- [Metadata](#)

Note: Please use the sample attached and pass the elements accordingly.

User Guidance - Service Input Parameters

Input Parameters	Type	Optional/Mandatory
Response Object	OrderChangeRS	M

Response Definition

Note: The update of the optional and mandatory information for `OrderChangeRS` - `OrderViewRS` in split ticketing reshop, reprice, and reissue scenarios is in progress.

Note: A response API's optional and mandatory fields are determined by which elements are used in the corresponding request API.

MessageDoc

Elements	Details	Optional/Mandatory
MessageDoc	Message document information including the document name and version number.	M

Party - Sender

Elements	Details	Optional/Mandatory
----------	---------	--------------------

Party - Sender		
Party - Sender	The NDC Message/Transaction Party(s) information. <i>Note:</i> The information about parties is intended for business use, it is not intended for transaction authentication and routing of the message.	M
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	The IATA standard payload attributes.	M
PaymentInfo		
Elements	Details	Optional/Mandatory
PaymentInfo	The payment information when an order is changed.	M
Amount	The amount applied to the associated payment method. Example: 300 USD	M
value	The value of <code>Amount</code> . Example: 564.37	M
CurCode	The currency code of <code>Amount</code> . Example: USD, GBP, AUD.	M
Desc	The description of the payment information.	M

PaymentInfo		
DescText	The description text value of <code>PaymentInfo</code> . Example: FOP text	M
OrderRefID	The order reference ID of an order that is being changed. Example: 54JWYL	M
PaymentStatusCode	Indicates the current state of the payment information. Examples: • ACCEPTED • ALLOCATED • CLOSED • COMMITTED • RECEIVED • REFUNDED • SENT	M
PaymentInfoID	The unique identifier of the payment information. Example: PAYMENT	O
PaymentMethod	The payment method used when changing an order.	M
OtherPaymentMethod	Information relating to non-standard forms of payment which may be used when changing an order.	M
Remark	Any additional, supplementary information about the payment method used when changing an order.	M
RemarkText	The remark text value of the payment method when changing an order. Example: On Account With Agency	M

PaymentInfo		
PaymentCard	The information about the card used during payment.	O
CardBrandCode	The branch code of the card used during payment. Example: AX	O
CardHolderName	The card holder's name. Example: John Doe	O
CardNumber	The card number of the card used during payment. Example: XXXXXX****XX00	O
CardTypeText	Additional information about the card type.	O
ExpirationDate	The expiration date of the card used during payment. Example: 0125	O
Voucher	A document that entitles the holder to a discount or that may be exchanged as the payment method when changing an order.	M
RemainingAmount	The remaining amount leftover if the total voucher amount isn't used when changing an order.	M
TypeCode	The form of payment type as per the IATA PADIS code list data element [9888] Form of Payment Identification encoding Scheme. Examples: Credit Card, Cash. CA.	M
PaymentFunctions		
Elements	Details	Optional/Mandatory

PaymentFunctions	The form of payment information.	O
PaymentSupportedMethod	The payment method accepted by an airline that is used during an OrderChange request.	O
PaymentTypeCode	The payment type code of the payment method as determined by the ATS Codeset PAYT. Example: On Account With Agency	O

Order		
Elements	Details	Optional/Mandatory
Response	The response information returned when an order has been changed.	M
Order	The order information on the changed order.	M
BookingRef	The booking reference information of the order that has been changed.	M
BookingID	The existing booking reference identifier of the order that is being changed. Example: TPC13478127253D27122023	M:
BookingRefTypeCode	The booking reference type code of the changed order. Example: 6 (Passenger confirmation number) Encoding Scheme: IATA Padis Codeset - List for data element [1153] Reference Qualifier.	M:

BookingEntity	The airline or organisation which assigned the booking information.  Note: For ticket reissuance/exchange.	M
Carrier	The organisation which carries the passenger, baggage, or goods, and or commits to delivering the carriage as well as any related services such as issuance of ticket and the creation of the order.  Note: For ticket re-issuance/exchange.	M
AirlineDesigCode	The airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF  Note: For ticket re-issuance/exchange.	M
OrderID	The carrier assigned ID which uniquely identifies a specific order. Example: 54BL77	M
OrderItem	An individually priced item within an order, made up of one or more services. May or may not be a selected offer item. Example: Non-chargeable services available on request such as a wheelchair.	M
OrderItemID	The unique identifier of the OrderItem. Example: ORDERITEM-2	O

FareDetail	The fare details section of the changed order.	M
AccountCode	The corporate unique identifier used when pricing special fares. Example: PAG20	O
FareCalculationInfo	Information related to the calculation of the fare amount by applying various rules to determine a final fare for the changed airline ticket.	M
AddlInfoText	The fare calculation text required in the fare calculation area of an electronic ticket.	O
PricingCodeText	The primary identifier reflecting the method of pricing the changed order. Example: CVG DL X/ATL DL XNA315.49DL X/ATL DL CVG335.26USD	M
ReportingCodeText	The secondary identifier reflecting the method of pricing for a changed order. It's also used in the reporting process. Example: 650.75END ZPCVGATLXNAATL XFCVG4.5ATL4.5XNA4.5ATL4.5	O
FareComponent	A portion of an itinerary between two consecutive fare construction points. If the journey has only one fare component, the points of origin and destination are the only fare construction points	M
CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy Class.	M
CabinTypeCode	The cabin type code as defined by PADIS codeset. Example: Y	M

CabinTypeName	The name given to a cabin compartment. Example: First, Business, and Economy.	M
FareBasisCityPairText	The identified published fare. Contains the origin and destination city codes and a two character designator of fare owning airline associated with the fare basis code. Example: ADLBNE	M
FareBasisCode	The fare basis code. Example: QDQA	M
FareRule	Special purchasing rules and restrictions used to differentiate fare levels from one another.	M
PaxSegmentRefID	A reference to a pax segment ID. Example: Example: S2	M
Price	The price of the changed order. Contains information such as the base amount, currency conversion and tax summary information of the changed order.	M
BaseAmount	The total base fare amount of the changed order. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 143.55	M
CurCode	The currency code of <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
CurConversion	The conversion of the used currency in the changed order to another currency.	M

ConversionRate	The conversion rate used to convert the currency to another in the changed order.	M
value	The value of <code>ConversionRate</code> . Example: 0.5542515889330287	M
BaseUnitCode	The combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
TaxSummary	The summary of all tax amounts applied on the changed order.	M
Tax	The compulsory contribution added to the changed order.	M
Amount	The tax amount applied to the changed order. Example: 15000 USD	M
value	The value of <code>Amount</code> . Example: 5.49	M
CurCode	The currency code of <code>Amount</code> . Example: USD, GBP	M
CurConversion	The conversion of the used currency in the changed order to another currency.	M
Amount	The tax amount applied to the changed order. Example: 15000 USD	M
value	The value of <code>Amount</code> . Example: 5.49	M
CurCode	The currency code of <code>Amount</code> . Example: USD, GBP	M

LocalAmount	The amount and currency as specified by the local country where the order was changed.	M
value	The value of <code>LocalAmount</code> . Example: 5.49	M
CurCode	The currency code of <code>LocalAmount</code> . Example: USD, GBP	M
DescText	The description text value of the tax applied to an order after it has been changed. Example: PASSENGER SERVICE CHARGE DOMESTIC DEPARTURE	M
TaxCode	The tax code applied to the changed order. Example: QR	M
TotalTaxAmount	The total of all applicable tax amounts included in the changed price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M
value	The value of <code>TotalTaxAmount</code> . Example: 32.89	M
CurCode	The currency code of <code>TotalTaxAmount</code> . Example: USD, GBP	M
TotalAmount	The total monetary price amount of the changed order, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 176.43	M

CurCode	The currency code of TotalAmount . Example: USD, GBP	M
PriceClassRefID	The reference to the price class ID that was used when changing the order. Example: REDeDeal-1	M
RBD	The Reservation Booking Designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. Example: 'J' for Business Class Premium, 'D' for Business Disc.	M
RBDCode	The code used to identify a particular RBD Example: P, J, W, M.	M
value	The value of RBDCode . Example: W	M
Name	The name of the RBDCode . Example: Red eDeal	M
FarePriceType	The type of fair price applied to a Fare Detail. Example: Filed amount, net amount, and or a sell amount.	M
FarePriceTypeCode	Indicates if the fare price provided is a filed amount, net amount, or a sell amount.	O
Price	The price of the changed order.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of BaseAmount . Example: 416.43	M

CurCode	The currency code for BaseAmount . Example: USD, GBP, AUD.	M
CurConversion	The conversion of the used currency in the changed order to another currency.	M
ConversionRate	The conversion rate used to convert the currency to another in the changed order.	M
value	The value of ConversionRate . Example: 0.5542515889330287	M
BaseUnitCode	The combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
EquivAmount	The entire amount of the transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of EquivAmount . Example: 751.32	M
CurCode	The currency code for EquivAmount . Example: USD, GBP, AUD.	M
TaxSummary	The summary of all tax amounts applied on the changed order.	M
Tax	The compulsory contribution added to the changed order.	M
Amount	The tax amount applied to the changed order. Example: 15000 USD	M

value	The value of Amount . Example: 5.49	M
CurCode	The currency code of Amount . Example: USD, GBP	M
CurConversion	The conversion of the used currency in the changed order to another currency.	M
Amount	The tax amount applied to the changed order. Example: 15000 USD	M
value	The value of Amount . Example: 5.49	M
CurCode	The currency code of Amount . Example: USD, GBP	M
LocalAmount	The amount and currency as specified by the local country where the order was changed.	M
value	The value of LocalAmount . Example: 5.49	M
CurCode	The currency code of LocalAmount . Example: USD, GBP	M
DescText	The description text value of the tax applied to an order after it has been changed. Example: PASSENGER SERVICE CHARGE DOMESTIC DEPARTURE	M
TaxCode	The tax code applied to the changed order. Example: QR	M

TotalTaxAmount	The total of all applicable tax amounts included in the changed price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M
value	The value of <code>TotalTaxAmount</code> . Example: 32.89	M
CurCode	The currency code of <code>TotalTaxAmount</code> . Example: USD, GBP	M
TotalAmount	The total monetary price amount of the changed order, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 176.43	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP	M
FareRefText	The fare reference key. Example: FO1	M
PaxRefID	The reference to a passenger ID. Example: PAX1	M
Commission	An amount of money, typically a set percentage of the value involved, paid to an agent in a commercial transaction.	O
CommissionCode	The commission code. Example: BSP Commission, OverrideCommission, and TotalCommission	O
Percentage	The commission percentage value. Example: 3	O

OrderItemID	The carrier assigned order item ID. Example: RFA53B61-D51-49EB-81CO-1-1-T1	M
OwnerCode	The airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF	M
Penalty	The penalty applied to a fare, based on changes to or cancellations of a fare.	M
AppCode	The penalty application type code. Examples: • ADE (After departure) • NOS (No show) • PDE (Prior to departure) • S2IPAX1IPDE	M
CancelFeeInd	The cancel fee indicator. If TRUE, cancellation fee(s) may apply.	M
ChangeFeeInd	The change fee indicator. If TRUE, change of Itinerary fee(s) may apply.	M
DescText	The description of the applicable penalty. Example: Change	M
PenaltyAmount	The penalty monetary value amount and currency code.	M
value	The value of <code>PenaltyAmount</code> . Example: 99	M
CurCode	The currency code of <code>PenaltyAmount</code> . Example: USD, GBP, AUD.	M

TypeCode	The penalty type information. Examples: • Cancellation • Change • NoShow • Upgrade • Other	M
Price	The price of the changed order.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 416.43	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
CurConversion	The conversion of the used currency in the changed order to another currency.	M
ConversionRate	The conversion rate used to convert the currency to another in the changed order.	M
value	The value of <code>ConversionRate</code> . Example: 0.5542515889330287	M
BaseUnitCode	The combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
EquivAmount	The entire amount of the transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M

value	The value of EquivAmount . Example: 751.32	M
CurCode	The currency code for EquivAmount . Example: USD, GBP, AUD.	M
TaxSummary	The summary of all tax amounts applied on the changed order.	M
Tax	The compulsory contribution added to the changed order.	M
Amount	The tax amount applied to the changed order. Example: 15000 USD	M
value	The value of Amount . Example: 5.49	M
CurCode	The currency code of Amount . Example: USD, GBP	M
CurConversion	The conversion of the used currency in the changed order to another currency.	M
Amount	The tax amount applied to the changed order. Example: 15000 USD	M
value	The value of Amount . Example: 5.49	M
CurCode	The currency code of Amount . Example: USD, GBP	M
LocalAmount	The amount and currency as specified by the local country where the order was changed.	M
value	The value of LocalAmount . Example: 5.49	M

CurCode	The currency code of <code>LocalAmount</code> . Example: USD, GBP	M
DescText	The description text value of the tax applied to an order after it has been changed. Example: PASSENGER SERVICE CHARGE DOMESTIC DEPARTURE	M
TaxCode	The tax code applied to the changed order. Example: QR	M
TotalTaxAmount	The total of all applicable tax amounts included in the changed price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M
value	The value of <code>TotalTaxAmount</code> . Example: 32.89	M
CurCode	The currency code of <code>TotalTaxAmount</code> . Example: USD, GBP	M
TotalAmount	The total monetary price amount of the changed order, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 176.43	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP	M

Service	The instance of a specific flight or service definition as it has been offered (and eventually ordered and consumed). In the context of a specific offer and or order.	M
PaxRefID	The unique identifier of a passenger. Example: PAX1	M
ServiceAssociations	The references to the details of this service. May include either passenger journeys, a service definition, or a selected seat.	M
PaxSegmentRefID	The reference to a passenger segment ID in a message. Example: S2	M
ServiceDefinitionRef	The airline specific definition of a product or service (excluding flights) that can be separately sold and delivered. Example: Bag, seat, or meal on a flight.	M
PaxSegmentRefID	A reference of a passenger segment ID within this message. Example: S4	M
ServiceDefinitionRefID	A reference of a service definition ID within this message. Example: BASRV2D67A650	M
ServiceID	The service ID assigned by the carrier. Example: SERVICE-ADT	M
StatusCode	The status code of the service instance. Example: ENTITLED	M

OrderKeys	Order Keys contain one Order ID with an associated Order Item ID(s).  Note: These are orders that were created from offers that have already been purchased, booked, and or are being held for a traveler.	M
OrderRefID	The carrier assigned ID which uniquely identifies a specific order across several messages. Example: 54JWYL	M
OrderItem	An individually priced item within an order, made up of one or more services. May or may not be a selected offer item. Example: Non-chargeable services available on request such as a wheelchair.	M
OrderItemRefID	The carrier assigned order item ID. Example: R92973F3-37B8-43C9-8857-1-1-T1	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF	M
OwnerCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: 1S	O
OriginalOrder	Used when an order has been sub-divided into associated orders or changed, and serves as a reference to the original order ID.	M

OrderRefID	The carrier assigned ID which uniquely identifies a specific order across several messages. Example: 54JWYL	M
OwnerCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF	M
OwnerCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF	M
PaymentTimeLimitDateTime	The date by which a complete payment must be made for the confirmed items in an offer. Example: 2023-12-27T23:59:00	M
StatusCode	The status of the service instance. See PADIS Codelist 4405 for possible values. Example: EXCHANGED  Note: For ticket re-issuance/exchange.	M
TotalPrice	The total price of the changed fare and or order.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 416.43	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M

CurConversion	The conversion of the used currency in the changed order to another currency.	M
ConversionRate	The conversion rate used to convert the currency to another in the changed order.	M
value	The value of <code>ConversionRate</code> . Example: 0.5542515889330287	M
BaseUnitCode	The combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
EquivAmount	The entire amount of the transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of <code>EquivAmount</code> . Example: 751.32	M
CurCode	The currency code for <code>EquivAmount</code> . Example: USD, GBP, AUD.	M
Markup	The markup applied to the changed offer or fare.	M
MarkupData	The primary source which contains all the markup data.	M
baseAmount	The original base amount without any markup value applied. Example: 416.43	M
taxAmount	The tax amount to be added to the overall discount/markup. Example: 93.07	M

totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5	M
newBaseAmount	The new base amount after discounts and or markups are applied. Example: 416.43	M
newOverrideInvisibleMarkup	The invisible Override Margin markup amount information that was added during reshop. Example: 10  Note: This element is only present when the Margin Override feature has been enabled and Invisible Override Margin amounts are added to booking during reshop. See Margin Override for more information.	M

newOverrideTotalMarkup	The total override markup amount during reshop. The value returned is a combination of the <code>newOverrideInvisibleMarkup</code> and <code>newOverrideVisibleMarkup</code> values. Example: 14 Note: This element is only present when the Margin Override feature has been enabled and Visible and Invisible Override Margin amounts are added to booking during reshop. See Margin Override for more information.	M
newOverrideVisibleMarkup	The visible Override Margin markup amount information that was added during reshop. Example: 4 Note: This element is only present when the Margin Override feature has been enabled and Visible Override Margin amounts are added to booking during reshop. See Margin Override for more information.	M
newTotalAmount	The new total amount after discounts and or markups are applied. Example: 509.5	M

visibleMarkup	The calculated amount of visible markup and or discount for a specific type of passenger. Example: 34.6	M
invisibleMarkup	The determined amount of invisible markup and or discount for a specific type of passengers.	M
totalMarkup	The total discount and or markup amount. Example 2	M
markupPerPax	The calculated markup and or discount for both invisible and visible markups per passenger.	M
visibleMarkupPerPax	The calculated visible markup and or discount amount per passenger for that particular type of passenger. Example: 20.9	M
invisibleMarkupPerPax	The calculated invisible markup and or discount amount per passenger for a particular type of passenger.	M
maxMarkupForInvisibleRules	The maximum markup and or discount limit for invisible rules.	M
maxMarkupForVisibleRules	The maximum markup and or discount limit for visible rules.	M
minMarkupForInvisibleRules	The minimum markup and or discount limit for invisible rules.	M
minMarkupForVisibleRules	The minimum markup and or discount limit for visible rules.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts. Example: 93.07	M

value	The value of <code>TotalTaxAmount</code> . Example: 93.07	M
CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts. Example: 509.5	M
value	The value of <code>TotalAmount</code> . Example: 509.5	M
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP, AUD.	M

TicketDocInfo		
Elements	Details	Optional/Mandatory
TicketDocInfo	Information corresponding to a group of one to four tickets for a single origin destination and a single passenger.	M
BookingRef	Information related to a booking or reservation.	M
BookingID	An existing booking reference identifier. Example: TPC13478127253D27122023	M
BookingEntity	The airline or organisation assigning the booking information.	O

TicketDocInfo		
BookingRefTypeCode	The booking reference type. Example: TPC	M
FareDetail	The amount charged by the carrier for the carriage of a passenger and their allowable free baggage. i Note: For a service, <code>OrderItem</code> representing seats and or ancillaries, the <code>FareDetail</code> element is optional (O).	M
FareCalculationInfo	Information related to the calculation of the fare amount by applying various rules to determine a final fare for an airline ticket.	O
AddlInfoText	The fare calculation text required in the fare calculation area of an electronic ticket.	O
PricingCodeText	The primary identifier reflecting the method of pricing for a transaction.	O
ReportingCodeText	The secondary identifier reflecting the method of pricing for a transaction which is used in the reporting process.	O
FareComponent	A portion of an itinerary between two consecutive fare construction points. If the journey has only one fare component, the points of origin and destination are the only fare construction points.	O

TicketDocInfo		
CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy.	O
CabinTypeCode	The Cabin Type Code as defined by PADIS codeset. Example: Economy (Y), Premium Economy (W), Business (C), and First (F).	O
CabinTypeName	The name given to a cabin compartment (e.g. Business, First, Economy). Examples: Economy (Y), Premium Economy (W), Business (C), and First (F).	O
FareBasisCityPairText	The identified published fare. A combination of the origin and destination city codes and two character designators of the fare owning airline associated with a Fare Basis Code. Example: MIANCEDL	O
FareBasisCode	The fare basis code. Example: Y26	O
PaxSegmentRefID	The reference to a Pax Segment ID. Example: S2	O
PriceClassRefID	A price point within a particular cabin type, sometimes referred to as 'Fare Families'. Example: REDeDeal-1	O

TicketDocInfo		
RBD	The Reservation Booking Designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. Examples: 'J' for Business Class Premium, 'D' for Business Disc.	O
RBDCode	The code used to identify a particular RBD. Example: P, J, W, and M.	O
value	The value of <code>RBDCode</code> . Example: N	O
FarePriceType	The type of fair price applied to a fare detail. Example: • Filed amount • Net amount • Sell amount	M
FarePriceTypeCode	Indicates if the fare price provided is a filed amount, net amount, or a sell amount.	O
Price	The price of the ticket.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 416.43	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M

TicketDocInfo		
CurConversion	The conversion of the used currency in the changed order to another currency.	M
ConversionRate	The conversion rate used to convert the currency to another in the changed order.	M
value	The value of <code>ConversionRate</code> . Example: 0.5542515889330287	M
BaseUnitCode	The combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP	M
EquivAmount	The entire amount of the transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of <code>EquivAmount</code> . Example: 751.32	M
CurCode	The currency code for <code>EquivAmount</code> . Example: USD, GBP, AUD.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	A compulsory contribution added to a fare.	M
Amount	The tax amount added to a fare.	M
value	The value of <code>Amount</code> : Example: 5.49	M

TicketDocInfo		
CurCode	The currency code for Amount . Example: USD, GBP, AUD.	M
CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M
Amount	The tax amount. Example: 15000 USD	M
value	The value of Amount . Example: 17.71	M
CurCode	The currency code for Amount . Example: USD, GBP, AUD.	M
LocalAmount	The local currency amount that equates to the converted currency amount.	M
value	The value of LocalAmount . Example: 17.71	M
CurCode	The currency code for LocalAmount . Example: USD, GBP, AUD.	M
DescText	The description text value of the tax Example: SAFETY AND SECURITY CHARGE DEPARTURE	M
TaxCode	An IATA TTBS Tax Code. Example: AY, GB.	M

TicketDocInfo		
TotalTaxAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M
value	The value of <code>TotalTaxAmount</code> . Example: 17.71	M
CurCode	The currency code for <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	The total monetary price amount, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 17.71	M
CurCode	The currency code for <code>TotalAmount</code> . Example: USD, GBP, AUD.	M
PaxRefID	The unique identifier for a passenger reference. Example: PAX1  Note: For ticket re-issuance/exchange.	M
OriginalIssueInfo	The issuing carrier and issuing location of a ticket.	M
IssueDate	The date that the document was originally issued. Example: 2023-12-27T22:26:00	M

TicketDocInfo		
IssuingAirlineDesigCode	The airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF	M
IssuingCarrier	The organisation which carries the passenger, baggage, or goods, and/or commits to delivering the carriage as well as any related services such as issuance of ticket, and the creation of an order.	M
AirlineDesigCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF	M
Name	The name of the airline or carrier. Example: Qantas Airways	M
TicketNumber	The ticket number comprised of the airline code, form code, and serial number. Example: 0815751410974	M
OriginDest	The origin and destination airport/city pair which confines a passenger journey or an aircraft flight.	M
DestCode	An IATA defined code identifying a city or station. Example: ADL	M
OriginCode	An IATA defined code identifying a city or station. Example: BNE	M
PaxRefID	The unique identifier for a passenger reference. Example: PAX1	M

TicketDocInfo		
PricingDate	The booked itinerary pricing date. Example: 2017-01-13  Note: This is the date the booked itinerary was priced.	M
RefdOrder	An uniquely identified record of the agreement of one party with another to receive products and services under specified terms and conditions. The order supports the sale of a flexible range of airline products and services that are not necessarily included in a journey.	M
OrderRefID	The changed order's order reference ID. Example: 54JWYL	M
OrderItem	An individually priced item within an order, made up of one or more services. May or may not be a selected offer item. Example: Non-chargeable services available on request such as a wheelchair.	M
OrderItemRefID	The carrier assigned order item ID. Example: R92973F3-37B8-43C9-8857-1-1-T1	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF	M
Ticket	The accountable document issued by or on behalf of a carrier which includes notices and the flight and passenger coupons contained therein.	M

TicketDocInfo		
ConnectedDocNumber	The ticket or document number to which the document is connected. Example: 0815751410672	M
Coupon	The portion of the Passenger Ticket and Baggage Check or Excess Baggage Ticket that indicates particular places between which the coupon is good for carriage.	M
ConnectedCouponNumber	The coupon number to which this document is connected. Example: 0815751410975	M
CouponNumber	The number assigned to the issued coupon. Example: 1	M
CouponStatusCode	The current status of the flight and or value coupon. Examples: • E (Exchanged/Reissued) • I (Irregular operations) • O/OPE (Open for use)	M
RFIC	The reason for issuance code. Examples: • A (Air Transportation) • C (Baggage) • E (Airport Services) • F (Merchandise) • G (In-flight Services)	M

TicketDocInfo		
RFISC	The reason for issuance sub code. Examples: • OCC (First Checked Bag) • OB1 (In-flight Entertainment) • OBX (Lounge)	M
RFISC_Desc	The corresponding description for the reason for issuance subcode. Example: CHANGE FEE	M
ServiceRefID	A reference to a service ID. Example: SRVES13585290	M
CouponValidityPeriod	The date range a coupon is valid for with an optional time component.	M
EffectiveDate	The start date for when a coupon is valid. Example: 2023-12-30T11:59:00	M
ExpirationDate	The end date for when a coupon is valid. Example: 2023-04-30T11:59:00	M
FareBasisCode	The ticketed fare basis code. Example: QDQA	M
SoldAirlineInfo	The transportation of a passenger on a dated operating segment.	M
PaxSegmentRefID	A reference to a <code>PaxSegmentID</code> . Example: S2	M

TicketDocInfo		
TicketDocTypeCode	The document type code as defined by PADIS 1001 (Document/Message Name, coded): • 1 - Ticketless • 700 - All other document types • 701 - Ticket (paper) • 703 - Stock control number • E - Excess baggage • J - EMD-A (Associated) • M - Miscellaneous charge order • O - Tour order • S - Special service ticket • T - Ticket • Y - EMD-S (Standalone) • INF - Infant ticket ETicket or EMD coupon status codes.The status will be returned as defined in IATA Codeset 4405: ----- Code Description ----- AL Airport control ----- B Flown/used ----- BD Boarded ----- CK Checked in ----- E Exchanged/reissued ----- OPE Open ----- RF Refunded	M

TicketDocInfo		
	----- V Void -----	
TicketNumber	The document number comprised of the airline code, form code, and serial number. Example: 0815751410966.	M

Warning		
Elements	Details	Optional/Mandatory
Warning	Contains information related to potential business errors detected during processing of the preceding request.	M
Code	The code corresponding to the processing warning as defined by PADIS 9321. Example: 5001	M
DescText	The text description of the provided warning. Example: Departure Time changed for QF1928 2023-12-31 ADLBNE-	M
OwnerName	The name of the organisation owning the warning codelist. Example: QF  Note: OwnerName is optional (O) in round-trip scenarios.	M

DataLists		
Elements	Details	Optional/Mandatory
BaggageAllowanceList	Baggage allowance data list definition	M
BaggageDisclosureList	Baggage disclosure data list definition.	M
ContactInfoList	Contact info data list definition.	M
FareList	Fare data list definition.	M
OriginDestList	Origin destination data list definition.	M
PaxJourneyList	Journey data list definition.	M
PaxList	Passenger data list definition.	M
PaxSegmentList	Passenger segment data list definition.	M
PriceClassList	Price Class data list definition.	M
ServiceDefinitionList	Service definition data list definition.	M
Metadata		
Elements	Details	Optional/Mandatory
Metadata	Message wide metadata information.	O
CodesetMetadata	The pre-defined code set metadata.	O
CodesetName	The name of the codeset. Example: PADIS Codeset.	O
OwnerID	The owner entity ID. Example: BA	O

OwnerName	The owner entity name. Example: British Airways.	O
-----------	---	---

For more details, [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.7.3 18.6 OrderChange Error Codes

 The following error codes are the supplier versions of the error codes from Altea NDC and SabreSonic GDS web services.

Error Codes	Error Message
911	SEGMENT SELL FAILURE
911	Unexpected error during service execution.
376	ERROR AT ISSUANCE TIME: SQ ETKT: MAXIMUM TICKET LIMIT REACHED
911	MESSAGE DATA AND PNR DO NOT MATCH
911	INVALID CHARACTER IN SSR>
466	UNABLE TO CREATE PAYMENT SOLUTION - REFER TO DISPATCH REPORT: INVALID FORM OF PAYMENT
462	PAYMENT FAILED
376	ERROR AT ISSUANCE TIME: TST EXPIRED - OVERRIDE OR DELETE AND REPRICE
376	ERROR AT ISSUANCE TIME: SQ ETKT: NOT AUTHORISED
376	ERROR AT ISSUANCE TIME: FOP RJT: CREDIT CARD DENIAL
911	PROMOTION CODE INVALID
466	UNABLE TO CREATE PAYMENT SOLUTION - REFER TO DISPATCH REPORT

Error Codes	Error Message
911	SPECIFIC SEAT REQUESTED NOT AVAILABLE - RESTRICTED
911	SEGMENT SELL FAILURE: FLIGHT DEPARTED, OTHER SEGMENT FROM CONNECTION IN ERROR
911	UNABLE TO RETRIEVE OFFER
376	ERROR AT REISSUANCE TIME: FOP RJT: NEED FORM OF PAYMENT
911	SSR COULD NOT BE PROCESSED CORRECTLY
466	INVALID FORM OF PAYMENT
376	ERROR AT REISSUANCE TIME: SQ ETKT: MAXIMUM TICKET LIMIT REACHED
911	RESERVATION PREVIOUSLY CANCELLED
911	INVALID FLIGHT STATUS
911	RESTRICTED
912	INVALID INPUT DATA: No match found for passenger: PAX2
911	SEAT ITEMS ALREADY EXIST FOR REQUESTED SEGMENTS
911	SEGMENT SELL FAILURE: REBOOK REJECTED: SEGMENT NOT AVAILABLE
368	NOT AUTHORIZED BY IATA
376	ERROR AT ISSUANCE TIME: FOP RJT: DISCREPANCY BETWEEN FP AMOUNT(S) AND TICKET TOTAL(S)
376	ERROR AT REISSUANCE TIME
376	ERROR AT REISSUANCE TIME: ET COUPON NOT AVAILABLE FOR ASSOCIATION
911	SSR NOT CREATED - DUPLICATE EXISTS
376	AUTO REFUND ISSUANCE FAILED
911	INTERNAL PROCESSING ERROR

Error Codes	Error Message
912	ERROR AT END OF TRANSACTION TIME: NEED ITINERARY
376	ERROR AT REISSUANCE TIME: SQ ETKT: NOT AUTHORISED
376	ERROR AT REISSUANCE TIME: SQ EMS: MAXIMUM TICKET LIMIT REACHED
911	UNKNOWN ERROR
911	UNABLE TO RETRIEVE PNR: OK
911	UNABLE TO RETRIEVE PNR: UNABLE TO PROCESS
911	INVALID FORMAT
376	ERROR AT ISSUANCE TIME: SCM RJT: LINK DOWN - RETRY IN 2 MINUTES
376	ERROR AT ISSUANCE TIME: UNABLE TO PROCESS - LINK DOWN TIPTAQ
376	ERROR AT ISSUANCE TIME: SIMULTANEOUS ISSUANCE TRANSACTION ONGOING - IGNORE AND RETRIEVE
911	SEGMENT SELL FAILURE: FLIGHT IS BOARDING
912	ERROR AT END OF TRANSACTION TIME: SIMULTANEOUS CHANGES TO PNR - USE WRA/RT TO PRINT OR IGNORE, TICKET RECONCILIATION NEEDED
911	SEGMENT SELL FAILURE: REBOOK REJECTED: NOT AVAILABLE IN THIS ITINERARY
376	ERROR AT ISSUANCE TIME
911	SPECIFIC SEAT REQUESTED IS NOT AVAILABLE.
911	PNR SPLIT ERROR: An error occurred during the execution of the OJF command.
376	EMD ISSUANCE FAILED. PLEASE RETRY.: SQ EMS: MAXIMUM TICKET LIMIT REACHED
911	DOCUMENT NUMBER NOT ELIGIBLE FOR AMADEUS TICKET CHANGER
376	ERROR AT REISSUANCE TIME: ETKT COUPONS SELECTED NOT AVAILABLE FOR REVALIDATION
911	INVALID SEGMENT SELECTION

Error Codes	Error Message
368	ELEMENT CANCELLATION NOT ALLOWED: FLIGHT DEPARTED
376	ERROR AT ISSUANCE TIME: VERIFY ITINERARY
912	ERROR AT END OF TRANSACTION TIME
368	ELEMENT CANCELLATION NOT ALLOWED: NOT ALLOWED : MARRIED SEGMENTS
912	ERROR AT END OF TRANSACTION TIME: SIMULTANEOUS CHANGES TO PNR - USE WRA/RT TO PRINT OR IGNORE
368	ELEMENT CANCELLATION NOT ALLOWED: CHECK SEGMENT NUMBER, CHECK ELEMENT NUMBER
368	ELEMENT CANCELLATION NOT ALLOWED: CHECK ELEMENT NUMBER, CHECK SEGMENT NUMBER
376	ERROR AT REISSUANCE TIME: UNABLE TO PROCESS
376	ERROR AT ISSUANCE TIME: FOP RJT: PAYMENT ACTION INCOMPATIBLE - PLEASE CALL YOUR SUPERVISOR
376	ERROR AT REISSUANCE TIME: NOT ALL REMAINING CPNS AVAILABLE IN ELECTRONIC RECORD
376	ERROR AT ISSUANCE TIME: PRE RJT: NO FARES/RBD/CARRIER/PASSENGER TYPE
376	ERROR AT REISSUANCE TIME: SELECT FA OR FHE PNR LINE NUMBER
911	PREVIOUS TST EXISTS/SEGMENT OVERLAP
911	USE FREEFLOW INFORMATION
376	ERROR AT REISSUANCE TIME: ALL PASSENGERS/SEGMENTS ALREADY TICKETED
911	CHECK FORMAT
376	ERROR AT ISSUANCE TIME: NEED FORM OF PAYMENT
376	ERROR AT REISSUANCE TIME: NEED FORM OF PAYMENT
376	ERROR AT REISSUANCE TIME: EMD - NEED FORM OF PAYMENT

Error Codes	Error Message
376	ERROR AT REISSUANCE TIME: PRE RJT: NO FARES/RBD/CARRIER/PASSENGER TYPE
911	SEGMENT SELL FAILURE: FLIGHT IS BOARDING, OTHER SEGMENT FROM CONNECTION IN ERROR
466	UNABLE TO CREATE PAYMENT SOLUTION - REFER TO DISPATCH REPORT: UNABLE TO CREATE PAYMENT SOLUTION - REFER TO DISPATCH REPORT
911	ADVANCE SEAT SELECTION NOT AVAILABLE, AIRPORT CHECK-IN IS ACTIVE
462	PAYMENT FAILED: RESTRICTED FORM OF PAYMENT
376	ERROR AT REISSUANCE TIME: CT RJT: COMMUNICATIONS LINE UNAVAILABLE
376	ERROR AT REISSUANCE TIME: MISSING OR INVALID ISSUED IN CONNECTION WITH
911	SEGMENT SELL FAILURE: FLIGHT DEPARTED, FLIGHT IS BOARDING
376	ERROR AT ISSUANCE TIME: VERIFY TOTAL AMOUNT CURRENCY
912	ERROR AT END OF TRANSACTION TIME: WARNING : CHECK ITINERARY STATUS, MINIMUM CONNECTION TIME - SEGMENTS 8/9
376	ERROR AT REISSUANCE TIME: ITINERARY/NAME CHANGE-VERIFY TST
376	ERROR AT REISSUANCE TIME: TST EXPIRED - OVERRIDE OR DELETE AND REPRICE
911	SEGMENT SELL FAILURE: NOT AVAILABLE AND WAITLIST CLOSED
911	ENDORSEMENT RESTRICTION
376	ERROR AT ISSUANCE TIME: FPO NOT ALLOWED FOR FIRST ISSUE
376	ERROR AT ISSUANCE TIME: TICKETING INHIBITED-SSR DOCS MISSING FOR P1
912	ERROR AT END OF TRANSACTION TIME: RESTRICTED ENTRY - PNR RETRIEVED IN READ MODE
911	REPRICING FAILED
376	ERROR AT ISSUANCE TIME: TICKETING INHIBITED-SSR DOCS MISSING FOR P2
911	ERROR

Error Codes	Error Message
911	SSR NOT CREATED - DUPLICATE MEAL
911	SEGMENT SELL FAILURE: REBOOK REJECTED: NOT AVAILABLE IN THIS ITINERARY, REBOOK REJECTED: SEGMENT NOT AVAILABLE
160	INVALID PASSENGER SELECTION
376	ERROR AT ISSUANCE TIME: CMC RJT : COMMISSION NOT VALIDATED - RE ENTER COMMISSION
376	ERROR AT REISSUANCE TIME: MORE SEGMENTS THAN COUPONS TO REVALIDATE
376	ERROR AT REISSUANCE TIME: SQ EMS: NOT AUTHORISED
376	ERROR AT ISSUANCE TIME: SCM RJT: UNABLE TO PROCESS - TIMEOUT
912	ERROR AT END OF TRANSACTION TIME: MULTIPLE ELIGIBLE FF ELEMENTS EXIST- SEGMENT ASSOCIATE OR DELETE, AUTOMATIC PNR UPDATE PERFORMED, TICKET RECONCILIATION NEEDED
376	ERROR AT REISSUANCE TIME: SQ ETKT: NO MORE DATA AVAILABLE
376	EMD ISSUANCE FAILED. PLEASE RETRY.: EMD - UNCONFIRMED SERVICE REQUEST
911	UNABLE TO CREATE ORDER
368	ELEMENT CANCELLATION NOT ALLOWED: CHECK SEGMENT NUMBER, NOT ALLOWED : MARRIED SEGMENTS
911	TICKET NOT FOUND
376	ERROR AT REISSUANCE TIME: VERIFY TOTAL AMOUNT CURRENCY
376	ERROR AT ISSUANCE TIME: TICKETING INHIBITED-SSR DOCS MISSING FOR P5
911	COMMUNICATION ERROR
911	SYSTEM ERROR
376	ERROR AT ISSUANCE TIME: TICKETING INHIBITED-SSR DOCS AIRLINE PROVIDER NOT MATCHING FOR P1

Error Codes	Error Message
376	ERROR AT ISSUANCE TIME: FOP RJT: CREDIT CARD DENIAL 5.12 - INVALID TRANSACTION
912	ERROR AT END OF TRANSACTION TIME: MINIMUM CONNECTION TIME - SEGMENTS 3/4
376	ERROR AT ISSUANCE TIME: FOP RJT: CREDIT CARD DENIAL 5.05 - DO NOT HONOUR CARD
376	ERROR AT ISSUANCE TIME: FOP RJT: PAYMENT TRANSACTION DECLINED. SUSPECTED FRAUD.
376	ERROR AT REISSUANCE TIME: SQ EMS: INVALID TICKET/COUPON STATUS
911	UNABLE TO CONFIRM ORDER CHANGES
376	ERROR AT ISSUANCE TIME: FOP RJT: THE CREDIT CARD HAS BEEN DECLINED
376	ERROR AT ISSUANCE TIME: LAST TIME TO TICKET IS PAST - PLEASE REPRICE (23AUG23 23:59)
912	ERROR AT END OF TRANSACTION TIME: DUPLICATE SEGMENT 8/10,9/11,12/13, WARNING: CHECK SEGMENT CONTINUITY - SEGMENT 9/12, TICKET RECONCILIATION NEEDED
376	ERROR AT ISSUANCE TIME: TICKETING INHIBITED-SSR DOCS MISSING FOR P4
911	SEGMENT SELL FAILURE: REBOOK REJECTED: SEGMENT NOT AVAILABLE, REBOOK REJECTED: NOT AVAILABLE IN THIS ITINERARY
911	UNCONFIRMED RESERVATION
376	ERROR AT ISSUANCE TIME: LAST TIME TO TICKET IS PAST - PLEASE REPRICE (12SEP23 23:59)
911	INVALID COUPON STATUS FOR TICKET UPDATE
376	ERROR AT ISSUANCE TIME: ETKT DISALLOWED - GHOST SEGMENTS EXIST
368	ELEMENT CANCELLATION NOT ALLOWED: IGNORE AND RE-ENTER

5.8 18.6 OrderRetrieve Overview

5.8.1 Introduction

The OrderRetrieve/ OrderView service set retrieves a specified order that matches one or more search criteria set by the user. Generally, used search criteria include Order Reference, Order ID, PNR, ticket number, EMD number, Traveler surname, and given name.

Search criteria may include any supported Order Reference information: the Order ID, a PNR reference, a ticket or coupon/ document number, or other Airline supported order reference and a Traveler's Surname and Given Name. Note that if the order retrieval request is initiated from the party that originally requested the order creation, then an Order Reference is sufficient with the identity of the requesting party. Suppose the order retrieval request is initiated from a party that did not originally request the order creation. In that case, an extended security mechanism may extend order view access to the party (e.g. using a CustomerInputRQ/RS for an additional security challenge (e.g. custom security question and answers.) The requestor may additionally specify filters to constrain the response information sets, including Trip itinerary, Flight segment, Passenger, Payment and Accountable document information. If no filters are specified, all order information is returned. If a matching order is found, the OrderView response will contain all order information or filtered information (if filters were requested in the order retrieval request.) If no matching Order is located, the OrderView response will include processing condition information and no order information.

5.8.2 OrderRetrieve Webservice

The OrderRetrieveRQ/OrderViewRS retrieves a specified order that matches one or more search criteria.

The below points have to be completed before an order retrieve can be done:

- The AirShopping transaction has been successfully run, and at least one valid offer has been stored.
- The FlightPrice transaction has been successfully run to refine the offer
- The OrderCreate transaction has been successfully run and has returned an order ID (and booking reference).

5.8.3 OrderRetrieve Endpoint

The following example URL represents an Order retrieve endpoint:

<https://api.tpconnects.online/rest/orderRetrieve>

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.8.4 18.6 OrderRetrieveRQ

Introduction

The OrderRetrieveRQ service provides IATA Accredited Travel Agents, new retailers, and Service Providers the ability to retrieve an order. This service returns the order details along with the E-Ticket and EMD details.

Also, the OrderRetrieveRQ service allows refreshing the order after all the major functions such as Order Create, Ticketing, Reissue, and Seat/EMD addition. At any point in time, the latest order details can be retrieved from PSS by this OrderRetrieveRQ service.

Additional uses of the OrderRetrieveRQ service are as follows:

- Import PNR created outside platform.
- OrderRetrieve trigger for an OCN received.

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.6. The following are the element checklist to be passed in order retrieve request. The elements which are marked “**M**” are mandatory to be passed in request. The parameters passed as “**O**” are optional, it is well and good if implemented.

 To transition from an OrderCreate request to an OrderRetrieve request, the seller must provide the necessary input parameters based on the order details obtained from the OrderViewRS response.

Input parameters to be transitioned from OrderViewRS (OrderCreateRS) to OrderRetrieveRQ	API Flow
EchoTokenText AgencyID IATANumber PseudoCityID travelAgentID BookingID TypeCode	➔ OrderRetrieveRQ

The OrderRetrieveRQ service comprises of the following structure:

- [MessageDoc](#)
- [Party - Sender](#)
- [PayloadAttributes](#)
- [OrderFilterCriteria](#)

Request Parameters

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	Message Document information	O
Party - Sender		
Elements	Details	Optional/Mandatory
Party	Party and Sender definition.	M

PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M

Request Definition

OrderFilterCriteria		
Elements	Details	Optional/Mandatory
Request	Order Change Query.	M
OrderFilterCriteria	Order list request filter criteria.	M
BookingRefFilterCriteria	Information related to booking or reservation.	O
BookingEntity	Airline or Organization assigning the booking information.	O
BookingID	Existing booking reference Identifier.	O
TypeCode	Booking Reference Type. Example: 6 (Passenger confirmation number) Encoding Scheme: IATA Padis Codeset - List for data element [1153] Reference Qualifier	O
Order	A uniquely identified record of the agreement of one party with another to receive products and services under specified terms and conditions. Order supports the sale of a flexible range of airline products and services.	O
OrderID	Carrier assigned ID which uniquely identifies a specific Order across several messages.	M

OrderFilterCriteria		
Elements	Details	Optional/Mandatory
OwnerCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	O
OwnerTypeCode	Indicates whether the owner is the ORA or POA.	O

For more details [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.8.5 18.6 OrderRetrieveRS - OrderViewRS

Introduction

The OrderRetrieveRS - OrderViewRS is the system response for the OrderRetrieveRQ service.



Note: OrderRetrieveRS - OrderViewRS is used to represent the complete details of an order at any given time. Based on whether the order is ticketed, certain fields such as: 'Order/OrderItem → StatusCodes', and TicketDocInfo values will be displayed accordingly.

OrderRetrieveRS - OrderViewRS constitutes of the below structure:

- [MessageDoc](#)
- [Party - Sender](#)
- [PayloadAttributes](#)
- [PaymentInfo](#)
- [PaymentFunctions](#)
- [Order](#)
- [Processing](#)
- [TicketDocInfo](#)
- [Warning](#)
- [DataLists](#)

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.2. The following are the element checklist to be passed in air shopping request. The elements which are marked “M” are mandatory to be passed in response. The parameters passed as “O” are optional, it is well and good if implemented.

 **Note:** Please use the sample attached and pass the elements accordingly.

Response Parameters

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	 Note: MessageDoc is optional (O) in split ticketing scenarios.	M
Party - Sender		
Elements	Details	Optional/Mandatory
Party	Party and Sender definition	M
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M

Response Definition



Note: A response API's optional and mandatory fields are determined by which elements are used in the corresponding request API.

PaymentInfo		
Elements	Details	Optional/Mandatory
PaymentInfo	Information related to the settlement of a transaction through monetary or other compensations. For example, a payment may be applied to an entire Order or individual Order Items.	M
Amount	The amount applied to the associated payment method. Example: 300 USD	M
value	The value of <code>Amount</code> . Example: 258	M
CurCode	The currency code for <code>Amount</code> . Example: USD, GBP, AUD.	M
ContactInfoRefID	Reference to the Payer's Contact ID within this message.	O
Desc	An account or representation of the certain or major aspects, characteristics, or features of a person, object or event.  Note: <code>Desc</code> is optional (O) in round-trip and split ticketing scenarios.	M

DescText	Description text value.  Note: DescText is optional (O) in round-trip and split ticketing scenarios.	M
OrderRefID	Reference to an Order ID for this payment. Example: 54IUZU  Note: OrderRefID is optional (O) in round-trip and split ticketing scenarios.	M
PaymentInfoID	Uniquely identifies payment information within a message.	O
PaymentMethod	A form of procedure for the payment of goods or services, plus any transactional information specific to the payment method other than the amount.  Note: PaymentMethod is optional (O) in split ticketing scenarios.	M

OtherPaymentMethod	Information relating to non-standard forms of payment which may be used in exchange for goods or services.  Note: OtherPaymentMethod is optional (O) in split ticketing scenarios.	M
Remark	Additional, supplementary information about the document or service.  Note: OtherPaymentMethod is optional (O) in split ticketing scenarios.	M
RemarkText	Additional, supplementary information about the document or service. Example: ON ACCOUNT WITH AGENCY  Note: RemarkText is optional (O) in split ticketing scenarios.	M
Voucher	A document that entitles the holder to a discount or that may be exchanged for goods or services.  Note: Voucher is optional (O) in split ticketing scenarios.	M

RemainingAmount	Note: RemainingAmount is optional (O) in split ticketing scenarios.	M
TypeCode	The form of payment type. Examples: Credit Card, Cash. Encoding Scheme: IATA PADIS code list data element [9888] Form of Payment Identification Note: TypeCode is optional (O) in split ticketing scenarios.	M

PaymentFunctions		
Elements	Details	Optional/Mandatory
PaymentFunctions	The form of payment information.	O
PaymentSupportedMethod	The payment method accepted by an airline that is used during an OrderRetrieve request.	O
PaymentTypeCode	The payment type code of the payment method as determined by the ATS Codeset PAYT. Example: On Account With Agency	O
PaymentBrandCode	The form of payment brand code as determined by the ATS Codeset PAYB. Example: VI	O
PaymentMethodAddlInfo	Additional information about the payment method	O

PaymentOtherMethodAddlInfo	Additional information about the other form of payment.	O
Remarks	Additional and supplementary information about the form of payment.	O
RemarkText	The value of the Remarks . Example: Credit/Debit Card	O

Order		
Elements	Details	Optional/Mandatory
Order	A uniquely identified record of the agreement of one party with another to receive products and services under specified terms and conditions. Order supports the sale of a flexible range of airline products and services that are not necessarily Journey b	M
BookingRef	Information related to a booking or reservation.	M
BookingID	An existing booking reference identifier. Example: T2F6VH	M
BookingRefTypeCode	A booking reference type. Example: 6 (Passenger confirmation number) Encoding Scheme: IATA Padis Codeset - List for data element [1153] Reference Qualifier. Example: 1A	M
BookingEntity	The airline or organisation providing the booking information.	M

Carrier	The organization which carries the passenger, baggage, or goods, and/or commits to delivering the carriage as well as any related services such as issuance of ticket or creation of an order.	M
AirlineDesigCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF	M
BookingID	An existing booking reference identifier. Example: T2F6VH	M
BookingRefTypeCode	A booking reference type. Example: 6 (Passenger confirmation number) Encoding Scheme: IATA Padis Codeset - List for data element [1153] Reference Qualifier. Example: 1A	M
OrderID	A carrier assigned ID which uniquely identifies a specific order across several messages. Example: 54BL77	M
OrderItem	An individually priced item within an order, made up of one or more services. This may or may not be a selected offer Item. Example, non-chargeable services available on request such as a wheelchair.	M
FareDetail	A placeholder for the fare detail structure	M

FareCalculationInfo	Information related to the calculation of the fare amount by applying various rules which determines the final fare for an airline ticket.  Note: FareCalculationInfo is optional (O) in split ticketing scenarios.	M
AddInfoText	The fare calculation text required in the fare calculation area of an electronic ticket.	O
PricingCodeText	The primary identifier reflecting the method of pricing for a transaction.  Note: PricingCodeText is optional (O) in split ticketing scenarios.	M
ReportingCodeText	The secondary identifier reflecting the method of pricing for a transaction. It's also used in the reporting process.	O
FareComponent	A portion of an itinerary between two consecutive fare construction points. If the journey has only one fare component, the points of origin and destination are the only fare construction points.	M
CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy.	M

CabinTypeCode	The cabin type code as defined by PADIS codeset. Example: • Y (Economy) • W (Premium Economy) • C (Business) • F (First)	M
CabinTypeName	The name given to a cabin compartment. Example: • Economy (Y) • Premium Economy (W) • Business (C) • First (F)	M
FareBasisCityPairText	The identified published fare. Origin and destination city codes and two character designator of fare owning airline associated with Fare Basis Code. Example: SYDADL	M
FareBasisCode	The fare basis code. Example: Y26	M
FareRule	Special purchasing rules and restrictions used to differentiate fare levels from one another.  Note: <code>FareRule</code> is optional (O) in split ticketing scenarios.	M
PaxSegmentRefID	A reference to a Pax Segment ID.	M

Price	The price of the fare component.  Note: Price is optional (O) in split ticketing scenarios.	M
BaseAmount	The total base amount of a fare. Example:  Note: BaseAmount is optional (O) in split ticketing scenarios.	M
value	The value of BaseAmount . Example: 142.81  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code for BaseAmount . Example: USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M

CurConversion	The conversion of one currency to another.  Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M
ConversionRate	The conversion rate used to convert a currency to another.  Note: <code>ConversionRate</code> is optional (O) in split ticketing scenarios.	M
value	The value of <code>ConversionRate</code>. Example: 0.5542515889330287  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
BaseUnitCode	 Note: <code>BaseUnitCode</code> is optional (O) in split ticketing scenarios.	M
TaxSummary	A summary of taxes include in a fare.  Note: <code>TaxSummary</code> is optional (O) in split ticketing scenarios.	M

Tax	A compulsory contribution added to a fare <i>i</i> Note: Tax is optional (O) in split ticketing scenarios.	M
Amount	The tax amount added to a fare. <i>i</i> Note: Amount is optional (O) in split ticketing scenarios.	M
value	The value of Amount : Example: 5.49 <i>i</i> Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code for Amount . Example: USD, GBP, AUD. <i>i</i> Note: CurCode is optional (O) in split ticketing scenarios.	M
CurConversion	The conversion of one currency to another. <i>i</i> Note: CurConversion is optional (O) in split ticketing scenarios.	M

Amount	The currency conversion amount.  Note: Amount is optional (O) in split ticketing scenarios.	M
value	The value of Amount . Example: 5.49  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code for Amount . Example: USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M
LocalAmount	The local currency amount that equates to the converted currency amount.  Note: LocalAmount is optional (O) in split ticketing scenarios.	M

value	The value of <code>LocalAmount</code> . Example: 9.89  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of <code>LocalAmount</code> . Example: USD, GBP, AUD.  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
DescText	The description text which explains the reasoning for the addition of a tax on fare. Example: PASSENGER SERVICE CHARGE DOMESTIC DEPARTURE  Note: <code>DescText</code> is optional (O) in split ticketing scenarios.	M
TaxCode	The IATA TTBS Tax Code used for the applied tax. Example: AY, GB.  Note: <code>TaxCode</code> is optional (O) in split ticketing scenarios.	M

TotalTaxAmount	The total amount of taxes applied on a fare.  Note: TotalTaxAmount is optional (O) in split ticketing scenarios.	M
value	The value of TotalTaxAmount . Example: 33.73  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of TotalTaxAmount . Example: USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M
TotalAmount	The total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.  Note: TotalAmount is optional (O) in split ticketing scenarios.	M

value	The value of <code>TotalAmount</code> . Example: 176.53  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP, AUD.  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
PriceClassRefID	A price point within a particular Cabin Type (sometimes referred to as 'Fare Families').  Note: <code>PriceClassRefID</code> is optional (O) in split ticketing scenarios.	M
RBD	A Reservation Booking Designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. Example: 'J' for Business Class Premium, 'D' for Business Discount.	M
RBDCode	The code used to identify a particular RBD. Example: P, J, W, M.	M
value	The value of <code>RBD</code> . Example: Q	M

Name	The name of the RBD. Example: Red eDeal  Note: Name is optional (O) in split ticketing scenarios.	M
FarePriceType	The type of fair price applied to a Fare Detail. Example: The filed amount, net amount, or a sell amount.	M
FarePriceTypeCode	Indicates if the fare price provided is a filed amount, net amount, or a sell amount.  Note: FarePriceTypeCode is mandatory (M) in split ticketing scenarios.	O
FareBasisCode	Fare basis code. Example: Y26	O
Price	The price of the fare type.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of BaseAmount . Example: 142.81	M
CurCode	The currency code of BaseAmount . Example: USD, GBP, AUD.	M

CurConversion	The conversion of one currency to another. <i>Note:</i> CurConversion is optional (O) in split ticketing scenarios.	M
ConversionRate	The conversion rate used to convert a currency to another. <i>Note:</i> ConversionRate is optional (O) in split ticketing scenarios.	M
value	The value of ConversionRate . Example: 0.5542515889330287 <i>Note:</i> value is optional (O) in split ticketing scenarios.	M
BaseUnitCode	<i>Note:</i> BaseUnitCode is optional (O) in split ticketing scenarios.	M
EquivAmount	The entire amount of the transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.	M
value	The value of EquivAmount . Example: 257.65	M

CurCode	The currency code of <code>EquivAmount</code> . Example: USD, GBP, AUD.	M
Markup	The markup applied to an offer or fare.  Note: <code>Markup</code> is optional (O) in one-way scenarios.	M
MarkupData	The primary source which contains all the markup data.  Note: <code>MarkupData</code> is optional (O) in one-way scenarios.	M
offerItemId	The Offer Item ID which the markup is applied to. Example: P2C5165E-7CD1-416C-96B01cyl7q38kcw8l-1-1  Note: <code>offerItemId</code> is optional (O) in one-way scenarios.	M
baseAmount	The original base amount without any markup value applied. Example: 416.43  Note: <code>baseAmount</code> is optional (O) in one-way scenarios.	M

invisibleMarkup	The determined amount of invisible markup or discount for a specific type of passengers.  Note: invisibleMarkup is optional (O) in one-way scenarios.	M
invisibleMarkupPerPax	The calculated invisible markup or discount amount per passenger for a particular type of passenger.  Note: invisibleMarkupPerPax is optional (O) in one-way scenarios.	M
markupPerPax	The calculated markup or discount for both invisible and visible markups per passenger.  Note: markupPerPax is optional (O) in one-way scenarios.	M
newBaseAmount	The new base amount after discounts or markups are applied. Example: 416.43  Note: newBaseAmount is optional (O) in one-way scenarios.	M

newOverrideInvisibleMarkup	The invisible Override Margin markup amount information that was added to an offer. Note: This element is only present when the Margin Override feature has been enabled and a Invisible Override Margin amount has been added to a booking during shopping. See Margin Override for more information.	
newOverrideTotalMarkup	The combined amount of the <code>newOverrideVisibleMarkup</code> and <code>newOverrideInvisibleMarkup</code> amounts. Note: This element is only present when the Margin Override feature has been enabled and Visible and Invisible Override Margin amounts has been added to a booking during shopping. See Margin Override for more information.	

newOverrideVisibleMarkup	The visible Override Margin markup amount information that was added to an offer.  Note: This element is only present when the Margin Override feature has been enabled and a Visible Override Margin amount has been added to a booking during shopping. See Margin Override for more information.	
newTotalAmount	The new total amount after discounts and or markups are applied. Example: 509.5  Note: <code>newTotalAmount</code> is optional (O) in one-way scenarios.	M
noOfPax	The number of passengers of a particular pax type. Example: 2  Note: <code>noOfPax</code> is optional (O) in one-way scenarios.	M
taxAmount	The tax amount to be added to the overall discount and or markup. Example: 93.07  Note: <code>taxAmount</code> is optional (O) in one-way scenarios.	M

totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5  Note: <code>totalAmount</code> is optional (O) in one-way scenarios.	M
totalMarkup	The total discount and or markup amount. Example: 2  Note: <code>totalMarkup</code> is optional (O) in one-way scenarios.	M
visibleMarkup	The calculated amount of visible markup or discount for a specific type of passenger. Example: 34.6  Note: <code>visibleMarkup</code> is optional (O) in one-way scenarios.	M
visibleMarkupPerPax	The calculated visible markup or discount amount per passenger for that particular type of passenger. Example: 20.9  Note: <code>visibleMarkupPerPax</code> is optional (O) in one-way scenarios.	M

paxType	The type of passenger. Example: ADT  Note: paxType is optional (O) in one-way scenarios.	M
maxMarkupForInvisibleRules	The maximum markup and or discount limit for invisible rules.  Note: maxMarkupForInvisibleRules is optional (O) in one-way scenarios.	M
maxMarkupForVisibleRules	The maximum markup and or discount limit for visible rules.  Note: maxMarkupForVisibleRules is optional (O) in one-way scenarios.	M
minMarkupForInvisibleRules	The minimum markup and or discount limit for invisible rules.  Note: minMarkupForInvisibleRules is optional (O) in one-way scenarios.	M

minMarkupForVisibleRules	The minimum markup and or discount limit for visible rules.  Note: minMarkupForVisibleRules is optional (O) in one-way scenarios.	M
newOverrideVisibleMarkup	The visible Override Margin markup amount information that was added to an offer.  Note: This element is only present when the Margin Override feature has been enabled and a Visible Override Margin amount has been added to a booking during shopping. See Margin Override for more information.	M
newOverrideInvisibleMarkup	The invisible Override Margin markup amount information that was added to an offer.  Note: This element is only present when the Margin Override feature has been enabled and a Invisible Override Margin amount has been added to a booking during shopping. See Margin Override for more information.	M

TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	A compulsory contribution to state revenue, levied by the government on workers' income and business profits or added to the cost of some goods, services, and transactions.	M
Amount	The tax amount added to a fare. Example: 15000 USD	M
value	The value of <code>Amount</code> . Example: 11.8	M
CurCode	The currency code of <code>Amount</code> . Example: USD, GBP, AUD.	M
CurConversion	The conversion of one currency to another.  Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M
Amount	The tax amount added to a fare. Example: 15000 USD  Note: <code>Amount</code> is optional (O) in split ticketing scenarios.	M

value	The value of <code>Amount</code> . Example: 11.8 <i>i</i> Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of <code>Amount</code> . Example: USD, GBP, AUD. <i>i</i> Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
LocalAmount	The local currency amount that equates to the converted currency amount. <i>i</i> Note: <code>LocalAmount</code> is optional (O) in split ticketing scenarios.	M
value	The value of <code>LocalAmount</code> . Example: 11.8 <i>i</i> Note: <code>value</code> is optional (O) in split ticketing scenarios.	M

CurCode	The currency code of <code>LocalAmount</code> . Example: USD, GBP, AUD.  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
Country	The country <code>LocalAmount</code> applies to. An ISO Country Code. Example: US, FR.  Note: <code>Country</code> is mandatory (M) in split ticketing scenarios.	O
CountryCode	An ISO Country Code. Example: US, FR.  Note: <code>CountryCode</code> is mandatory (M) in split ticketing scenarios.	O
DescText	The description text which explains the reasoning for the addition of a tax on fare. Example: PASSENGER SERVICE CHARGE DOMESTIC DEPARTURE	M
TaxCode	The IATA TTBS Tax Code used for the applied tax. Example: AY, GB.	M
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M

value	The value of <code>TotalTaxAmount</code> . Example: 11.8	M
CurCode	The currency code of <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	Total monetary price amount, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 28.1	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP, AUD.	M
FareRefText	The fare reference key. Example: FO1  Note: <code>FareRefText</code> is optional (O) in split ticketing scenarios.	M
PaxRefID	A reference to a Passenger ID. Example: PAX1	M
Commission	An amount of money, typically a set percentage of the value involved, paid to an agent in a commercial transaction.	O
CommissionCode	The commission code. Example: BSP Commission, OverrideCommission, and TotalCommission	O
Percentage	The commission percentage value. Example: 3	O

OrderItemID	A carrier assigned Order Item ID. Example: P98E9DABD-2F41-4E3A-8A81lejfo93cvvb42-1-1-T1 Note: During <code>OrderCreate</code> - <code>OrderViewRS</code>, we are creating NDC response just based on supplier response, while it will be different in <code>OrderRetrieveRS</code> - <code>OrderViewRS</code>. It is not mandatory that all the fields should have matching values in two different APIs.	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
PaymentTimeLimitDateTime	The date and time by which a complete payment must be made for the items in an Order Item. Example: 2023-12-27T23:59:00 Note: <code>PaymentTimeLimitDateTime</code> is mandatory (M) in split ticketing scenarios.	M

Penalty	A penalty amount added to a fare due to any changes or cancellation of a fare.  Note: <code>Penalty</code> is optional (O) in split ticketing scenarios.	M
AppCode	The penalty application type. Examples: • ADE (After departure) • NOS (No show) • PDE (Prior to departure)  Note: <code>AppCode</code> is optional (O) in split ticketing scenarios.	M
CancelFeeInd	The cancel fee indicator. If TRUE, cancellation fees may apply.  Note: <code>CancelFeeInd</code> is optional (O) in split ticketing scenarios.	M
ChangeFeeInd	The change fee indicator. If TRUE, change of itinerary fees may apply.  Note: <code>ChangeFeeInd</code> is optional (O) in split ticketing scenarios.	M

DescText	The description of the applicable penalty. Example: Not Allowed.  Note: DescText is optional (O) in split ticketing scenarios.	M
TypeCode	The penalty type code information. Examples: • Cancellation • Change • NoShow • Upgrade • Other  Note: TypeCode is optional (O) in split ticketing scenarios.	M
PenaltyAmount	The penalty monetary value amount and currency code.  Note: PenaltyAmount is optional (O) in split ticketing scenarios.	M

value	The value of <code>PenaltyAmount</code> . Example: 99  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of <code>PenaltyAmount</code> . Example: USD, GBP, AUD.  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
TypeCode	The penalty type code information. Examples: • Cancellation • Change • NoShow • Upgrade • Other  Note: <code>TypeCode</code> is optional (O) in split ticketing scenarios.	M
Price	The amount of money expected, required, or given in payment for something.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 99	M

CurCode	The currency code of <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
CurConversion	The conversion of one currency to another. <i>i</i> Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M
ConversionRate	The conversion rate used to convert a currency to another. <i>i</i> Note: <code>ConversionRate</code> is optional (O) in split ticketing scenarios.	M
value	The value of <code>BaseAmount</code> . Example: 99 <i>i</i> Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP <i>i</i> Note: <code>BaseUnitCode</code> is optional (O) in split ticketing scenarios.	M

EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the currency indicator code.	M
value	The value of EquivAmount . Example: 99	M
CurCode	The currency code of EquivAmount . Example: USD, GBP, AUD.	M
TaxSummary	The sum of all tax amounts applied on a given price.	M
Tax	A compulsory contribution to state revenue, levied by the government on workers' income and business profits or added to the cost of some goods, services, and transactions.	M
Amount	The tax amount. Example: 15000 USD	M
value	The value of Amount . Example: 99	M
CurCode	The currency code of Amount . Example: USD, GBP, AUD.	M
Country	The country Tax applies to. An ISO Country Code. Example: US, FR.  Note: Country is mandatory (M) in split ticketing scenarios.	O

CountryCode	An ISO Country Code. Example: US, FR. <i>i</i> Note: CountryCode is mandatory (M) in split ticketing scenarios.	O
CurConversion	The conversion of one currency to another. <i>i</i> Note: CurConversion is optional (O) in split ticketing scenarios.	M
Amount	The tax amount. Example: 15000 USD <i>i</i> Note: Amount is optional (O) in split ticketing scenarios.	M
value	The value of Amount . Example: 99 <i>i</i> Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of Amount . Example: USD, GBP, AUD. <i>i</i> Note: CurCode is optional (O) in split ticketing scenarios.	M

LocalAmount	The local currency amount that equates to the converted currency amount.  Note: CurCode is optional (O) in split ticketing scenarios.	M
value	The value of LocalAmount . Example: 99  Note: CurCode is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of LocalAmount . Example: USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M
DescText	The description text which explains the reasoning for the addition of a tax on fare. Example: PASSENGER SERVICE CHARGE DOMESTIC DEPARTURE	M
TaxCode	The IATA TTBS Tax Code used for the applied tax. Example: AY, GB.	M
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M

value	The value of <code>TotalTaxAmount</code> . Example: 99	M
CurCode	The currency code of <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	Total monetary price amount, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 99	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP, AUD.	M
PriceGuaranteeTimeLimitDateTime	The date beyond which a price is no longer guaranteed. Examples: 2015-01-13T13:59:38Z  Note: After this date, user will need to do a reprice of the offer to reprice the TST.	O
Service	The instance of a specific flight or Service Definition as it has been offered (and eventually ordered and consumed) in the context of a specific Offer and/or Order.	M
PaxRefID	Uniquely identifies a Passenger within the context of one message.	M
ServiceAssociations	References to the details of this Service. May include either Passenger Journeys, a Service Definition, or a Selected Seat.	M

PaxSegmentRefID	A reference to a Pax Segment ID. Example: S2	M
SelectedSeat	A sitting place for a passenger or crew in a cabin compartment on a dated operating leg. <i>i</i> Note: <code>SelectedSeat</code> is optional (O) in one-way scenarios.	M
Seat	A sitting place for a passenger located in the cabin. <i>i</i> Note: <code>Seat</code> is optional (O) in one-way scenarios.	M
ColumnID	Alphabetic character identifying a seat within a row. Example: F <i>i</i> Note: <code>ColumnID</code> is optional (O) in one-way scenarios.	M
RowNumber	An ordinal number identifying a seat row in an aircraft. Example: 15 <i>i</i> Note: <code>RowNumber</code> is optional (O) in one-way scenarios.	M

ServiceDefinitionRef	An airline specific definition of a product or service (excluding flights) that can be separately sold and delivered. Examples: • Bag • Seat • Meal on a flight	M
PaxSegmentRefID	A reference to a Pax Segment ID. Example: S2	M
ServiceDefinitionRefID	References a Service Definition ID within this message. Example: A-OC-oB5-SA Note: <code>ServiceDefinitionRefID</code> is optional (O) in split ticketing scenarios.	M

ServiceID	Service ID assigned by the carrier. Example: SRVW234B6564-4CD4-4F49-824E-1-1 Note: During <code>OrderRetrieveRS</code> - <code>OrderViewRS</code>, we are creating NDC response just based on supplier response, while it will be different in <code>OrderCreate</code> - <code>OrderViewRS</code>. It is not mandatory that all the fields should have matching values in two different APIs.	M
StatusCode	Status of the service instance. See PADIS Codelist 4405 for possible values. Note: Indicates the current status of an OrderItem enumeration whose values are: • CANCELLEDBYCUSTOMER • ENTITLED • NOTENTITLED	M

TicketingTimeLimitDateTime	The time by which passengers must secure tickets (or other accountable documents) for confirmed reservation as agreed with the airline. Example: 2023-12-27T23:59:00 Note: <code>TicketingTimeLimitDateTime</code> is mandatory (M) in split ticketing scenarios.	O
StatusCode	Status of the service instance. See PADIS Codelist 4405 for possible values. Note: Indicates the current status of an OrderItem enumeration whose values are: • CANCELLEDBYCUSTOMER • ENTITLED • NOTENTITLED	M
OrderKeys	Order Keys that contains one Order ID with associated Order Item ID(s). Note: These are Orders that were created from Offers that have already been purchased, booked and/or are being held for a Traveler.	M

OrderRefID	A carrier assigned ID which uniquely identifies a specific Order across several messages. Example: T2F6VH	M
OrderItem	An individually priced item within an Order, made up of one or more Services. May or may not be a selected Offer Item, example: Non-chargeable services available on request such as a wheelchair.	M
OrderItemRefID	A carrier assigned Order Item ID. Example: ORDERITEM-PAX1	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
OriginalOrder	This may be used when an order has been sub-divided into associated orders and serves as a reference to the original order ID.	M
OrderRefID	Carrier assigned ID which uniquely identifies a specific Order across several messages. Example: 54JWYL	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: 1A	M

PaymentTimeLimitDateTime	The date by which a payment must be made for the confirmed items in the order. Examples: 2023-12-27T23:59:00	M
StatusCode	The status of the service instance. See PADIS Codelist 4405 for possible values. Example: CONFIRMED	M
TotalPrice	The total price of a fare that includes all taxes and or penalties.	M
BaseAmount	The total base fare amount. Example: 200000	M
value	The value of <code>BaseAmount</code> . Example: 99	M
CurCode	The currency code of <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
CurConversion	The conversion of one currency to another. Note: <code>CurConversion</code> is optional (O) in split ticketing scenarios.	M
ConversionRate	The conversion rate used to convert a currency to another. Note: <code>ConversionRate</code> is optional (O) in split ticketing scenarios.	M

value	The value of <code>ConversionRate</code> . Example: 0.5542515889330287  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
BaseUnitCode	The a combination code of the currency used to purchase a fare and the converted currency. Example: AUDGBP  Note: <code>BaseUnitCode</code> is optional (O) in split ticketing scenarios.	M
EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the currency indicator code.	M
value	The value of <code>EquivAmount</code> . Example: 751.32	M
CurCode	The currency code of <code>EquivAmount</code> . Example: USD, GBP, AUD.	M
Markup	The markup applied to an offer or fare.	M
MarkupData	The primary source which contains all the markup data.	M
baseAmount	The original base amount without any markup value applied. Example: 416.43	M

taxAmount	The tax amount to be added to the overall discount and or markup. Example: 93.07	M
totalAmount	The previous <code>totalAmount</code> before the <code>taxAmount</code> is added. Example: 509.5	M
newBaseAmount	The new base amount after discounts or markups are applied. Example: 416.43	M
newBaseAmountPreRoundOff	The rounding off of the <code>newBaseAmount</code> to make the <code>newTotalAmount</code> a whole number. Example: 56.00	O
newTotalAmount	The new total amount after discounts and markups are applied. If a rounding-off rule is applied, the total amount will always be a whole number. Else, the total amount can have a decimal value. For example, if a rounding-off rule is applied, the total amount will be rounded off to the next whole number such as 83.0. Else, the total amount can be 82.99.	O
newTotalAmountPreRoundOff	The value of <code>newTotalAmount</code> before it was rounded off to a whole number. Example: 82.99.	O
visibleMarkup	The calculated amount of visible markup or discount for a specific type of passenger. Example: 34.6	M
invisibleMarkup	The determined amount of invisible markup or discount for a specific type of passengers.	M

totalMarkup	The total discount and or markup amount. Example: 2	M
markupPerPax	The calculated markup or discount for both invisible and visible markups per passenger.	M
visibleMarkupPerPax	The calculated visible markup or discount amount per passenger for that particular type of passenger. Example: 20.9	M
invisibleMarkupPerPax	The calculated invisible markup or discount amount per passenger for a particular type of passenger.	M
maxMarkupForInvisibleRules	The maximum markup and or discount limit for invisible rules.	M
maxMarkupForVisibleRules	The maximum markup and or discount limit for visible rules.	M
minMarkupForInvisibleRules	The minimum markup and or discount limit for invisible rules.	M
minMarkupForVisibleRules	The minimum markup and or discount limit for visible rules.	M
newOverrideVisibleMarkup	The visible Override Margin markup amount information that was added to an offer.	M
newOverrideInvisibleMarkup	The invisible Override Margin markup amount information that was added to an offer.	M
TaxSummary	The sum of all tax amounts applied to a given price.	M
Tax	The tax applied to a fare.  Note: Tax is mandatory (M) in split ticketing scenarios.	O

Amount	The tax amount. Example: 15000 USD  Note: Amount is mandatory (M) in split ticketing scenarios.	O
value	The value of Amount . Example: 41.65  Note: value is mandatory (M) in split ticketing scenarios.	O
CurCode	The currency code of Amount . Example: USD, GBP, AUD.  Note: CurCode is mandatory (M) in split ticketing scenarios.	O
Country	The country Tax applies to. An ISO Country Code. Example: US, FR.  Note: Country is mandatory (M) in split ticketing scenarios.	O

CountryCode	An ISO Country Code. Example: US, FR.  Note: CountryCode is mandatory (M) in split ticketing scenarios.	O
DescText	The description text which explains the reasoning for the addition of a tax on fare. Example: PASSENGER SERVICE CHARGE DOMESTIC DEPARTURE  Note: DescText is mandatory (M) in split ticketing scenarios.	O
TaxCode	The IATA TTBS Tax Code used for the applied tax. Example: AY, GB.  Note: TaxCode is mandatory (M) in split ticketing scenarios.	O
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.	M
value	The value of TotalTaxAmount . Example: 93.07	M
CurCode	The currency code of TotalTaxAmount . Example: USD, GBP, AUD.	M

TotalAmount	Total monetary price amount, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> . Example: 93.07	M
CurCode	The currency code of <code>TotalTaxAmount</code> . Example: USD, GBP, AUD.	M

Processing		
Elements	Details	Optional/Mandatory
Processing	Information related to how response results should be returned.  Note: <code>Processing</code> is mandatory (M) in one-way scenarios.	O
MarketingMessage	Additional and or supplementary information about the document or service.  Note: <code>MarketingMessage</code> is mandatory (M) in one-way scenarios.	O

Processing		
Desc	Additional and or supplementary information about the document or service.  Note: Desc is mandatory (M) in one-way scenarios.	O
DescText	The description text value. Example: updated to false  Note: DescText is mandatory (M) in one-way scenarios.	O

TicketDocInfo		
Elements	Details	Optional/Mandatory
TicketDocInfo	Information corresponding to a group of 1 to 4 Tickets for a single Origin Destination and a single Passenger.  Note: TicketDocInfo is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
BookingRef	Information related to a booking or reservation.  Note: BookingRef is optional (O) in split ticketing scenarios.	M
BookingEntity	The airline or organisation assigning the booking information.	O
BookingID	An existing booking reference identifier. Example: TPC13478127253D27122023  Note: BookingID is optional (O) in split ticketing scenarios.	M
BookingRefTypeCode	The booking reference type. Example: TPC  Note: BookingRefTypeCode is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
FareDetail	The amount charged by the carrier for the carriage of a passenger and his allowable free baggage. Note: For a Service <code>OrderItem</code> representing Seats/ Ancillaries, the <code>FareDetail</code> element is optional (O). Note: <code>FareDetail</code> is optional (O) in split ticketing scenarios.	M
FarePriceType	The type of fair price applied to a Fare Detail. Example: • Filed amount • Net amount • Sell amount Note: <code>FareDetail</code> is optional (O) in split ticketing scenarios.	M
Price	The price of the ticket. Note: <code>Price</code> is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
BaseAmount	The total base fare amount. Example: 200000  Note: BaseAmount is optional (O) in split ticketing scenarios.	M
value	The value of BaseAmount . Example: 416.43  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of BaseAmount . Example: USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M
CurConversion	The conversion rate used to convert a currency to another.  Note: CurConversion is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
ConversionRate	The conversion rate used to convert a currency to another.  Note: <code>ConversionRate</code> is optional (O) in split ticketing scenarios.	M
value	The value of <code>ConversionRate</code>. Example: 0.5542515889330287  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
BaseUnitCode	Example: AUDGBP  Note: <code>BaseUnitCode</code> is optional (O) in split ticketing scenarios.	M
EquivAmount	The entire amount of transaction stated in the local currency at the point of sale, or the currency as defined by the Currency Indicator Code.  Note: <code>EquivAmount</code> is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
value	The value of <code>EquivAmount</code> . Example: 751.32  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of <code>BaseAmount</code> . Example: USD, GBP, AUD.  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
TaxSummary	The sum of all tax amounts applied on a given price.  Note: <code>TaxSummary</code> is optional (O) in split ticketing scenarios.	M
Tax	A compulsory contribution to state revenue, levied by the government on workers' income and business profits or added to the cost of some goods, services, and transactions.  Note: <code>Tax</code> is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
Amount	Tax amount. Example: 15000 USD  Note: Amount is optional (O) in split ticketing scenarios.	M
value	The value of Amount . Example: 17.71  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of Amount . Example: USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M
CurConversion	The conversion rate used to convert a currency to another.  Note: CurConversion is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
Amount	The tax amount. Example: 15000 USD  Note: Amount is optional (O) in split ticketing scenarios.	M
value	The value of Amount . Example: 17.71  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of Amount . Example: USD, GBP, AUD.  Note: CurCode is optional (O) in split ticketing scenarios.	M
LocalAmount	The local currency amount that equates to the converted currency amount.  Note: LocalAmount is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
value	The value of <code>Local Amount</code> . Example: 17.71  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of <code>LocalAmount</code> . Example: USD, GBP, AUD.  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
DescText	The description text value. Example: PASSENGER SERVICE CHARGE DOMESTIC ARRIVAL  Note: <code>DescText</code> is optional (O) in split ticketing scenarios.	M
TaxCode	The IATA TTBS Tax Code used for the applied tax. Example: AY, GB.  Note: <code>TaxCode</code> is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
TotalTaxAmount	Total of all applicable tax amounts included in the price. If tax breakdowns are provided, this amount should match the sum of the tax breakdown amounts.  Note: TotalTaxAmount is optional (O) in split ticketing scenarios.	M
value	The value of TotalTaxAmount . Example: 17.71  Note: value is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of TotalTaxAmount . Example: USD, GBP, AUD.  Note: CurCode optional (O) in split ticketing scenarios.	M
TotalAmount	Total monetary price amount, including all tax, surcharge, and fee amounts.  Note: TotalAmount is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
value	The value of <code>TotalAmount</code> . Example: 17.71  Note: <code>value</code> is optional (O) in split ticketing scenarios.	M
CurCode	The currency code of <code>TotalAmount</code> . Example: USD, GBP, AUD.  Note: <code>CurCode</code> is optional (O) in split ticketing scenarios.	M
PaxRefID	Uniquely identifies a Passenger within the context of one message. Example: PAX1  Note: <code>PaxRefID</code> is optional (O) in split ticketing scenarios.	M
OriginalIssueInfo	The issuing carrier and issuing location of a ticket.  Note: <code>OriginalIssueInfo</code> is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
IssueDate	The date that the document was originally issued. Example: 2023-12-27T22:26:00  Note: IssueDate is optional (O) in split ticketing scenarios.	M
IssuingAirlineDesigCode	The Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF  Note: IssuingAirlineDesigCode is optional (O) in split ticketing scenarios.	M
IssuingCarrier	The organisation which carries the passenger, baggage, or goods, and/or commits to delivering the carriage as well as any related services such as issuance of ticket, creation of Order, etc.  Note: IssuingCarrier is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
AirlineDesigCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF Note: <code>AirlineDesigCode</code> is optional (O) in split ticketing scenarios.	M
Name	The name of the airline or carrier. Example: Qantas Airways Note: <code>Name</code> is optional (O) in split ticketing scenarios.	M
TicketNumber	The document number comprised of the airline code, form code, and serial number. Example: 0815751410974 Note: <code>TicketNumber</code> is optional (O) in split ticketing scenarios.	M
OriginDest	The origin and destination airport/city pair which confines a passenger journey or an aircraft flight. Note: <code>OriginDest</code> is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
DestCode	IATA defined code identifying a city or station. Example: ADL  Note: DestCode is optional (O) in split ticketing scenarios.	M
OriginCode	An IATA defined code identifying a city or station. Example: BNE  Note: OriginCode is optional (O) in split ticketing scenarios.	M
PaxRefID	Uniquely identifies a Passenger within the context of one message. Example: PAX1  Note: PaxRefID is optional (O) in split ticketing scenarios.	M
PricingDate	The booked itinerary pricing date. Example: 2017-01-13  Note: This is the date the booked itinerary was priced.  Note: PricingDate is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
RefdOrder	An uniquely identified record of the agreement of one party with another to receive products and services under specified terms and conditions. Order supports the sale of a flexible range of airline products and services that are not necessarily Journey  Note: RefdOrder is optional (O) in split ticketing scenarios.	M
OrderRefID	A carrier assigned ID which uniquely identifies a specific order across several messages.  Note: OrderRefID is optional (O) in split ticketing scenarios.	M
OrderItem	An individually priced item within an order, made up of one or more services. May or may not be a selected offer item. Example: Non-chargeable services available on request such as a wheelchair.  Note: OrderItem is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
OrderItemRefID	A Carrier assigned Order Item ID.  Note: OrderItemrefID is optional (O) in split ticketing scenarios.	M
OwnerCode	An airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.  Note: OwnerCode is optional (O) in split ticketing scenarios.	M
Ticket	The accountable document issued by or on behalf of a carrier which includes notices and the flight and passenger coupons contained therein.  Note: Ticket is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
ConnectedDocNumber	The ticket or document number to which the document is connected. Example: 0815751410672  Note: ConnectedDocNumber is mandatory (M) in one-way scenarios.	O
Coupon	The portion of the Passenger Ticket and Baggage Check or Excess Baggage Ticket that indicates particular places between which the coupon is good for carriage.  Note: Coupon is optional (O) in split ticketing scenarios.	M
ConnectedCouponNumber	The coupon number to which this document is connected.  Note: ConnectedCouponNumber is mandatory (M) in one-way scenarios.	O

TicketDocInfo		
BaggageAllowanceRefID	A reference to a <code>BaggageAllowanceID</code>. Note: <code>BaggageAllowanceRefID</code> is optional (O) in split ticketing scenarios.	M
CouponNumber	Number assigned to the issued coupon. Note: <code>CouponNumber</code> is optional (O) in split ticketing scenarios.	M
CouponStatusCode	Current status of the flight/value coupon. Examples: • E (Exchanged/Reissued) • OPE (Open/Unflown) • B (Flown) Note: <code>CouponStatusCode</code> is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
RFIC	The reason for issuance code. Examples: • A (Air Transportation) • C (Baggage) • E (Airport Services) • F (Merchandise) • G (In-flight Services)  Note: RFIC is mandatory (M) in one-way scenarios.	O
RFISC	The reason for issuance sub code. Examples: • OCC (First Checked Bag) • OB1 (In-flight Entertainment) • OBX (Lounge)  Note: RFISC in mandatory (M) in one-way scenarios.	O
RFISC_Desc	The corresponding description for the Reason for Issuance subcode. Example: CHANGE FEE  Note: RFISC_Desc is mandatory (M) in one-way scenarios.	O

TicketDocInfo		
ServiceRefID	A reference to a Service ID. Example: SRVES13585290  Note: ServiceRefID is mandatory (M) in one-way scenarios.	O
CouponValidityPeriod	The date range a coupon is valid for with an optional time component.  Note: CouponValidityPeriod is optional (O) in split ticketing scenarios.	M
EffectiveDate	The start date for when a coupon is valid. Example: 2023-12-30T11:59:00  Note: EffectiveDate is optional (O) in split ticketing scenarios.	M
ExpirationDate	The end date for when a coupon is valid. Example: 2023-04-30T11:59:00  Note: ExpirationDate is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
FareBasisCode	The fare basis code as ticketed. Example: QDQA  Note: FareBasisCode is optional (O) in split ticketing scenarios.	M
SoldAirlineInfo	The transportation of a passenger on a Dated Operating Segment.  Note: SoldAirlineInfo is optional (O) in split ticketing scenarios.	M
PaxSegmentRefID	A reference to a PaxSegmentID. Example: S2  Note: PaxSegmentRefID is optional (O) in split ticketing scenarios.	M
TicketDocTypeCode	The document type code as defined by PADIS 1001 (Document/ Message Name, coded). Example: T  Note: TicketDocTypeCode is optional (O) in split ticketing scenarios.	M

TicketDocInfo		
TicketNumber	The document number comprised of the airline code, form code, and serial number. Example: 0815751410672  Note: TicketNumber is optional (O) in split ticketing scenarios.	M

Warning		
Elements	Details	Optional/Mandatory
Warning	Contains information related to potential business errors detected during processing of the preceding request.  Note: Warning is optional (O) in one-way and multi-city scenarios.	M
Code	The code corresponding to the processing warning as defined by PADIS 9321.  Note: Code is mandatory (M) in split ticketing scenarios.	O

Warning		
DescText	The free text description of the provided warning. Example: Seat 14E is pending  Note: DescText is optional (O) in one-way and multi-city scenarios.	M
OwnerName	The name of the organization owning the warning codelist. Example: QF  Note: OwnerName is optional (O) in one-way and multi-city scenarios.	M
DescText	The free text description of the provided warning. Example: Status is pending for Service W234B6564-4CD4-4F49-824E-1-5 and Document is not Issued-230000079  Note: DescText is mandatory (M) in round-trip scenarios.	O

DataLists		
Elements	Details	Optional/Mandatory
BaggageAllowanceList	Baggage allowance data list definition	M

BaggageDisclosureList	 Note: BaggageDisclosureList is optional (O) in split ticketing scenarios.	M
ContactInfoList	Contact Info data list definition.	M
FareList	Fare list data list definition.	M
OriginDestList	Origin destination data list definition.	M
PaxJourneyList	Journey data list definition.	M
PaxList	Passenger data list definition.	M
PaxSegmentList	Segment data list definition.	M
PriceClassList	Price class data list definition.	M
ServiceDefinitionList	Service definition data list definition.	M

For more details, [click here](#) to view the complete schema.

5.8.6 18.6 OrderRetrieve Error Codes

 The following error codes are the supplier versions of the error codes from Altea NDC and SabreSonic GDS web services.

Error Codes	Error Message
129	NO MATCH FOR RECORD LOCATOR
911	Unexpected error during service execution.
	RESERVATION PREVIOUSLY CANCELLED

Error Codes	Error Message
	INTERNAL PROCESSING ERROR
	INVALID RECORD LOCATOR
	INVALID NAME

5.9 18.6 ServiceList Overview

5.9.1 Introduction

The Service List API delivers a detailed inventory of available services and their prices for each flight within an order.

The ServiceList API is utilised to request a catalogue of Ancillary Services. The ServiceList request enables users to retrieve the catalogue of ancillary services related to their flight(s), either during the primary booking flow or after ticket issuance (post-sale flow).

In the B2B portal, agencies should be able to view the available ancillaries for the selected segment using the 'Add ancillaries' function. The ancillaries, as returned from the ServiceList API, should be grouped according to the ancillary grouping existing in the platform, such as XBAG, Special baggage, Meals, Special services, etc. Ancillary selection should be possible for each passenger in the case of multi-passenger orders, and together, the ancillaries can be added as non-flight services against the order.

For an API outbound integration, agents can submit the ServiceList API request with the passenger and segment details for which the ancillary list is requested.

Prime Booking Flow

In the prime booking flow, the ServiceList request query is composed of:

- The offer ID and offer item ID containing the flights.
- If applicable, a list of passengers to whom the catalogue will apply (catalogue request with passenger selection).
- If applicable, a list of flights to which the catalogue will apply (catalogue request with flight selection).

Post Sale Flow

In the post-sale flow, the ServiceList request query is composed of:

- The order ID or PNR Record Locator.

- If applicable, a list of passengers to whom the catalogue will apply (catalogue request with passenger selection).
- If applicable, a list of flights to which the catalogue will apply (catalogue request with flight selection).

Based on the ServiceList API response, the ancillary list will be returned to the requesting entity and displayed per passenger per segment/bound to be selected and added to an order. The ServiceList also provides the eligibility for each service per passenger and segment, based on which the service needs to be displayed for selection.

Some ancillaries may require additional information to be entered to add a service to an order successfully. Examples include Pet in Cabin, Unaccompanied Minor, etc. For this purpose, the ServiceListRS contains a section called:

 'ServiceListRS -> Response -> DataLists -> ServiceDefinitionList -> ServiceDefinition -> BookingInstructions'

It also contains details of additional text required to be sent for a service to be added to an order.

5.9.2 ServiceList Endpoints

REST

 <https://api.tpconnects.online/rest/serviceList>

SOAP

 <https://api.tpconnects.online/soap>

SOAPAction: <http://www.iata.org/ndc/ServiceList/>

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.9.3 18.6 ServiceListRQ

Introduction

The ServiceList transaction set returns a detailed inventory of available services and their prices for each flight within an order.

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.6. The following is the element checklist to be passed in the seat availability request. The elements which are marked “**M**” are mandatory to be passed in the request. The parameters passed as “**O**” are optional, it is well and good if implemented.



Note: please use the sample attached and pass the elements accordingly.

User Guidance - Service Input Parameters

Input Parameters	Type	Optional/Mandatory
Request Object	ServiceListRQ	M

The ServiceListRQ service comprises of the following structure:

- [MessageDoc](#)
- [Party - Sender](#)
- [PayloadAttributes](#)
- [CoreRequest](#)
- [Pax](#)
- [ShoppingResponse](#)

Request Parameters

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	Message Document information	O
Party - Sender		
Elements	Details	Optional/Mandatory
Party	Party and Sender definition.	M

PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M

Request Definition

CoreRequest		
Elements	Details	Optional/Mandatory
CoreRequest	Core Service List request including choice of Journey information, Offer, or Order references.	M
Offer	A proposal to sell a specific set of products or Services under specific conditions, for a certain price. Can be the response to a shopping request.  Note: Applicable for pre booking seat availability request.	M
OfferID	Carrier assigned ID which uniquely identifies a specific Offer across several messages.  Note: Applicable for pre booking seat availability request.	M

OwnerCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code.  Note: Applicable for pre booking seat availability request.	M
OfferItem	A priced grouping of one or more services within an Offer.	O
OfferItemID	Carrier assigned ID which exists uniquely within an Offer.	O
Order	A uniquely identified record of the agreement of one party with another to receive products and services under specified terms and conditions. Order supports the sale of a flexible range of airline products and services that are not necessarily Journey b.  Note: Applicable for seat availability after booking.	M
OrderID	Carrier assigned ID which uniquely identifies a specific Order across several messages.  Note: Applicable for seat availability after booking.	M
OwnerCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.  Note: Applicable for seat availability after booking.	M

PaxSegmentRefID	Reference to a Passenger Segment ID. Note: Applicable for seat availability after booking.	O
OriginDest	The Origin and Destination airport/city pair which confines a passenger journey or an aircraft flight.	M
OriginDestID	Uniquely identifies an Origin Destination within the context of one message.	O
PaxJourney	A collection of segments which satisfies transportation of a passenger for a given origin and destination.	M
PaxJourneyID	Uniquely identifies a Passenger Journey within the context of one message.	M
PaxSegment	Transportation of a passenger on a Dated Operating Segment.	M
Arrival	The action or process of arriving of a transport vehicle in any place or location.	M
AircraftScheduledDateTim e	The Scheduled Date and Time of Arrival of the aircraft at the terminal or departure gate at an airport.	M
IATALocationCode	IATA defined code identifying a city or station.	M
CabinType	Type of compartment of an aircraft, offering specific services (e.g. business class, economy).	O
CabinTypeCode	Cabin Type Code as defined by PADIS codeset (e.g. 1, 2, 3, etc.)	O
CabinTypeName	Name given to a cabin compartment (e.g. Business, First, Economy).	O

DatedOperatingLeg	The nonstop operation of a transport vehicle between the departure station and the arrival station. Can be used for aircrafts as well as other transport vehicles such as train or bus etc.	O
IATAAircraftType	Grouping of aircrafts with the same form, function and specification, currently flown, or soon to be flown. Possible types are defined in the IATA SSIM.	M
IATAAircraftTypeCode	Code assigned to an aircraft type in IATA SSIM.	M
Dep	The action or process of leaving of a transport vehicle from any place or location.	M
AircraftScheduledDateTim e	The Scheduled Date and Time of Departure of the aircraft at the terminal or departure gate at an airport.	M
IATALocationCode	IATA defined code identifying a city or station.	M
Duration	Total segment time including the combined air time and connection times of any legs.	O
MarketingCarrierInfo	The commercial designation under which a Dated Operating Segment can be booked, either under the operating carrier's designator or that of another carrier (codeshare).	M
CarrierDesigCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code.	M
MarketingCarrierFlightNum berText	The numerical designation of a flight as it is marketed by a carrier.	M
RBDCode	Code used to identify a particular RBD. Example: P, J, W, M.	M

value	The value of <code>RBDCode</code> .	O
Name	The name of the <code>RBDCode</code> .	O
OperatingCarrierInfo	An operation between board point and any subsequent off point within the same flight designator. Could be one or more legs. Could also be used for other transport vehicles such as train or bus etc.	M
CarrierDesigCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	O
OperatingCarrierFlightNumberText	The numerical designation of a flight as it is operated by a carrier.	O
PaxSegmentID	Uniquely identifies a Passenger Segment within the context of one message.	O
SecureFlightInd	When TRUE, this segment is subject to US TSA 'Secure Flight' passenger prescreening program.	M
SegmentTypeCode	Defines the operational flight segment type (e.g. Open, Passive, Service). Encoding Scheme: IATA PADIS 1.4 Codeset FST - Flight Segment Type	O

Pax		
Elements	Details	Optional/Mandatory
Pax	Any person except members of the crew carried or to be carried with the consent of the carrier, on board of any transport vehicle such as aircraft, train, bus, ship.	M

Birthdate	The Date of Birth of the Passenger. Intended to be used in NDC Anonymous Shopping requests. Example: 2017-01-13	O
Individual	A single human being as distinct from a group, class, or family.	O
GivenName	A personal name given to the individual at birth and used before a family name. Also called first name. E.g. JOHN.	O
MiddleName	Individual's middle name or initial.	O
SurName	Annotation: Individual's hereditary name(s) common to all members of a family. Also known as family name or last name. E.g. SMITH. Excludes any potential suffix.	O
TitleName	A word such as Mr., Mrs., Miss or Dr that is used before an individual's name to indicate the gender, profession or marital status.	O
PaxID	Uniquely identifies a Passenger within the context of one message.	O
PTC	Type code applying to the Passenger which typically drives pricing, example: ADT, CHD.	O

ShoppingResponse		
Elements	Details	Optional/Mandatory

ShoppingResponse	Facilitates the tracking of what was offered and contains an identifier unique to the source Airline for a set of product offers returned in response to a shopping request.  Note: ShoppingResponse is optional (O) in split ticketing scenarios.	O
OwnerCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: 1A	O
ShoppingResponseID	An unique shopping session response ID. Example: W380A3268-7F91-4F52-BD60  Note: ShoppingResponseID is optional (O) in split ticketing scenarios.	O

For more details, [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.9.4 18.6 ServiceListRS

Introduction

The ServiceList transaction set returns a detailed inventory of available services and their prices for each flight within an order.

Implementation

This section describes the implementation of the input message based on the NDC schema version 18.6. The following is the element checklist to be received in the seat availability response. The elements which are marked “**M**” are mandatory to be passed in response. The parameters passed as “**O**” are optional; they are well and good if implemented.



Note: Please use the sample attached and pass the elements accordingly.

User Guidance - Service Input Parameters

Input Parameters	Type	Optional/Mandatory
Response Object	ServiceListRS	M

Our ServiceList Response constitutes the below structure:

- [MessageDoc](#)
- [PayloadAttributes](#)
- [ALaCarteOffer](#)
- [ShoppingResponse](#)
- [PaymentFunctions](#)
- [DataLists](#)

Response Parameters

MessageDoc		
Elements	Details	Optional/Mandatory
MessageDoc	Message Document information	M
PayloadAttributes		
Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.	M

Response Definition



Note: A response API's optional and mandatory fields are determined by which elements are used in the corresponding request API.

ALaCarteOffer

Elements	Details	Optional/Mandatory
ALaCarteOffer	A proposal to sell a specific set of products or Services under specific conditions, for a certain price. Can be the response to a shopping request.	M
ALaCarteOfferItem	Contains one Service (excluding flights) or Service Bundle which is priced per unit. A La Carte Offer Items are optional, and the quantities of these can be selected for any of the eligible passengers and segments.	M
Eligibility	Refers to the Passengers, Price class or segments for which this offer item is eligible.	M
FlightAssociations	Eligibility of this offer item to the following segments or journeys.	M
PaxSegmentRefID	Reference to the flight segments on which this Offer Item can be provided.	M
PaxRefID	Reference to the passengers who are eligible for this Offer Item	M
OfferItemID	Uniquely Identifies an Offer within the context of one message.	M

Service	The instance of a specific flight or Service Definition as it has been offered (and eventually ordered and consumed) in the context of a specific Offer and/or Order.	M
ServiceDefinitionRefID	Reference to a service definition.	M
ServiceID	Service ID assigned by the carrier.	M
UnitPrice	The unit price information of the ALaCarteOffer item.	M
BaseAmount	The base amount information of the unit price.	M
value	The value of <code>BaseAmount</code> .	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
CurConversion	The result of converting one currency into another currency. Example: Local currency to USD, air miles to monetary.	M
Amount	The amount information of <code>CurConversion</code> .	M
value	The value of <code>Amount</code> .	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
ConversionRate	The information of the rate used to convert the local currency into the billing currency.	M

value	The value of <code>ConversionRate</code> .	M
LocalAmount	The amount and currency information as specified by the local country.	M
value	The value of <code>LocalAmount</code> .	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
TotalAmount	Total monetary price amount, including all tax, surcharge, and fee amounts.	M
value	The value of <code>TotalAmount</code> .	M
CurCode	The currency code for <code>BaseAmount</code> . Example: USD, GBP, AUD.	M
OfferID	Carrier assigned ID which uniquely identifies a specific Offer across several messages.	M
OwnerCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code.	M

ShoppingResponse

Elements	Details	Optional/Mandatory
----------	---------	--------------------

ShoppingResponse	Facilitates the tracking of what was Offered and contains an identifier unique to the source Airline for a set of product Offers returned in response to a shopping request.	M
ShoppingResponseID	Unique shopping session response ID.	M

PaymentFunctions		
Elements	Details	Optional/Mandatory
PaymentFunctions	The form of payment information.	O
PaymentSupportedMethod	The payment method accepted by an airline that is used during a ServiceList request.	O
PaymentTypeCode	The payment type code of the payment method as determined by the ATS Codeset PAYT. Example: CA	O
PaymentBrandCode	The form of payment brand code as determined by the ATS Codeset PAYB. Example: VI	O
PaymentMethodAddlInfo	Additional information about the payment method	O
PaymentOtherMethodAddlInfo	Additional information about the other form of payment.	O
Remarks	Additional and supplementary information about the form of payment.	O
RemarkText	The value of the Remarks . Example: Credit/Debit Card	O

DataLists		
Elements	Details	Optional/Mandatory
OriginDestList	Origin Destination data list definition.	M
PaxJourneyList	Journey data list definition.	M
PaxList	Passenger data list definition.	M
PaxSegmentList	Segment data list definition.	M
ServiceDefinitionList	Service Definition data list definition.	M

For more details, [click here](#) to view the complete schema.

 For API samples with complete parameters, refer to [Appendix A: Full API Examples](#)

5.10 Appendix A: Full API Examples

 Prerequisite:

- Ensure that a native PDF viewer application is installed and configured on your device for seamless viewing of PDF documents. This could include applications like Adobe Acrobat Reader, Preview on macOS, or any other native PDF viewer specific to your operating system.
- A standard JSON viewer or editor should be available to open and inspect API samples.

5.10.1 Primary Workflow Samples

API	API Samples
AirShopping	AirShoppingRQ.json AirShoppingRS.json

API	API Samples
OfferPrice	OfferPriceRQ.json OfferPriceRS.json
OrderCreate	OrderCreateRQ.json OrderCreateRS.json
SeatAvailability	SeatAvailRQ.json SeatAvailRS.json
OrderCancel	OrderCancelRQ.json OrderCancelRS.json
OrderReshop	OrderReShopRQ.json OrderReShopRS.json OrderRePriceRQ.json OrderRePriceRS.json
OrderChange	OrderChangeRQ.json OrderViewRS (OrderChangeRS).json
OrderRetrieve	OrderRetrieveRQ.json OrderRetrieveRS.json
ServiceList	ServiceListRQ.json ServiceListRS.json

5.10.2 Servicing Workflow Samples

API Workflow	API Samples
Post-ticketing confirmed seat addition OrderView -> PostSeatRQ -> PostSeatRS -> OrderChangRQ -> OrderChangeRS	OrderViewRS - PostSeat.json SeatAvailRQ - PostOrder Flow.json SeatAvailRS - PostOrder Flow.json OrderChangeRQ - PostSeat Flow.json OrderChangeRS - PostSeat Flow.json
Post-ticketing confirmed ancillary addition OrderView -> PostServiceRQ -> PostServiceRS -> OrderChangRQ(Payment) -> OrderChangeRS	OrderViewRS - PostServiceFlow.json ServiceListRQ - PostServiceFlow.json ServiceListRS - PostServiceFlow.json OrderChangeRQ - PostServiceFlow.json OrderChangeRS - PostServiceFlow.json

5.11 Appendix B: Glossary

Acronym	Definition
API	Application Programming Interface
APIS	Advanced Passenger Information System
ATPCO	Air Tariff Publishing Company
BSP	Billing Settlement Plan
CC	Credit Card
EMD	Electronic Miscellaneous Document
FF	Frequent Flyer
FOP	Form of payment

Acronym	Definition
FBC	Fare Basis Code
IATA	International Air Transport Association
JSON	Javascript Object Notation
PNR	Passenger Name Record
PTC	Passenger Type Code
PNR	Passenger Name Record
PSS	Passenger Sales and Service System
PADIS	Passenger and Airport Data Interchange Standards
RFIC	Reason For Issuance Code
RFISC	Reason for Issuance Sub-Code
SSR	Special Service Request
NDC	New Distribution Capability

6 Common Schemas

- [Definition](#)
- [MessageDoc](#)
- [Party - Participant](#)
- [Party - Sender](#)
- [PayloadAttributes](#)
- [PointOfSale](#)

Definition

Every API request should contain the `Party` element to identify the requesting party.



The update of the optional and mandatory information for common schemas in split ticketing reshop, reprice, and reissue scenarios is in progress.

MessageDoc

Element	Details	Optional/Mandatory
MessageDoc	MessageDoc Type Note: • MessageDoc is optional (O) in OrderCreateRS - OrderViewRS split ticketing scenarios. • MessageDoc is optional (O) in OrderCancelRS - OrderViewRS split ticketing scenarios. • MessageDoc is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios. • MessageDoc is optional (O) in SeatAvailabilityRS split ticketing scenarios.	• AirShoppingRQ : O • AirShoppingRS : M • OfferPriceRQ : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRQ : O • OrderCancelRS - OrderViewRS : M • OrderRetrieveRQ : O • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRQ : O • SeatAvailabilityRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRQ(Reshop) : O • OrderReshopRQ(Reprice) : O

MessageDoc		
Element	Details	Optional/Mandatory
		• OrderReshopRS(Reshop) :O • ServiceListRQ :O • ServiceListRS :M

MessageDoc

Element	Details	Optional/Mandatory
Name	Implementation name. Example: ThisAirline Gateway Note: • Name is optional (O) in OrderCreateRS - OrderViewRS split ticketing scenarios. • Name is optional (O) in OrderCancelRS - OrderViewRS split ticketing scenarios. • Name is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios. • Name is optional (O) in SeatAvailabilityRS split ticketing scenarios.	• AirShoppingRQ : O • AirShoppingRS : M • OfferPriceRQ : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRQ : O • OrderCancelRS - OrderViewRS : M • OrderRetrieveRQ : O • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRQ : O • SeatAvailabilityRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRQ(Reshop) : O • OrderReshopRQ(Reprice) : O

MessageDoc		
Element	Details	Optional/Mandatory
		• OrderReshopRS(Reshop) :O • ServiceListRQ :O • ServiceListRS :M

MessageDoc

Element	Details	Optional/Mandatory
RefVersionNumber	The reference to the framework version. Example: SOAP 2015.1 Note: • RefVersionNumber is optional (O) in OrderCreateRS - OrderViewRS split ticketing scenarios. • RefVersionNumber is optional (O) in OrderCancelRS - OrderViewRS split ticketing scenarios. • RefVersionNumber is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios. • RefVersionNumber is optional (O) in SeatAvailabilityRS split ticketing scenarios.	• AirShoppingRQ : O • AirShoppingRS : M • OfferPriceRQ : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRQ : O • OrderCancelRS - OrderViewRS : M • OrderRetrieveRQ : O • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRQ : O • SeatAvailabilityRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRQ(Reshop) : O • OrderReshopRQ(Reprice) : O

MessageDoc

Element	Details	Optional/Mandatory
		• OrderReshopRS(Reshop) :O • ServiceListRQ :O • ServiceListRS :M

JSON SAMPLE - MESSAGEDOC

```
"MessageDoc": {
  "Name": "NDC"
  "RefVersionNumber": 18.6,
}
```

Party - Participant

Element	Details	Optional/Mandatory
---------	---------	--------------------

Party	Party information. This information is intended for business use, it is not intended for transaction authentication and routing of the message.	• AirShoppingRQ:M • AirShoppingRS:O • OfferPriceRQ:M • OfferPriceRS:O • OrderCreateRQ:M • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:M • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRS - OrderViewRS:O • OrderChangeRQ:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------	--	--

Participant	Message Participant(s).	
		• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCancelRQ:O • OrderCreateRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O

Corporation	Corporate party information.  This is only needed for 1S.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------------	---	--

CorporateCodeText	Corporate code assigned to a corporate buyer used for accessing special fares.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------------------	--	--

TravelAgency	A private retailer or public service that provides travel and tourism related services to the public on behalf of suppliers such as activities, airlines, car rentals, cruise lines, hotels, railways, travel insurance, and package tours.	• AirShoppingRQ:M • AirShoppingRS:O • OfferPriceRQ:M • OfferPriceRS:O • OrderCreateRQ:M • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
--------------	---	--

AgencyID	Unique Agency Seller ID. Example: CTRV	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRS:O • OfferPriceRQ:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
----------	--	--

IATANumber	IATA-assigned agency number. Example: 98417900	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
------------	--	--

Name	Agency name. Example: Carson Travel	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
------	-------------------------------------	--

PseudoCityID	An identifier for a corporate user of a computer reservation system (CRS) or global distribution system (GDS), typically a travel agency. Also known as Office ID.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
--------------	---	--

TravelAgent	Individual agent who solicits and procures business from potential customers on behalf of one or more principals, usually against payment of a percentage of the realised sales revenue as commission.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------------	--	--

TravelAgentID	Booking and Servicing Agent information. ID. Example: 98417900 Note: The ID correlates to the specified ID Type.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
---------------	---	--

JSON SAMPLE - PARTY - PARTICIPANT

```
{
  "Party": {
    "Participant": {
      "TravelAgency": {
        "AgencyID": 1000,
        "IATANumber": "000000000",
        "Name": "ABC Travels",
        "PseudoCityID": "XXXXX",
        "TravelAgent": {
          "TravelAgentID": "XXXXX-1111111111-1111"
        }
      }
    }
  }
}
```

Party - Sender

Element	Details	Optional/Mandatory
---------	---------	--------------------

Party	Party information. This information is intended for business use, it is not intended for transaction authentication and routing of the message.	• AirShoppingRQ : M • AirShoppingRS : O • AirShoppingRS : O • OfferPriceRQ : M • OfferPriceRS : O • OrderCreateRQ : M • OrderCreateRS - OrderViewRS M • OrderCancelRQ : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRQ : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRQ : M • SeatAvailabilityRS : O • OrderChangeRQ : M • OrderChangeRS - OrderViewRS : M • OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : M • OrderReshopRS(Reshop) : O • ServiceListRQ : M
-------	--	--

		• ServiceListRS:O
--	--	-------------------

Sender	Message sender information.	• AirShoppingRQ : M • AirShoppingRS : O • OfferPriceRQ : M • OfferPriceRS : O • OrderCreateRQ : M • OrderCreateRS - OrderViewRS : M • OrderCancelRQ : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRQ : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRQ : M • SeatAvailabilityRS : O • OrderChangeRQ : M • OrderChangeRS - OrderViewRS : M • OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : M • OrderReshopRS(Reshop) : O • ServiceListRQ : M • ServiceListRS : O
--------	-----------------------------	--

Aggregator	An entity who distributes a Sellers shopping request to multiple Airlines and aggregates subsequent responses.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRS - OrderViewRS O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------------------	---	---

AggregatorID	The unique identifier of the aggregator organisation.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
--------------	---	--

Corporation	Corporate party information.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------------	------------------------------	--

CorporateCodeText	Corporate code assigned to a corporate buyer used for accessing special fares.  This is only needed for 1S.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------------------	---	--

TravelAgency	A private retailer or public service that provides travel and tourism related services to the public on behalf of suppliers such as activities, airlines, car rentals, cruise lines, hotels, railways, travel insurance, and package tours.	• AirShoppingRQ : M • AirShoppingRS : O • OfferPriceRQ : M • OfferPriceRS : O • OrderCreateRQ : M • OrderCreateRS - OrderViewRS : M • OrderCancelRQ : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRQ : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRQ : M • SeatAvailabilityRS : O • OrderChangeRQ : M • OrderChangeRS - OrderViewRS : M • OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : M • OrderReshopRS(Reshop) : O • ServiceListRQ : M • ServiceListRS : O
--------------	---	--

AgencyID	Unique Agency Seller ID. Example: CTRV	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
----------	--	--

ContactInfoRefID	A reference to a ContactInfoID.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
------------------	---------------------------------	--

IATANumber	The IATA-assigned agency number. Example: 98417900 Note: • IATANumber is optional (O) in OrderCreate - OrderViewRS split ticketing scenarios. • IATANumber is optional (O) in OrderCancelRS - OrderViewRS split ticketing scenarios. • IATANumber is optional (O) in OrderRetrieve - OrderViewRS split ticketing scenarios.	• AirShoppingRQ : O • AirShoppingRS : O • OfferPriceRQ : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRQ : O • OrderCancelRS - OrderViewRS : M • OrderRetrieveRQ : O • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRQ : O • SeatAvailabilityRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRQ(Reshop) : O • OrderReshopRQ(Reprice) : O • OrderReshopRS(Reshop) : O • ServiceListRQ : O • ServiceListRS : O
------------	---	--

Name	The agency name. Example: Carson Travel Note: Name is optional (O) in OrderCreate - OrderViewRS one-way scenarios.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
------	--	--

PseudoCityID	An identifier for a corporate user of a computer reservation system (CRS) or global distribution system (GDS), typically a travel agency. Also known as Office ID. Example: ABCDFG	• AirShoppingRQ :O • AirShoppingRS :O • OfferPriceRQ :O • OfferPriceRS :O • OrderCreateRQ :O • OrderCreateRS - OrderViewRS :M • OrderCancelRQ :O • OrderCancelRS - OrderViewRS :M • OrderRetrieveRQ :O • OrderRetrieveRS - OrderViewRS :M • SeatAvailabilityRQ :O • SeatAvailabilityRS :O • OrderChangeRQ :O • OrderChangeRS - OrderViewRS :M • OrderReshopRQ(Resh op) :O • OrderReshopRQ(Repr ice) :O • OrderReshopRS(Resh op) :O • ServiceListRQ :O • ServiceListRS :O
--------------	---	--

Tids	The travel industry designator service. Example: 987654	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
------	--	--

TravelAgent	An individual agent who solicits and procures business from potential customers on behalf of one or more principals, usually against payment of a percentage of the realised sales revenue as commission. Note: TravelAgent is optional (O) in OrderCreate - OrderViewRS split ticketing scenarios.	• AirShoppingRQ : M • AirShoppingRS : O • OfferPriceRQ : M • OfferPriceRS : O • OrderCreateRQ : M • OrderCreateRS - OrderViewRS : M • OrderCancelRQ : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRQ : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRQ : M • SeatAvailabilityRS : O • OrderChangeRQ : M • OrderChangeRS - OrderViewRS : M • OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : M • OrderReshopRS(Reshop) : O • ServiceListRQ : M • ServiceListRS : O
-------------	--	--

TravelAgentID	The booking and servicing agent information. ID. Example: 134781340254-11631 Note: The ID correlates to the specified ID Type.	• AirShoppingRQ : M • AirShoppingRS : O • OfferPriceRQ : M • OfferPriceRS : O • OrderCreateRQ : M • OrderCreateRS - OrderViewRS : M • OrderCancelRQ : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRQ : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRQ : M • SeatAvailabilityRS : O • OrderChangeRQ : M • OrderChangeRS - OrderViewRS : M • OrderReshopRQ(Reshop) : M • OrderReshopRQ(Reprice) : M • OrderReshopRS(Reshop) : O • ServiceListRQ : M • ServiceListRS : O
---------------	---	--

UserName	The username of the travel agent.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
----------	-----------------------------------	--

TypeCode	Agency/ Agent Identification Type. Example: B - Booking Agent	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
----------	--	--

POSCountryCode	The point of sale country code where the order was created. Example: AU	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
----------------	---	--

AgentCode	The travel agent's code. Example: 134781340254	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-----------	---	--

AgencyStationCode	Example: ACD00134	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------------------	-------------------	--

EnabledSystem	An NDC enabled system.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
---------------	------------------------	--

SystemID	An NDC enabled SystemID. Example: API and B2B  This is an optional value. If no value is passed, it will be defaulted to "API".	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):O • OrderReshopRQ(Reprice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
----------	--	--

JSON SAMPLE - PARTY-SENDER

```
"Sender": {
  "TravelAgency": {
    "AgencyID": 1000,
    "IATANumber": "000000000",
    "Name": "ABC Travels",
    "PseudoCityID": "XXXXX",
    "TravelAgent": {
      "TravelAgentID": "XXXXX-1111111111-1111"
    }
  },
  "EnabledSystem": {
    "SystemID": "B2B"
  }
}
```

PayloadAttributes

Elements	Details	Optional/Mandatory
PayloadAttributes	IATA standard payload attributes.  Note: PayloadAttributes is optional (O) in OrderReshopRQ(Reshop) round-trip scenarios.	• AirShoppingRQ:O • OfferPriceRQ:M • AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:M • OrderCreateRS - OrderViewRS:M • OrderCancelRQ:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRQ:M • SeatAvailabilityRS:M • OrderCancelRQ:M • OrderRetrieveRQ:M • OrderChangeRQ:M • OrderChangeRS - OrderViewRS:M • OrderReshopRQ(Reshop):M

PayloadAttributes

Elements	Details	Optional/Mandatory
		• OrderReshopRQ(Rep rice) :M • OrderReshopRS(Res hop) :M • ServiceListRQ:M • ServiceListRS:M

PayloadAttributes

Elements	Details	Optional/Mandatory
EchoTokenText	A reference for additional message identification, assigned by the requesting host system. When a request message includes an echo token the corresponding response message MUST include an echo token with an identical value. Note: EchoTokenText is optional (O) in OrderReshopRQ(Reshop) round-trip scenarios.	- AirShoppingRQ : O - OfferPriceRQ : M - AirShoppingRS : M - OfferPriceRS : M - OrderCreateRQ : M - OrderCreateRS - - OrderViewRS : M - OrderCancelRQ : M - OrderCancelRS - - OrderViewRS : M - OrderRetrieveRQ : O - OrderRetrieveRS - - OrderViewRS : M - SeatAvailabilityRQ : M - SeatAvailabilityRS : M - OrderCancelRQ : M - OrderChangeRQ : M - OrderChangeRS - - OrderViewRS : M - OrderReshopRQ(Reshop) : M

PayloadAttributes

Elements	Details	Optional/Mandatory
		• OrderReshopRQ(Rep rice) :M • OrderReshopRS(Res hop) :M • ServiceListRQ:M • ServiceListRS:M

PayloadAttributes

Elements	Details	Optional/Mandatory
VersionNumber	For all IATA versioned messages, the version of the message is indicated by a decimal value. Example: 18.61	- AirShoppingRQ : O - AirShoppingRS : M - OfferPriceRQ : O - OfferPriceRS : M - OrderCreateRQ : O - OrderCreateRS - OrderViewRS : M - OrderCancelRQ : O - OrderCancelRS - OrderViewRS : M - OrderRetrieveRQ : O - OrderRetrieveRS - OrderViewRS : M - SeatAvailabilityRQ : O - SeatAvailabilityRS : M - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : M - OrderReshopRQ (Reshop) : O - OrderReshopRQ (Repurchase) : M

PayloadAttributes

Elements	Details	Optional/Mandatory
		- OrderReshopRS (Reshop) : M - ServiceListRQ : M - ServiceListRS : M

JSON SAMPLE - PAYLOADATTRIBUTES

```
{
  "EchoTokenText": "XXXXXXXXXXXXXXXXXXXXXXXXX",
  "VersionNumber": 18.61
}
```

PointOfSale

Elements	Details	Optional/Mandatory
----------	---------	--------------------

PointOfSale	Point of Sale information.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Rep rice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------------	----------------------------	---

Country	The country origin of the point of sale.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Rep rice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
---------	--	---

CountryName	The name of the country where the point of sale took place..	- AirShoppingRQ:O - AirShoppingRS:O - OfferPriceRQ:O - OfferPriceRS:O - OrderCreateRQ:O - OrderCreateRS - OrderViewRS:O - SeatAvailabilityRQ:O - SeatAvailabilityRS:O - OrderCancelRQ:O - OrderCancelRS - OrderViewRS:O - OrderRetrieveRQ:O - OrderRetrieveRS - OrderViewRS:O - OrderChangeRQ:O - OrderChangeRS - OrderViewRS:O - OrderReshopRQ(Reshop):O - OrderReshopRQ(Rep rice):O - OrderReshopRS(Reshop):O - ServiceListRQ:O - ServiceListRS:O
-------------	--	---

Device	Device upon which the secure transaction will occur.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Rep rice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
--------	--	---

BrowserUserAgentHeaderText	User Agent String. This contains the user agent string.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Repurchase):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
----------------------------	---	---

DeviceCode	The device code from which the request was initiated.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Repurchase):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
------------	---	---

IPAddressText	The associated IP address. Examples: 192.0.2.8, 198.51.100.0	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Rep rice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
---------------	--	---

RequestTime	Point of sale timestamp value. Example: 2017-01-13T13:59:38Z Note: This may be used if the point of sale time zone differs from the message creation timestamp.	• AirShoppingRQ:O • AirShoppingRS:O • OfferPriceRQ:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • SeatAvailabilityRQ:O • SeatAvailabilityRS:O • OrderCancelRQ:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRQ:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRQ(Reshop):O • OrderReshopRQ(Rep rice):O • OrderReshopRS(Reshop):O • ServiceListRQ:O • ServiceListRS:O
-------------	--	---

JSON SAMPLE - POINT OF SALE

```
"PointOfSale": {  
  "Device": {  
    "DeviceCode": "94.200.XX.XX"  
  }  
},
```


7 DataLists

This section lists all the available DataLists in our 18.6 requests and responses. The following DataLists are available :

- BaggageAllowanceList
- BaggageDisclosureList
- ContactInfoList
- FareList
- OriginDestList
- PaxJourneyList
- PaxList
- PaxSegmentList
- PriceClassList
- ServiceDefinitionList

7.1 BaggageAllowanceList

Version and Release Plan				
Version	Summary	Release Status	Pre-Live Date	Live Date
1.0		RELEASE D		



The update of the optional and mandatory information for `BaggageAllowanceList` in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Details	Optional/Mandatory
----------	---------	--------------------

BaggageAllowanceList	Baggage allowance data list definition	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
----------------------	--	--

BaggageAllowance	The amount of checked or carry-on luggage the airline will allow per passenger.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
------------------	--	--

ApplicableBagText	The applicable bag type. Examples: • Carry-On • Checked • 1st Checked Bag • 2nd Checked Bag Note: ApplicableBagText is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
-------------------	---	--

ApplicablePartyText	The baggage weight restriction application. Examples: Party (Party applies to all Travelers), and Traveler. Note: ApplicablePartyText is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : O
---------------------	--	--

BaggageAllowanceID	The unique identifier of a baggage allowance. Examples: BAEBF3AA16-CO, CKBAG1-1-23KG.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
--------------------	--	--

PieceAllowance	Defines the maximum number of each allowable baggage type.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieve - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
----------------	--	--

ApplicablePartyText	The baggage weight restriction application. Examples: Party (Party applies to all Travelers), and Traveler. Note: ApplicableBagText is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : O
---------------------	--	--

PieceWeightAllowance	The baggage weight allowance with application information. Note: PieceWeightAllowance is optional (O) in OrderRetrieveRS - OrderViewRS and OrderCreateRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
----------------------	--	--

TotalQty	The maximum pieces of baggage allowed.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
----------	--	--

value	The numerical value of <code>TotalQty</code> . Example: 4	• <code>AirShoppingRS : M</code> • <code>OfferPriceRS : M</code> • <code>OrderCreateRQ : O</code> • <code>OrderCreateRS -</code> <code>OrderViewRS : M</code> • <code>OrderCancelRS -</code> <code>OrderViewRS : M</code> • <code>OrderRetrieveRS -</code> <code>OrderViewRS : M</code> • <code>OrderChangeRQ : O</code> • <code>OrderChangeRS -</code> <code>OrderViewRS : M</code> • <code>OrderReshopRS (Reshop) :</code> <code>M</code> • <code>OrderReshopRS (Reprice)</code> <code>: M</code>
-------	---	--

TypeCode	The type of baggage allowance. Example: Checked or CarryOn. • AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) - Reprice: M
----------	--

WeightAllowance	The baggage weight allowance with application information. Note: WeightAllowance is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-----------------	---	--

MaximumWeightMeasure	The maximum weight value and unit of measure. Note: MaximumWeightAllowance is optional (O) in OrderCancelRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
----------------------	---	--

value	The value of <code>MaximumWeightMeasure</code> . Example: 50 Note: <code>value</code> is optional (O) in <code>OrderRetrieveRS - OrderViewRS</code> split ticketing scenarios.	• <code>AirShoppingRS : M</code> • <code>OfferPriceRS : M</code> • <code>OrderCreateRQ : O</code> • <code>OrderCreateRS - OrderViewRS : M</code> • <code>OrderCancelRS - OrderViewRS : M</code> • <code>OrderRetrieveRS - OrderViewRS : M</code> • <code>OrderChangeRQ : O</code> • <code>OrderChangeRS - OrderViewRS : M</code> • <code>OrderReshopRS (Reshop) : O</code> • <code>OrderReshopRS (Reprice) : O</code>
-------	--	--

UnitCode	The unit of measurement code. Example: KILOGRAM  Note: UnitCode is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
----------	---	--

7.2 BaggageDisclosureList

Version and Release Plan				
Version	Summary	Release Status	Pre-Live Date	Live Date
1.0		RELEASED		



The update of the optional and mandatory information for BaggageDisclosureList in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Details	Optional/Mandatory
BaggageDisclosureList	Baggage disclosure data list definition. Note: BaggageDisclosureList is optional (O) in OrderRetrieveRS - OrderViewRS and OrderCreateRS - OrderViewRS split ticketing scenarios.	- AirShoppingRS : O - OfferPriceRS : M - OrderCreateRQ : O - OrderCreateRS - OrderViewRS : M - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : M - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : M - OrderReshopRS(Reshop) : O - OrderReshopRS(Reprice) : O

BaggageDisclosure	Disclosure information specifically related to baggage. Note: BaggageDisclosure is optional (O) in OrderRetrieveRS - OrderViewRS and OrderCreateRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-------------------	--	--

BaggageDisclosureID	The unique identifier of a bag disclosure. Example: BaggageKey-1 Note: BaggageDisclosureID is optional (O) in OrderRetrieveRS - OrderViewRS and OrderCreateRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
---------------------	---	--

CommercialAgreementID	A bilateral agreement identifier. Example: Baggage cost, Baggage Determining Carrier.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : O • OrderCancelRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-----------------------	--	--

Desc	The description of a baggage disclosure. Note: Desc is optional (O) in OrderRetrieveRS - OrderViewRS and OrderCreateRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
------	---	--

DescText	The description text value of a baggage disclosure. Example: Not subject to US DOT and CTA Reservation or Disclosure. Note: DescText is optional (O) in OrderRetrieveRS - OrderViewRS and OrderCreateRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
----------	--	--

RuleTypeCode	The US Department of Transportation (DOT) Reservation or Disclosure baggage rule. Examples: Y, Disclosure AND US DOT Reservation. Note: RuleTypeCode is optional (O) in OrderRetrieveRS - OrderViewRS and OrderCreateRS - OrderViewRS split ticketing scenarios.	- AirShoppingRS : O - OfferPriceRS : M - OrderCreateRQ : O - OrderCreateRS - OrderViewRS : M - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : M - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : M - OrderReshopRS (Reshop) : O - OrderReshopRS (Reprice) : O
--------------	---	--

7.3 ContactInfoList

Version and Release Plan				
Version	Summary	Release Status	Pre-Live Date	Live Date
18.6	Order Management 2.0 and Split Ticketing	PLANNED	TBC	TBC

i The update of the optional and mandatory information for ContactInfoList in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Details	Optional/Mandatory
ContactInfoList	Contact info data list definition.  Note: ContactInfoList is optional (O) in OrderCreateRQ multi-city scenarios.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : M • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O

ContactInfo	The electronic or geographic address which a party has provided as the contact channel. For example, contact email, contact postal address, and contact phone number.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-------------	--	--

ContactInfoID	The unique identifier for a passengers contact information. Example: CNCT-1  Note: ContactInfoID is mandatory (M) in OrderCreateRQ multi-city scenarios.	- AirShoppingRS : O - OfferPriceRS : O - OrderCreateRQ : O - OrderCreateRS - OrderViewRS : M - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : M - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : M - OrderReshopRS (Reshop) : O - OrderReshopRS (Reprice) : O
---------------	--	--

ContactTypeText	A classification for a particular set of contact information. Example: Primary, Payment.  Note: ContactTypeText is mandatory (M) in OrderCreateRQ multi-city scenarios.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-----------------	---	--

EmailAddress	The email address which should be used for contact purposes.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
--------------	--	--

EmailAddressText	The email address text which should be used for contact purposes. Example: JohnDoe@acme.com	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
------------------	--	--

LabelText	Used to differentiate multiple email addresses of one contact. Example: Operational	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-----------	---	--

Individual	The person who's contact information is associated with <code>ContactInfoList</code> .	• <code>AirShoppingRS:O</code> • <code>OfferPriceRS:O</code> • <code>OrderCreateRQ:M</code> • <code>OrderCreateRS - OrderViewRS:M</code> • <code>OrderCancelRS - OrderViewRS:M</code> • <code>OrderRetrieveRS - OrderViewRS:M</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:M</code> • <code>OrderReshopRS(R eshop):O</code> • <code>OrderReshopRS(R eprice):O</code>
------------	--	--

IndividualID	A unique identifier of an individual. Example: 1	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
IndividualRefID	A reference to an individuals unique identifier. Example: PAX1 Note: IndividualRefID is mandatory (M) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• OrderCreateRQ : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O

Phone	A passenger's phone details. IMPROVEMENT - 18.6 IMPROVEMENT - 18.6 Release Note	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-------	--	--

CountryDialingCode	A numeric telephone dialing prefix for the member countries of the International Telecommunication Union (ITU). Example: +971 IMPROVEMENT - 18.6	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
LabelText	Used to differentiate multiple phone numbers of one contact. Examples: Work, Home, and Mobile. Note: LabelText is mandatory (M) in OrderCreateRQ multi-city scenarios.	• OrderCreateRQ : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O

PhoneNumber	The phone number text. Examples: +1 999-999-9999 ext 1234, 617-9976 Note: This may be a simple, un-structured phone number, such as +01 999-999-9999 ext 1234 or combined with the additional attributes to create a structured phone number.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-------------	---	--

GenderCode	The gender of the individual. Examples: M, F, or X for unspecified.  For 1A, this is not passed for Infants.	• AirShoppingRS :O • OfferPriceRS :O • OrderCreateRQ :O • OrderCreateRS - OrderViewRS :O • OrderCancelRS - OrderViewRS :O • OrderRetrieveRS - OrderViewRS :O • OrderChangeRQ :O • OrderChangeRS - OrderViewRS :O • OrderReshopRS (Reshop) :O • OrderReshopRS (Reprice) :O
------------	---	--

GivenName	A personal name given to the individual at birth and used before a family name. Also called first name. Example: JOHN.	• AirShoppingRS :O • OfferPriceRS :O • OrderCreateRQ :O • OrderCreateRS - OrderViewRS :O • OrderCancelRS - OrderViewRS :O • OrderRetrieveRS - OrderViewRS :O • OrderChangeRQ :O • OrderChangeRS - OrderViewRS :O • OrderReshopRS (Reshop) :O • OrderReshopRS (Reprice) :O
-----------	--	--

MiddleName	An individual's middle name or initial. Example: G, GEORGE.	• AirShoppingRS :O • OfferPriceRS :O • OrderCreateRQ :O • OrderCreateRS - OrderViewRS :O • OrderCancelRS - OrderViewRS :O • OrderRetrieveRS - OrderViewRS :O • OrderChangeRQ :O • OrderChangeRS - OrderViewRS :O • OrderReshopRS (Reshop) :O • OrderReshopRS (Reprice) :O
------------	---	--

Surname	An individual's hereditary name(s) common to all members of a family. Also known as family name or last name. Excludes any potential suffix. Example: SMITH.	• AirShoppingRS :O • OfferPriceRS :O • OrderCreateRQ :O • OrderCreateRS - OrderViewRS :O • OrderCancelRS - OrderViewRS :O • OrderRetrieveRS - OrderViewRS :O • OrderChangeRQ :O • OrderChangeRS - OrderViewRS :O • OrderReshopRS (Reshop) :O • OrderReshopRS (Reprice) :O
---------	---	--

TitleName	A word such as Mr., Mrs., Miss or Dr which is used before an individual's name to indicate the gender, profession or marital status. Note: For 1A , this is not passed for Infants.	• AirShoppingRS :O • OfferPriceRS :O • OrderCreateRQ :O • OrderCreateRS - OrderViewRS :O • OrderCancelRS - OrderViewRS :O • OrderRetrieveRS - OrderViewRS :O • OrderChangeRQ :O • OrderChangeRS - OrderViewRS :O • OrderReshopRS (Reshop) :O • OrderReshopRS (Reprice) :O
-----------	--	--

AreaCodeNumber	The phone number area code. IMPROVEMENT - 18.6	• AirShoppingRS:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):O
----------------	---	--

7.4 FareList

Version and Release Plan				
Version	Summary	Release Status	Pre-Live Date	Live Date
1.0		RELEASE D		



The update of the optional and mandatory information for **FareList** in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Details	Optional/Mandatory
FareList	Fare data list definition.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Repric e) : M

FareGroup	The fare grouping of a fare.	• AirShoppingRS:O • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M
-----------	------------------------------	--

FareCode	The fare type code. Based on the PADIS codeset element 9910 - Fare Qualifier encoding scheme: Examples: • 70J - Published Fares • 70K - Dynamic Discounted Fares • 749 - Negotiated Fares • 756 - One Way Fare • 758 - Private Fares Note: FareCode is optional (O) in OrderRetrieveRS -OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M
----------	---	--

FareDetail	The amount charged by the carrier for the carriage of a passenger and his allowable free baggage. Note: FareDetail is optional (O) in OrderChange - OrderViewRS multi-city scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
------------	---	--

FareComponent	A portion of an itinerary between two consecutive fare construction points. If the journey has only one fare component, the points of origin and destination are the only fare construction points	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy Class. Note: CabinType is mandatory (M) in OrderRetrieve - OrderViewRS split ticketing scenarios.	• OrderCreateRQ : O • OrderRetrieve - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O

CabinTypeCode	The cabin type code as defined by the PADIS codeset. Example: Y Note: CabinTypeCode is mandatory (M) in OrderRetrieve - OrderViewRS split ticketing scenarios.	• OrderCreateRQ : O • OrderRetrieveRS - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • : OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
CabinTypeName	The name given to a cabin compartment. Example: First, Business, and Economy. Note: CabinTypeName is mandatory (M) in OrderRetrieve - OrderViewRS split ticketing scenarios.	• OrderCreateRQ : O • OrderRetrieveRS - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O

FareBasisCityPairText	The identified published fare. Contains the origin and destination city codes and a two character designator of fare owning airline associated with the fare basis code. Example: MIANCEDL Note: • FareBasisCityPairText is mandatory (M) in OrderCancelRS - OrderViewRS round-trip scenarios. • FareBasisCityPairText is mandatory (M) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : O • OrderCancelRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : M
-----------------------	---	--

FareBasisCode	The fare basis code. Example: QDQA Note: FareBasisCode is mandatory (M) in OrderReshopRS(Reshop) round-trip and multi-city scenarios.	• AirShoppingRS:O • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):O • OrderReshopRS(Reprice):M
---------------	---	--

PaxSegmentRefID	The reference to a Pax Segment ID. Example: S4 Note: PaxSegmentRefID is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	• AirShoppingRS:O • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M
-----------------	--	--

RBD	The reservation booking designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. Example: 'J' for Business Class Premium, 'D' for Business Disc. Note: - RBD is mandatory (M) in OrderRetrieveRS - OrderViewRS split ticketing scenarios. - RBD is optional (O) in OrderReshopRS (Reshop) one-way scenarios.	- AirShoppingRS : O - OfferPriceRS : M - OrderCreateRQ : O - OrderCreateRS - OrderViewRS : O - OrderCancelRS - OrderViewRS : O - OrderRetrieveRS - OrderViewRS : O - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : O - OrderReshopRS (Reshop) : M - OrderReshopRS (Reprice) : M
-----	--	--

RBDCode	The code used to identify a particular RBD Example: P, J, W, M. Note: • RBDCode is mandatory (M) in OrderRetrieveRS - OrderViewRS split ticketing scenarios. • RBDCode is optional (O) in OrderReshopRS (Reshop) one-way scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : O • OrderCancelRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
---------	--	--

value	The value of <code>RBD</code> . Example: Q Note: <code>value</code> is mandatory (M) in <code>OrderRetrieveRS</code> - <code>OrderViewRS</code> split ticketing scenarios. <code>value</code> is optional (O) in <code>OrderReshopRS(Reshop)</code> one-way scenarios.	<code>AirShoppingRS:O</code> <code>OfferPriceRS:M</code> <code>OrderCreateRQ:O</code> <code>OrderCreateRS - OrderViewRS:O</code> <code>OrderCancelRS - OrderViewRS:O</code> <code>OrderRetrieveRS - OrderViewRS:O</code> <code>OrderChangeRQ:O</code> <code>OrderChangeRS - OrderViewRS:O</code> <code>OrderReshopRS(Reshop):M</code> <code>OrderReshopRS(Reprice):M</code>
-------	---	--

PaxRefID	A reference to a Passenger ID. Example: PAX1 Note: • PaxRefID is mandatory (M) in OrderRetrieveRS - OrderViewRS split ticketing scenarios. • PaxRefID is optional (O) in OrderReshopRS (Reshop) one-way scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : O • OrderCancelRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
----------	---	--

FarePriceType	The type of fair price applied to a Fare Detail. Example: Filed amount, net amount, or a sell amount. Note: FarePriceType is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	• AirShoppingRS:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):O
---------------	---	--

FareRefText	The fare reference key text. Example: PQ123456  FareRefText is returned in AirShoppingRS , but not OfferPriceRS or OrderViewRS (OrderCreateRS and OrderRetrieveRS).	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : O • OrderCancelRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-------------	---	--

FarePriceTypeCode	Indicates if the fare price provided is a filed amount, net amount, or a sell amount.  For 1TF, this is a mandatory element.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : O • OrderCancelRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-------------------	--	--

Price	The price of the fare. Note: Price is optional (O) in OrderReshopRS(Reshop) one-way scenarios.	• AirShoppingRS:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):O
-------	--	--

FareGroupID	The fare grouping unique identifier. Example: FG3 Note: - FareGroupID is optional (O) in OrderReshopRS (Reshop) one-way scenarios. - FareGroupID is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	- OrderCreateRQ : O - OrderCreateRS - OrderViewRS : M - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : M - OrderChangeRQ : O: - OrderChangeRS - OrderViewRS : M - OrderReshopRS (Reshop) : M - OrderReshopRS (Reprice) : O
-------------	---	--

7.5 OriginDestList

Version and Release Plan				
Version	Summary	Release Status	Pre-Live Date	Live Date
1.0		RELEASED		



The update of the optional and mandatory information for OriginDestList in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Details	Optional/Mandatory
----------	---------	--------------------

OriginDestList	Origin destination data list definition.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:O
----------------	--	---

OriginDest	The origin and destination airport and city pair which confines a passenger journey or an aircraft flight. • AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M • ServiceListRS : M
------------	---

DestCode	An IATA defined code identifying a city or station. Example: BNE • AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:M
----------	---

OriginCode	An IATA defined code which identifies the origin city or station. Example: ADL • AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M • ServiceListRS : M
------------	---

OriginDestID	The unique identifier of an origin destination. Example: ADLBNE • AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:O
--------------	--

PaxJourneyRefID	The unique identifier of a passenger journey. Example: F1	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:M
-----------------	---	---

7.6 PaxJourneyList

Version and Release Plan				
Version	Summary	Release Status	Pre-Live Date	Live Date
1.0		RELEASED		



The update of the optional and mandatory information for `PaxJourneyList` in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Details	Optional/Mandatory
PaxJourneyList	Journey data list definition.	• <code>AirShoppingRS</code> : M • <code>OfferPriceRS</code> : M • <code>OrderCreateRQ</code> : O • <code>OrderCreateRS</code> – <code>OrderViewRS</code> : M • <code>OrderCancelRS</code> – <code>OrderViewRS</code> : M • <code>OrderRetrieveR</code> S – <code>OrderViewRS</code> : M • <code>OrderChangeRQ</code> : O • <code>OrderChangeRS</code> – <code>OrderViewRS</code> : M • <code>OrderReshopRS</code> (Reshop) : M • <code>OrderReshopRS</code> (Reprice) : M • <code>ServiceListRS</code> : O

PaxJourney	A collection of segments which satisfies transportation of a passenger for a given origin and destination.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS – OrderViewRS : M • OrderCancelRS – OrderViewRS : M • OrderRetrieveR S – OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS – OrderViewRS : M • OrderReshopRS(Reshop) : M • OrderReshopRS(Reprice) : M • ServiceListRS : M
------------	--	--

Duration	The total journey time including the combined air time and connection times. In case of stopover, this may or may not include stopover durations. Example: PT1H35M Note: <code>Duration</code> is optional (O) in <code>OrderRetrieveRS - OrderViewRS</code> one-way and multi-city scenarios.	• <code>AirShoppingRS</code> : M • <code>OfferPriceRS</code> : M • <code>OrderCreateRQ</code> : O • <code>OrderCreateRS - OrderViewRS</code> : O • <code>OrderCancelRS - OrderViewRS</code> : O • <code>OrderRetrieveRS - OrderViewRS</code> : M • <code>OrderChangeRQ</code> : O • <code>OrderChangeRS - OrderViewRS</code> : O • <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M • <code>ServiceListRS</code> : O
----------	--	--

PaxJourneyID	The unique identifier of a passengers journey. Example: F2 i During <code>OrderCreateRS - OrderViewRS</code> , we are create an NDC response based on the supplier response, while it will be different in <code>OrderRetrieveRS - OrderViewRS</code> . It is not mandatory that all the fields should have matching values between the two different APIs.	• <code>AirShoppingRS : M</code> • <code>OfferPriceRS : M</code> • <code>OrderCreateRQ : O</code> • <code>OrderCreateRS - OrderViewRS : M</code> • <code>OrderCancelRS - OrderViewRS : M</code> • <code>OrderRetrieveRS - OrderViewRS : M</code> • <code>OrderChangeRQ : O</code> • <code>OrderChangeRS - OrderViewRS : M</code> • <code>OrderReshopRS (Reshop) : M</code> • <code>OrderReshopRS (Reprice) : M</code> • <code>ServiceListRS : O</code>
--------------	--	--

PaxSegmentRefID	A reference to a Passenger Segment ID. Example: S4 i During <code>OrderCreateRS - OrderViewRS</code>, we are creating NDC response just based on supplier response, while it will be different in <code>OrderRetrieveRS - OrderViewRS</code>. It is not mandatory that all the fields should have matching values between the two different APIs.	• <code>AirShoppingRS</code> : M • <code>OfferPriceRS</code> : M • <code>OrderCreateRQ</code> : O • <code>OrderCreateRS - OrderViewRS</code> : M • <code>OrderCancelRS - OrderViewRS</code> : M • <code>OrderRetrieveRS - OrderViewRS</code> : M • <code>OrderChangeRQ</code> : O • <code>OrderChangeRS - OrderViewRS</code> : M • <code>OrderReshopRS(Reshop)</code> : M • <code>OrderReshopRS(Reprice)</code> : M • <code>ServiceListRS</code> : O
-----------------	--	--

7.7 PaxList

Version and Release Plan				
Version	Summary	Release Status	Pre-Live Date	Live Date
1.0		RELEASE D		



The update of the optional and mandatory information for PaxList in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Details	Optional/Mandatory
----------	---------	--------------------

PaxList	Passenger data list definition. <i>i</i> Note: PaxList is optional (O) in OrderCreateRQ multi-city scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:M • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:M • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:O
---------	--	---

Pax	Any person except members of the crew carried or to be carried with the consent of the carrier, on board of any transport vehicle such as aircraft, train, bus, ship. Holds the attributes specific to a one booking.	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : M • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M • ServiceListRS : O
-----	---	---

Birthdate	The date of birth of the passenger. Example: 1973-12-06	• AirShoppingRS:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilit yRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:O
-----------	--	--

CitizenshipCountry Code	The ISO country code of the passengers' country of citizenship (can be extended by bilateral agreement in case of exceptions, example Kosovo). Examples: US, FR. Note: <code>CitizenshipCountryCode</code> is mandatory (M) in <code>OrderCreateRQ</code> multi-city scenarios.	• <code>OrderCreateRQ:O</code> • <code>OrderCancelRS - OrderViewRS:O</code> • <code>OrderRetrieveRS - OrderViewRS:O</code> • <code>SeatAvailabilityRS:O</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:O</code> • <code>OrderReshopRS(Reshop):O</code> • <code>OrderReshopRS(Reprice):O</code> • <code>ServiceListRS:O</code>
----------------------------	--	--

ContactInfoRefID	A reference to the contact information ID of a passenger. Example: CNCT-1 Note: ContactInfoRefID is mandatory (M) in OrderCreateRQ multi-city scenarios.	- AirShoppingRS : O - OfferPriceRS : O - OrderCreateRQ : O - OrderCreateRS - OrderViewRS : M - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : M - SeatAvailabilityRS : O - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : M - OrderReshopRS (Reshop) : M - OrderReshopRS (Reprice) : M - ServiceListRS : O
------------------	--	---

IdentityDoc	Any document which may be used to identify a person or verify aspects of a person's personal identity. If issued in a small, standard credit card size form, it is usually called an identity card. Some countries issue formal identity documents such as passports.  Note: IdentityDoc is mandatory (M) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• OrderCreateRQ : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderReshopRS (Reshop) : M • OrderReshopRS (Resprice) : M • ServiceListRS : O
Birthdate	The birth date of the passenger in their identity document. Example: 1989-12-29  Note: Birthdate is mandatory (M) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• OrderCreateRQ : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : O • OrderRetrieveRS - OrderViewRS : O • OrderReshopRS (Reshop) : O • OrderReshopRS (Resprice) : O • ServiceListRS : O

Individual	The person who's information listed in PaxList . Note: Individual is optional (O) in SeatAvailabilityRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M • ServiceListRS : O
------------	---	---

Birthdate	The individuals birth date. Example: 1973-12-06	• AirShoppingRS:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilit yRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:O
-----------	---	--

GenderCode	The code used to identify an individuals gender. Example: M	• AirShoppingRS:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilit yRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):O • ServiceListRS:O
------------	--	--

GivenName	A personal name given to the individual at birth and used before a family name. Also called first name. Example: JOHN. Note: - GivenName is optional (O) in OrderCreateRQ multi-city scenarios. - GivenName is optional (O) in SeatAvailabilityRS split ticketing scenarios.	- AirShoppingRS : O - OfferPriceRS : O - OrderCreateRQ : M - OrderCreateRS - OrderViewRS : M - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : M - SeatAvailabilityRS : M - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : M - OrderReshopRS (Reshop) : M - OrderReshopRS (Reprice) : M - ServiceListRS : O
-----------	---	---

IndividualID	The unique identifier of an individual. Example: PAX1 Note: Individual is optional (O) in SeatAvailabilityRS split ticketing scenarios.	- AirShoppingRS : O - OfferPriceRS : O - OrderCreateRQ : O - OrderCreateRS - OrderViewRS : M - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : M - SeatAvailabilityRS : M - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : M - OrderReshopRS (Reshop) : M - OrderReshopRS (Reprice) : M - ServiceListRS : O
MiddleName	An individual's middle name or initial. Example: G, GEORGE. Note: MiddleName is mandatory (M) in OrderCreateRQ multi-city scenarios.	- OrderCreateRQ : O - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : O - OrderReshopRS (Reshop) : O - OrderReshopRS (Reprice) : O

Surname	An individual's hereditary name(s) common to all members of a family. Also known as family name or last name. Excludes any potential suffix. Example: SMITH. Note: Surname is optional (O) in SeatAvailabilityRS split ticketing scenarios.	- AirShoppingRS : O - OfferPriceRS : O - OrderCreateRQ : M - OrderCreateRS - OrderViewRS : M - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : M - SeatAvailabilityRS : M - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : M - OrderReshopRS (Reshop) : M - OrderReshopRS (Reprice) : M - ServiceListRS : O
---------	---	---

TitleName	A word such as Mr., Mrs., Miss or Dr that is used before an individual's name to indicate their gender, profession or marital status.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M • ServiceListRS : O
-----------	--	---

PaxID	The unique identifier of a passenger. Example: PAX1  Note: PaxID is optional (O) in OrderCreateRQ multi-city scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:M • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:M
-------	---	---

PTC	The passenger type code which determines pricing. Examples: • ADT (Adult) • CHD (Child) • INF (Infant)  Note: PTC is optional (O) in OrderCreatorQ multi-city scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreatorQ:M • OrderCreatorRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:O
-----	--	---

7.8 PaxSegmentList

Version and Release Plan				
Version	Summary	Release Status	Pre-Live Date	Live Date
1.0		RELEASED		



The update of the optional and mandatory information for `PaxSegmentList` in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Details	Optional/Mandatory
PaxSegmentList	Passenger segment data list definition.	• <code>AirShoppingRS:M</code> • <code>OfferPriceRS:M</code> • <code>OrderCreateRQ:O</code> • <code>OrderCreateRS - OrderViewRS:M</code> • <code>OrderCancelRS - OrderViewRS:M</code> • <code>OrderRetrieveRS - OrderViewRS:M</code> • <code>SeatAvailabilityRS:M</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:M</code> • <code>OrderReshopRS(Reshop):M</code> • <code>OrderReshopRS(Reprice):M</code> • <code>ServiceListRS:O</code>

PaxSegment	Transportation of a passenger on a Dated Operating Segment.  Note: PaxSegment is optional (O) in OrderChangeRQ one-way scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:M • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:M
------------	---	---

Arrival	The action or process of the arriving of a transport vehicle in any place or location.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:M
---------	--	---

AircraftScheduledDateTime	The scheduled date and time of arrival of the aircraft at the terminal or departure gate at an airport. Example: 2023-12-30T08:35:00 Note: AircraftScheduledDateTime is optional (O) in SeatAvailabilityRS round-trip and multi-city scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:M
---------------------------	---	---

IATALocationCode	An IATA defined code identifying a city or station. Example: SYD	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:O
------------------	--	---

StationName	The name of the station. Example: Sydney Kingsford Smith Apt, AU.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:O
-------------	---	---

TerminalName	The name of the terminal. Example: 3	• AirShoppingRS:M • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilit yRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:O
--------------	--------------------------------------	--

CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy Class. Note: CabinType is mandatory (M) in OrderReshopRS(Reshop) one-way scenarios.	• AirShoppingRS:O • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):O • OrderReshopRS(Reshop, eprice):O • ServiceListRS:O
-----------	---	--

CabinTypeCode	The cabin type code as defined by the PADIS codeset. Example: Y	• AirShoppingRS:O • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):O • ServiceListRS:O
---------------	--	---

CabinTypeName	The name given to a cabin compartment. Example: First, Business, and Economy. Note: CabinTypeName is mandatory (M) in SeatAvailabilityRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O • ServiceListRS : O
---------------	--	---

DatedOperatingLeg	The nonstop operation of a transport vehicle between the departure station and the arrival station. Can be used for aircraft as well as other transport vehicles such as trains or busses.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M
-------------------	--	--

DatedOperatingLegID	The unique identifier of the DatedOperatingLeg . Example: S2	• AirShoppingRS :O • OfferPriceRS :O • OrderCreateRQ :O • OrderCreateRS - OrderViewRS :M • OrderCancelRS - OrderViewRS :M • OrderRetrieveRS - OrderViewRS :M • SeatAvailabilityRS :O • OrderChangeRQ :O • OrderChangeRS - OrderViewRS :M • OrderReshopRS (Reshop) :O • OrderReshopRS (Reprice) :O • ServiceListRS :M
---------------------	--	---

CarrierAircraftType	A carrier defined internal grouping of aircrafts with the same form, function, and specification.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:M
---------------------	---	---

CarrierAircraftTypeCode	The internal code used by a carrier to identify the type of aircraft. Example: 73M	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:M
-------------------------	---	---

CarrierAircraftTypeName	The internal name given by a carrier for a specific aircraft type. Example: Embraer 190 Note: CarrierAircraftTypeName is mandatory (M) in SeatAvailabilityRS split ticketing scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:O
-------------------------	--	---

ChangeofGaugeInd	When TRUE, indicates a Change of Gauge will take place between the current leg and that which immediately precedes it.	• OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O • ServiceListRS : O
------------------	--	--

DistanceMeasure	The total distance between the beginning and end stations of a leg. Note: DistanceMeasure is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O • ServiceListRS : O
-----------------	--	--

value	The value of <code>DistanceMeasure</code> . Example: 724 Note: <code>value</code> is optional (O) in <code>OrderRetrieve -</code> <code>OrderViewRS</code> split ticketing scenarios.	• <code>OrderCreateRQ:O</code> • <code>OrderCreateRS -</code> <code>OrderViewRS:M</code> • <code>OrderCancelRS -</code> <code>OrderViewRS:M</code> • <code>OrderRetrieveRS</code> <code>- OrderViewRS:M</code> • <code>SeatAvailabilit</code> <code>yRS:O</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS -</code> <code>OrderViewRS:M</code> • <code>OrderReshopRS(R</code> <code>eshop):O</code> • <code>OrderReshopRS(R</code> <code>eprice):O</code> • <code>ServiceListRS:O</code>
-------	---	--

UnitCode	The unit of measurement for <code>DistanceMeasure</code> . Example: Miles Note: <code>UnitCode</code> is optional (O) in <code>OrderRetrieve</code> - <code>OrderViewRS</code> split ticketing scenarios.	• <code>OrderCreateRQ:O</code> • <code>OrderCreateRS - OrderViewRS:M</code> • <code>OrderCancelRS - OrderViewRS:M</code> • <code>OrderRetrieveRS - OrderViewRS:M</code> • <code>SeatAvailabilityRS:O</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:M</code> • <code>OrderReshopRS(R eshop):O</code> • <code>OrderReshopRS(R eprice):O</code> • <code>ServiceListRS:O</code>
----------	---	--

Dep	The action or process of leaving a transport vehicle from any place or location.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:M
-----	--	---

AircraftScheduledDateTime	The scheduled date and time of departure of the aircraft at the terminal or departure gate at an airport. Example: 2023-12-29T06:00:00 Note: AircraftScheduledDateTime is mandatory (M) in SeatAvailabilityRS split ticketing scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:M
---------------------------	--	---

IATALocationCode	An IATA defined code identifying a city or station. Example: ADL	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:O
------------------	--	---

OnGroundDuration	The total time the aircraft remains on the ground between the current leg and the leg which immediately precedes it.	• AirShoppingRS:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):O • ServiceListRS:O
------------------	---	---

StationName	The name of the station. Example: Adelaide International, AU	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:O
-------------	--	---

TerminalName	The name of the terminal. Example: 1 Note: TerminalName is optional (O) in OfferPriceRS:one-way scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):O • ServiceListRS:O
--------------	--	---

Duration	The total segment time including the combined air time and connection times of any legs. Example: PT2H10M  Note: Duration is mandatory (M) in SeatAvailabilityRS split ticketing scenarios.	- AirShoppingRS:M - OfferPriceRS:M - OrderCreateRQ:O - OrderCreateRS - OrderViewRS:M - OrderCancelRS - OrderViewRS:M - OrderRetrieveRS - OrderViewRS:M - SeatAvailabilityRS:O - OrderChangeRQ:O - OrderChangeRS - OrderViewRS:M - OrderReshopRS(R eshop):M - OrderReshopRS(R eprice):M - ServiceListRS:M
----------	---	---

MarketingCarrierInfo	The commercial designation under which a Dated Operating Segment can be booked, either under the operating carrier's designator or that of another carrier (codeshare).	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:M
----------------------	--	---

CarrierDesigCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example QF	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:M
------------------	---	---

CarrierName	The commercial name of the carrier. Example: Qantas Airways • AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:O
-------------	--

MarketingCarrierFlightNumberText	The numerical designation of a flight as it is marketed by a carrier. Example: 730	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:M
----------------------------------	--	---

MarketingCarrierRBD	The reservation booking designator. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. Example: 'J' for Business Class Premium, 'D' for Business Disc.	• AirShoppingRS : O • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • SeatAvailabilityRS : O • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M • ServiceListRS : O
---------------------	---	---

RBDCode	A code used to identify a particular RBD. Example: P, J, W, M.	• AirShoppingRS:O • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilit yRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):M • ServiceListRS:O
---------	---	--

value	The value of <code>RBDCode</code> . Example: Q	• <code>AirShoppingRS:O</code> • <code>OfferPriceRS:M</code> • <code>OrderCreateRQ:O</code> • <code>OrderCreateRS - OrderViewRS:M</code> • <code>OrderCancelRS - OrderViewRS:M</code> • <code>OrderRetrieveRS - OrderViewRS:M</code> • <code>SeatAvailabilityRS:O</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:M</code> • <code>OrderReshopRS(R eshop):O</code> • <code>OrderReshopRS(R eprice):M</code> • <code>ServiceListRS:O</code>
-------	--	---

Name	The name of the MarketingCarrierRBD . Example: ECONOMY	• AirShoppingRS:O • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRS - OrderViewRS:O • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):O • ServiceListRS:O
------	--	---

OperatingCarrierInfo	An operation between board point and any subsequent off point within the same flight designator. Could be one or more legs. Can also be used for other transport vehicles such as trains or busses.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:O
----------------------	--	---

CarrierDesigCode	Airline code assigned to a carrier. Either ICAO-defined 3-character code or IATA-defined 2-character code. Example: QF	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M • ServiceListRS:M
------------------	--	---

CarrierName	The commercial name of the carrier. Example: Qantas Airways • AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:O
-------------	--

Disclosure	Disclosed information of OperatingCarrierInfo. Note: Disclosure is optional (O) in AirShoppingRS one-way scenarios.	- AirShoppingRS:M - OfferPriceRS:M - OrderCreateRQ:O - OrderCreateRS - OrderViewRS:O - OrderCancelRS - OrderViewRS:O - OrderRetrieveRS - OrderViewRS:O - SeatAvailabilityRS:O - OrderChangeRQ:O - OrderChangeRS - OrderViewRS:O - OrderReshopRS(R eshop):O - OrderReshopRS(R eprice):O - ServiceListRS:O
------------	---	---

Desc	The description of information for <code>OperatingCarrierInfo</code>. Note: <code>Desc</code> is optional (O) in <code>AirShoppingRS</code> one-way scenarios.	• <code>AirShoppingRS:M</code> • <code>OfferPriceRS:M</code> • <code>OrderCreateRQ:O</code> • <code>OrderCreateRS - OrderViewRS:O</code> • <code>OrderCancelRS - OrderViewRS:O</code> • <code>OrderRetrieveRS - OrderViewRS:O</code> • <code>SeatAvailabilityRS:O</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:O</code> • <code>OrderReshopRS(Reshop):O</code> • <code>OrderReshopRS(Reprice):O</code> • <code>ServiceListRS:O</code>
------	---	---

DescText	The text description of <code>OperatingCarrierInfo</code>. Example: ALLIANCE AIRLINES Note: <code>DescText</code> is optional (O) in <code>AirShoppingRS</code> one-way scenarios.	• <code>AirShoppingRS:M</code> • <code>OfferPriceRS:M</code> • <code>OrderCreateRQ:O</code> • <code>OrderCreateRS - OrderViewRS:O</code> • <code>OrderCancelRS - OrderViewRS:O</code> • <code>OrderRetrieveRS - OrderViewRS:O</code> • <code>SeatAvailabilityRS:O</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:O</code> • <code>OrderReshopRS(R eshop):O</code> • <code>OrderReshopRS(R eprice):O</code> • <code>ServiceListRS:O</code>
----------	---	---

OperatingCarrierFlightNumberText	The numerical designation of a flight as it is operated by a carrier. Example: 510	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:O
---	---	---

OperatingCarrierRBD	The reservation booking designator code. A categorisation used to facilitate access to inventory, application of filed fares, and to identify cabin entitlement. Identified using a single alpha character. Example: 'J' for Business Class Premium, 'D' for Business Disc. Note: OperatingCarrierRBD is optional (O) in OrderCreateRS – OrderViewRS and OrderRetrieveRS – OrderViewRS split ticketing scenarios.	• OrderCreateRQ : O • OrderCreateRS – OrderViewRS : M • OrderCancelRS – OrderViewRS : M • OrderRetrieveRS – OrderViewRS : M • SeatAvailabilityRS : O • OrderChangeRQ : O • OrderChangeRS – OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : O • ServiceListRS : O
---------------------	--	--

RBDCode	A code used to identify a particular RBD. Example: P, J, W, M. Note: RBDCode is optional (O) in OrderCreateRS - OrderViewRS and OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):O • ServiceListRS:O
---------	---	--

value	The value of <code>RBDCode</code> . Example: N Note: <code>value</code> is optional (O) in <code>OrderCreateRS - OrderViewRS</code> and <code>OrderRetrieveRS - OrderViewRS</code> split ticketing scenarios.	• <code>OrderCreateRQ:O</code> • <code>OrderCreateRS - OrderViewRS:M</code> • <code>OrderCancelRS - OrderViewRS:M</code> • <code>OrderRetrieveRS - OrderViewRS:M</code> • <code>SeatAvailabilityRS:O</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:M</code> • <code>OrderReshopRS(R eshop):O</code> • <code>OrderReshopRS(R eprice):O</code> • <code>ServiceListRS:O</code>
-------	---	--

PaxSegmentID	The unique identifier of a passenger segment. Example: S4	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • SeatAvailabilityRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):M • OrderReshopRS(Reprice):M • ServiceListRS:M
--------------	--	---

SecureFlightInd	When TRUE, this segment is subject to US TSA 'Secure Flight' passenger prescreening program. Example: True Note: SecureFlightInd is mandatory (M) in SeatAvailabilityRS split ticketing scenarios.	• AirShoppingRS :O • OfferPriceRS :M • OrderCreateRQ :O • OrderCreateRS - OrderViewRS :M • OrderCancelRS - OrderViewRS :M • OrderCancelRS - OrderViewRS :M • OrderRetrieveRS - OrderViewRS :M • SeatAvailabilityRS :O • OrderChangeRQ :O • OrderChangeRS - OrderViewRS :M • OrderReshopRS (Reshop) :O • OrderReshopRS (Reprice) :O • ServiceListRS :O
-----------------	---	---

SegmentTypeCode	Defines the operational flight segment type (e.g. Open, Passive, Service). Encoding Scheme: IATA PADIS 1.4 Codeset FST - Flight Segment Type. Example: HK <i>i</i> Note: SegmentTypeCode is mandatory (M) in SeatAvailabilityRS split ticketing scenarios.	- AirShoppingRS:M - OfferPriceRS:M - OrderCreateRQ:O - OrderCreateRS - OrderViewRS:M - OrderCancelRS - OrderViewRS:M - OrderRetrieveRS - OrderViewRS:M - SeatAvailabilityRS:O - OrderChangeRQ:O - OrderChangeRS - OrderViewRS:M - OrderReshopRS(R eshop):O - OrderReshopRS(R eprice):O - ServiceListRS:O
-----------------	---	---

7.9 PriceClassList

Version and Release Plan				
Version	Summary	Release Status	Pre-Live Date	Live Date
1.0		RELEASED		



The update of the optional and mandatory information for `PriceClassList` in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Details	Optional/Mandatory
PriceClassList	Price class data list definition.	• <code>AirShoppingRS:M</code> • <code>OfferPriceRS:M</code> • <code>OrderCreateRQ:O</code> • <code>OrderCreateRS - OrderViewRS:M</code> • <code>OrderCancelRS - OrderViewRS:M</code> • <code>OrderRetrieveRS - OrderViewRS:M</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:M</code> • <code>OrderReshopRS(R eshop):M</code> • <code>OrderReshopRS(R eprice):M</code>

PriceClass	A price point within a particular Cabin Type (sometimes referred to as 'Fare Families').	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M
------------	--	--

CabinType	The type of compartment of an aircraft, offering specific services. Example: Business Class, Economy Class. Note: CabinType is optional (O) in OrderCreateRS - OrderViewRS and OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
-----------	--	--

CabinTypeCode	The cabin type code as defined by the PADIS codeset. Example: 1, 2, 3, 4 Note: CabinTypeCode is optional (O) in OrderCreatorRS - OrderViewRS and OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreatorRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
---------------	--	---

CabinTypeName	The name given to a cabin compartment. Example: First, Business, and Economy. Note: CabinTypeName is optional (O) in OrderCreateRS - OrderViewRS and OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O
---------------	--	--

Code	The price class code. Example: 1, ABC.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M
------	--	--

Desc	The description of the price class.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):O
------	-------------------------------------	--

DescText	The description text value of the price class. Note: DescText is mandatory (M) in OrderChangeRS - OrderViewRS one-way scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):O
----------	---	--

MarkupStyleText	The mark-up style of the description text. Example: CABIN	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:O • OrderRetrieveRS - OrderViewRS:O • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:O • OrderReshopRS(R eshop):O • OrderReshopRS(R eprice):O
-----------------	--	--

Name	The price class name. Example: SUPERSAVER	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(R eshop):M • OrderReshopRS(R eprice):M
------	---	--

PriceClassID	The unique identifier of a price class. Example: RedeDeal-1	• AirShoppingRS : M • OfferPriceRS : M • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : M • OrderReshopRS (Reprice) : M
--------------	---	--

7.10 ServiceDefinitionList



The update of the optional and mandatory information for `ServiceDefinitionList` in split ticketing reshop, reprice, and reissue scenarios is in progress.

Elements	Description	Optional/Mandatory
----------	-------------	--------------------

ServiceDefinitionList	Service definition data list definition.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O: • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop) :O • OrderReshopRS(Reprice) :O • ServiceListRS:O
-----------------------	--	---

ServiceDefinition	The description and characteristics of a non-flight product or service that can be separately sold and delivered. Example: Bag, seat, and meal on a flight.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):O • OrderReshopRS(Reprice):O • ServiceListRS:M
-------------------	--	---

Desc	The description of the service Note: Desc is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):O • OrderReshopRS(Reprice):O • ServiceListRS:M
------	---	---

DescText	The description text value of the service. Example: SEAT ASSIGNMENT Note: DescText is optional (O) in OrderCreateRS - OrderViewRS and OrderRetrieveRS - OrderViewR split ticketing scenarios.	• AirShoppingRS:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):O • OrderReshopRS(Reprice):O • ServiceListRS:O
----------	---	---

Name	The service name. Example: Lounge Pass Note: Name is optional (O) in OrderCreateRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS:O • OfferPriceRS:O • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):O • OrderReshopRS(Reprice):O • ServiceListRS:M
------	---	---

OwnerCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF Note: OwnerCode is optional (O) in OrderCreateRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS : O • OfferPriceRS : O • OrderCreateRQ : O • OrderCreateRS - OrderViewRS : M • OrderCancelRS - OrderViewRS : M • OrderRetrieveRS - OrderViewRS : M • OrderChangeRQ : O • OrderChangeRS - OrderViewRS : M • OrderReshopRS (Reshop) : O • OrderReshopRS (Reprice) : O • ServiceListRS : O
-----------	---	---

RFIC	The reason for issuance code. Examples: • A (Air Transportation) • C (Baggage) • E (Airport Services) • F (Merchandise) • G (In-flight Services) Note: RFIC is optional (O) in <code>OrderRetrieveRS - OrderViewRS</code> split ticketing scenarios.	• <code>AirShoppingRS:M</code> • <code>OfferPriceRS:M</code> • <code>OrderCreateRQ:O</code> • <code>OrderCreateRS - OrderViewRS:M</code> • <code>OrderCancelRS - OrderViewRS:M</code> • <code>OrderRetrieveRS - OrderViewRS:M</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:M</code> • <code>OrderReshopRS(Reshop):O</code> • <code>OrderReshopRS(Reprice):O</code> • <code>ServiceListRS:O</code>
------	--	--

RFISC	The reason for issuance sub code. Examples: • OCC (First Checked Bag) • OB1 (In-flight Entertainment) • OBX (Lounge) Note: RFISC is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:M • OrderRetrieve - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop) :O • OrderReshopRS(Reprice)):O • ServiceListRS:O
-------	--	--

ServiceCode	An airline specific service code which can be associated with the reason for issuance sub code. Sample implementer encoding: • XLEG: Extra Leg Room Seat • XBAG: Extra Bag	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):O • OrderReshopRS(Reprice):O • ServiceListRS:O
-------------	--	---

ServiceDefinitionAssociation	A choice to determine if the information of a service definition needs to be extended with specific bag or seat characteristics, or whether the service definition is used as a bundle in further service definitions. Note: <code>ServiceDefinitionAssociation</code> is optional (O) in <code>OrderRetrieveRS - OrderViewRS</code> split ticketing scenarios.	• <code>AirShoppingRS:M</code> • <code>OfferPriceRS:M</code> • <code>OrderCreateRQ:O</code> • <code>OrderCreateRS - OrderViewRS:O</code> • <code>OrderCancelRS - OrderViewRS:M</code> • <code>OrderRetrieveRS - OrderViewRS:M</code> • <code>OrderChangeRQ:O</code> • <code>OrderChangeRS - OrderViewRS:M</code> • <code>OrderReshopRS(Reshop):O</code> • <code>OrderReshopRS(Reprice):O</code> • <code>ServiceListRS:O</code>
------------------------------	--	--

BaggageAllowanceRefID	A reference to a Baggage Allowance ID in a service. Example: BA5515CA50-CO. Note: BaggageAllowanceRef ID is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:O • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):O • OrderReshopRS(Reprice):O • ServiceListRS:O
-----------------------	---	---

ServiceBundle	Where multiple services are offered for sale as a single service. Note: ServiceBundle is optional (O) in OrderCancelRS - OrderViewRS round-trip scenarios.	- OrderCreateRQ : O - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : O - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : O - OrderReshopRS (Reshop) : O - OrderReshopRS (Reprice) : O - ServiceListRS : O
MaximumServiceQty	The maximum number of service definitions that may be selected in the bundle. Note: MaximumServiceQty is optional (O) in OrderCancelRS - OrderViewRS round-trip scenarios.	- OrderCreateRQ : O - OrderCancelRS - OrderViewRS : M - OrderRetrieveRS - OrderViewRS : O - OrderChangeRQ : O - OrderChangeRS - OrderViewRS : O - OrderReshopRS (Reshop) : O - OrderReshopRS (Reprice) : O - ServiceListRS : O

ServiceDefinitionID	The service definitions unique identifier. Example: BASRVA417CF93-CO Note: ServiceDefinitionID is optional (O) in - OrderRetrieveRS - - OrderViewRS one-way scenarios.	- OrderCreateRQ : O - AirShoppingRS : M - OfferPriceRS : M - OrderCreateRS - - OrderViewRS : O - OrderCancelRS - - OrderViewRS : M - OrderRetrieveRS - - OrderViewRS : M - OrderChangeRQ : O - OrderChangeRS - - OrderViewRS : M - OrderReshopRS (Reshop) : O - OrderReshopRS (Reprice) : O - ServiceListRS : M
---------------------	--	---

ValidatingCarrierCode	An airline code assigned to a carrier. Either an ICAO-defined 3-character code or an IATA-defined 2-character code. Example: QF Note: ValidatingCarrierCode is optional (O) in OrderRetrieveRS - OrderViewRS split ticketing scenarios.	• AirShoppingRS:M • OfferPriceRS:M • OrderCreateRQ:O • OrderCreateRS - OrderViewRS:M • OrderCancelRS - OrderViewRS:M • OrderRetrieveRS - OrderViewRS:M • OrderChangeRQ:O • OrderChangeRS - OrderViewRS:M • OrderReshopRS(Reshop):O • OrderReshopRS(Reprice):O • ServiceListRS:M
-----------------------	--	---

8 IATA 18.6 - Assets

IATA 18.6 - Assets		
		
 Click on the zip file above to download all XSD files as a bundle.		
Selling APIs	Request	Response
AirShopping		

IATA 18.6 - Assets		
OfferPrice		
OrderCreate		
SeatAvailability		

IATA 18.6 - Assets		
OrderRetrieve		
OrderCancel		
Servicing APIs	Request	Response
OrderReshop		

IATA 18.6 - Assets		
OrderChange		
ServiceList		



TPConnects Technologies

27th Floor, The Baygate Tower, Al Mustaqbal St - Business Bay

PO Box 127615- Dubai-UAE

+971 (04)4329383 | support@tpconnects.com

www.tpconnects.com