

TRIPJACK

AIR API DOCUMENTATION

This document, which contains confidential material, is private and confidential and is the property and copyright of Tripjack. No part of this document may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, chemical, photocopy, recording or otherwise without the prior written permission of Tripjack.

Revision History

Version	Date	Revisions
1.0	19-09-2019	Document Creation
1.1	24-01-2020	Revised new few API's (SSR,Release PNR)
1.2	06-02-2020	Enhanced Search & Book API
1.3	06-09-2020	Amendment API (Cancellation,GetCharges)
1.4	24-04-2021	Emergency ContactDetails (Review,Book)
1.4	30-08-2021	Removed unused Status from Booking Detail & Cancellation Amendment & Fare Rule
1.5	18-10-2021	1. Account Code of fare in Search,Review 2. Booking Detail with Pax pricing 3. Booking Detail with Traveller Status 4. Detailed Error Codes for Confirm-Book
1.6	29-10-2021	1. Add restriction on preferredAirline in the search API. 2. Added information about dobe in the AirReview response.
1.7.0	21-04-2022	Student & Senior Citizen Fare Integration
1.7.1	12-05-2022	Addition of Trip Additional Info in search
1.7.2	21-07-2022	Provide GDS PNR
1.7.3	14-11-2022	Addition of Messages in Review Response
1.7.4	29-12-2022	Fare Rule Request changes Get User Balance details
1.7.5	10-12-2022	Fare Rule Information in Review Response
1.8	23-03-2023	Fare Rule V2 API
1.8.1	25-11-2024	Q & A section updation
1.8.2	26-02-2025	Added TJ_FLEX fare type Click Here

Version 1.8.2

- Added TJ_FLEX fare type

Version 1.8.1

- Updated the Q & A section

Version 1.8

- Switching from V1 fare rule to V2. Sample request and response- [Link](#)

Version 1.7.5

- Post review, Fare Rule Added to Review Response - [Link](#)

Version 1.7.4

- Post review, Fare Rule Request to have BookingId instead of priceId - [Link](#)
- To get user Balance Details. [Link](#)

Version 1.7.3 (Updates)

- Review request response with messages - [Link](#)

Version 1.7.2 (Updates)

- Booking Details request response without GDS PNR- [Link](#)
- Booking Details request response with GDS PNR-[Link](#)
- Booking Details (with Pax pricing) request response without GDS PNR-[Request](#), [Response](#)
- Booking Details (with Pax pricing) request response with GDS PNR-[Request](#), [Response](#)

Version 1.7.1 (Updates)

- Search request and response with new “tai” trip additional information- Sample [Link](#)

Version 1.7.0 (Updates)

- Search request and response for new fares- Sample [Link](#)
- Review Response with new “dc” (DocumentConditions) - Sample [Link](#)
- Book requests for new fares - Sample [Link](#)
- Booking details request and response- [Link](#)

Version 1.5 (Updates)

- Corporate/Retail Code in totalPriceList in Search and Review - Sample Logs : [Link](#)
- Booking Detail with Pax Level Pricing - Sample Logs - [Link](#)
- Booking Detail with Traveler Status - Sample Logs - [Link](#)

Version 1.4 (Updates)

- Emergency Contact Detail (Review,Book)
- Sample Logs : [Link](#)

Version 1.3 (Updates)

- Amendment API (Cancellation,GetCharges)

Version 1.2 (Updates)

- Enhanced Search and Book (Without Payment Medium)

Version 1.1 (Updates)

- Special Return
- SSR (Baggage,Meal,Seat & Extra Services)
- Release PNR

Table of Contents:

1. Introduction
2. Sample Code
3. Service Definition
4. Web Service Flow
5. Flight Service
6. Common Object Structure
7. Tax Codes and Description
8. Error Codes and Message
9. UAT Certification - (Test Cases)
10. FAQ

Postman Collection

Link to Download Postman Collection :

<https://www.getpostman.com/collections/3fe3424de3e8118a6432>

Step : 1 : Download the content from Postman Link and save with extension (.json)

Step : 2 : Export the json file to Postman Application

Step : 3: Create Environment File with “apikey” (shared user api key) and host (apitest.tripjack.com).

Sample Format for Certification logs - [Link](#)

1. Introduction

Tripjack API exports a REST based web service over HTTPS, using JSON to encode service request and response data. We use an SSL secured channel to transmit data from client to the service. It is intended specially for developers and other team members to help them know how the Air API Service works. This guide provides all the required information to integrate this TRIPJACK.COM Air API.

All the steps right from search, to review, seat sell, additional ssr, fare rules and final booking are sequentially followed by using a shared api key header ("apikey").

apikey – Your sandbox or production API key

2. Sample Code

1. Java

```
protected String getAPIResponse(String request, String apiURL) {
    Proxy proxy = null;
    String responseBody = null;
    URL endpoint = null;
    try {
        endpoint = new URL(apiURL);
        URLConnection urlConnection = endpoint.openConnection(proxy);
        setHeaderParams(urlConnection);
        setPostData(urlConnection, request);
        urlConnection.connect();
        responseBody = getResponseContent(urlConnection);
    } catch (IOException e) {
        e.printStackTrace();
    }
    return responseBody;
}

private void setHeaderParams(URLConnection urlConnection) {
    urlConnection.setRequestProperty("apikey", "xxxx-yyy-zzzz");
    urlConnection.setRequestProperty("Content-Type", "application/json");
}

private void setPostData(URLConnection urlConnection, String requestBody) throws IOException {
    urlConnection.setDoOutput(true);
    OutputStream outputStream = urlConnection.getOutputStream();
    OutputStreamWriter osw = new OutputStreamWriter(outputStream);
    osw.write(requestBody, 0, requestBody.length());
    osw.flush();
    osw.close();
}
```

2. Python

```
import requests
import json

apikey = '*****-****-***-****-****'
api_url = "https://apitest.tripjack.com"
headers = {"apikey": apikey, "Content-Type": "application/json"}

def doSearch(base_url, apikey, endpoint, search_request):
    print("searching flight list...")
    url = api_url + endpoint
    response = requests.post(url, data=json.dumps(search_request), headers=headers)
    if response.ok:
        print(response.json())
        # parse search_response
        return response

if __name__ == "__main__":
    search_request = {
        "searchQuery": {
            "cabinClass": "ECONOMY",
            "paxInfo": {
                "ADULT": "1",
                "CHILD": "1",
                "INFANT": "1"
            },
            "routeInfos": [
                {
                    "fromCityOrAirport": {
                        "code": "DEL"
                    },
                    "toCityOrAirport": {
                        "code": "BOM"
                    },
                    "travelDate": "2020-11-19"
                }
            ],
            "searchModifiers": {
            }
        }
    }
    doSearch(api_url, apikey, '/fms/v1/air-search-all', search_request)
```

3. PHP

```
function callAPI($method, $url, $data){
    $curl = curl_init();
    switch ($method){
        case "POST":
            curl_setopt($curl, CURLOPT_POST, 1);
            if ($data)
                curl_setopt($curl, CURLOPT_POSTFIELDS, $data);
            break;
        default:
            if ($data)
                $url = sprintf("%s?%s", $url, http_build_query($data));
    }
    // OPTIONS:
    curl_setopt($curl, CURLOPT_URL, $url);
    curl_setopt($curl, CURLOPT_HTTPHEADER, array(
        'apikey: 111111111111111111111111',
        'Content-Type: application/json',
    ));
    curl_setopt($curl, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl, CURLOPT_HTTPAUTH, CURLAUTH_BASIC);
    // EXECUTE:
    $result = curl_exec($curl);
    if(!$result){die("Connection Failure");}
    curl_close($curl);
    return $result;
}
```


3. Service Definition

Below are the available service URL & definition:-

UAT Environment:

Protocol : https

Domain: apitest.tripjack.com

Service Name	URL
Search Service	https://apitest.tripjack.com/fms/v1/air-search-all
FareRule Service	https://apitest.tripjack.com/fms/v2/farerule
Review Service	https://apitest.tripjack.com/fms/v1/review
Book Service (Instant Ticket)	https://apitest.tripjack.com/oms/v1/air/book
Book Service (Hold)	https://apitest.tripjack.com/oms/v1/air/book
Confirm Fare Before Ticket	https://apitest.tripjack.com/oms/v1/air/fare-validate
Book Service (Confirm Hold Book)	https://apitest.tripjack.com/oms/v1/air/confirm-book
Booking Details	https://apitest.tripjack.com/oms/v1/booking-details
Release PNR(Hold)	https://apitest.tripjack.com/oms/v1/air/unhold
Seat Service	https://apitest.tripjack.com/fms/v1/seat
Get Amendment Charges	https://apitest.tripjack.com/oms/v1/air/amendment/amendment-charges
Submit Amendment	https://apitest.tripjack.com/oms/v1/air/amendment/submit-amendment
Amendment Details	https://apitest.tripjack.com/oms/v1/air/amendment/amendment-details
User Detail	https://apitest.tripjack.com/ums/v1/user-detail

Note : End point never ends with “/” otherwise System will give an error.

Production Environment:

Protocol : https


Domain: tripjack.com

Service Name	URL
Search Service	https://tripjack.com/fms/v1/air-search-all
FareRule Service	https://tripjack.com/fms/v2/farerule
Review Service	https://tripjack.com/fms/v1/review
Book Service (Instant Ticket)	https://tripjack.com/oms/v1/air/book
Book Service (Hold)	https://tripjack.com/oms/v1/air/book
Confirm Fare Before Ticket	https://tripjack.com/oms/v1/air/fare-validate
Book Service (Confirm Hold Book)	https://tripjack.com/oms/v1/air/confirm-book
Booking Details	https://tripjack.com/oms/v1/booking-details
Release PNR(Hold)	https://tripjack.com/oms/v1/air/unhold
Seat Service	https://tripjack.com/fms/v1/seat
Get Amendment Charges	https://tripjack.com/oms/v1/air/amendment/amendment-charges
Submit Amendment	https://tripjack.com/oms/v1/air/amendment/submit-amendment
Amendment Details	https://tripjack.com/oms/v1/air/amendment/amendment-details
User Detail	https://apitest.tripjack.com/ums/v1/user-detail

Note : End point never ends with “/” otherwise System will give an error.

4. Web Service flow


1. Search (Without SSR)

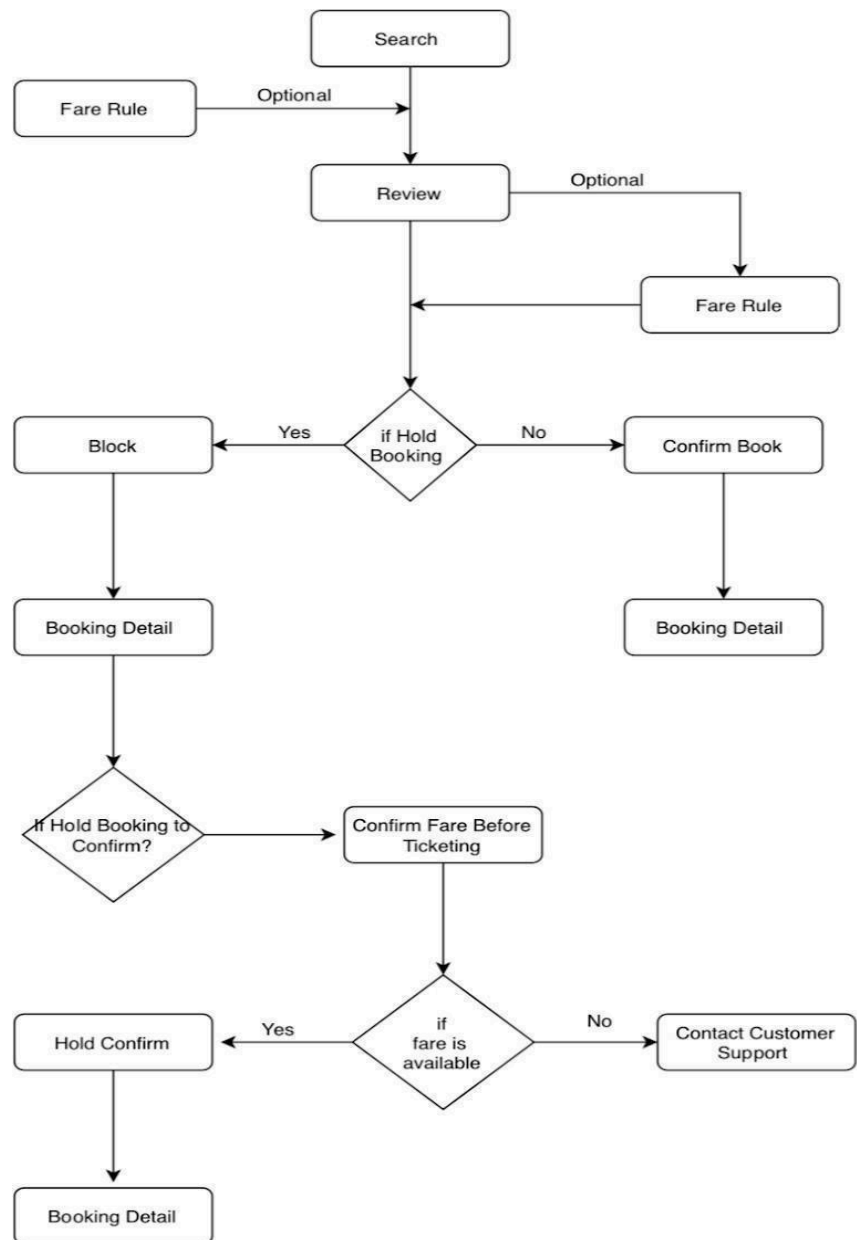

* Booking Detail Should be called elapsed 5 seconds

* Hold Booking will be decided from review response


2. Search (With SSR)

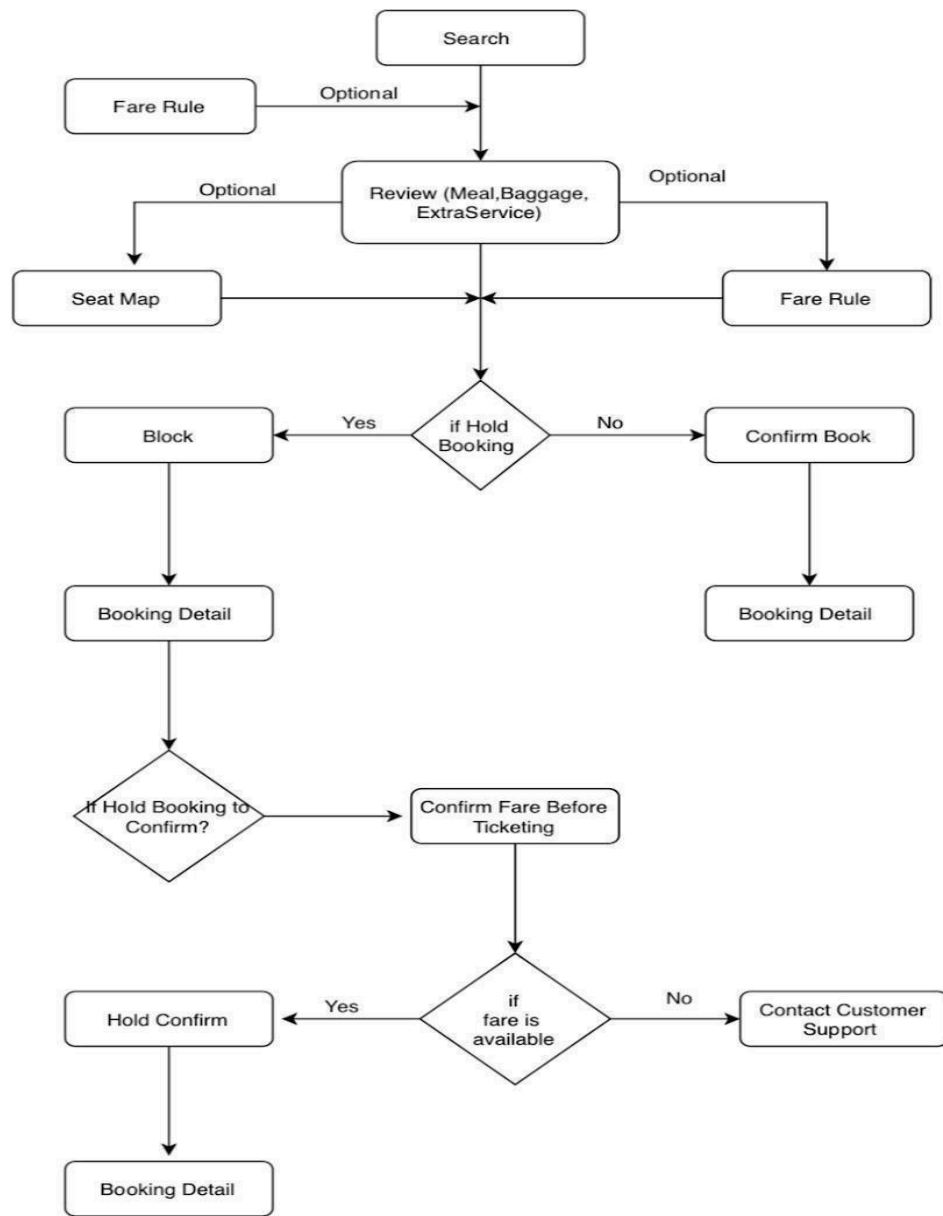

* Booking Detail Should be called elapsed 5 seconds

* Hold Booking will be decided from review response

3. CANCELLATION AMENDMENT API

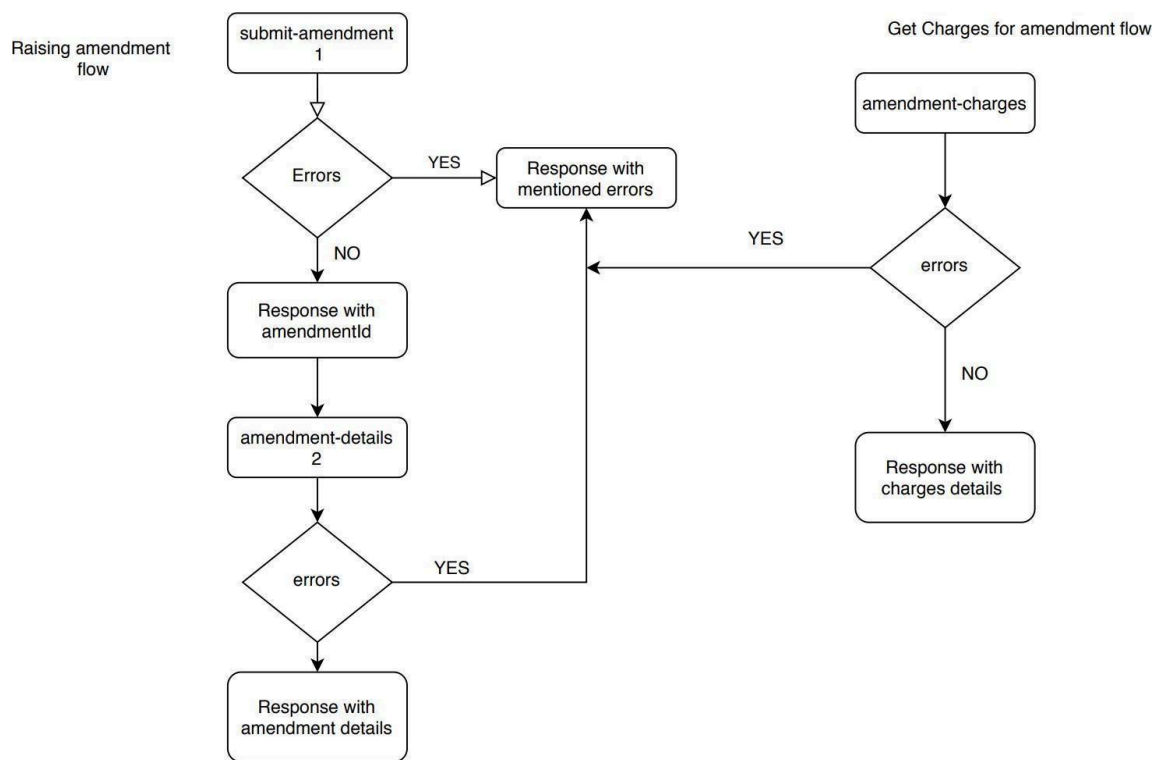

5.FLIGHT SERVICE

1. SEARCH
2. REVIEW
3. FARE RULE
4. SEAT MAP
5. BOOKING API
 - a. INSTANT BOOK
 - b. HOLD
 - c. CONFIRM FARE BEFORE TICKET
 - d. CONFIRM-BOOK (TICKETING AFTER HOLD)
6. RETRIEVE BOOKING
 - a. Retrieve Booking
 - b. Retrieve Booking with Pax Pricing
7. RELEASE PNR
8. AMENDMENT API
 - a. Get Charges
 - b. Cancellation Amendment
9. User Detail API

Complete Booking Log : (2Adult -1 Child -1 Infant)

[Click Here to Take Complete Flow - Sample Logs](#)

5.1 SEARCH

Availability Types:

The following section describes the availability method exposed via the API to search.

This method provides availability information with the cheapest fare option available. The request includes a single query for all cases (Oneway, Return, Multi-city). When the request is requested, the system starts validating and the search engine starts searching for the search query and will **return the best price options available SearchResults from all suppliers.**

API : air-search-all
Request : Search Request
Response : Search Result (All Supplier Search Results)


URL: https://apitest.tripjack.com/fms/v1/air-search-all

Request Method: POST

Samples : [All Examples for Search \(Oneway, Return, Multi-city\)](#)

*Please change dates in sample request

Sample Request View :

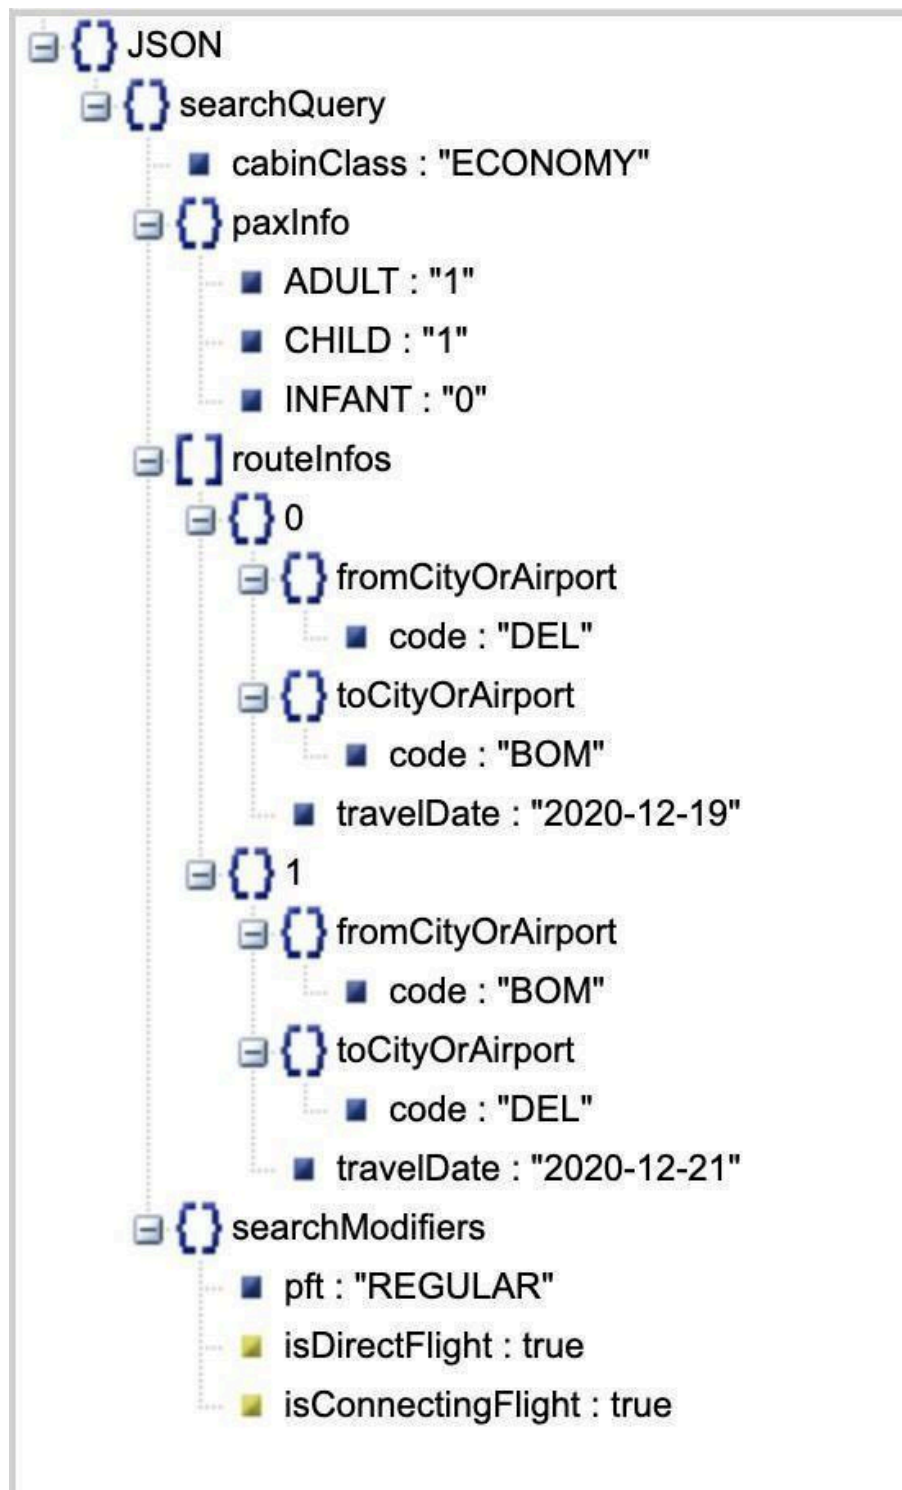

* Travel Date Format : YYYY-MM-DD

CabinClass Allowed values: (Default Value : ECONOMY)

1. ECONOMY
2. PREMIUM_ECONOMY
3. BUSINESS
4. FIRST

Route Info

1. Incase of **Domestic One Way or International One Way** - 1 route info with fromCityOrAirport and toCityOrAirport along with travelDate should be there.
2. Incase of **Domestic Return or International Return** - 2 route info with fromCityOrAirport and toCityOrAirport along with travelDate should be there.
3. InCase of **Domestic Multi-City or International Multi-City** - 2-6 route infos with fromCityOrAirport and toCityOrAirport along with travelDate should be there.


*** Travel Date Format : YYYY-MM-DD**

Search Modifiers :

1. If **Only Direct Flight** Required then isDirectFlight : true and isConnectingFlight : false
2. If **Only Connecting Flight** Required then isConnectingFlight : true and isDirectFlight : false
3. If **Both Direct & Connecting Flight** Required - then fields are not required to send or both should be true in request.
4. If Student or senior citizen fares are required, set “pft” as STUDENT or SENIOR_CITIZEN respectively.
5. If other fares are required, “pft” is not required to send or set it as REGULAR. If pft is empty, it is considered as REGULAR by default.

Preferred Carrier : [Sample Request Link](#)

1. preferredAirline (field) - which supports multiple airline codes as preferred airline to search.(List<String>). Max size of an array/List will be 10.

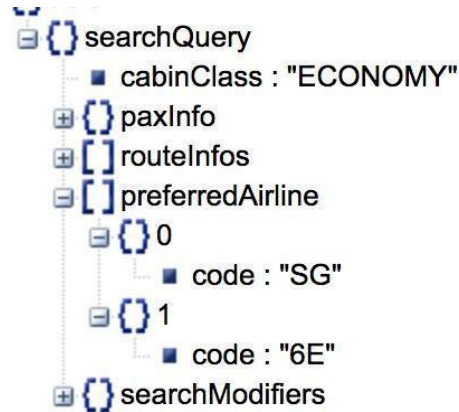


Request Payload Structure :

Key	Parent	Type	Description	Mandatory/ Optional
searchQuery	root	Object		Mandatory
cabinClass	searchQuery	String	CabinClass to Search	Optional
paxInfo	searchQuery	Object	Pax count	Mandatory
ADULT	paxInfo	String		Mandatory
CHILD	paxInfo	String		Optional
INFANT	paxInfo	String		Optional
preferredAirline	searchQuery	ArrayList		Optional
code	preferredAirline	String		Optional
searchModifiers	searchQuery	Object		Optional
isDirectFlight	searchModifiers	Boolean		Optional
isConnectingFlight	searchModifiers	Boolean		Optional
pft	searchModifiers	String	For Regular, Student, Senior citizen fare	Optional
routeInfos	searchQuery	ArrayList		Mandatory
fromCityOrAirport	routeInfos	Object		Mandatory
code	fromCityOrAirport	String		Mandatory

toCityOrAirport	routeInfos	Object		Mandatory
code	toCityOrAirport	String		Mandatory
travelDate	routeInfos	String	YYYY-MM-DD	Mandatory

Response Sample View:

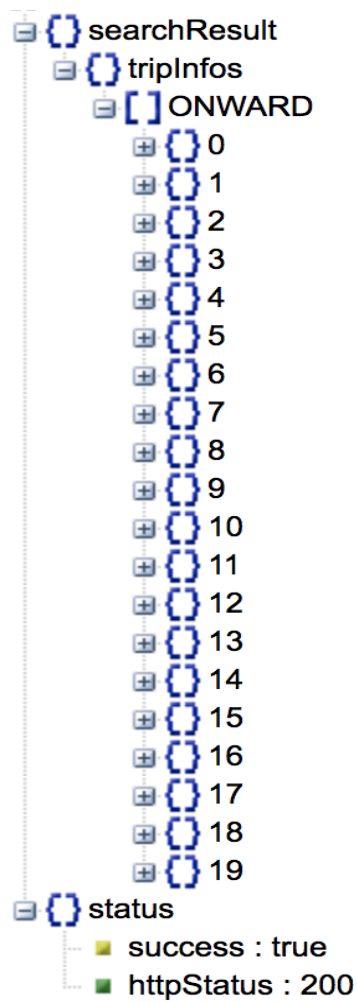

2. In Case Of No Search Result From Supplier , then Response will be returned (only httpStatus 200).

```
status
  success : true
  httpStatus : 200
```

SearchResult Structure :

1. In the case of **Domestic One way or International Oneway Search** : Search Result will have an “ONWARD” key which will have tripInfos (List<Trips>).
2. In case of **Domestic Return** : Search Result will have “ONWARD” and “RETURN” key which will have corresponding Oneway and Return Search Results.
3. In case of **International Return or International Multi-City** : Search Result will have a “COMBO” key which will have corresponding Combined Requested Route Infos.
4. In the case of **Domestic Multi-City** : Equivalent Number of Route Infos , Equivalent index ids generated. (Each index id belongs to each route info).

Example : (3 Route infos of multi-city.)

DEL - BOM - (21-02-2020) & BOM - BLR (26-02-2020) , BLR - GOI (02-03-2020) - 3 index ids will be created in order of routeinfo.

Each Id belongs to corresponding route info (**in search it will be treated each route info as Multiple one ways**).

Response:

Key	Parent	Type	Description	Mandatory/ Optional
searchResult	root	Object		
tripInfos	searchResult	Object		
ONWARD	tripInfos	ArrayList	Onward Info	
RETURN	tripInfos	ArrayList	Return Info	
COMBO	tripInfos	ArrayList	Combined Info (International Return/Multi city)	


ONWARD/RETURN/COMBO - tripInfos

Key	Parent	Type	Description	Mandatory/ Optional
sI	ONWARD/RETURN/COMBO	ArrayList	Segment Information	Mandatory
totalPriceList	ONWARD/RETURN/COMBO	ArrayList		

TripInfo Brief : - Each TripInfo which has sI (segments information and totalPriceList of trip).

sI (Segment Information) - List<Segments> : which has control of the fields.

→ **fd** (Flight Designator) - which has Marketing Airline Information , Airline Equipment type, flight number).



- al - airline info which has code (IATA Airline Code, followed with Airline name).
- fn - Marketing Airline Flight Number
- eT - Marketing Airline Equipment Type

→ **stops** - Number of Stops in this segment.

→ **duration** - Segment Journey duration (In Minutes)

→ **land** - is this flight arriving the next day.

→ **isRs** - isReturnSegment will be true and this field is present only when the segment is return flight.

→ **sN** - segment number

→ **dt** - Departure Time of this segment (YYYY-MM-SS HH:MM Format)

→ **at** - Arrival time of this segment (YYYY-MM-SS HH:MM Format)

→ **aa** - Arrival Airport Information (which has IATA Airport code,name,country,**Terminal**)


→ **da** - Departure Airport Information (which has IATA Airport code,name,country,**Terminal**)

→ **oB** - Operating Airline which has code (IATA Airline Code, followed with Airline name).

→ **so** - Stop Over airports (which has IATA Airport code,name,country)

→ **cT** - Connecting Time (LayOver time) - In Minutes

→ **id** - id of the segment.



totalPriceList - Under TripInfo - This is Summarised PriceInformation about the trip

- **fareIdentifier** - what type of fare is this. PUBLISHED, SPECIAL_RETURN, TJ_FLEX.
- **code** - account code(corporate/retail code) of the fare (optional field).
- **Id** - Unique Trip price Id (which is used for reviewing/revalidating the price which is going to be sold and booked) in upcoming requests and valid for 30 Minutes from search.
- **sri** - special return identifier
- **msri** - matched special return identifier (Special Return Explained Below)
- **fd** - Fare Detail in **Per PaxType Wise** - (Example : 2Adult, 1 Child Search then have to multiply by 2 for Adult Fare and multiply by 1 for Child Fare)
 - ◆ **ADULT/CHILD/INFANT** - will be key (Each PayType - Per Pax Fare)
 - ◆ **fC** - fare Components of Fare to PaxType -
 - TAF - Taxes and Fees
 - NF - Net Fare
 - NCM - Net Commission
 - BF - Base Fare
 - TF - Total Fare
 - ◆ **afc** - additional fareComponents in Detail - Break Up of fC Component
 - TAF - Break Up of Taxes and Fees from fC
 - OT - Other Charges
 - MF - Management Fee
 - MFT - Management Fee Tax
 - AGST - Airline GST Component
 - YQ - Fuel Surcharge
 - YR - Carrier Misc Fee
 - FTC - Flex Total Charges (**visible if fareIdentifier id TJ_FLEX**)
 - NCM - Break Up of Net Commission
 - OT - Gross Commission
 - TDS - TDS
 - ◆ **sR** - Seats Remaining`
 - ◆ **bI** - Baggage information (Hand Baggage & Checking baggage Related)
 - **iB** - Checking Baggage (No format specific, example : *20Kg , 20 Kg, 1 Piece , 1 Piece, 20 Kilograms*)
 - **cB** - Cabin Baggage
 - ◆ **isHB** - Hand Baggage indicator (Boolean)
 - ◆ **rT** - Refundable Type (Integer type as below follows)
 - 0 - Non Refundable
 - 1 - Refundable

- 2 - Partial Refundable
- ◆ **cc** - Cabin Class Fare
 - ECONOMY
 - PREMIUM_ECONOMY
 - BUSINESS
 - FIRST
- ◆ **cB** - Class Of Booking
- ◆ **fB** - Fare Basis
- ◆ **mi** - Meal Indicator (Boolean Type)
 - **True** - Free Meal
 - **False** - Paid Meal
- **tai** - trip additional information
 - ◆ **tbi** - trip baggage information (contains baggage information for every pax type in respective segments mapped using segment's "id").

TJ_FLEX Fare: (Applicable in case of Domestic Flights and Direct flights)

TJ Flex is an exciting new fare category offered by TripJack providing customers the flexibility to cancel their airline tickets for any reason with ZERO CANCELLATION. By selecting the TJ Flex fare during the booking process and paying a reasonable fee, customers can have their airline cancellation penalties waived off at the time of cancellation of tickets.

Please note that cancellation needs to be done at least 24 hours before the scheduled departure time of the flight. Also, the *TJ Flex fee ("Flex Total Charges") is **non-refundable** under any circumstances.

The fee added for this type booking if added under additional fare components with the name as FTC (Flex Total Charges).

This will be identified by Object from **totalPriceList** which has fareIdentifier is **TJ_FLEX**.

Example: [link](#)

Special Return : (Applicable in case of Domestic Return)

SPECIAL RETURN where the onward and return journeys fare filed as Special Return and which needs to be sold as single fare and booking also will be created Single PNR of Onward and Return Journey (where it has different cancellation policies and restrictions in journey wise cancellation and penalties are subject to airlines and tripjack).

If the Fare Identifier of one Journey is "SPECIAL_RETURN", then another journey's Fare Identifier should also be of "SPECIAL_RETURN" type.

This will be identified by Object from **totalPriceList** which has **sri** (special return identifier) and **msri** (matched special return identifier).

Case 1: msri and sri is not present but the fare type is SPECIAL_RETURN , which means any of

SPECIAL RETURN Fare from that Particular airline can be combined and sold.


Example : DEL - BOM (Onward) and BOM - DEL (Return) in Indigo/Spicejet/GoAir flights if totalPriceList any price is SPECIAL_RETURN fare in onward and any fare of SPECIAL_RETURN in Return flights available can be sold and vice versa for Return to Onward.

***(sri and msri must be empty in this case) , when trying to sell any SPECIAL_RETURN Fare both journeys must be of SPECIAL_RETURN fare.**

Case 2: And In case there is sri and msri is not empty in **totalPriceList** than any priceInfo Cannot be combined opened as Case 1,sri is Special Return Identifier of Unique Current Price Information and msri will have list of Unique Identifier of sri (which is sri key of SPECIAL_RETURN fare in Return journey)".

```
"sri": "6461UK975",  
"msri": [  
  "6071UK910"  
],  
"messages": []
```

Example : DEL - BOM (Onward) and BOM - DEL (Return) in Air Vistara

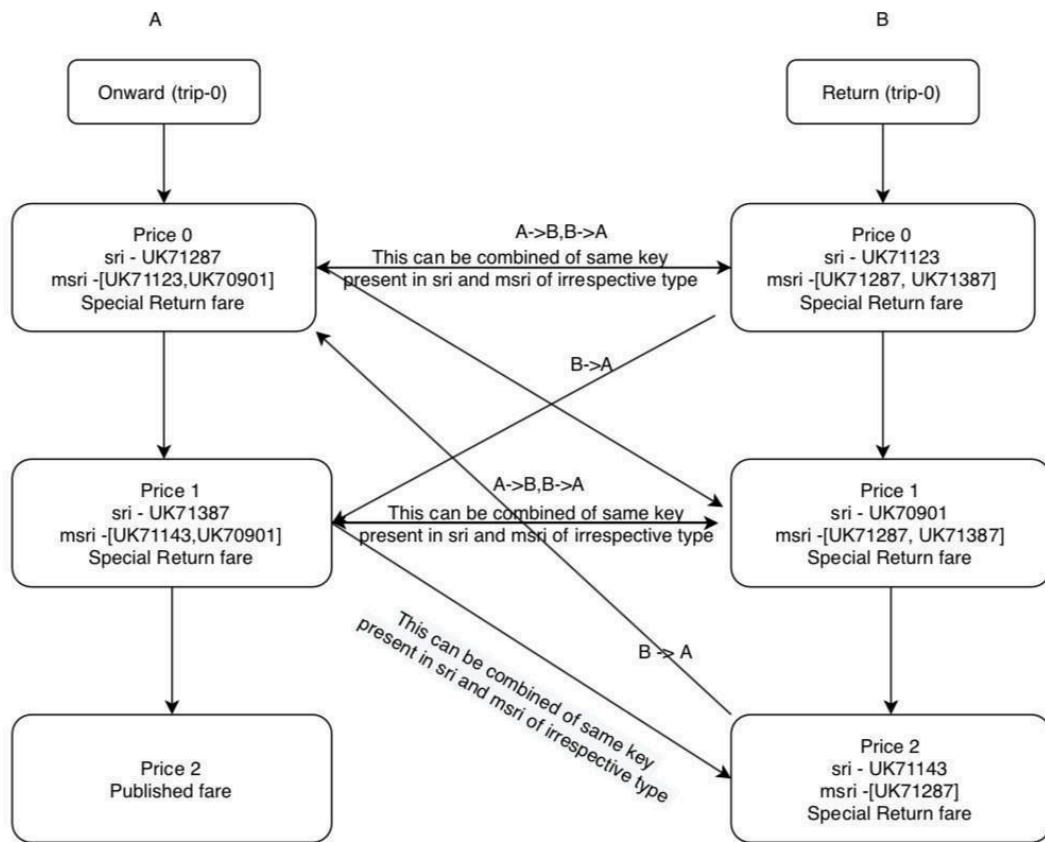


[A - B] Onward price id (sri) in Onward Flights (A) and key from msri of A must be matched key of sri in return flights (B)

[B-A] Which is vice versa from Return to Onward of sri and msri

Examples for Special Return : [Click here to take examples](#)

5.2 Review API (Revalidate/Price RBD)

This method provides selected flight information with revalidated fare available from the supplier. The request supports all cases (Oneway, Return, Multi-City). When the request is requested, the system starts validating and the review engine starts validating the selected flight **from the supplier and returns the confirmed fare for particular session time with Tripjack Booking Reference Created** and returned Tripjack booking reference (reviewed price id) valid for next mentioned seconds in **AirReviewResponse (conditions::st).**

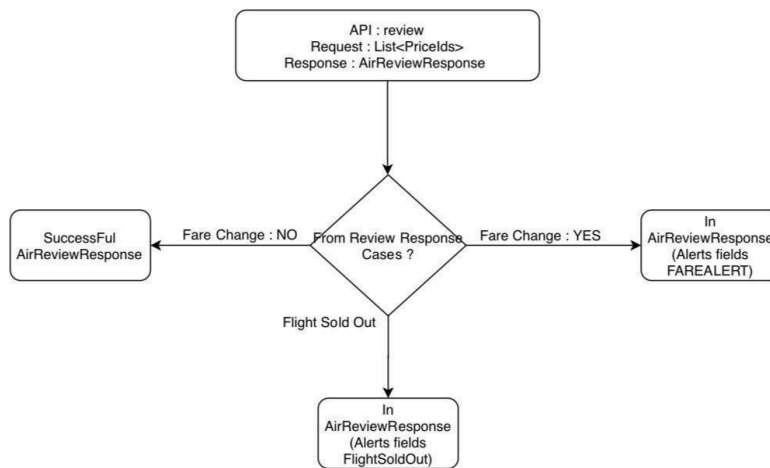


URL: <https://apitest.tripjack.com/fms/v1/review>

Request Method : POST

Sample Payloads : [Click Here to Take Samples](#)

Sample Request View :

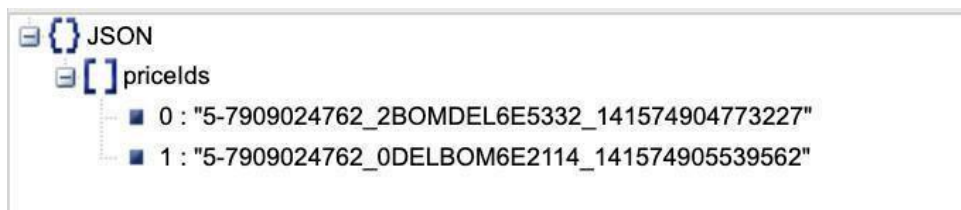


* Sample Domestic Return case.

Request Payload:

Key	Parent	Type	Description	Mandatory/ Optional
priceIds	root	ArrayList	List of PriceId for which itinerary has to be reviewed(price validated).	Mandatory


1. It should be in order of route info requested.
2. In Case of **Domestic One way,International One way , International Return and International Multi-City** - only 1 price id will be requested (to validate the price available).
3. In Case of **Domestic Return** - 2 Price id has to be requested (1 from ONWARD and another from RETURN Search Result).
4. In Case of Domestic Multi-City - n (till 6) Price id can be requested (Each will be treated as multiple one ways).

Sample Response View :

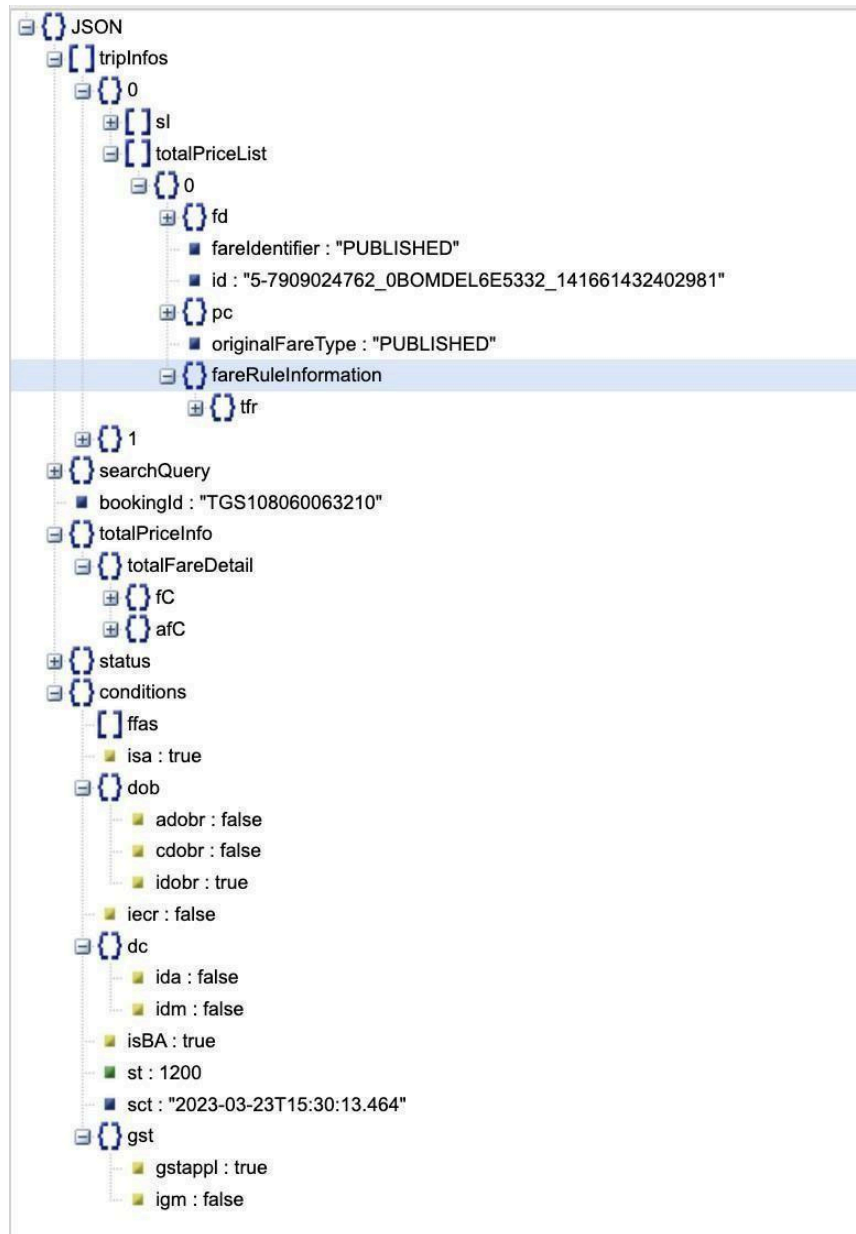


*Sample Domestic Return Case


Case :1 : If priceIds keys are expired (if keys sent in review request are wrong or if expired from system).
- will give “Keys Passed if the request is already expired. Please pass valid keys” with httpStatus :400 .

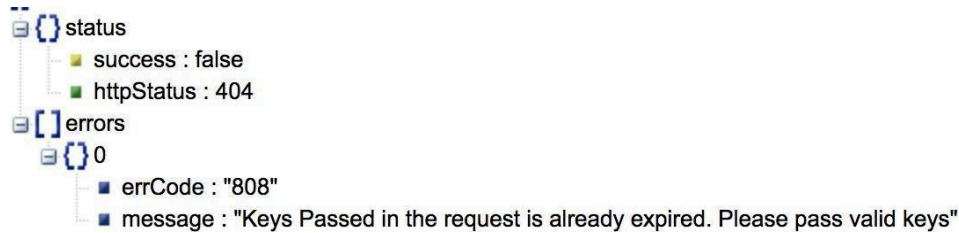


Case : 2 : If Booking Class is available with Fare Change from Supplier then AirReviewResponse will have field “alerts” (type : **FAREALERT**) which indicates old fare and newfare difference. - Example [Link](#)

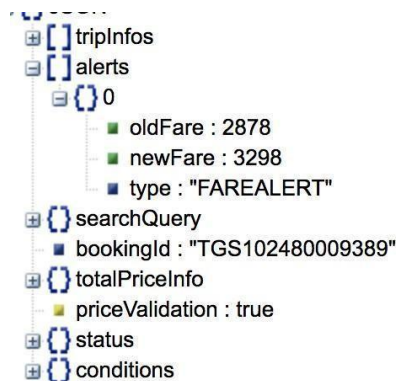

Case 3 : If Selected Flight (Price Id is not available from supplier due to booking class not available, other reasons) then AirReviewResponse will have errors (List<errors> which give description and httpStatus : 400).

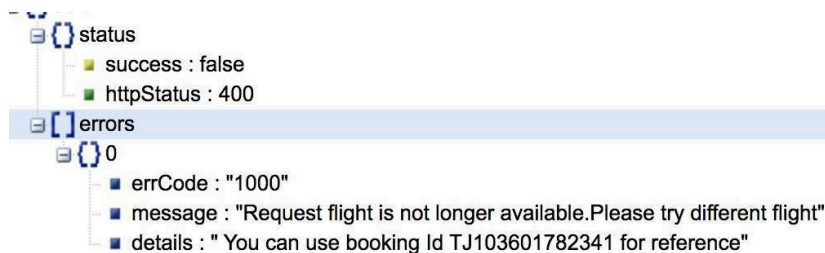


How to use conditions from AirReviewResponse and field Description.

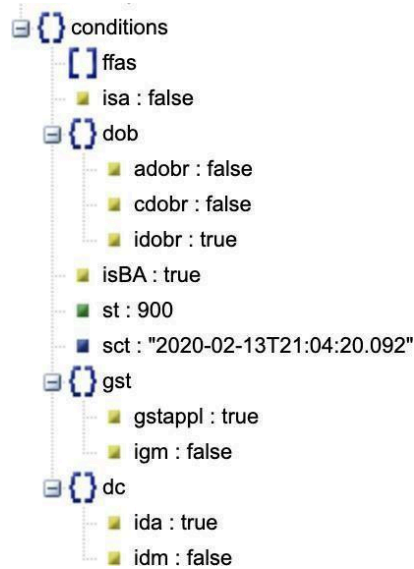

- **ffas** - Frequent Flier Airlines
- **isa** - is Seat Applicable on selected flight (if this true ,another api to fetch seat information)
- **isBA** - is Hold (Block) option applicable for selected flight
- **st** - Session Time In Seconds (Reviewed Price Id is valid for mentioned seconds to make booking)
- **sct** - Session Created Time.
- **pcs** - Passport Booking Conditions
 - ◆ **pped** - Passport Expiry Date is required at the time of booking
 - ◆ **pid** - Passport Issue Date is required at the time of booking
 - ◆ **pm** - Passport is Mandatory for booking
 - ◆ **dobe** - Date of Birth of all the passenger in the booking will be mandatory
- **dob** - Date Of Birth Required or Not in PaxType wise
 - ◆ **adobr** - Adult Date of Birth Required
 - ◆ **cdobr** - Child Date of Birth Required
 - ◆ **idobr** - Infant Date of Birth Required
- **gst** - GST is Applicable and mandatory information
 - ◆ **igm** - GST Mandatory (true) - Valid GST Number and Registered Name and GST Address, GST mobile number has to be passed in Booking request.
 - ◆ **gstappl** - GST Applicable (true) - GST Can be passed in this booking but not mandatory.
- **iecr** - is Emergency Contact Details Required.
 - ◆ If this attribute is true - which is mandatory and has to be passed in Booking API.
- **dc** - document conditions, for fares such as student/senior citizen fare
 - ◆ **ida** - Is document Id (student/senior citizen Id) applicable
 - ◆ **idm** - Id document Id (student/senior citizen Id) mandatory

totalPriceInfo - Selected Journey's Total Fare

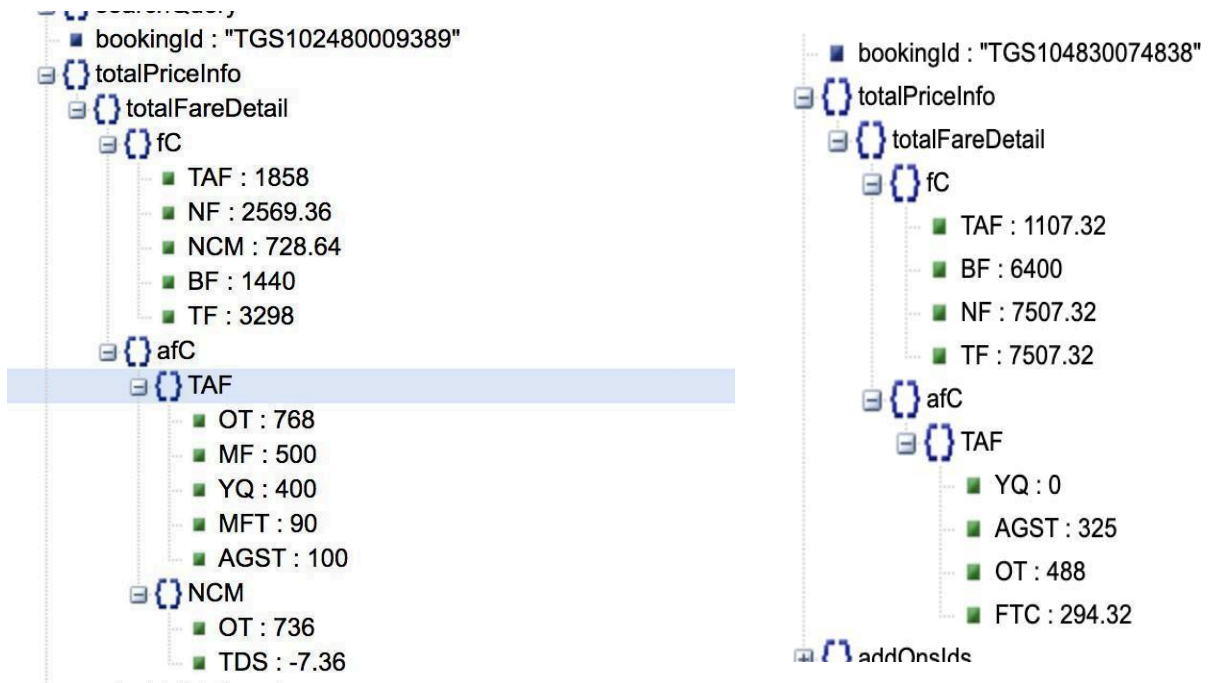


totalFareDetail - Total Journey Summarized Price of Total Travellers. - (Example : 2Adult, 1 Child Search then have to multiply by 2 for Adult Fare and multiply by 1 for Child Fare)

- fc - Fare Components (which has airline , commission related fare information)
 - ◆ TAF - Taxes and Fees
 - ◆ NF - Net Fare
 - ◆ NCM - Net Commission (Net Commission is Gross Commission - TDS)
 - ◆ BF - Base Fare
 - ◆ TF - Total Fare (This fare will be charged from agent , net commission will be returned after that)
- afc - Additional Fare Components (which has break of Above fc fare components)
 - ◆ TAF - Break Up of Taxes and Fees from fc
 - OT - Other Charges
 - MF - Management Fee
 - MFT - Management Fee Tax (It's nothing but GST of Management Fee)
 - YQ - Fuel Surcharge
 - AGST - Airline GST Component
 - FTC - Flex Total Charges
 - ◆ NCM - Break Up of Net Commission
 - OT - Gross Commission
 - TDS - TDS

TripInfo Brief : - Each TripInfo which has sI (updated segments information and totalPriceList of trip).

1. **sI (Segment Information)** - List<Segments> : which has control of the fields.


- Id - Segment ID - which is used for SSR if any to be selected.
- **fd** (Flight Designator) - which has Marketing Airline Information , Airline Equipment type, flight number).



- al - airline info which has code (IATA Airline Code, followed with Airline name).
 - fN - Marketing Airline Flight Number
 - eT - Marketing Airline Equipment Type
- **stops** - Number of Stops in this segment.
 - **duration** - Segment Journey duration
 - **land** - is this flight arriving the next day.
 - **isRs** - isReturnSegment will be true when the segment is returning flight and in other cases it will be false.
 - **sN** - segment number
 - **dt** - Departure Time of this segment (YYYY-MM-SS HH:MM Format)
 - **at** - Arrival time of this segment (YYYY-MM-SS HH:MM Format)
 - **aa** - Arrival Airport Information (which has IATA Airport code,name,country,**Terminal**)
 - **da** - Departure Airport Information (which has IATA Airport code,name,country,**Terminal**)
 - **oB** - Operating Airline which has code (IATA Airline Code, followed with Airline name).
 - **so** - Stop Over airports (which has IATA Airport code,name,country)
 - **cT** - Connecting Time (LayOver time)
 - **ssrInfo** - **Baggage,Meal,Extra Services** .. (explained below)

2. **totalPriceList : Journey Summarised fare**

- **fd** - fareDetails of Requested Passenger Types - (Which is explained in page - 21)
- **fareIdentifier** - what kind of fare **PUBLISHED,CORPORATE,SPECIAL_RETURN, TJ_FLEX.**
- **code** - account code(corporate/retail code) of the fare (optional field).
- **messages** - **if any supplier or airline remarks (Object type is list)**
 - ◆ type - The type of message
 - ◆ message - The content of the message
- **id** - unique id of price
- **pc** - Plating Carrier of Journey
- **fareRuleInformation** - Provides Fare Rule Information.

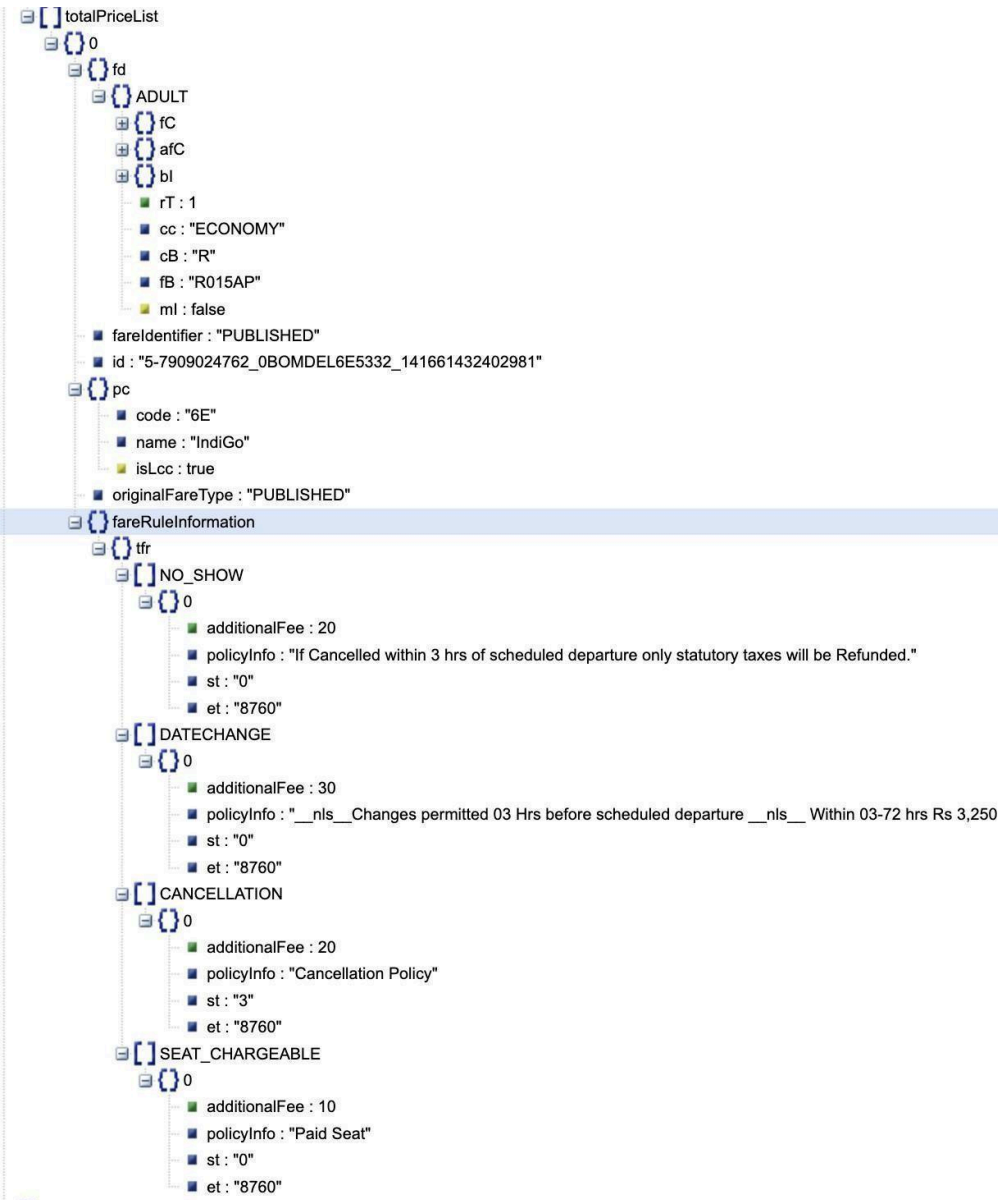


Fare Detail : - PaxType Wise Fare Break Up , Booking class and fare related information.

- **ADULT/CHILD/INFANT** - will be key
- **fC** - fare Components of Fare to PaxType - (Which is explained in page -)
- **sR** - Seats Remaining
- **bI** - Baggage information (Hand Baggage & Checking baggage Related)
 - ◆ **iB** - Checking Baggage (No format specific example :*20Kg , 20 Kg, 1 Piece , 1 Piece*)
 - ◆ **cB** - Cabin Baggage
- **isHB** - Hand Baggage indicator (Boolean)
- **rT** - Refundable Type (Integer type as below follows)
 - ◆ 0 - NON - Refundable

- ◆ 1 - Refundable
- ◆ 2 - Partial Refundable
- **cc** - Cabin Class Fare
 - ◆ ECONOMY
 - ◆ PREMIUM_ECONOMY
 - ◆ BUSINESS
 - ◆ FIRST
- **cB** - Class Of Booking
- **fB** - Fare Basis
- **mi** - Meal Indicator (Boolean Type)
 - ◆ **True** - Free Meal
 - ◆ **False** - Paid Meal

SSR Informations :

Applicable SSR's are under segment information : BAGGAGE, MEAL , EXTRASERVICES.

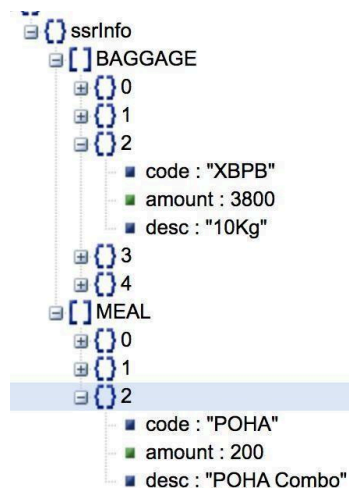

Each SSR Information has detailed information that needs to be shown and passed to the next request.

- **code** : which is a unique code of that SSR Received from supplier and that's needed to be sent in booking request if customer selected any.
- **amount** : Amount of Corresponding SSR.
- **desc** - Description of Corresponding SSR that needs to be shown to Customer for clear information.
- In Case connecting Segments , Baggage (SSRType , amount field will be not present) - which means - whatever selected on the first segment of journey applicable to that corresponding

journey. (Baggage always works as journey wise, when the amount is present in segment wise then segment wise Baggage applicable ,it can be varied).

- In Case of Meal (SSR type) - Each segment will have a unique Meal SSR which is applicable only on that segment.
- In Case of Meal (SSR type, if the amount field is empty , then any meal can be selected at free of cost).

If SSR is being selected for any segment then corresponding segment (segment “id” as key has to be passed in booking request field key) - which is explained in below booking flows.

Air Review Response:

Key	Parent	Type	Description	Mandatory/ Optional
tripInfos	root	Array of tripInfo	Array of tripInfo object. Each Object contains details of each trip.	Mandatory
searchQuery	root	Object	Contains details of Search made.	Mandatory
bookingId	root	String	Booking Id generated after setting up the session.	Mandatory
totalPriceInfo	root	Object	Contains the total fare details of the booking	Mandatory
conditions	root	Object	Details like passport , DOB, GST.	Mandatory
pcs	conditions	Object	Only in case of International search. Passport components	Optional
pped	pcs	Boolean	Passport Expiry Date	Optional
pid	pcs	Boolean	Passport Issue Date	Optional
pm	pcs	Boolean	Passport Mandatory	Optional
dobe	pcs	Boolean	DateOfBirth Required	Optional

ffas	conditions	ArrayList	Frequent Flier	Optional
dob	conditions	Object	Whether date of birth of ADULT, CHILD and INFANT is required or not during booking	Optional
adobr	dob	Boolean	Is Adult date of Birth is required in Passengers details	Optional
cdobr	dob	Boolean	Is Child date of Birth is required in Passengers details	Optional
idobr	dob	Boolean	Is Infant date of Birth is required in Passengers details	Optional
isBA	conditions	Boolean	Blocking Allowed (Booking can be put on HOLD)	Optional
st	conditions	Integer	Review Session Valid Time in seconds	Optional
sct	conditions	String	Session Created Time	Optional
gst	conditions	Object	Whether GST is required or not during booking	Optional
gstappl	gst	Boolean	GST applicable for current booking.	Optional
igm	gst	Boolean	GST Mandatory	Optional
iecr	conditions	Boolean	Is Emergency Contact Required	Optional
status	root	Object	Status of the API call	Mandatory
dc	conditions	Object	Conditions for document Id	Mandatory
ida	dc	Boolean	Is documentID applicable	Optional
idm	dc	Boolean	Is documentID mandatory	Optional

5.3 Fare Rule API

This method is used to get the fare rules, penalties and conditions of a specific flight option. It contains the fare rule info and the relevant details associated with it, such as restrictions and Penalty charges, cancellation charges, no show charges and seat information.

URL: <https://apitest.tripjack.com/fms/v2/farerule>

Request Method: POST

Samples : [Click here to take examples](#)

1. Mini Rule Structure
2. Cat 16 Category (Unstructured Paragraph Format)

Sample Request View after Search:

Send priceId in the request.

```
JSON
{
  id : "16-0764987189_BOMDEL15330_282038212531214"
  flowType : "SEARCH"
}
```

Sample Request View after Review/Booking:

Send bookingId in the request. Booking Id is returned in the Review Response.

```
JSON
{
  id : "TJ123456789012"
  flowType : "REVIEW"
}
```

* Sample Search fare Rule

* **flowType :** SEARCH, REVIEW, BOOKING_DETAIL


*System can respond to any one type from the supplier (Mini Rule or Cat 16 Category).

1. If Cat 16 Category under miscInfo (rest of fields will be empty/not present)
2. If Mini Rule MiscInfo will not be present.


Case :1 : If priceIds or booking Id keys are expired (if keys sent in review request are wrong or if expired from system). - will give “Keys Passed in the request has already expired. Please pass valid keys” with httpStatus :400 .

Case 2 : Mini Rule

2.1 Sample Fare Rule Response (Mini Rule) with st(start time) and et(end time) in minutes:

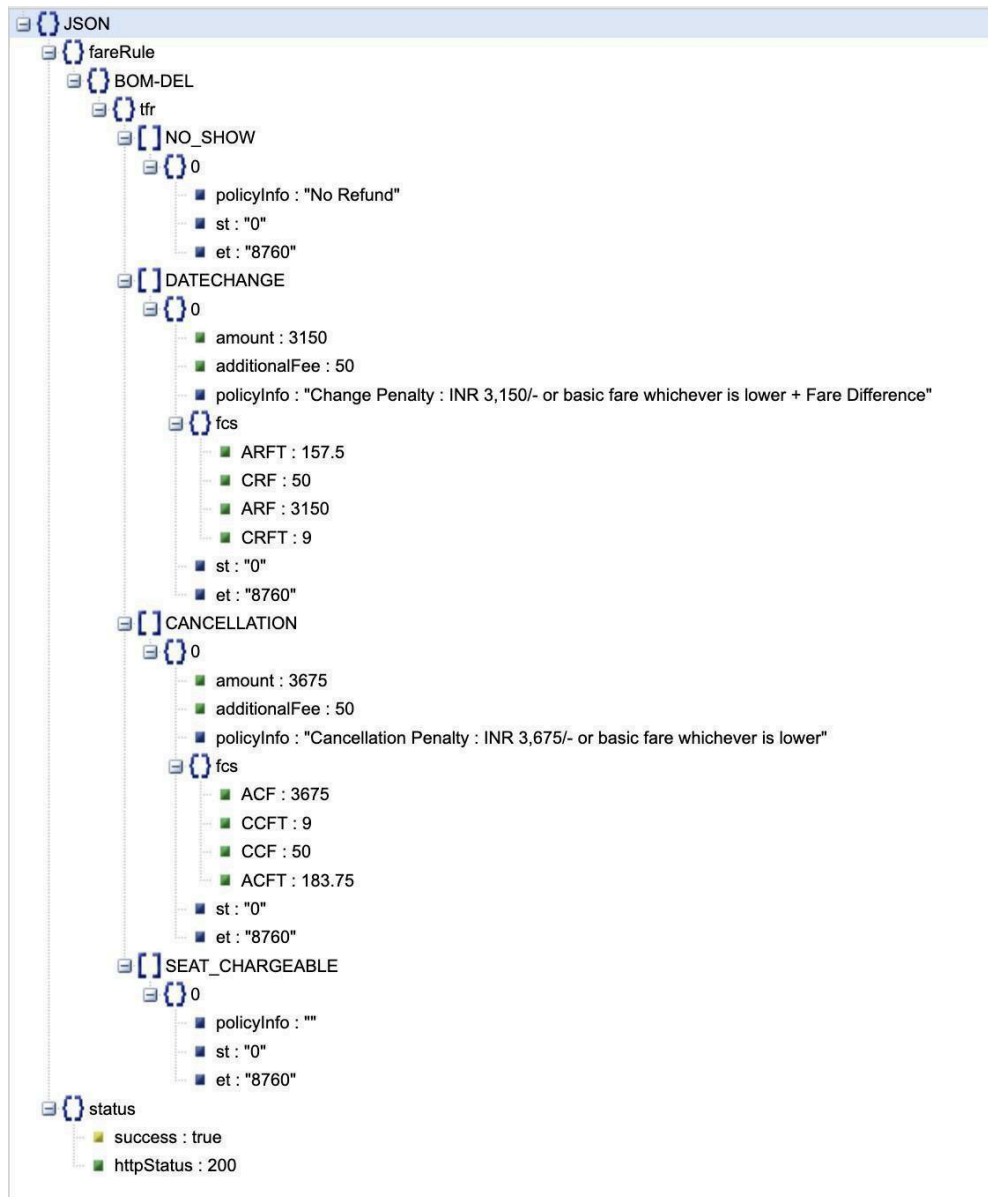

2.2 Sample Fare Rule Response (Mini Rule) with pp (policy period- BEFORE_DEPARTURE, AFTER_DEPARTURE, DEFAULT):

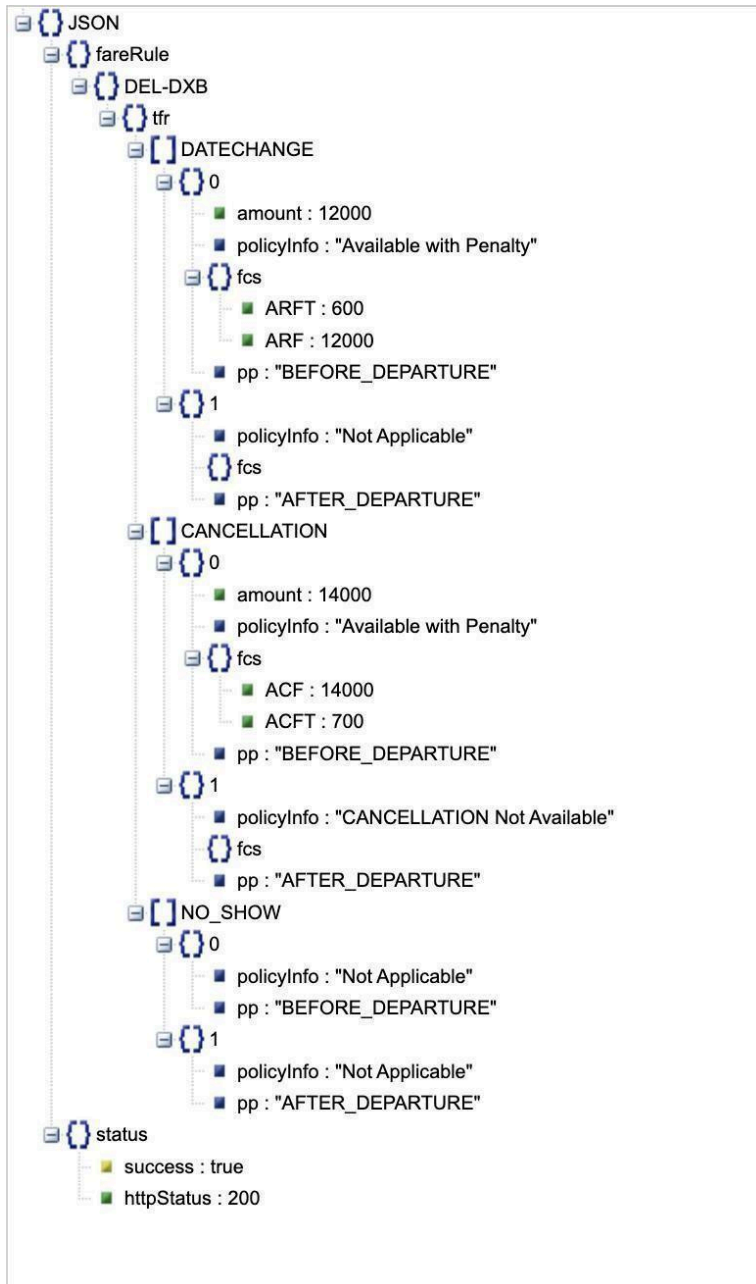

tfr - Timed Fare rule which has CANCELLATION, DATECHANGE, NO_SHOW, SEAT_CHARGEABLE information as a key.

Each of these keys will have a list of policies. Each policy will have either start and end time(time before departure) or each policy will have a policy period such as Before Departure,After Departure,Default.

- amount - Corresponding Fare Rule Type Airline Fee (Airline Cancellation,Reschedule Fee)
- additionalFee - Tripjack Fee
- policyInfo - Some Additional Text which is shown for customers.
- st - start time: hours before departure when that policy starts (minimum value 0 hours)
- et - end time: hours before departure when that policy ends (maximum value 8760 hours)
- pp - policy period can have values BEFORE_DEPARTURE, AFTER_DEPARTURE, DEFAULT.

Note- The API will return either on of st/et and pp, not both

- fcs - fare components related to fare rule
 - ◆ ARF - Airline Reschedule Fee
 - ◆ ARFT - Airline Reschedule Fee Tax
 - ◆ CRF - Tripjack Reschedule Fee
 - ◆ CRFT - Tripjack Reschedule Fee Tax
 - ◆ ACF - Airline Cancellation Fee
 - ◆ ACFT - Airline Cancellation Fee Tax
 - ◆ CCF - Tripjack Cancellation Fee
 - ◆ CCFT - Tripjack Cancellation Fee Tax

Case : 3: In case of no mini rule for supplier then Cat 16 Category Type fare rule returned in below structure under the “mi” tag as plain string format.



Request Payload:

Key	Parent	Type	Description	Mandatory/ Optional
flowType	root	String	Flow Type. Whether SEARCH or REVIEW	Mandatory
id	root	String	Price Id or bookingId whose fare rule need to be fetched	Mandatory

Response:

Key	Parent	Type	Description	Mandatory/ Optional
farerule	root	Object	Trip level Id	Mandatory
status	root	Object	Status of the API call	Mandatory
[departureCode-arrivalCode]	farerule	Object	Departure code and Arrival code. Eg: DEL-MAA	Mandatory
tfr	[departureCode-arrivalCode]	Object	Fare rule Information about Cancellation,DateChange..	Optional
NO_SHOW	tfr	Object	No show information	Optional
DATECHANGE	tfr	Object	Date Change Information	Optional
CANCELLATION	tfr	Object	Cancellation information	Optional
SEAT_CHARGEABLE	tfr	Object	Seat chargeable information	Optional
miscInfo	[departureCode-arrivalCode]	ArrayList	Plain Text Fare Rule info	Optional

5.4 Seat MAP API

This method is used to get the Seat Information about the reviewed (revalidated flight).After Review is Successful, Seat Map can be requested by calling this api by passing “**bookingid**” from AirReviewResponse and isa (from conditions in AirReviewResponse should be also true) to fetch enough seat information otherwise no seat information will be provided in SeatMapResponse.

*Response will contain seat configuration of all the aircrafts that are present in selected flights.

URL: <https://apitest.tripjack.com/fms/v1/seat>

Request Method : POST


Sample Payloads : [Click Here to Examples](#)

Sample Request View :

 bookingId : "TJ105401792345"

*BookingId from AirReviewResponse has to be passed to fetch seat map

Sample Response View :

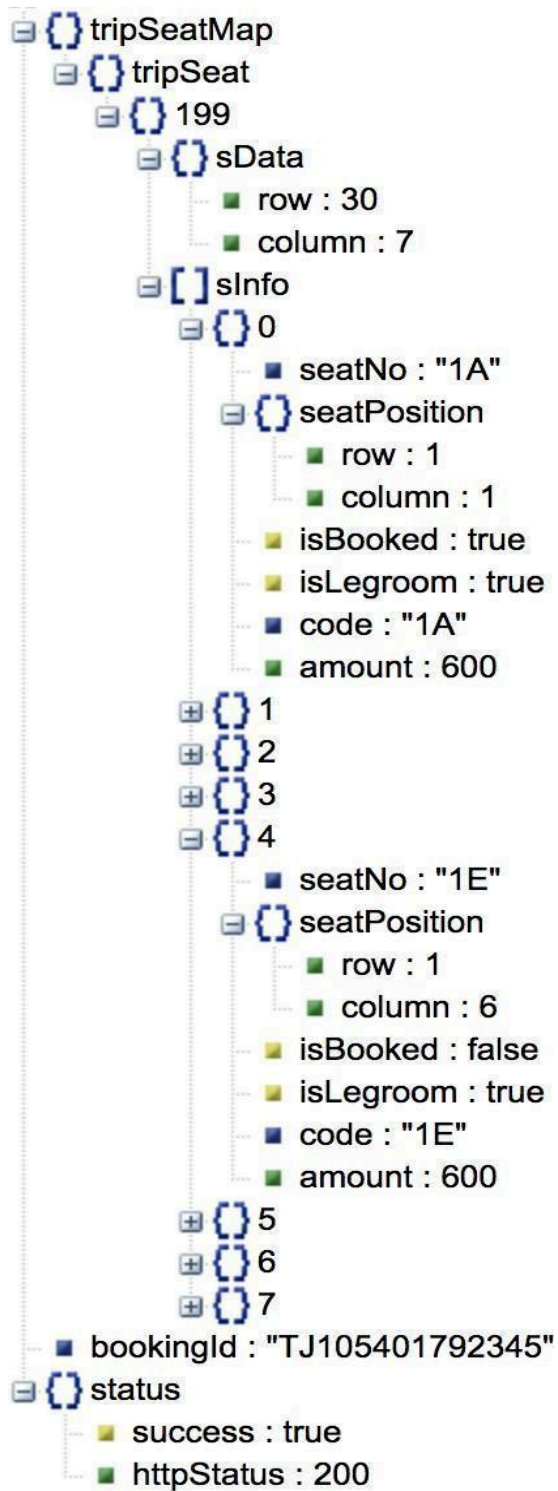

TripSeatMap : This will contain a selected journey applicable seat map based on AirCraft type.

→ tripSeat (key)

- ◆ **key** - (segment :id from tripInfos in review response) - belongs to that particular segment
- ◆ **sData** - Seat Deck Data (How many columns and rows to be created)
- ◆ **nt**- notes/reason if sInfo is not available/applicable for a particular leg.
- ◆ **sInfo** - List of Seats in Selected Segment
 - **seatNo** : Seat Information Number with code
 - **seatPosition** : will have row and column number to place seat
 - row
 - column
 - **isBooked** - is already booked for a seat or not.
 - **isLegRoom** : Leg Space (attribute will present only if available)
 - **code** : Supplier Booking Code which needs to be passed for booking if a customer selects this particular seat.
 - **amount** : Seat Chargeable amount.

Request Payload:

Key	Parent	Type	Description	Mandatory/ Optional
bookingId	root	String		Mandatory

Response:

Key	Parent	Type	Description	Mandatory/ Optional
bookingId	root	String		Mandatory
tripSeatMap	root	Object	It contains a Map of AirCraft and its Seat configuration for the whole trip.	Mandatory
tripSeat	tripSeatMap			
nt	Notes	String	Notes for if particular leg/segment does not has sInfo information.	
sData		Object		
row	sData	Integer		

column	sData	Integer		
sInfo		Array of Object	Each Object contains single seat Information.	
seatNo	sInfo	String	Seat No	
isBooked	sInfo	boolean	Seat status	
isLegroom, isAisle	sInfo sInfo	Boolean boolean	Seat with Legroom Aisle seat	
code	sInfo	String	Seat Code	
amount	sInfo	Double	Seat Price	
seatPosition	sInfo	Object		
row	seatPosition	Integer	Deck Data Row	
column	seatPosition	Integer	Deck Data column	

5.5 BOOKING API

The following section describes the availability methods exposed via the API to Book.


1. INSTANT BOOK
2. HOLD
3. CONFIRM FARE BEFORE TICKET
4. CONFIRM-BOOK (TICKETING AFTER HOLD)

Book method is to **hold the Booking or Direct Ticketing**. After Submitting the passenger & contact details for the selected itinerary ,BookingResponse will be given with bookingId and status of submitted request.

1. While submitting BookingRequest it will be validated then taking forward to booking, in case of any validation failure, Error Message will be given in response.
2. After validation,Booking will be created in the Tripjack System by deducting Payment ,and the Supplier Side will be done. (BookingDetails Api has to be used to GET PNR and TicketNumber if any and Order Status must be Success).
3. In case of any fare jump , PNR and Ticket Number will be not generated, and can directly coordinate with Tripjack Customer Support.

1: INSTANT BOOK (With Payment Info)

This method is used to book the reviewed/selected flight confirming instantly with Airline and Tripjack by passing Payment Information, Travellers and Contact Details , If Any GST also can be passed.

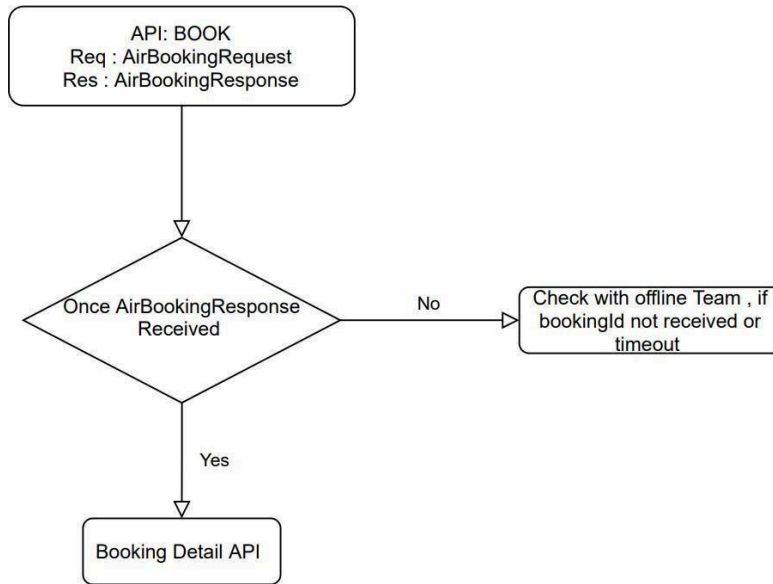

URL: <https://apitest.tripjack.com/oms/v1/air/book>

Request Method : POST

*** The amount sent in the Book Request should be Gross Fare (TF from AirReviewResponse).**

Sample : [Click to here to take examples](#)

Cases to verify before integration :

- **With GST & Passport**
- **With SSR**

Notes on Booking Request :

Case :1 : SSR - List of Meal, Baggage - In Request code which is selected by customer Vs on segment key (AirReviewResponse -> “tripInfos” under segment will be having unique key called id which is key)

Case :2 : In Case of GST (all fields of GST has to be passed) with Valid and as IATA Standard have to be used.

Case 3 : In case of SME fares , GST will be mandatory , in that case have to verify AirReviewResponse Conditions (igm and gstappl need to be true) & have to pass GST Info in booking.

Case 4 : In case of **iecr is mandatory** in Review Response , in book request contactInfo (Emergency contact name,contact email and contact number) are mandatory to be passed in request. (Note : Email, Contact Number which is sent in contact info where ticket copy is not delivered to mentioned norms).

Case 5 : In case document Id is mandatory in review response, in book request traveller info document id is mandatory to be passed.

Sample Request View (Without SSR) :

```
JSON
{
  bookingId : "TJS106300003496"
  paymentInfos : [
    {
      amount : 7403
    }
  ]
  travellerInfo : [
    {
      ti : "Mr"
      fN : "Test"
      IN : "AdultA"
      pt : "ADULT"
    }
    {
      ti : "Mr"
      fN : "Test"
      IN : "ChildA"
      pt : "CHILD"
    }
    {
      ti : "Mr"
      fN : "Test"
      IN : "InfantA"
      pt : "INFANT"
      dob : "2019-08-09"
    }
  ]
  gstInfo : {
    gstNumber : "04AABCA7122A1ZF"
    email : "xxx@yyyy.com"
    registeredName : "XYZ Pvt Ltd"
    mobile : "+919231100324"
    address : "gurugram"
  }
  deliveryInfo : {
    emails : [
      {
        0 : "xxx@yyyy.com"
      }
    ]
    contacts : [
      {
        0 : "+919231100324"
      }
    ]
  }
}
```

Description :

- **bookingId** : Booking Id from AirReviewResponse
- **paymentInfos** - Payment for the booking to Tripjack (List<PaymentInfos>)
 - amount - total payable amount to Tripjack for the booking (TF from AirReviewResponse)
- **deliveryInfo** - Delivery Details Related to Booking (which need to be passed to supplier)
 - emails - Booking Email Id (It should be valid email id)
 - contacts - Valid Contact Number (Followed with country code and valid mobile number)
- Example (+919500112233)
- **contactInfo** - Emergency Contact Details Related to Booking (which need to be passed to supplier).
 - emails - Emergency Email Id (It should be valid email id) - which is used by airline
 - contacts - Valid Contact Number (Followed with country code and valid mobile number)
- Example (+919500112233) - which is used by airline
 - ecn - Emergency Contact Name - which is used by airline
- **travellerInfo** - List of Traveller which flight to be booked
 - **ti** - Title of the Traveller
 - **Adult:** Mr,Mrs,Ms
 - **Child:** Ms, Master
 - **Infant :** Ms, Master
 - **pt** - PaxType - ADULT,CHILD, INFANT (Values should be Caps)
 - **fN** - First Name of the Traveller
 - **IN** - Last Name of the Traveller (Key : lowercase “L”N)
 - **dob** - Traveller Date Of Birth (YYYY-MM-DD Format)
 - **pNum** - Passport Number
 - **eD** - Expiry Date of the passport (YYYY-MM-DD Format)
 - **pNat** - Passport Nationality (Passport Issued Country) - IATA Country Code(2-Letter)
 - **pid** - Passport Issue Date (YYYY-MM-DD Format)
 - **ssrBaggageInfos** (List of baggage on segment selected)
 - **key** : Segment Key from AirReviewResponse
 - **code** : Customer Selected SSR Code on Corresponding Segment
 - **ssrMealInfos**
 - **key** : Segment Key from AirReviewResponse
 - **code** : Customer Selected SSR Code on Corresponding Segment
 - **ssrSeatInfos**
 - **key** : Segment Key from AirReviewResponse
 - **code** : Customer Selected SSR Code on Corresponding Segment
 - **ssrExtraServiceInfos**

- **key** : Segment Key from AirReviewResponse
 - **code** : Customer Selected SSR Code on Corresponding Segment
- **di** - Document ID when required
- **gstInfo** - GST Which needs to be passed for billing and supplier - **all fields under gst are mandatory.**
 - gstNumber - Valid 15 digit GST Number (mandatory)
 - registeredName - GST Registered Name (maximum 35 characters as IATA standard) (mandatory)
 - Email - GST Email
 - Mobile - GST Mobile
 - Address - GST Registered Address (maximum 70 characters as IATA standard)

Request Payload:

Key	Parent	Type	Description	Mandatory/ Optional
bookingId	root	String	Booking id which is generated at Review.	Mandatory
paymentInfos	root	Array of Objects	Object containing the payment details of Booking. Do not send paymentInfos in case of Hold booking.	Mandatory
amount	paymentInfos	number	Total cost for the Booking	Mandatory
travellerInfo	root	Array of Objects	List of traveller details object	Mandatory
gstInfo	root	Object	Object containing GST info	Mandatory
gstNumber	gstInfo	String	GST number	Mandatory
registeredName	gstInfo	String	GST name	Mandatory
deliveryInfo	root	Object	Object containing the details of delivery emails and mobile numbers	Mandatory
contactInfo	root	Object	Object containing the emergency contact details (emails, mobile numbers and contact name)	Optional

Response:

Key	Parent	Type	Description	Mandatory/ Optional
bookingId	root	String	Booking id which is generated at Review.	Mandatory
status	root	Object	Status of the APi call	Mandatory

2: HOLD (Without PaymentInfo)

Book method is to **hold the Booking** . After Submitting passenger & contact details for the selected itinerary, BookingResponse will be given with bookingId and status of submitted request.


1. While submitting BookingRequest will be validated then taking forward to booking, in case of any validation failure, Error Message will be given in response.

2. After validation , Booking will be done and Supplier Booking is Success in BookingDetails API Call will get PNR and TicketNumber if any.

3. In case of any fare jump, PNR and Ticket Number will be not generated. And can directly coordinate with Customer Support.


Which is the same as **INSTANT BOOK (request should not have paymentInfo)**.

Flow For Hold & Hold Confirm Ticket :

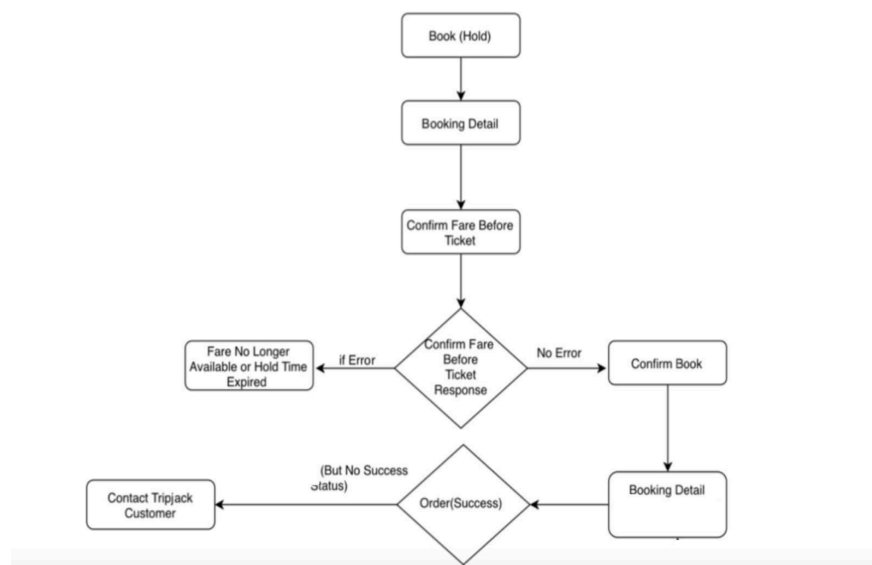

Sample Payloads : [Click to here to take examples](#)

Sample Request View :

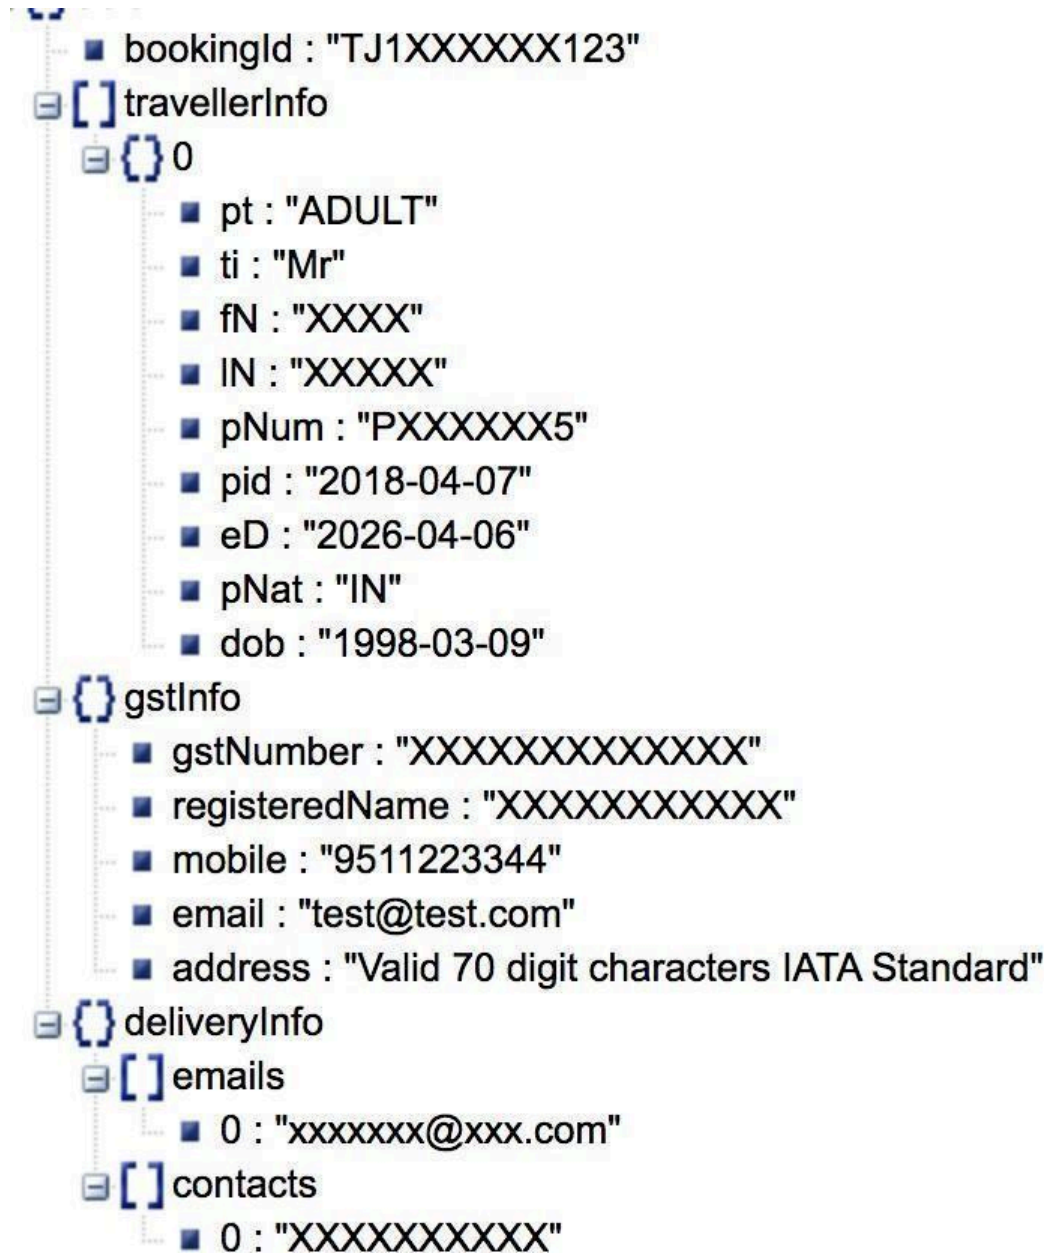

3. CONFIRM-FARE BEFORE TICKETING (BEFORE CONFIRM TICKETING)


This method is used to Validate the fare for PNR is available or not , if the fare is not available it will give “Fare No Longer available or if time limit of hold booking is expired”.

URL: <https://apitest.tripjack.com/oms/v1/air/fare-validate>

Method: POST

Sample Payloads : [Click to here to take examples](#)


Sample Request View :



```
{
  "bookingId": "TJ1XXXXXXXXXX"
}
```


Sample Response View :

Case : 1 : If Successful , Fare & Booking class still valid to confirm on Supplier before ticketing.

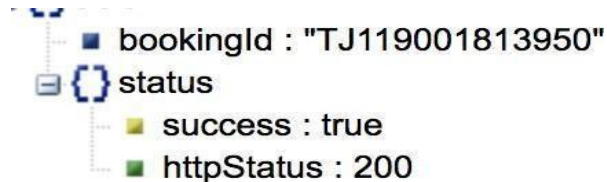


```
{
  "bookingId": "TJ119001813950",
  "status": {
    "success": true,
    "httpStatus": 200
  }
}
```

Case : 2: If fare or booking class is not available on the Supplier side for Hold PNR.

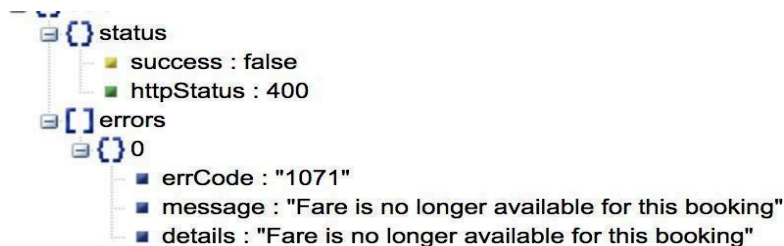

```
{
  "status": {
    "success": false,
    "httpStatus": 400
  },
  "errors": [
    {
      "errCode": "1071",
      "message": "Fare is no longer available for this booking",
      "details": "Fare is no longer available for this booking"
    }
  ]
}
```

Case : 3 : If the **Hold time limit is expired** for the Hold PNR.

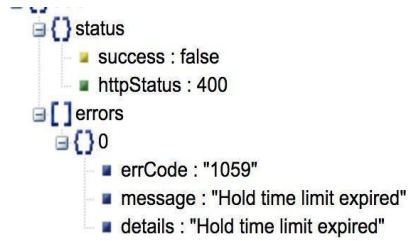

Request Payload:

Key	Parent	Type	Description	Mandatory/ Optional
bookingId	root	String	Id of the booking which needs to be released	Mandatory

Response:

Key	Parent	Type	Description	Mandatory/ Optional
status	root	Object	Status of the API call	Mandatory

4. CONFIRM-BOOK (HOLD BOOKING TO CONFIRM)

This method is used to confirm the hold(blocked) ticket by making payment to the booking and confirming the ticket (after the fare confirmation before ticketing api).

URL: <https://apitest.tripjack.com/oms/v1/air/confirm-book>

Method: POST

Sample Payloads : [Click to here to take example](#)

Sample Request View :

```
{
  "bookingId": "TJS100400003508",
  "paymentInfos": {
    "amount": "30930.50"
  }
}
```

Case : 1: If fare or booking class is not available on the Supplier side for Holded PNR.

```
{
  "status": {
    "success": false,
    "httpStatus": 400
  },
  "errors": {
    "errCode": "1071",
    "message": "Fare is no longer available for this booking",
    "details": "Fare is no longer available for this booking"
  }
}
```

Case : 2 : If the **Hold time limit is expired** for the Holded PNR.

```
{
  "status": {
    "success": false,
    "httpStatus": 400
  },
  "errors": {
    "errCode": "1059",
    "message": "Hold time limit expired",
    "details": "Hold time limit expired"
  }
}
```

Request Payload:

Key	Parent	Type	Description	Mandatory/ Optional
bookingId	root	String	Booking id which is generated at Review.	Mandatory
paymentInfos	root	Array of Objects	Object containing the payment details of Booking.	Mandatory
amount	paymentInfos	number	Total cost for the Booking	Mandatory

Response:

Key	Parent	Type	Description	Mandatory/ Optional
status	root	Object	Status of the API call	Mandatory
bookingId	root	String	Booking id which is already generated.	Mandatory

6. RETRIEVE BOOKING: (BookingDetail)

The following section describes the Booking detail methods exposed via the API to Retrieve.

1. Booking Detail
2. Detailed Booking Information (Included from Version 1.5)

6.A. Booking Detail

This method is used to retrieve booking details and booking status of an existing booking using BookingId. It is typically used after a booking has been made to capture a current snapshot of the reservation to get sync of PNR,ticket number.

URL: <https://apitest.tripjack.com/oms/v1/booking-details>


Method: POST

Sample Payloads : [Click Here to Take Examples](#)

Sample Request View :

```
{
  "bookingId": "TJ1XXXXXXXXXX"
}
```

Sample Response View :

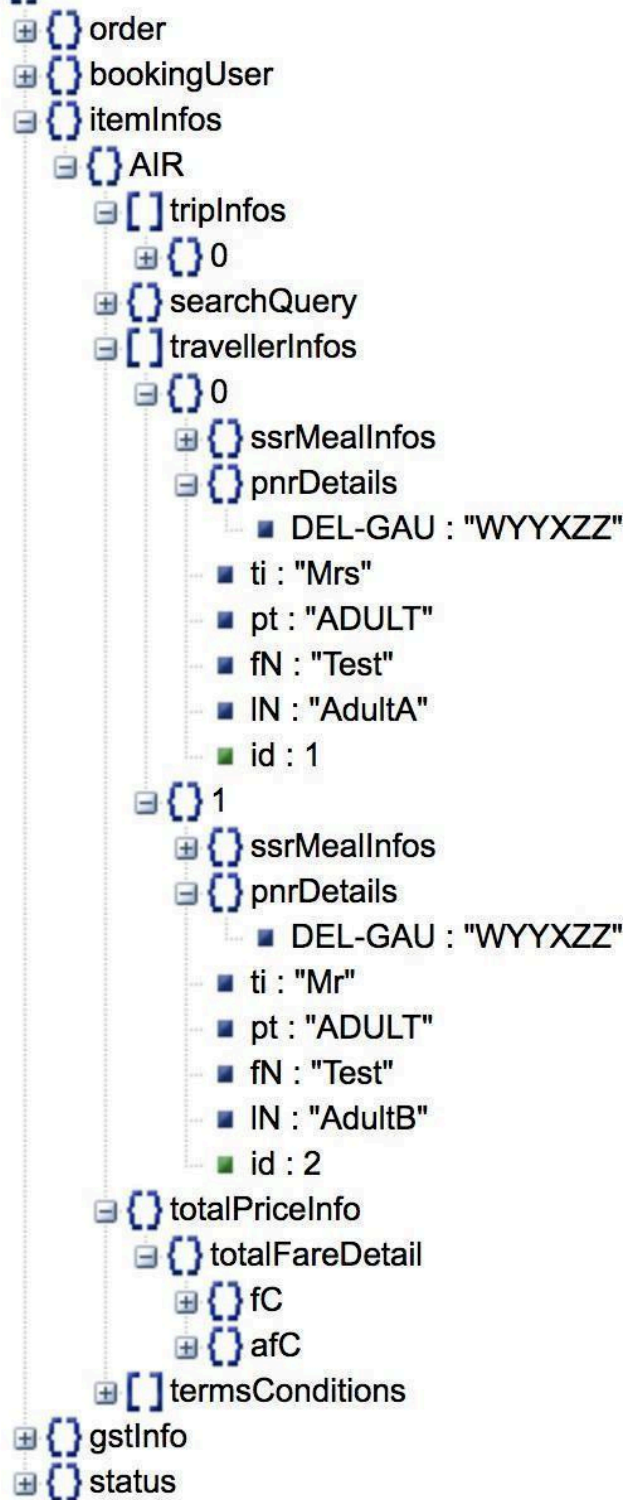

Request Payload:

Key	Parent	Type	Description	Mandatory/ Optional
bookingId	root	String	Id of the booking which needs to be retrieved	Mandatory

Response:

Key	Parent	Type	Description	Mandatory/ Optional
order	root	Object	This object contains the order details	Mandatory
itemInfos	root	Object	This includes the item info like price information, passenger details and search query	Mandatory
AIR	itemInfos	Object	Includes all the details of the AIR booking	Mandatory
tripInfos	AIR	Array of tripInfo	Array of tripInfo object	Mandatory
travellerInfos	AIR	Object	Array of travellerInfo	Mandatory
gstInfo	root	Object	This contains the GST data that is given when booking	Mandatory
status	root	Object	Status of the API call.	Mandatory

Description of Booking Details Response :**→ Order** - Order which Created in Tripjack System


- ◆ **bookingId** - Unique Reference Number for Booking in Tripjack System
- ◆ **amount** - Order Amount which charged in Tripjack System
- ◆ **deliveryInfo** - Booking EmailId and Contact Info which passed in Booking Request
- ◆ **status - Order Status of Booking Id (Its Success or ON_HOLD, PENDING) -**
 - SUCCESS - Order has been Success with Payment & Supplier Side PNR & Ticket Number Generated
 - ON_HOLD - Order has been blocked.
 - CANCELLED - Order has been Cancelled.
 - FAILED - Order has been failed due to Other reasons.
 - PENDING - Order has been fallen to pending state.
 - ABORTED - Order has been aborted.

- UNCONFIRMED - Order has been unconfirmed when hold booking is not confirmed and PNR is released.

◆ **contactInfo** - Emergency contact details which passed in Booking Request

→ **itemInfos**

- ◆ **tripInfos** - which is already explained same in Review & Search - which contains Journey Related Information
- ◆ **totalPriceInfo** - which has Fare Component & Additional Fare Components - Fare Related Information to the Booking.

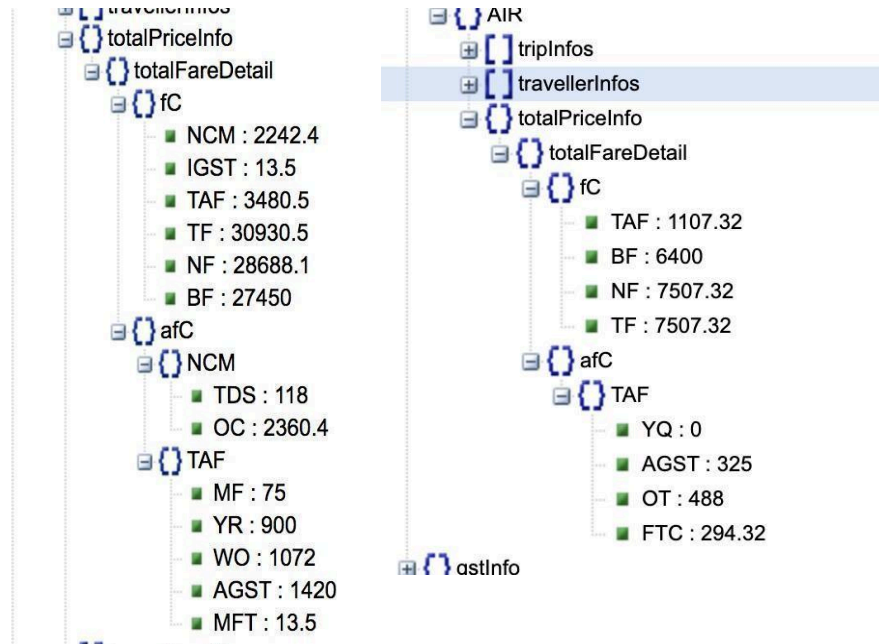

→ **fc - Fare Components**

- ◆ NF - Net Fare
- ◆ IGST - Integrated Goods and Services Tax.
- ◆ TAF - Taxes and Fees
- ◆ SSRP - Special Service Price (SSR - Baggage, Meal, Seat..)
- ◆ TF - Total Fare
- ◆ BF - Base Fare
- ◆ NCM - Net Commission


→ **afc - Additional Fare Components - Break Up of “fc” if applicable**

- ◆ TAF - Taxes and Fees Break Up -Refer Taxes and codes Description
 - FTC - Flex Total Charges
- ◆ NCM - Net Commission
 - TDS - TDS
 - OT - Gross Commission
- ◆ SSRP - SSR Price
 - SP - Seat Price
 - MP - Meal Price

- BP - Baggage Price

◆ **travellerInfos** - which has PNR , SSR Related information to Booked Passengers.


- pnrDetails - key - Segment - “DepartureCode-ArrivalCode”.”Airline PNR”

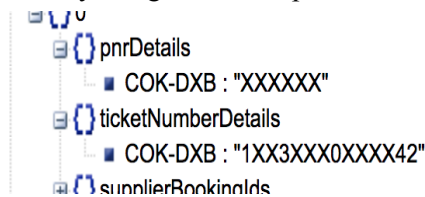


- gdsPnrs - key - Segment - “DepartureCode-ArrivalCode”.”GDS PNR " and this is an optional field.




- ticketNumberDetails - key - Segment - “DepartureCode-ArrivalCode”.”ticketNumber”

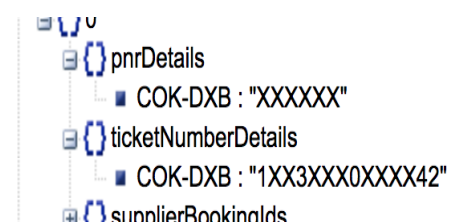

- ssrMealInfos,ssrBaggageInfos,ssrSeatInfos,ssrExtraServicInfos will followed by key : Segment - “DepartureCode-ArrivalCode”.”corresponding SSR Information”



- statusMap - Describes Traveller status when any amendment(Cancellation,Void,Reissue & No Show) has been made.
 1. Incase, if any amendment is not being raised for this Traveller(if no changes made on Traveller , statusMap field will be not available)
 2. Describe about sector and Traveller status : Applicable values are “CANCELLED”, ”NO_SHOW”, ”VOIDED” and ”REISSUED”

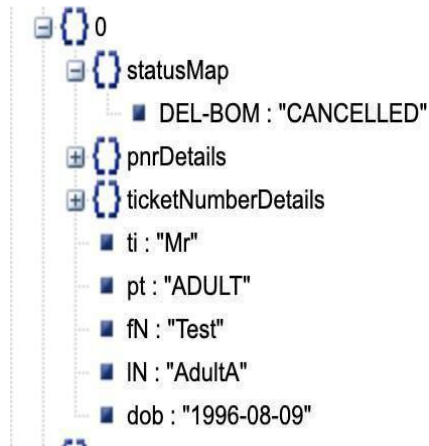

→ **gstInfo** - GST Info which passed in Booking request for billing.

6.B. Detailed Booking Information


This method is used to **retrieve detailed booking details like Traveller Level Information (Pricing,Passport, Class of book, Fare basis..)** and booking status of an existing booking using BookingId along with pax pricing required.It is typically used after a booking has been made to capture a current snapshot of the reservation of PNR,ticket number.

URL: <https://apitest.tripjack.com/oms/v1/booking-details>

Method: POST

Sample Payloads : [Click Here to Take Examples](#)


Sample Request View :



Note : if requirePaxPricing is false , Traveller Level pax pricing will be not sent in response (which remains 6.A Booking Detail)

Sample Response View :

1. New Field “bi” is added under “sI” Object in TripInfo

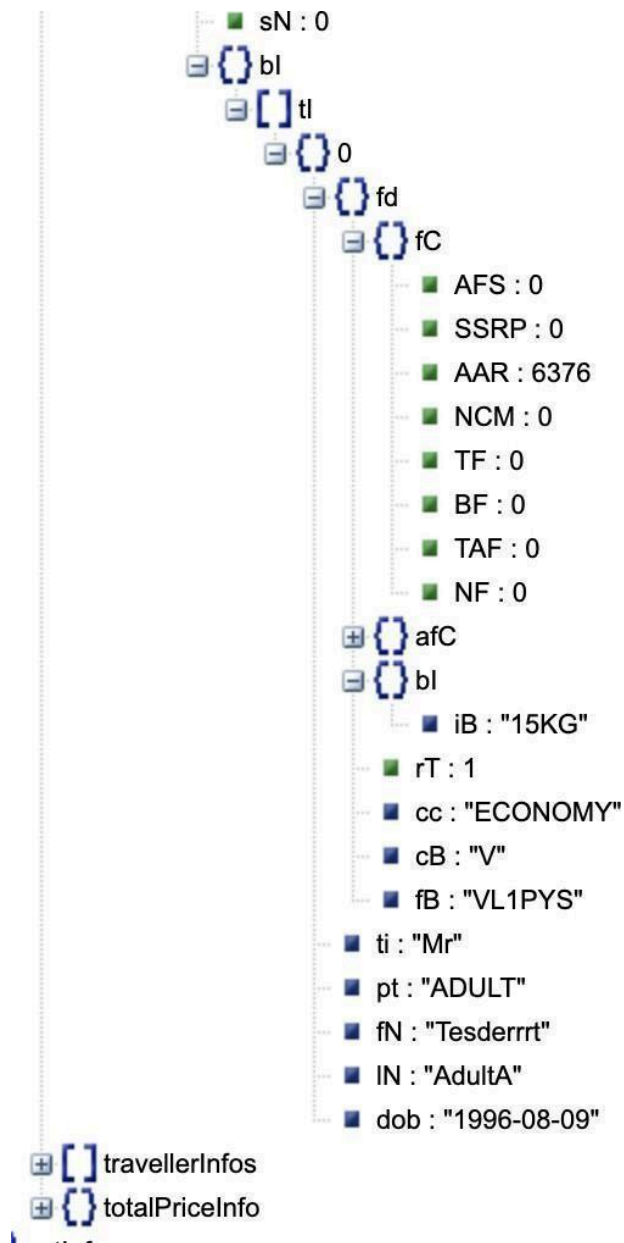

Description of Booking Details Response :

→ Order - Order which Created in Tripjack System


- ◆ **bookingId** - Unique Reference Number for Booking in Tripjack System
- ◆ **amount** - Order Amount which charged in Tripjack System
- ◆ **deliveryInfo** - Booking EmailId and Contact Info which passed in Booking Request
- ◆ **status - Order Status of Booking Id (Its Success or ON_HOLD, PENDING) -**
 - SUCCESS - Order has been Success with Payment & Supplier Side PNR & Ticket Number Generated
 - ON_HOLD - Order has been blocked.
 - CANCELLED - Order has been Cancelled.
 - FAILED - Order has been failed due to Other reasons.
 - PENDING - Order has been fallen to pending state.
 - ABORTED - Order has been aborted.
 - UNCONFIRMED - Order has been unconfirmed when hold booking is not confirmed and PNR is released.

- ◆ **contactInfo** - Emergency contact details which passed in Booking Request

→ itemInfos

- ◆ **tripInfos** - which is already explained same in Review & Search - which contains Journey Related Information
 - Under each sI (SegmentInfo): **(Added from Version 1.5)**
 - bI - Booking Related Traveller Information
 - ◆ ti - Array of Traveller Information
 - fd -
 - fc and afc - Fare Detail of corresponding Traveller - which describes base fare and tax components.
 - rT - Refundable Type
 - cB - Class of Book
 - fB - Fare Basis
 - Bi - BaggageInfo - describes about hand & check-in baggage
 - ◆ iB- Hand Baggage
 - ◆ cB - Check-In Baggage
 - Ti - Traveller Title
 - fN - Traveller First Name
 - IN - Traveller Last Name
 - pt - Traveller Pax Type
 - Dob - Traveller Date of Birth
 - pNum - Passport Number
 - pNat - Passport Nationality
 - eD - Passport Expiry Date
 - pid - Passport Issue Date
 - di - Document Id

- ◆ **totalPriceInfo** - which has Fare Component & Additional Fare Components - Fare Related Information to the Booking.

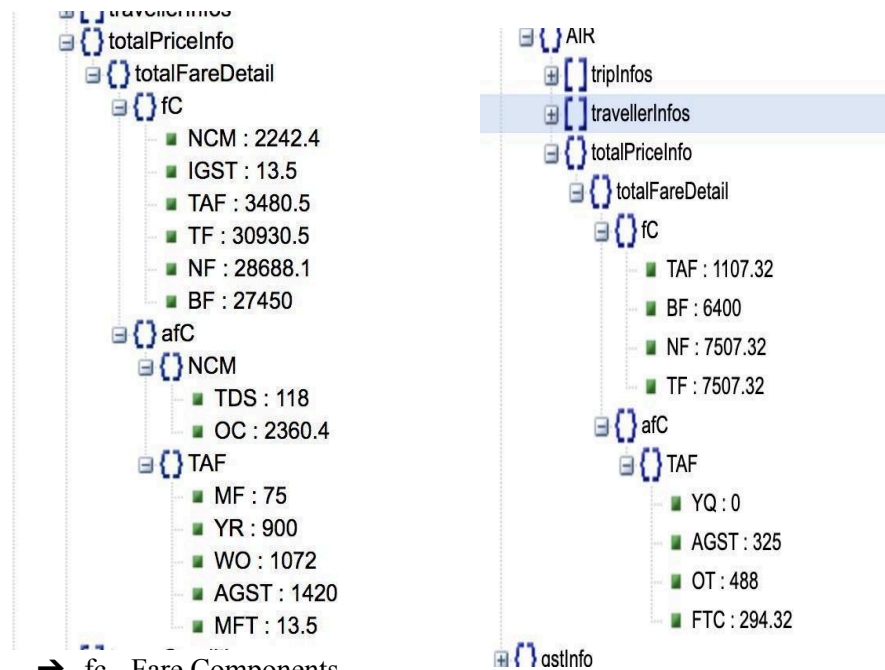


→ fc - Fare Components

- ◆ NF - Net Fare
- ◆ IGST - Integrated Goods and Services Tax.
- ◆ TAF - Taxes and Fees
- ◆ SSRP - Special Service Price (SSR - Baggage, Meal, Seat..)
- ◆ TF - Total Fare
- ◆ BF - Base Fare
- ◆ NCM - Net Commission

→ afc - Additional Fare Components - Break Up of “fc” if applicable

- ◆ TAF - Taxes and Fees Break Up -Refer Taxes and codes Description
 - FTC - Flex Total Charges
- ◆ NCM - Net Commission
 - TDS - TDS
 - OT - Gross Commission
- ◆ SSRP - SSR Price
 - SP - Seat Price
 - MP - Meal Price
 - BP - Baggage Price


- ◆ **travellerInfos** - which has PNR , SSR Related information to Booked Passengers.
 - pnrDetails - key - Segment - “DepartureCode-ArrivalCode” :” Airline PNR”

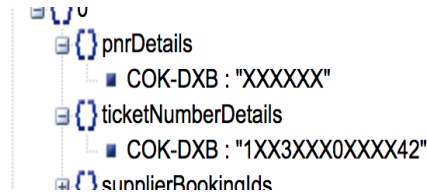


- gdsPnrs - key - Segment - “DepartureCode-ArrivalCode” : ”GDS PNR” and this is an optional field.




- ticketNumberDetails - key - Segment - “DepartureCode-ArrivalCode” : ”ticketNumber”

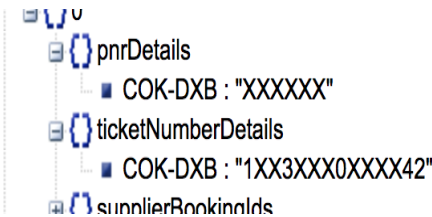

- ssrMealInfos,ssrBaggageInfos,ssrSeatInfos,ssrExtraServiceInfos will followed by key : Segment - “DepartureCode-ArrivalCode” : ”corresponding SSR Information”



- statusMap - Describes Traveller status when any amendment(Cancellation,Void,Reissue & No Show) has been made.
 1. Incase, if any amendment is not being raised for this Traveller(if no changes made on Traveller , statusMap field will be not available)
 2. Describe about sector and Traveller status : Applicable values are “CANCELLED”, ”NO_SHOW”, ”VOIDED” and ”REISSUED”

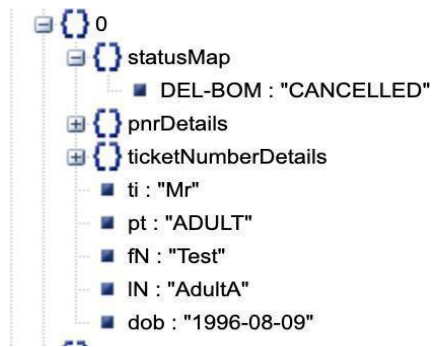

→ **gstInfo** - GST Info which passed in Booking request for billing.

7. Release PNR


This method is used to Release the PNR that is currently on HOLD status, when Customer doesn't want to confirm the pnr. Once this API Called , PNR will be released from Supplier (PNR will be cancelled) , then to confirm the Status of this API , again Booking Details API needs to be called Order Status : UNCONFIRMED (which confirms PNR is released). If Order Status is not UNCONFIRMED, then can contact the TripJack Team.

URL: <https://apitest.tripjack.com/oms/v1/air/unhold>


Method: POST

Sample Payloads : [Click Here to take examples.](#)

Sample Request View :

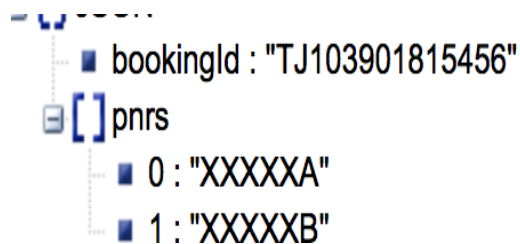

Sample Response View :



Request Payload:

Key	Parent	Type	Description	Mandatory/ Optional
bookingId	root	String	Id of the booking which needs to be released	Mandatory
pnrs	root	Array of String	Pnrs that need to be released	Mandatory

8. Amendment API

This method is used to apply cancellation over a booking. It consists of three apis namely:

1. **Get Amendment Charges (Optional)** -To get the charges of the cancellation over a booking.It won't apply amendment over the booking.
2. **Submit Amendment** - To apply an amendment on a booking this api must be called. It will provide an **amendmentId** which is used to check/poll the status of the amendment.
3. **Get Amendment Details** - To get the status and other details of an applied amendment.

Get Amendment Charges:

This is an optional api request to know the amendment charges for Cancellation. For any amendment prerequisite is that the booking must be in SUCCESS state. It will provide amendment charges and refundable amount pax wise for the booking or if the charges are not present then **“Please contact the support team to know the amendment charges”** in response.


URL: <https://apitest.tripjack.com/oms/v1/air/amendment/amendment-charges>

Method: POST


Sample Payloads : [Click Here to take examples.](#)

Request Structure :


- **bookingId**
 - **type**
 - **remarks** - Mandatory to send some remarks to get amendment charges
 - **trips** - ArrayList of trips for which amendment is to be raised (If Particular Journey to be cancelled)
 - ◆ **src:** departure airport code
 - ◆ **dest:** arrival airport code
 - ◆ **departureDate** -Departure travel date (YYYY-MM-DD)
 - ◆ **travellers** : list of travellers from a particular trip in a booking for which amendment is to be raised.
 - **fn** - first name of traveller
 - **ln** - last name of traveller
1. **Get amendment charges request for complete booking:** Submitting only the booking id will provide charges for all the pax types for the whole complete/booked trip.

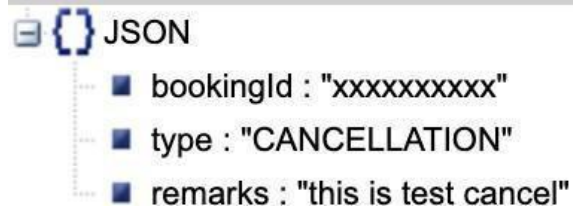

2. **Get amendment charges request for some selected travellers** : Submit travellers details along with their trip details. Charges will be returned only for the given pax types for the given trips.

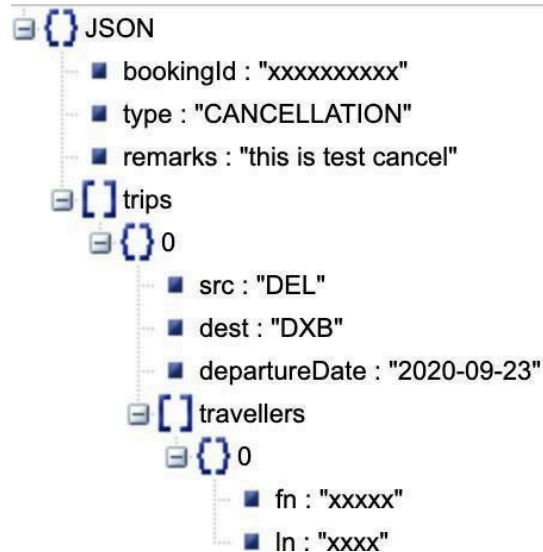

3. **Get amendment charges request for a particular trip**: If charges are required for all pax types in a particular trip then submit trip details without any traveller details.

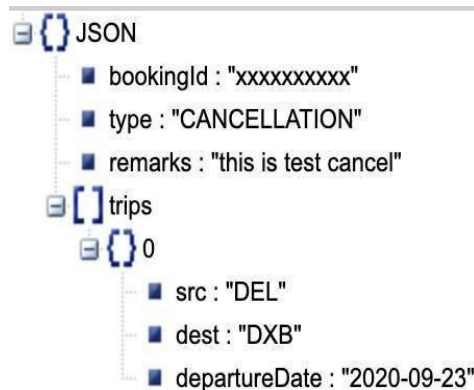


Response Structure

- bookingId
- trips
 - ◆ src - source airport code

- ◆ **dest** - destination airport code
- ◆ **departureDate** - Departure travel date(YYYY-MM-DD)
- ◆ **flightNumbers** - flight numbers list (includes connecting flights flight numbers)
- ◆ **airlines** - airlines code
- ◆ **amendmentInfo** - (Map of PaxType,PaxAmendmentCharges)
 - **amendmentCharges** - Amendment Charges for Particular paxtype
 - **refundAmount** - Refundable Amount for Particular paxtype
 - **totalFare** - Total Fare for Particular paxtype

Sample Response

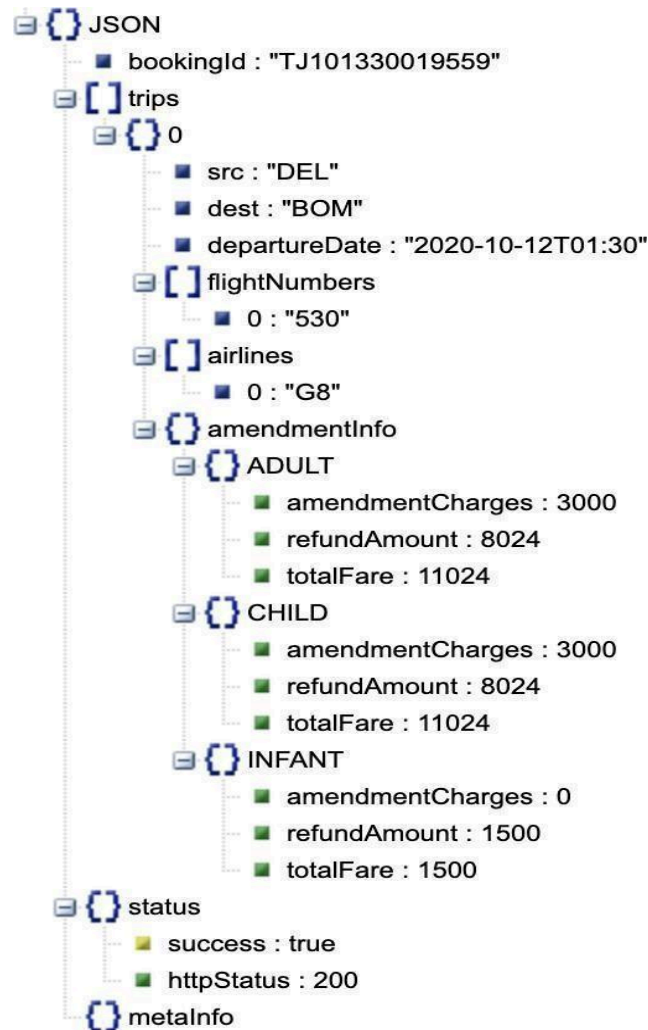

Submit Amendment : (Cancellation)

This is used to apply an amendment on a booking. After applying, an “amendmentId” will be returned in response which will be used to check/poll the status of the amendment.

URL: <https://apitest.tripjack.com/oms/v1/air/amendment/submit-amendment>

Method: POST

Sample Payloads : [Click Here to take examples.](#)


Request Structure :

- **bookingId**
- **type**
- **remarks**- Mandatory to send some remarks to submit an amendment.
- **trips** : ArrayList of trips for which amendment is to be raised
 - ◆ **src** - departure airport code
 - ◆ **dest** - arrival airport code
 - ◆ **departureDate** - Departure travel date(YYYY-MM-DD)
 - ◆ **travellers**- list of travellers from a particular trip in a booking for which amendment is to be raised.
 - **fn** - first name of traveller
 - **ln** - last name of traveller

Submit amendment request for complete booking: Submitting only the booking id with remark will apply amendment on the complete trip.

```
{
  "bookingId": "xxxxxxxxxx",
  "type": "CANCELLATION",
  "remarks": "this is test cancel"
}
```

Submit amendment request for some selected travellers : Submit travellers details along with their trip details. Amendment will be applicable only on the given trip and given travellers.

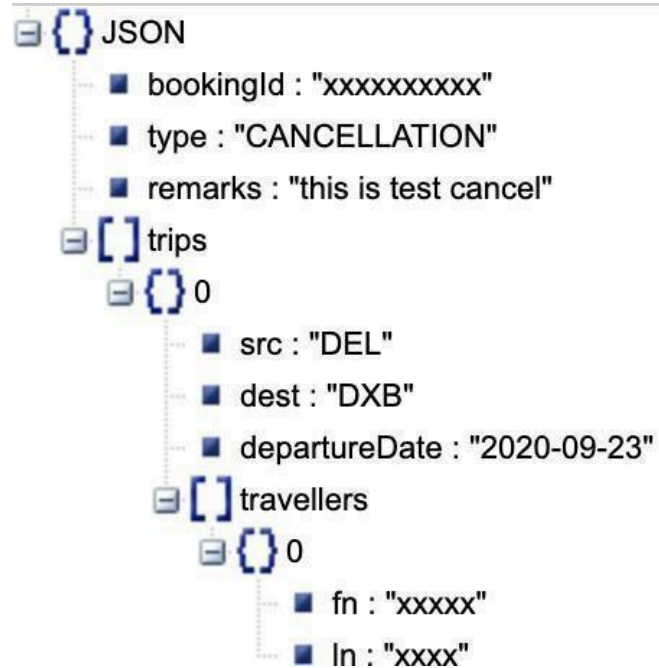

Submit amendment request for a particular trip: If amendment needs to be submitted for all pax types in a particular trip then submit trip details without any traveller details.



Response Structure :

- **bookingId**
- **amendmentId** - Should be used for polling current amendment status

Sample Response



Get Amendment Details:

This request is used for polling the status of amendment, amendment and refund charges. It requires an **amendmentId** returned in the submit amendment response . If the amendment status is in REQUESTED state polling must be done 4-5 times with elapsed 10sec to get the status.(even more than 5 times still in REQUESTED State, then contact the support team to know more about the amendment status).

URL: <https://apitest.tripjack.com/oms/v1/air/amendment/amendment-details>

Method: POST

Sample Payloads : [Click Here to take examples.](#)


Request Sample:

 **JSON**
 amendmentId : "yyyyyy"

Request Structure

- **amendmentId:** AmendmentId (from submit amendment response)

Response Structure :

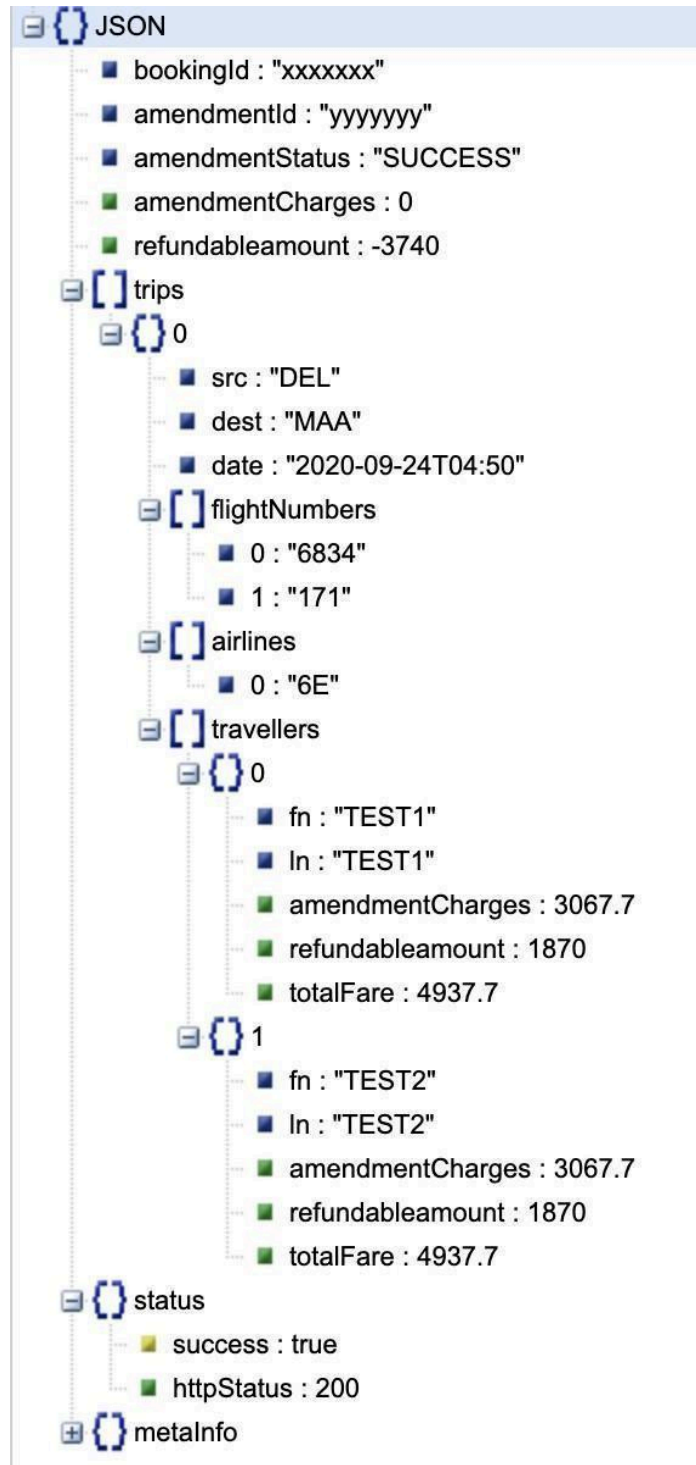

Response Structure : It consists of the amendment details

- **bookingId** - Booking Id
- **amendmentId** - Amendment Id
- **amendmentStatus** -Status of amendment
 - ◆ REQUESTED - Amendment is in requested state
 - ◆ REJECTED - Amendment is rejected.
 - ◆ SUCCESS - Amendment modification has been successful with all changes.
 - ◆ PENDING - Amendment has been in progress.
- **amendmentCharges** - Total Amendment Charges of selected trips
- **refundableAmount** - Total Refund Amount of selected trips
- **totalFare** - Total fare of Booking
- **trips** : It is a list consisting of the tripwise amendment details
 - ◆ **src**- source airport code
 - ◆ **dest**-destination airport code
 - ◆ **departureDate**- travel date
 - ◆ **flightNumbers** -flight numbers list
 - ◆ **Airlines**-airlines list
 - ◆ **travellers**- list of traveller with amendment charges details
 - **fn** -traveller first name
 - **ln** -traveller last name
 - **amendmentCharges** - traveller amendment charges for particular trip
 - **refundAmount**- traveller refund amount for particular trip
 - **totalFare**- traveller total fare for particular trip

Get User Balance Details:


This request is used for getting the results of user balance. It requires an **api key** for authentication. The response will show userId, total balance, wallet balance, credit balance, total outstanding balance.

URL: <https://apitest.tripjack.com/ums/v1/user-detail>

Method: GET

Sample request and response- [Link](#)

Response Structure:

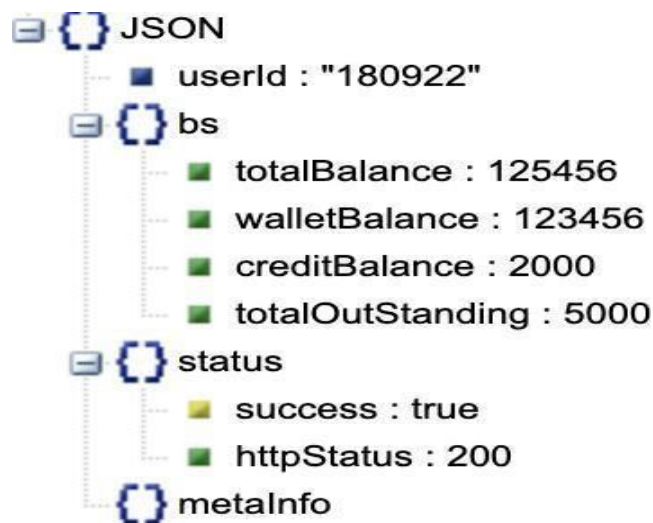

Response Structure : It consists of the following details

- **userId** - user Id
- **totalBalance:** Total Balance.
- **walletBalance** - Wallet Balance
- **creditBalance** -Credit Balance .
- **totalOutStanding** - Total Outstanding Balance.

6.Common Object Structure:

tripInfo:

Key	Parent	Type	Description	Mandatory/ Optional
sl	tripInfo	Array of segmentInfo	Array of segments for the current trip.	Mandatory

segmentInfo:

Key	Parent	Type	Description	Mandatory/ Optional
id	segmentInfo	String	Id which generated during review for ssr	Optional
fD	segmentInfo	Object	Flight Designator (Marketing airline,Equipment and Flight number)	Mandatory
stops	segmentInfo	Integer	Count of the stops in current segment.	Mandatory
duration	segmentInfo	Integer	Travel duration of the current segment in minutes.	Mandatory
cT	segmentInfo	Number (Long)	Connecting Time Between two segments	Optional
da	segmentInfo	Object	Departure Airport	Mandatory
aa	segmentInfo	Object	Arrival Airport	Mandatory
dt	segmentInfo	String	Departure date and time. Format: YYYY-MM-DDTHH:MM	Mandatory
iand	segmentInfo	boolean	arrivalNextday	Optional
at	segmentInfo	String	Arrival date and time. Format: YYYY-MM-DDTHH:MM	Mandatory
isRs	segmentInfo	Boolean	Identify if Return Segment	Optional
sN	segmentInfo	Integer	Segment Number	Mandatory

ssrInfo	segmentInfo	Object	Special service requests	Optional
-------------------------	-------------	--------	--------------------------	----------

fD: [Flight Designator - Marketing Airline,Equipment Type & Flight Number]

Key	Parent	Type	Description	Mandatory/ Optional
al	fD	Object	Airline Information	Mandatory
code	al	String	Airline code	Mandatory
name	al	String	Airline name	Mandatory
isLcc	al	Boolean	True if the airline is LCC else false	Mandatory
fN	fD	String	Flight Number	Mandatory
eT	fD	String	Equipment Type	Mandatory

ssrInfo:

Key	Parent	Type	Description	Mandatory/ Optional
MEAL	ssrInfo	Array of Object	Meal Information	Optional
BAGGAGE	ssrInfo	Array of Object	Baggage Information	Optional

SSR Info:

Key	Parent	Type	Description	Mandatory/ Optional
code	Object	String	Unique code of each ssr	Mandatory
desc	Object	String	Description which needs to be shown in UI	Mandatory

ADULT / CHILD/ INFANT

Key	Parent	Type	Description	Mandatory/ Optional
fC	ADULT (or) CHILD (or) INFANT	Object	Fare Components	Mandatory
afC	ADULT (or) CHILD (or) INFANT	Object	Additional Fare Components	Optional
sR	ADULT (or) CHILD (or) INFANT	Integer	Seat Remaining	Optional
bI	ADULT (or) CHILD (or) INFANT	object	CheckIn & Hand Baggage	Optional
iB	bI	String	Check In Baggage	Optional
cB	bI	String	Cabin Baggage	Optional
rT	ADULT (or) CHILD (or) INFANT	Integer	Refundable Attribute 0: Non-Refundable, 1: Refundable, 2: Partial Refundable	Mandatory
cc	ADULT (or) CHILD (or) INFANT	String	Cabin class	Mandatory
cB	ADULT (or) CHILD (or) INFANT	String	Class Of Booking	Mandatory
fB	ADULT (or) CHILD (or) INFANT	String	Fare Basis	Mandatory
mI	ADULT (or) CHILD (or) INFANT	Boolean	Meal Inclusive	Optional

searchQuery:

Key	Parent	Type	Description	Mandatory/ Optional
routeInfos	searchQuery	Array of routeInfo	This contains the list of route details	Mandatory
preferredAirline	searchQuery	Array of Object	List of Airline codes that are preferred during search. Maximum size of an array will be 10.	Optional
cabinClass	searchQuery	String	Cabin class for which search is done.	Mandatory
paxInfo	searchQuery	Object	Pax details	Mandatory

ADULT	paxInfo	number	Number of ADULT in search	Mandatory
CHILD	paxInfo	number	Number of CHILD in search	Mandatory
INFANT	paxInfo	number	Number of INFANT in search	Mandatory
searchModifiers	searchQuery	Object	Additional (if only direct or connecting flight, or student, senior citizen fares)	Optional
isDirectFlight	searchModifiers	Boolean	True or False	Optional
isConnectingFlight	searchModifiers	Boolean	True or False	Optional

Preferred Airlines

Key	Parent	Type	Description	Mandatory/ Optional
code	preferredAirline	String	Airline code	Mandatory

Refundable Type

Key	Parent	Type	Description	Mandatory/ Optional
rT		Integer		Mandatory

travellerInfo:

Key	Parent	Type	Description	Mandatory/ Optional
pt	travellerInfo	String	PaxType of the passenger	Mandatory
ti	travellerInfo	String	Passenger Title	Mandatory
fN	travellerInfo	String	FirstName of the passenger	Mandatory

IN	travellerInfo	String	LastName of the passenger	Mandatory
dob	travellerInfo	String	Date of Birth if paxtype is INFANT. Accepted type: YYYY-MM-DD	Mandatory only if pt is INFANT
ff	travellerInfo	Object	Frequent flyer object for respective passenger	Optional
[airline_code]	ff	String	Frequent flyer number with airline code as key. Eg: "ff": {"AI": "23422"}	Optional
ssrMealInfos	travellerInfo	Array of Object	Meal Information	Optional
code	ssrMealInfos	String	Unique key from AirReviewResponse if customer selected any	Optional
key	ssrMealInfos	String	Unique key from AirReviewResponse on which segment customer selected	Optional
ssrBaggageInfos	travellerInfo	Array of Object	Baggage Information	Optional
code	ssrBaggageInfos	String	Unique key from AirReviewResponse if customer selected any	Optional
key	ssrBaggageInfos	String	Unique key from AirReviewResponse on which segment customer selected	Optional
statusMap	travellerInfo	Object	Pax wise status (pending/reissue...)	Optional
di	travellerInfo	String	Document Id	Optional

routeInfo:

Key	Parent	Type	Description	Mandatory/ Optional
fromCityOrAirport	routeInfo	Object	Details of Departure City and Airport	Mandatory
toCityOrAirport	routeInfo	Object	Details of Arrival City and Airport	Mandatory
travelDate	routeInfo	String	Date of Departure. Format: YYYY-MM-DD	Mandatory

Order Detail:

Key	Parent	Type	Description	Mandatory/ Optional
bookingId	root	String	Unique Booking Id	Mandatory
bookingUserId	root	String	API booking User Id	Mandatory
amount	root	Float	Total cost for the booking	Mandatory
markup	root	Float	Markup price of the booking	Mandatory
deliveryInfo	root	Object	Object containing the details of delivery emails and mobile numbers	Mandatory
status	root	String	Status of the booking	Mandatory
createdOn	root	String	Timestamp when the booking was created. Format: YYYY-MM-DDTHH:mm:ss.SSS	Mandatory
contactInfo	root	Object	Object containing the details of emergency contact name,email and contact numbers	Optional
itemInfos	root	Object	Trip which booking has been created (contains all info about segment,	Mandatory

			pnr,ticket Number on segments and pax wise)	
--	--	--	---	--

Delivery Info:

Key	Parent	Type	Description	Mandatory/Optional
emails	deliveryInfo	Array of String	List of emails to which booking details will be sent	Mandatory
contacts	deliveryInfo	Array of String	List of mobile numbers to which booking details will be sent	Mandatory

Contact Info:

Key	Parent	Type	Description	Mandatory/Optional
emails	contactInfo	Array of String	List of emergency emails	Mandatory
contacts	contactInfo	Array of String	List of emergency contact numbers	Mandatory
ecn	contactInfo	String	Emergency Contact Name	Mandatory

Response Status :

Key	Parent	Type	Description	Mandatory/ Optional
success	status	Boolean	True if success and False if failure	Mandatory
httpStatus	status	number	Status code of the API call	Mandatory

Gst Info :

Key	Parent	Type	Description	Mandatory
gstNumber	gstInfo	String	GST number which is entered while booking	Mandatory
registeredName	gstInfo	String	GST name	Mandatory
mobile	gstInfo	String	GST Mobile	Optional
email	gstInfo	String	GST Email	Optional
address	gstInfo	String	GST Address	Optional

AmendmentRequest :

Name	Type	Mandatory	Explanation	Mandatory/Optional
bookingId	String	yes	The booking id received while booking the ticket	Mandatory
type	ENUM	yes	Ex: CANCELLATION	Mandatory
amendmentId	String	Yes,only when polling the status of previously raised amendment	It is the id of amendment received after raising the amendment for a booking	Mandatory ,only while polling the amendment status
remarks	String	yes	Any remarks for the amendment request	Mandatory, Only in submit amendment

				request
trips	AmendmentTrip	no	If amendment is to be raised for some specific trips in the booking ,then this object should be passed.	optional

AmendmentTrip:

Name	Type	Mandatory	Explanation	Mandatory/Optional
src	String	yes	Departure airport code for the trip.	Mandatory
dest	String	yes	Arrival airport code for the trip.	Mandatory
departureDate	LocalDate	yes	Departure date of the trip.	Mandatory
travellers	List of AmendmentTraveller	no	It is a list of all the travellers for which the amendment should be raised. If not passed in request then the request is considered for all the travellers in that particular trip.	optional

AmendmentTraveller

Name	Type	Mandatory	Explanation	Mandatory/Optional
fn	String	yes	First name of traveller	Mandatory
ln (small "L")	String	yes	Last name of traveller	Mandatory

AmendmentChargesResponse

Name	Type	Description
bookingId	String	Booking Id
errors	List of errors	Errors in the request if any
trips	List of trips	Tripwise amendment charges

AmendmentTripCharges

Name	Type	Description
src	String	Source of the single trip
dest	String	Destination of the single trip
departureDate	LocalDateTime	Departure date of trip
flightNumbers	Set of String	Flight number
airlines	Set of String	Airline codes
amendmentInfo	Map of AmendmentInfo Object	PaxWise charges Ex Adult,Child,Infant
travellers	List of Traveller Object	Traveller Wise charges details

PaxAmendment Charges

Name	Type	Description
message	String	message
amendmentCharges	Double	Each Pax charge

refundAmount	Double	Each Pax charge
totalFare	Double	Each Pax charge

Amendment Traveller Detail :

Name	Type	Description
fn	String	First Name of traveller
ln (small 'L')	String	Last Name of traveller
amendmentCharges	Double	Traveller charge
refundAmount	Double	Traveller charge
totalFare	Double	Traveller charge

Amendment Response

Name	Type	Description
bookingId	String	Booking Id
amendmentId	String	Amendment Id
amendmentStatus	String	Status of amendment
amendmentCharges	Double	Charges for whole booking
refundableAmount	Double	Charges for whole booking
totalFare	Double	Charges for whole booking
trips	List <AmendmentTripCharges>	Tripwise details

7. Tax Codes and Description

These are below Fare Component Codes which are followed by Tripjack.

Key	Description
AT	Airline Taxes
BF	Base Fare
MF	TripJack Management Fees
TF	Total Fare
NF	Net Fare
TAF	Taxes And Fees
WO	Airport Tax
MFT	TripJack Management Fee Tax
UDF	User Development Fee
AGST	Airline GST
IGST	IGST
TAF	Taxes and Fee
MF	Management Fee
OT	Other Tax
OB	Carrier Ticketing Fee
YR	Carrier Misc Fee
RCF	Travel Fee
YQ	Fuel Surcharge
WO	Airport Tax
PSF	Passenger Service fee

WC	Airport Arrival Tax
YM	Development Fee
OC	Other Charges
BP	Baggage Price
MP	Meal Price
SP	Seat Price
CCF	TripJack Cancellation Fee
CCFT	TripJack Cancellation fee tax
ACF	Airline Cancellation Fee
ACFT	Airline Cancellation fee tax
ARF	Airline Reschedule Fee
ARFT	Airline Reschedule fee tax
AI	Additional Incentive
NCM	Net Commission
BCM	Commission
IATA	IATA Commission
PLB	PLB
SM	Segment Money
CGST	Central GST
SGST	State GST
IGST	Integrated GST
UGST	Union Territory GST
XT	Additional Taxes
PF	Payment Fee
FTC	Flex Total charges

8. Error Codes and Message

Error Code	Message
400	Bad Request
404	Resource Not Found
407	You are not allowed to do search with given parameters. Please change your search criteria
408	Access Denied
411	You don't have enough permission to perform this action
412	UnAuthorized Access!, The provided API key is invalid.
802	Your account is currently inactive
805	Gst number (GSTIN) should be 15 characters only and valid GST
806	Invalid Email or Mobile
810	There is something went wrong with backend service. It could be due to invalid/bad data.
816	Duplicate request.
819	Invalid Address
1000	Request flight is not longer available.Please try different flight
1001	Infant can't be greater than no of adults.
1002	Child can't be greater than no of adults.
1003	Travel date should be in ascending order . Next travel date can't be less than previous travel date.
1004	Travel date can't be after year.
1005	Origin and Destination can't be same.
1006	No of passenger can't be greater than 9.
1007	First Name shouldn't be blank and it shouldn't contains any whitespace character.

1008	Last Name shouldn't be blank and it should contains only alphabet and whitespace character.
1009	Price Id's cannot be empty
1010	Any two passengers can't have same name
1012	Adult's age should be between 12-100 years from the date of departure.
1013	Child's age should be between 2-12 years from the date of departure.
1014	Infant's age should be between 0-2 years from the date of departure.
1015	Total amount passed in payment doesn't match with total order Amount
1019	Minimum time between two consecutive trips does not satisfy the criteria.
1020	Same sector same day is not allowed
1051	Adult's dob required.
1052	Child's dob required.
1053	Infant's dob required.
1056	Seat Selection Not Applicable
1057	No booking found for booking Id
1059	Hold time limit expired
1064	Please, enter passport number.
1065	Please, enter valid passport issue date.
1066	Please, enter valid passport expiry date.
1067	Passport should not expire within 6 months from travel date.
1068	Travel date can't occur before Passport Issue Date.
1071	Fare is no longer available for this booking
1119	Child or Infant cannot be selected for student fare
1120	Child or Infant cannot be selected for senior citizen fare
2540	Please contact support team to know the amendment charges
2541	Amendment has already been raised for requested booking Id

2542	Invalid Trip/Passenger requested , Check Trip or Passenger details submitted
------	--

2543	Amendment Not allowed because travel date is passed
2544	Amendment already raised, call support or check amendment for updates
2545	Invalid Amendment type requested
2546	Invalid Amendment Id sent in request
2549	Amendment Type not passed in request
2550	Departure Airport cannot be empty or Blank
2551	Arrival Airport cannot be empty or blank
2552	Departure Date cannot be empty or Blank
2553	Amendment unable to be raised due to #custom , Please contact support team
2554	Either Booking id or amendment type is invalid
2555	Invalid amendment id
2556	Remarks is mandatory to send in request
2557	Either sector or departure date submitted is invalid
2560	Emergency ContactEmail/ContactNumber/ContactName can't be null
2561	Emergency Contact Name cannot be blank/null!
2567	Document Id not provided in passenger details
2568	Document Id cannot have special characters
2569	For senior citizen fare, age should be more than 60 years on the date of departure

9. UAT Certification (Test Case)

API Partner needs to go through a certification process in order to get live access. Here we are mentioning the certification process which is Mandatory to be completed when the client is done with the API Integration.

1. Published Fares
2. Special Return
3. Passport Cases
4. With GST / Without GST
5. With SSR
6. With Student/Senior Citizen (optional)

<u>S.no</u>	Type	Sector *	Pax	Flight Type
Oneway				
1	Oneway	DEL - BOM	1A	DIRECT
2	Oneway	DEL - BOM	1A	CONNECTING
3	Oneway	DEL - DXB	2A - 2C	DIRECT
4	Oneway	BOM - SIN	2A - 2C	CONNECTING
5	OneWay	MAA - DMK	3A - 2C	DIRECT
6	OneWay	DXB - BKK	5A - 3C - 2I	DIRECT
7	OneWay	DXB - BKK	5A - 3C - 2I	CONNECTING
7	OneWay	BOM - MAA	5A - 4C - 3I	DIRECT
Return				
1	Dom Return	DEL - BOM	1A	DIRECT
2	Dom Return	DEL - BOM	1A	CONNECTING
3	Return	DEL - DXB	2A - 2C	DIRECT
4	Return	BOM - SIN	2A - 2C	CONNECTING
5	Return	MAA - DMK	3A - 2C	DIRECT
6	Return	DXB - BKK	5A - 3C - 2I	DIRECT
7	Return	DXB - BKK	5A - 3C - 2I	CONNECTING

7	Return	BOM - MAA	5A - 4C - 3I	DIRECT
8	Dom Return	DEL - BOM	3A - 2C	DIRECT
9	Dom Return	DEL - BOM	5A - 3C - 2I	CONNECTING
Multicity				
1	Domestic	Any	5A-3C	CONNECTING
2	Domestic	Any	5A-4C-1I	DIRECT
3	Intl	Any	4A-2C-2I	DIRECT
4	Intl	Any	4A-2C-2I	CONNECTING

Note:

1. Please provide Request & response for all methods that you are implementing.
2. Certification request by API Partner (API Partner makes a certification request by providing JSON Request/ Response along with confirmation numbers for the test cases)
3. Test Cases Verification - will verify the test cases using JSON Request/ Response and suggest, if there is any change required. The turnaround time for the test case verification is around 1-4 working days.
4. Sign off and Live access - On successful completion of all the above steps, Tripjack.com will give sign off and provide Live access details to the client. It is strongly recommended that the API Partner also completes their UAT before making the services live at their end.

Going Live Steps :

1. Certification Process

- Clients must provide all the test cases mentioned in the document.
- Logs should be in json format.
- Clients should not send their logs.
- No modification in logs should be there.
- API Key also needs to be attached along with the logs.
- There should be different files for each request and response.
- Passenger Name should be proper. (TBA, Test cannot be passed for certification)

Bookings Should have :

1. Published Fare Booking - Domestic, International
2. Special Return Fare Booking
3. Booking with Passport
4. Booking with GST
5. Booking with SSR (Baggage,Meal)
6. Booking with Student/Senior Citizen

2. Post Certification

- Point your Integration to the Production environment endpoints (Urls mentioned in document) and apikey.
- It is important for you to provide the current IP address ranges to whitelist at our end.

Frequently Asked Questions

The following are support queries that are frequently asked by developers to the API Support team. This is not an exhaustive list, and you can find more detailed help in our guidelines and specifications. If you need technical help and cannot find it here or elsewhere in the documentation, then please contact the Tripjack support team.

Please make a note that these FAQs are listed as per the most updated version of all APIs.

Current API Version : 1.7.0

Whenever you raise any queries on support email. Below things are necessary for a speedy response from the support team.

1. URL on which you are trying/sending a request.
2. API key used in the request
3. Request and Response json
4. API version.

General Errors

- **Invalid Access. Send valid authorization token. Either token is invalid or it's expired** : Please pass the api key in the request headers (mandatory for all APIs), Please refer to the document for sample code.

- **Unauthorized Access Error** : API Key passed in headers is wrong, Please contact the tech support team.
- **Insufficient balance** : Please contact the Business Team to topup the account.
- **Inactive Account** : Please contact the Business Team , your current account or apikey is Disabled.

* ALL System/Flight Related error mentioned on [Error code and Message](#)

Q. How to pass headers on request ?

A. Refer to [Sample Code](#)

Q. Where to find the Airport and Airline Related Information?

A. For Airport Codes and Airline Info , Please refer to [IATA Website](#)

Q. Is there an API that checks source and destination or do we need to maintain masters at our level?

A. No, we don't have the api to check source and destination. On search api request you have to pass both.

Q. How many passengers can be passed in Search API at minimum and maximum?

A. Minimum: 1 adult

Maximum: Sum of adult and child passengers should be equal or less than 9. Number of infants should be equal or less than the number of adults. If these conditions are not satisfied then you will get errors.

Q. What are the possible values for CabinClass types?

A. "ECONOMY", "PREMIUM_ECONOMY" , "BUSINESS" , "FIRST"

Q. For how long are the Search PriceIds valid?

A. PriceIds are Valid for 30 minutes

Q. Is there a way to filter Price, Departure from time, Arrival to time and 2 stops and more than 3?

A. No, we don't have this flexibility in API.

Q. How would I know If an Segment has connecting flights?

- A. There is an element in response to Search (TripInfo :: sI) named as "stops" and "so". It has all the information for connecting stops.
- stops - number of stops
 - so - stopover airport information

Q. Can you please let me know how to get Layover information in Search API between each flight?

A. This can be checked in (sI :: cT) object. if there is any connecting flight. If there is no connecting flight this field will come in response.

Q. Which id can be used in request to fetch Fare-Rule?

A. Particular Trip priceId from search Response (During Search/Review) , in case after ticket booked BookingId has to be passed in request with flowtype.

Q. How can I get Description of Each Fare/Tax Component ?

A. Refer [Tax and Code Section](#)

Q. What is the difference in review requests for Domestic One Way and Domestic Return and Domestic multi city?

A. **In Case of Domestic Return** - 2 price id has to be passed (1 flight selected from Onward and another from Return)- in a single review request.

In Case of Domestic Multi-city - N (Maximum 6) of price id has to be passed - based on route requested in search (in single review request.)

In case of International Domestic/ Multi city - Only one price id has to be passed in review request.

Q. In case of Domestic Return or Multi City , will we get more than 1 bookingId?

A. No, In all cases there will be only a single bookingId.

Q. Is Passport Info mandatory for all International sectors?

A. No, It depends on the supplier , We will return the parameters(**pm**) in the review response that need to be sent in the booking request. If its not available in response it means passport is not mandatory

Q. Is Gst Applicable for All bookings?

A. No, it depends on the supplier, whether that supplier supports gst or not, This information will be returned in review response If the value of igm is true then gst information has to be passed mandatorily in the booking, If it's false and gstappl is true it means gst option is available against this price.

Q. When to call Seat API ?

A. This is only allowed to call only when “isa” is true in the review response.

Q. Do We need to validate fare before going to book?

A. No , There is no need to validate fare before calling book api , If there is any fare Jump , then it will be returned in review response. (**alerts**) - Example [Link](#)

Q. Do we need to validate fare in case of Hold booking , before going to confirm?

A. Yes , After hold , you need to call fare-validate api to check if the fare is still available or not, if this api returns success, only then proceed for confirm booking. Else that fare is no longer available and you will have to create new booking.

Note : In case if there is any FARE JUMP (which can happen in GDS Booking) then this API will return false and you have to create a new booking.

Q. What is the Age Limit of Child & Infant booking?

A. An Infant had to be less than 2 years , A child should be less than 12 years.

Q. What are all the Passengers Titles that can be passed?

A. For Adults : (Mr , Mrs , Ms) , for Child (Ms , Master), for Infant (Ms , Master).

Q. An itinerary has a connecting flight then, will PNR and E Ticket be different for connecting flights?

A. No. PNR and E Ticket will be the same as validating carrier(issuing carrier) for all connecting flights will be the same.

Q. API for Date/Time change

A. Review/Revalidate API , (sl :: dt and at) will get updated , if supplier updates new departure and arrival time.

Q. Is all Gst Fields (GST Registered Number,Name, Mobile, Email & Address) Mandatory ?

A. Yes, all fields are mandatory, when ever passing gst fields (all relevant fields need to be passed in request).

Q. How to support Special Return Fare in case of Domestic Return ?

A. In Case of Special Return Fare (FareType Should be SPECIAL_RETURN) and current “sri” tag from PriceInfo has to chosen from ONWARD FLIGHT and selected “sri” tag has to be matched RETURN FLIGHT Price “msri” tag should contain selected “sri” tag. (vice versa for Return flights to onward flights). Refer More on : Page No : 20, 21

Q. What is the time duration between hold booking and confirm booking? -

A. In Booking Detail Response under (itemInfos :: timeLimit) can be referred , and in case of no time limit specified in response it means our system doesn't have any information about the same. It would be an individual client what they want to display to their customers.

Q. What Payment Medium type will be used in Booking ?

A. API Partner no need to send Payment Medium in Book or Confirm Book API Request, Tripjack system will decide which payment should be used for API Partner.

Q. What is the SSRTYPE supported in the TripJack platform ?

A. BAGGAGE

- B. MEAL
- C. SEAT

Q. How can I add SSR to Travellers while Booking ?

- A. In AirReviewResponse for every (**segment :: ssrInfo**) can be used, where code is primary key for which is selected for traveller and key will be segment key ,that need to be passed in Book Request.
- B. In AirReviewResponse , ssrInfo will be present only if the quantity available is greater than requested passenger count.
- C. In Case of connecting segments (Baggage SSRType) -
 - a. if the amount field will be null to represent whatever selected on the first segment , the same will be applicable on all consecutive segments.
 - b. If the amount field is not null , then the corresponding segment is applicable to selected different baggage options. (Example : Thru Flight Scenarios).Refer more on : Page No : 44

Q. Can I pass the default/dummy DOB ?

- A. No, In case of DOB/Passport mandatory , exact DOB of Passenger/Traveller needs to be passed.
- B. you can validate the dob object under condition in the review response for the same.

Q. What are the FareTypes supported in Search Response ?

- A. Please check this information with the Business Team.

Q. What cases need to be covered in the Certification Process ?

- A. Published Fare Booking - Domestic, International
- B. Special Return Fare Booking
- C. Booking with Passport
- D. Booking with GST
- E. Booking with SSR (Baggage,Meal).

Sample Format for Certification logs - [Link](#)

Q. Is Duplicate Booking allowed In TripJack ?

- A. No, System will check Same Itinerary and Same Passenger Booked by the same agent , then System wont allow to create the booking for a new request.

Q. Is Multiple Current Code supported In TripJack ?

- A. No, Tripjack Air API Supports Only INR

Q. In the search API response, we are getting all types of cabin class results, Where as in the request, we have passed Cabin Class as "ECONOMY" only.

- A. For Domestic (India) & International

- a. If we have ECONOMY in the request then we are supposed to get results for all the cabin classes.
- b. If we have PREMIUM ECONOMY in the request then we are supposed to get PREMIUM ECONOMY, BUSINESS and FIRST class.
- c. If we have BUSINESS on request then we are supposed to get BUSINESS and FIRST class.

Q. In case a flight appears with a special return fare. Do we also get the same flight if available at normal fare. In other words do we get a special return fare and normal onward and return fare in the same flight in the same search result?

A. Yes, if flights are available at normal fare, then it will reflect in the same search results.

Q. How can we identify if a fare is refundable or nonrefundable?

A. You can check the same from the "rT" tag under totalPriceList in search/review response.

- a. rT - Refundable Type
 - i. 0 - Non Refundable
 - ii. 1 - Refundable
 - iii. 2 - Partial Refundable

Q. Can we select different baggage in 2 connecting segments(DEL-BLR--> DEL-BOM-BLR, DEL-BOM 30kg, BOM-BLR 60 Kg)?

A. No, you have to select the same baggage details for all connecting segments.

Q. Can we pass Frequent flyers on booking requests?

A. Yes, you can pass the same in book request under travellerInfo:

```
"ff": {
  "AirlineCode": "frequent flyer number"
}
```

Q. How can we identify validating and operating airlines?

A. For Operating airlines you can refer to oB Tag.

- a. In case "oB" is not present in the response, we have to consider the "fD" tag. In this case both Marketing airline (Validating airline) and Operating airline are the same.
- b. In case the operating airline and marketing airline are different, the "oB" tag will be present in the response.

Q. What is code in totalPriceList?

A. The account code(corporate/retail code) of fare . It is an optional field and will be shown in Search and Review response under totalPriceList if applicable.

Q. Is Corporate Fare applicable for infants ?

A. No - Corporate fares are not applicable for Infants.

Q. Will Tripjack send SMS/Email to the given contact number/email in Booking Request ?

- A. No - Tripjack wont send any SMS/Email to Given contact number/email in booking request.
- B. Tripjack API will send SMS/Email to API Partner Only.

Q. How can we get the student and senior citizen fare in Search response?

Ans:- Using pft field in searchModifiers

Student sample request- [Student search](#)

Senior citizen sample request- [Senior citizen search](#)

Note : Student / Senior Citizen - applicable only for ADULT Paxtype, if requested other than Adult pax type, tripjack system gives error on Such requests.

Q. While searching for the student and senior citizen fare , do we get the only student and senior citizen fare in the search response?

Ans :- If Search is for STUDENT Fare , then only Student fare will be applicable, Same for SENIOR_CITIZEN then fare returned will be only for Senior Citizen..

Q. How can we identify the student fare and senior citizen fare from search responses?

Ans :- In SearchResponse, the respective TripInfo Object with Price Information has “ft” (which is fare type) representing STUDENT or SENIOR_CITIZEN (which is similar to PUBLISHED Fare).

Q. What is the minimum and maximum age of students which will be applicable for the student fare?

Ans :-

1. STUDENT : On the date of departure - should be Minimum 12 years.
2. SENIOR_CITIZEN : on the date of departure - should be Minimum 60 years

Q. Is there any special document ID needed to pass while booking for Student/Senior Citizen Fare ?

Ans :- Yes, In AirReviewResponse -> BookingConditions -> DocumentConditions(di) - will represent - is document id applicable or mandatory to be passed while booking.

Q. Is DOB mandatory for student or senior citizen fare?

Ans :- It depends on AirReviewResponse -> BookingConditions -> DobConditions (which is similar to existing flow).

Q. Will the same flow for the Cancellation Amendment for Student/Senior Citizen & is there any additional fields that need to be passed ?

Ans :-

1. Existing flow for the Cancellation Amendment remains the same.
2. No additional fields are required.

Q. How baggage information is mapped to segments ?

Ans:-

1. In Search response Baggage information is mapped with the segment **id**.

Q.How can we verify the TJ_FLEX fares

Ans:- There is a fareIdentifier key under totalProceList if the value equals TJ_FLEX.

TripJack- Flights 2D Barcode User Guide

Objective

The Ministry of Civil Aviation has mandated airlines to issue air tickets with barcodes to quicken the flow of passengers at airport entry gates. In order to implement this order, Tripjack has implemented 2D Barcode on the Flight tickets.

In an effort to provide a better level of customer services and enhanced operations and security at all Airports we will require that all our API partners include a Barcode of the booking reference in all their communications Itinerary to the customers.

Implementation

Instructions to Generate Bar Code on Itinerary

- The suggested text should be “Your Airlines Reference:” followed by the code.
- This should have a 10 pixel margin at top and at right to ensure that codes do not overflow page.
- Difference between 2 barcodes should be 50 pixels.
- Below is the sample screenshot for your reference

Deepanshu Bhatta Email: deepanshu.bhatta@tripjack.com Phone: 8881865469 Address: E-425 Kamla Nagar	
Booking Time: Feb 5, 2023 12:51 AM Booking ID: TGS114420060474 Booking Status: CONFIRMED	 Vistara 5SNMRA Airline PNR

Flight Detail						
*Please verify flight timings & terminal info with the airlines						
Flight	Fare Type	Class	Type	Departing	Arriving	Duration
UK - 115 Vistara	NA	Premium Economy	Refundable	Tue, 21 Feb '23, 23:45 Delhi, 3 Delhi Intl airport	Wed, 22 Feb '23, 08:20 Singapore, 3 Changi Intl Arpt	6h 5m

Passenger Details						
Sr	Name & FF	Sector	PNR & Ticket No.	Baggage Check-in Cabin	Meal, Seat & Other Preference	Document Id
1	Mr FSGVSGVS DSGSDG (A)	DEL-SIN	5SNMRA (2281095029808)	35KG	NA	
						
2	Mr GSD GSDGDSG (A)	DEL-SIN	5SNMRA (2281095029809)	35KG	NA	
						

- Bar code is not required for Infant

- Syntax to create the PNR Barcode:**

<Format Code><Number of Legs Encoded><Passenger Name><Electronic Ticket Indicator><Operating carrier PNR Code><From City Airport Code><To City Airport Code><Operating carrier Designator><Flight Number><Date of Fight (Julian Date)><Compartment Code><Seat Number><Check-in Sequence Number><Passenger Status><Field Size of variable>

Barcode Example: M1SRIVASTAVA/PANKAJ ABC123 DELBOM6E 0112

226Y00000000 000

String details are as follows:

Element Description	Field Size	Unique/Repeated	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Format Code	1	U	M																			
Number of Legs Encoded	1	U	1																			
Passenger Name	20	U	S	R	I	V	A	S	T	A	V	A	/	P	A	N	K	A	J			
Electronic Ticket Indicator	1	U																				
Operating carrier PNR Code	7	R	A	B	C	1	2	3														
From City Airport Code	3	R	D	E	L																	
To City Airport Code	3	R	B	O	M																	
Operating carrier Designator	3	R	6	E																		
Flight Number	5	R	6	1	1	2																
Date of Fight (Julian Date)	3	R	2	2	6																	
Compartment Code	1	R	Y																			
Seat Number	4	R	0	0	1	A																
Check-in Sequence Number	5	R	0	0	2	5																
Passenger Status	1	R	0																			
Field Size of variable	2	R	0	9																		

Element Description	Field Size	Remarks
Format Code	1	Default → M
Number of Legs Encoded	1	Default →1
Passenger Name	20	Syntax: <Last Name>/<FirstName><MiddleName> Trimmed to 20 Character in case more than 20 Right padded with space in case less than 20 character
Electronic Ticket Indicator	1	Use Blank space

Operating carrier PNR Code	7	<i>This has been to 7 Character, in case less than 7 this has to be right padded.</i> <i>Ex: ABCDEF as "ABCDEF".</i>
From City Airport Code	3	<i>Departure Station code</i>

To City Airport Code	3	<i>Arrival Station code</i>
Operating carrier Designator	3	For Eg; → "6E " , "G8" etc. <i>This has to be 3 characters in case less than it should be right padded.</i>
Flight Number	5	<i>This has to be 5 character in case less than 5 it should be right padded.</i> <i>Ex:</i> <i>1 will be as "0001 "</i> <i>11 will be as "0011 "</i> <i>111 will be as "0111 "</i> <i>1111 will be as "1111 "</i> <i>11111 will be as "11111"</i>
Date of Fight (Julian Date)	3	You will need to convert to JulianDate. <i>Refer to</i> http://www.longpelaexpertise.com/toolsJulian.php#:~:text=Today's%20date%20is%2008%2DFeb,Today's%20Julian%20Date%20is%2023039%20. Consider the last 3 digits of the "Converted value" For eg; For the date 01-May-23, Julian Date is 23121 Hence Date of Flight will be 121
Compartment Code	1	Default → Y

Seat Number	4	Default → "0000"
Check-in Sequence Number	5	Default → "00000"
Passenger Status	1	Default → 0
Field Size of variable	2	Default → 00

- **Barcode needs to be generated journey wise for each individual passenger.**

For Instance, Consider the following scenario:

Mr. A and Mr. B have booked a return flight Del-Mum-Del with travel dates as 9th Feb(Onwards) and 12th Feb(Return).

Then as per the new implementation, the ticket copy will have 4 barcodes:

1. Barcode for Mr. A for Del-Mum journey
2. Barcode for Mr. B for Del-Mum journey
3. Barcode for Mr.A for Mum-Del journey
4. Barcode for Mr. B for Mum-Del journey

API Key Configuration – User Guide

What is it?

API Key Configuration is a feature that allows authorized users to generate and manage secure API keys. These keys are used to authenticate users in the system, enabling them to search, book, and perform other operations seamlessly.


- An API key is a unique, encrypted alphanumeric string (with special characters).
- It identifies an application or an authorized user for secure access.

How does it work?

This feature allows users to generate and manage their own API keys.

Steps to Generate or Update an API Key:

1. Login to your account.
2. Navigate to Manage User → API Configuration (from the left-side menu).
3. You will see the following options:
 - API Key
 - Whitelisted IPs
4. To generate or update:
 - Enter/Update the required Whitelisted IPs.
 - Click SAVE.
5. A confirmation popup will appear:
 - Select YES → Generate a new API key.
 - Select NO → Keep your existing API key unchanged and only update the IPs.

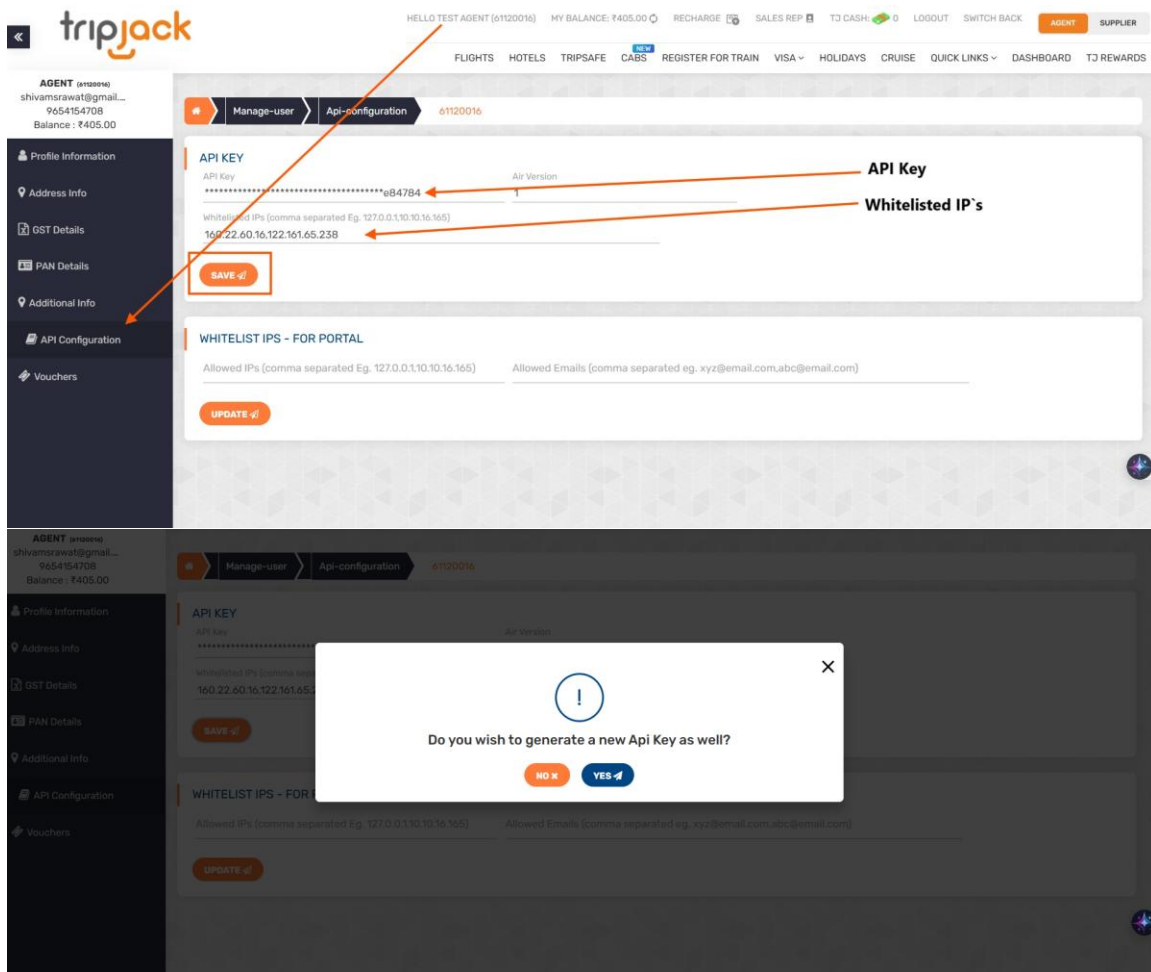

Whitelist IPs

- You can add multiple IP addresses (comma-separated).
- Only these IPs will be allowed to access the system using your API key.
- This ensures security by limiting API usage to authorized IPs only.

Important Notes

- Whenever you revisit the API Configuration page, the API Key will be masked. Copy and save it securely when you generate it the first time.
- Use Whitelist IPs to prevent your API key from being exposed to all users.
- Never share API Keys through email, SMS, or with third parties. This may compromise your system's security.

The system does not support IPv6. Please disable IPv6 before requesting API, otherwise it may result in an "Access Denied" error.



AIR API DOCUMENTATION - POST-BOOKING ANCILLARIES

© Copyright 2023, Tripjack (Powered By Atlas Travels Online).

This document, which contains confidential material, is private and confidential and is the property and copyright of Tripjack. No part of this document may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, chemical, photocopy, recording or otherwise without the prior written permission of Tripjack.

Revision History

REVISION	DATE	REVISION
1.0	22-06-2023	POST-ANCILLARIES

Below are the available service URL & definition

UAT Environment:

Protocol : https

Domain: apitest.tripjack.com

SERVICE NAME	URL
FETCH SSR	https://apitest.tripjack.com/fms/v1/ancillaries/fetch/ssr
FETCH SEAT	https://apitest.tripjack.com/fms/v1/ancillaries/fetch/seat
ADD SSR	https://apitest.tripjack.com/oms/v1/air/amendment/add/ssr
AMENDMENT DETAILS	https://apitest.tripjack.com/oms/v1/air/amendment/amendment-details

Production Environment:

Protocol : https

Domain: tripjack.com

SERVICE NAME	URL
FETCH SSR	https://tripjack.com/fms/v1/ancillaries/fetch/ssr
FETCH SEAT	https://tripjack.com/fms/v1/ancillaries/fetch/seat
ADD SSR	https://tripjack.com/oms/v1/air/amendment/add/ssr
AMENDMENT DETAILS	https://tripjack.com/oms/v1/air/amendment/amendment-details

1.0 POST BOOKING ANCILLARIES

These APIs need to be invoked in a mention order.

- FETCH SSR
- FETCH SEAT
- ADD SSR
- AMENDMENT DETAILS

1.0.1 FETCH SSR API

This method retrieves the SSR (MEAL/BAGGAGE) information after the booking process is finalized and the booking status is marked as SUCCESS.

→ For meals, they can only be added once per passenger per segment. If a meal has already been selected during pre-booking, it cannot be added again for the same passenger for that segment.

→ For baggage, it can be added per passenger per trip, and multiple baggage items can be selected(Once at a time).

Note : Infants are not allowed to add SSR

URL: <https://apitest.tripjack.com/fms/v1/ancillaries/fetch/ssr>

Request Method : POST


Sample Payloads : will attach soon


FETCH SSR REQUEST STRUCTURE :

 JSON

```
■ bookingId : "TGS108370066489"
```

FETCH SSR RESPONSE STRUCTURE :

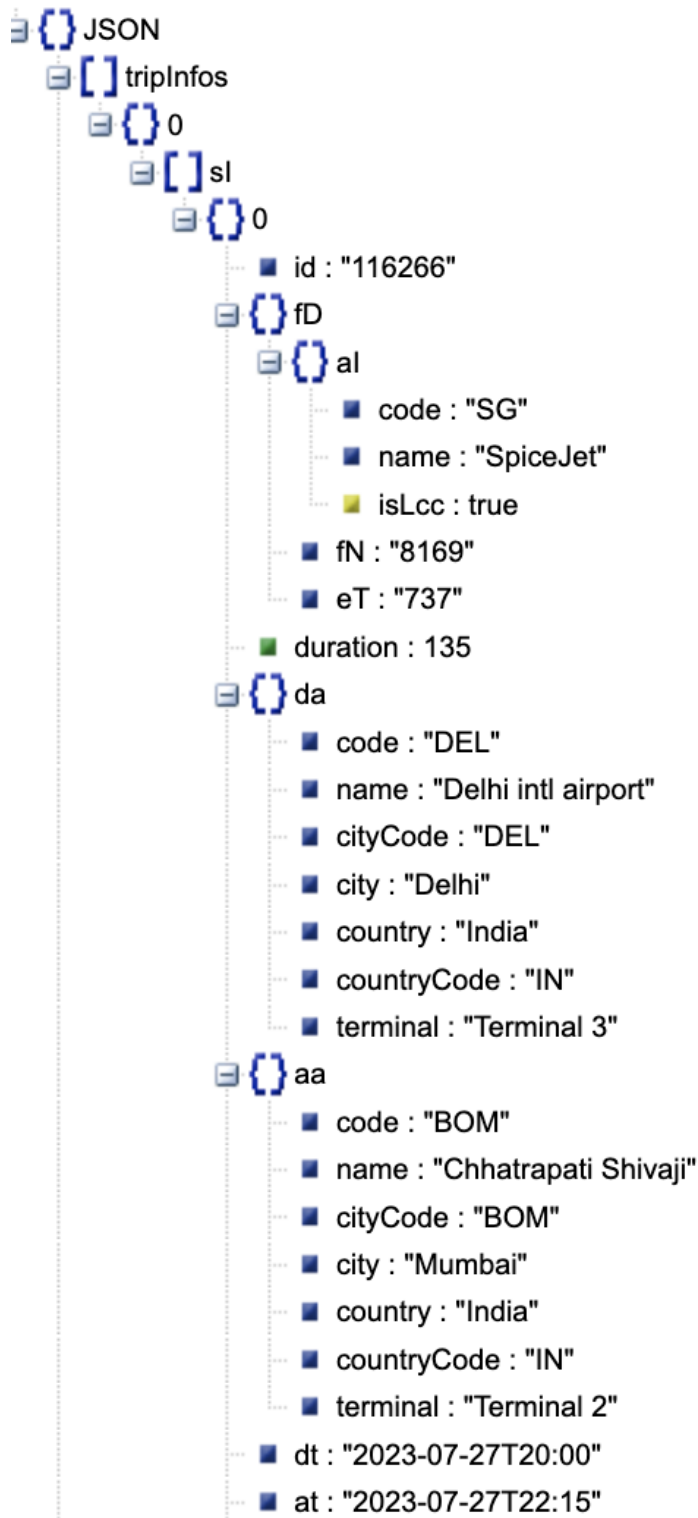


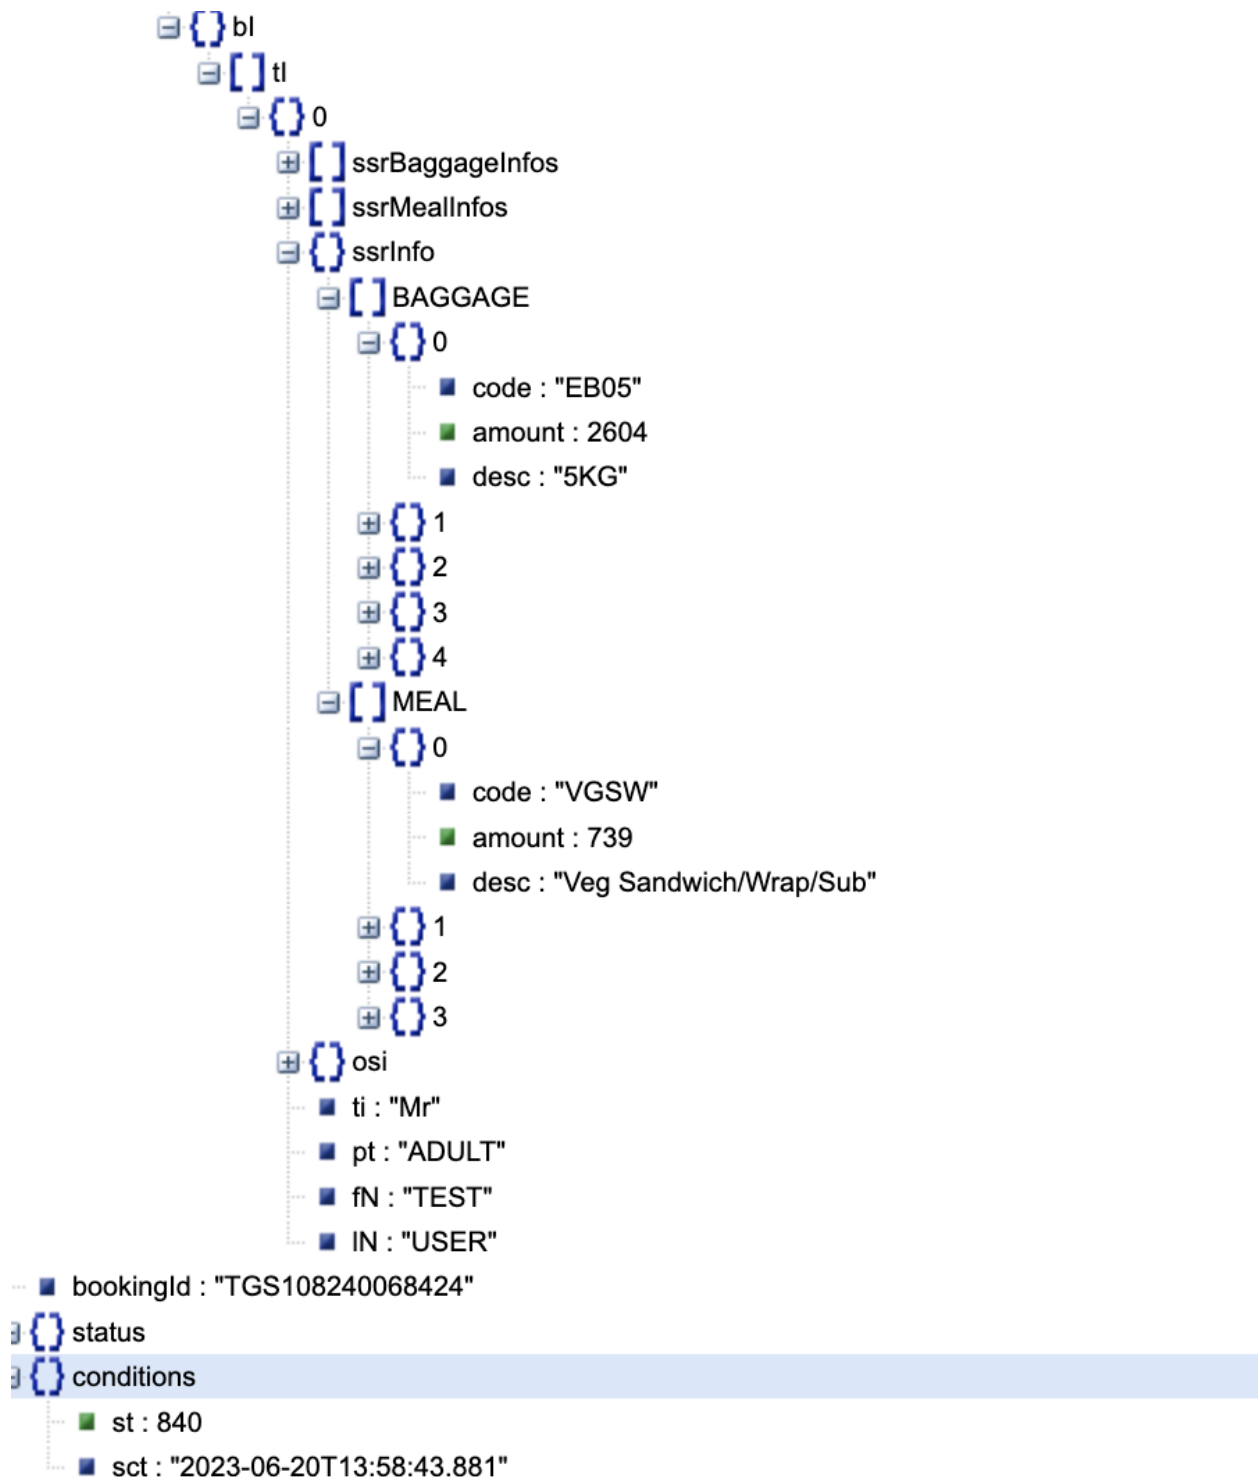


TriplInfos → Includes List of SegmentInfos

sl (Segment Information) - List<Segments> : which has control of the fields.

- **Id** - Segment ID - which is used for SSR if any to be selected.
- **fD** (Flight Designator) - which has Marketing Airline Information , Airline Equipment type, flight number).
 - **al** - airline info which has code (IATA Airline Code, followed with Airline name).
 - **fN** - Marketing Airline Flight Number
 - **eT** - Marketing Airline Equipment Type
- **duration** - Segment Journey duration
- **da** - Departure Airport Information (which has IATA Airport code,name,country,Terminal)
- **aa** - Arrival Airport Information (which has IATA Airport code,name,country,Terminal)
- **dt** - Departure Time of this segment (YYYY-MM-SS HH:MM Format)
- **at** - Arrival time of this segment (YYYY-MM-SS HH:MM Format)
- **bl** - Booking Related Information
 - **tl** (travellerInfo) - List of Traveler information
 - **ssrBaggageInfos** : It contains information of already selected Baggage , it will be empty in case no baggage is selected.

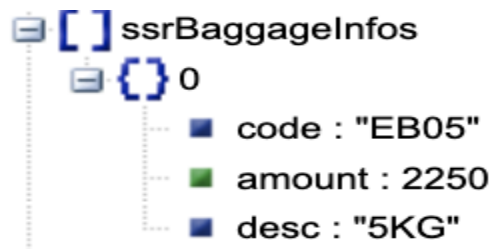

- **ssrMealInfos** : It contains information of an already selected Meal , it will be empty in case no baggage is selected.

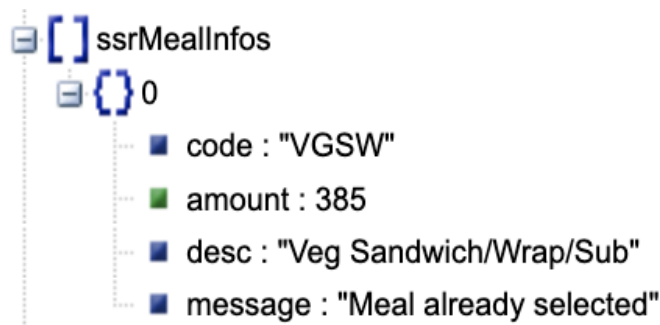


- **ssrInfo**: Each SSR Information has detailed information that needs to be shown and passed to the next request.
 - **code** : which is a unique code of that SSR Received from supplier and that's needed to be sent in booking request if customer selected any.
 - **amount** : Amount of Corresponding SSR.
 - **desc** - Description of Corresponding SSR that needs to be shown to Customer for clear information.


In the case of connecting Segments, the Baggage (SSRType), amount field will not be present- which means - whatever is selected on the first segment of the journey applies to that corresponding journey.

In Case of Meal (SSR type) - Each segment will have a unique Meal SSR which is applicable only to that segment.


Case 1: when all Baggage has been selected and Meal is also selected.

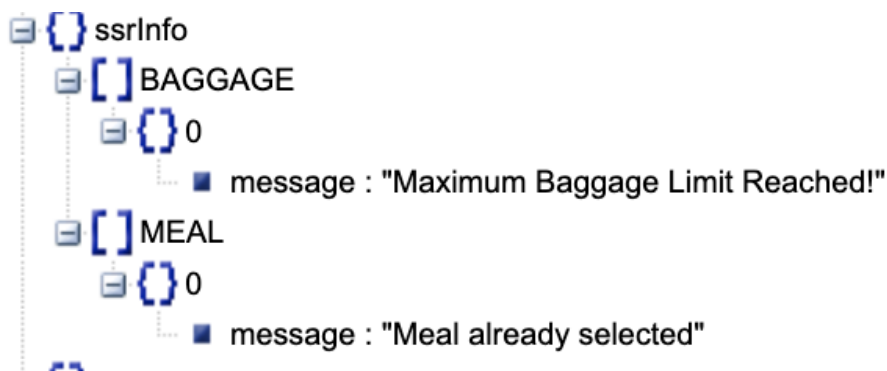


Case 2 : when pax status is canceled

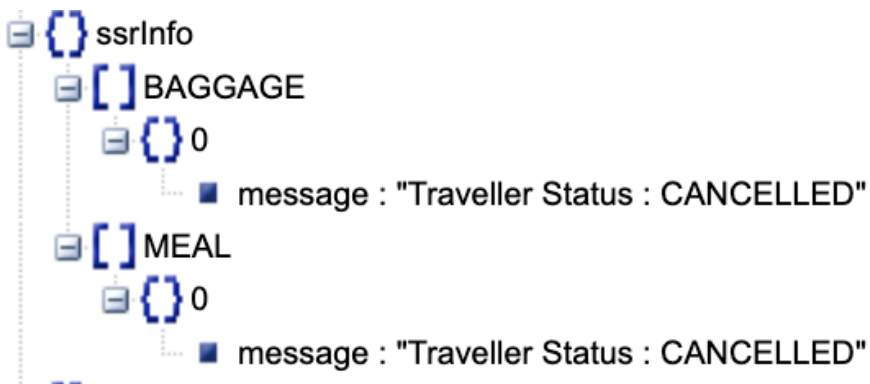

Case 3: when pax has Reissued booking

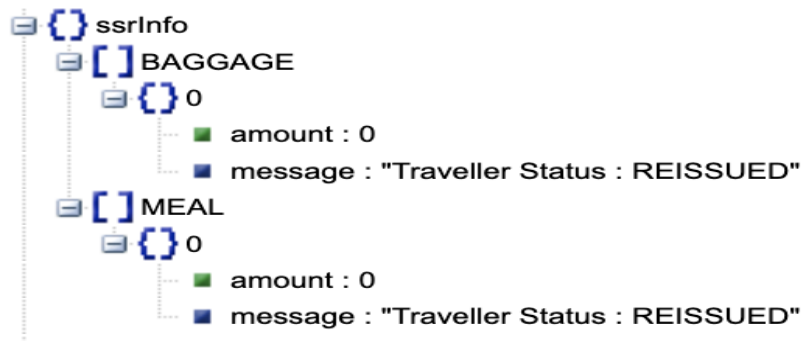

Case 4 : when manul SSR Amendment has done for pax

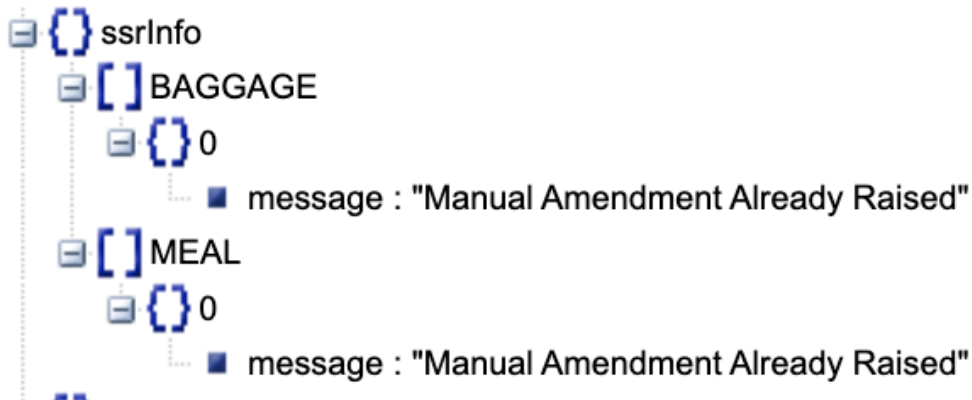

- **ti** - Title of the Traveler
 - Adult: Mr,Mrs,Ms
 - Child: Ms, Master
 - Infant : Ms, Master
- **pt** - PaxType - ADULT,CHILD, INFANT (Values should be Caps)
- **fN** - First Name of the Traveler
- **IN** - Last Name of the Traveler
- **dob** - Traveler Date Of Birth (YYYY-MM-DD Format)

Conditions :

St : session time(secs)

Sct: session created time

Request payload

Key	Parent	Type	Description	Mandatory/ Optional
BookingId	Root	String		Mandatory

Response Payload

Key	Parent	Type	Description	Mandatory/ Optional
tripInfos	root	Array of tripInfos	Array of tripInfo object. Each Object contains details of each trip.	Mandatory
sl	tripInfo	Array of segmentInfo	Array of segments for the current trip.	Mandatory
bookingId	Root	String		Mandatory
conditions	Root	Object		Mandatory
st	conditions	Integer	Session time	
sct	conditions	String	Session created time	

segmentInfo:

Key	Parent	Type	Description	Mandatory/ Optional
id	segmentInfo	String	Id which generated during review for ssr	Optional
fD	segmentInfo	Object	Flight Designator (Marketing airline,Equipment and Flight number)	Mandatory
duration	segmentInfo	Integer	Travel duration of the current segment in minutes.	Mandatory
da	segmentInfo	Object	Departure Airport	Mandatory

aa	segmentInfo	Object	Arrival Airport	Mandatory
dt	segmentInfo	String	Departure date and time. Format: YYYY-MM-DDTHH:MM	Mandatory
at	segmentInfo	String	Arrival date and time. Format: YYYY-MM-DDTHH:MM	Mandatory
ssrInfo	segmentInfo	Object	Special service requests	Mandatory

fD: [Flight Designator - Marketing Airline,Equipment Type & Flight Number]

Key	Parent	Type	Description	Mandatory/ Optional
al	fD	Object	Airline Information	Mandatory
code	al	String	Airline code	Mandatory
name	al	String	Airline name	Mandatory
isLcc	al	Boolean	True if the airline is LCC else false	Mandatory
fN	fD	String	Flight Number	Mandatory
eT	fD	String	Equipment Type	Mandatory

ssrInfo:

Key	Parent	Type	Description	Mandatory/ Optional
MEAL	ssrInfo	Array of Object	Meal Information	Mandatory
BAGGAGE	ssrInfo	Array of Object	Baggage Information	Mandatory
code	Object	String	Unique code of each ssr	Mandatory
desc	Object	String	Description which needs to be shown in UI	Mandatory

1.0.2 FETCH SEAT MAP API

This API retrieves seat information after the booking process is completed and the booking status is marked as SUCCESS. Seat maps can be obtained by invoking this API and passing the "booking id" in a request

Please note that a seat can only be added once per passenger per segment.

Note : Infants are not allowed to add Seat

URL: <https://apitest.tripjack.com/fms/v1/ancillaries/fetch/seat>

Request Method : POST


Sample Payloads : will attach soon


FETCH SEAT REQUEST STRUCTURE :

 JSON

■ bookingId : "TGS108370066489"

FETCH SEAT RESPONSE STRUCTURE :

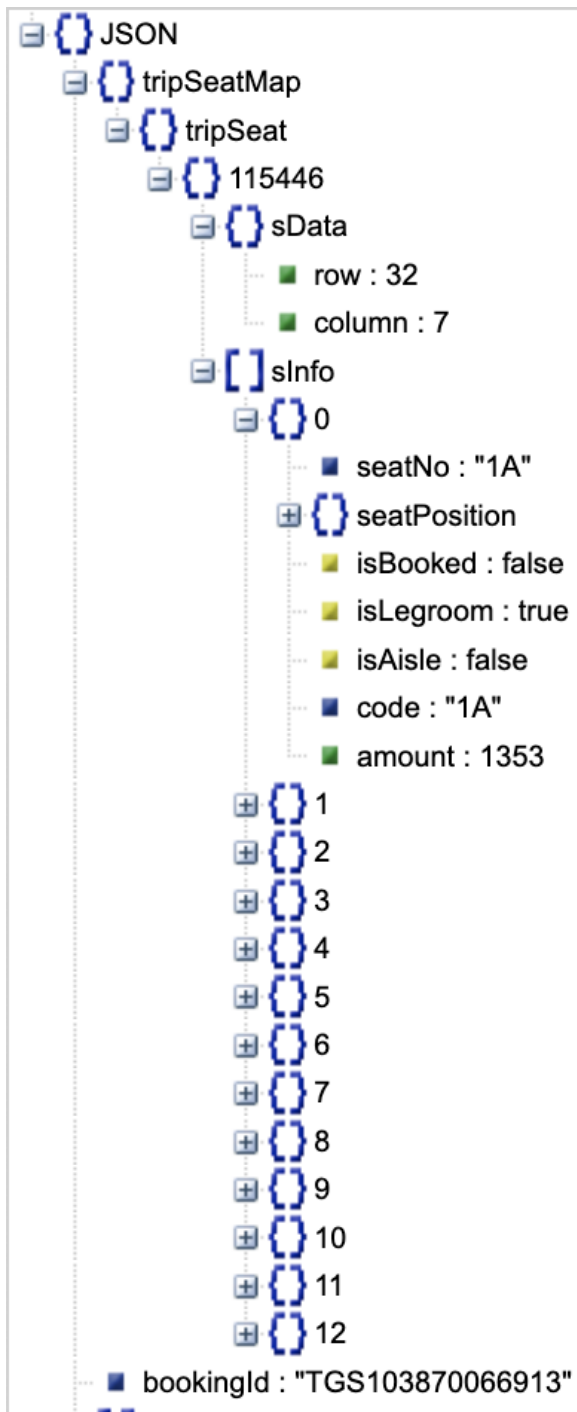

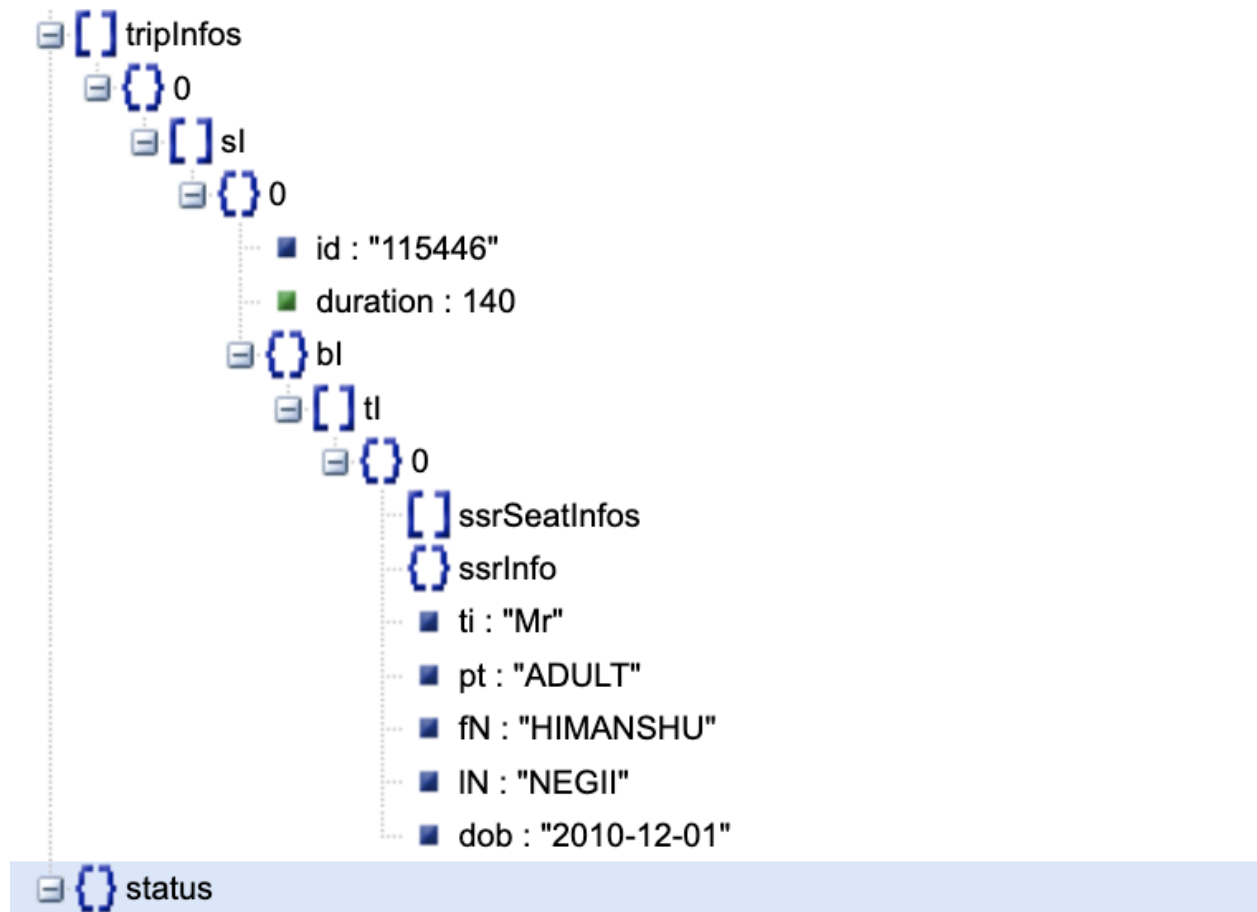

TripSeat : This will contain seat map Information.

→ **tripSeat (key)**

- ◆ **key** - segment :id , belongs to that particular segment
- ◆ **sData** - Seat Deck Data (How many columns and rows to be created)
- ◆ **sInfo** - List of Seats in Selected Segment
 - **seatNo** : Seat Information Number with code
 - **seatPosition** : will have row and column number to place seat
 - Row
 - Column
 - **isBooked** - False , if seat is available
 - **isLegRoom** :True, if Leg room is available
 - **isAisle** : True , if seat is aisle


- **code** : Supplier Booking Code which needs to be passed for booking if a customer selects this particular seat.
- **amount** : Seat Chargeable amount.

TripInfos: List of trip info

sl (Segment Information) - List<Segments> : which has control of the fields.


- **ID**: Segment Id, id of the segment.
- **duration** - Segment Journey duration (In Minutes)
- **bl** - Booking Related Information
 - **ssrSeatInfos**: It will contain information of the already selected seat, and will be empty in case no seat is select

→ Case :when the user has already selected a seat..

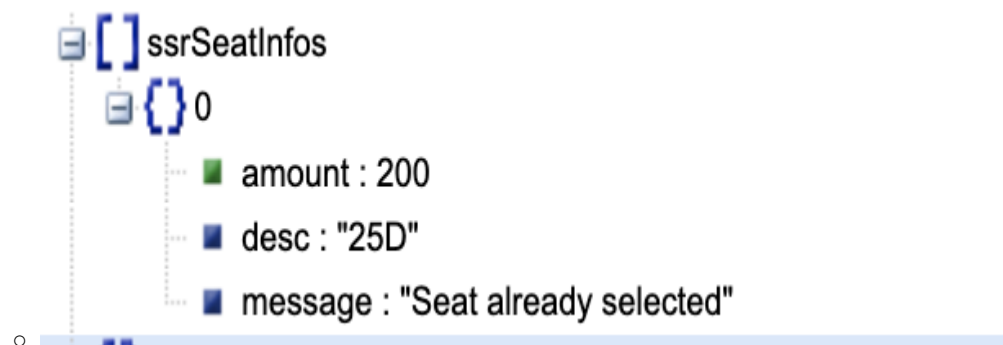


- **ssrInfo**: It will only be populated in following cases:


Case 1: When Manual amendment is done for seat

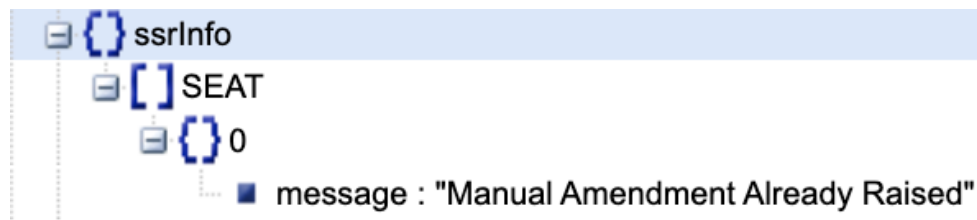

Case 2 :when pax has Reissued booking

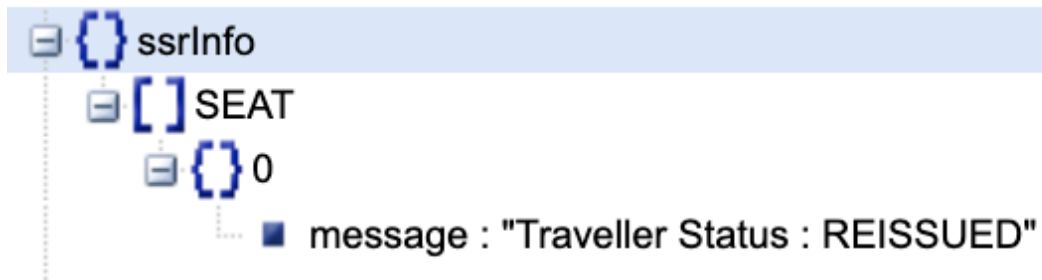

Case 3: when pax status is canceled

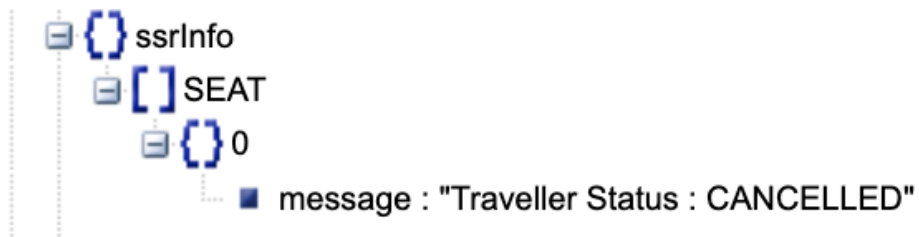

○ **tl (travellerInfo) : List of Traveller**

- **tl** - Title of the Traveler
- **Adult:** Mr,Mrs,Ms
- **Child:** Ms, Master
- **Infant** : Ms, Master

- **pt** - PaxType - ADULT,CHILD, INFANT (Values should be Caps)
- **fN** - First Name of the Traveler
- **IN** - Last Name of the Traveler
- **dob** - Traveler Date Of Birth (YYYY-MM-DD Format)

Request payload

Key	Parent	Type	Description	Mandatory/ Optional
BookingId	Root	String		Mandatory

Response payload

Key	Parent	Type	Description	Mandatory/ Optional
tripSeatMap	root	Object	It contains a Map of AirCRAFT and its Seat configuration for the whole trip.	Mandatory
tripSeat	tripSeatMap			
sData		Object		
row	sData	Integer		
column	sData	Integer		
sInfo		Array of Object	Each Object contains single seat Information.	
seatNo	sInfo	String	Seat No	Mandatory
isBooked	sInfo	boolean	Seat status	Mandatory
isLegroom, isAisle	sInfo sInfo	Boolean boolean	Seat with Legroom Aisle seat	
code	sInfo	String	Seat Code	Mandatory
amount	sInfo	Double	Seat Price	Mandatory
seatPosition	sInfo	Object		Mandatory
row	seatPosition	Integer	Deck Data Row	
column	seatPosition	Integer	Deck Data column	
BookingId	root	String		Mandatory
tripInfos	root	Array of tripInfo	Array of tripInfo object	Mandatory
travellerInfos		Object	Array of travellerInfo	Mandatory

1.0.3 ADD SSR API :


This API is utilized to include SSR for a selected Booking ID. It should be called after successfully invoking the FETCH SSR and FETCH SEAT APIs.

URL: <https://apitest.tripjack.com/oms/v1/air/amendment/add/ssr>

Request Method : POST

Sample Payloads : will attach soon

ADD SSR REQUEST STRUCTURE :

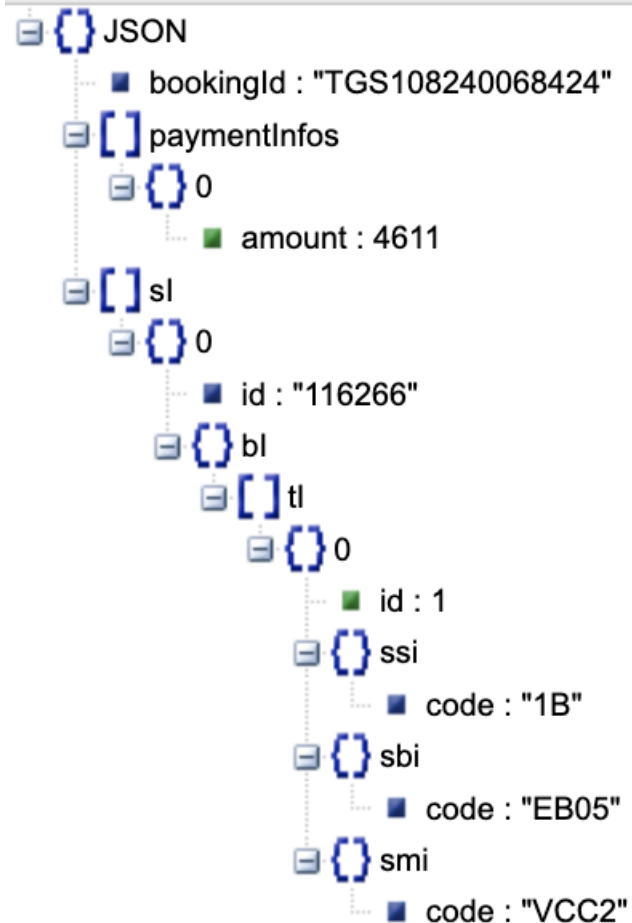

paymentInfos - Payment for the booking to Tripjack (List<PaymentInofs>)

- amount - total payable amount to Tripjack for the SSR


sl (Segment Information) - List<Segments> : It will contain a segment array for both trips(ONEWAY and RETURN).

- **ID:** Segment Id,id of the segment.

- **bl** - Booking Related Information
- **tl : List of Travelers**
 - **id** : id of a pax for whom the SSR is being added.
 - **sbi**: This contains information about the baggage that needs to be selected.


→ This information should be sent only when baggage needs to be added.

Case : In the case of more than one segment, the SBI information should be passed in another segment as well, with amount 0.

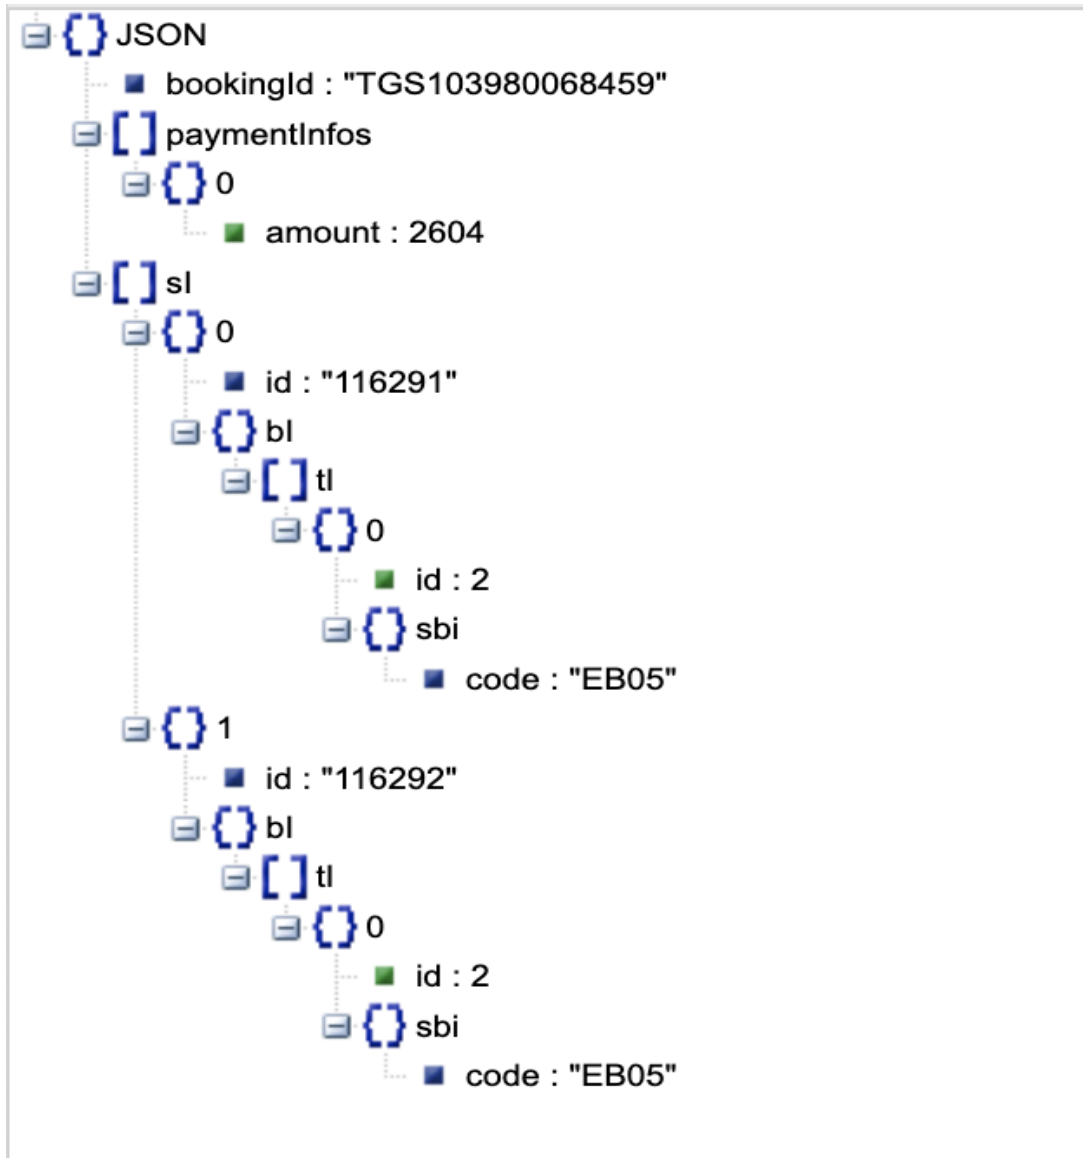


- **smi** : This contains information about the meal that needs to be selected.

→ This information should be sent only when a meal needs to be added.

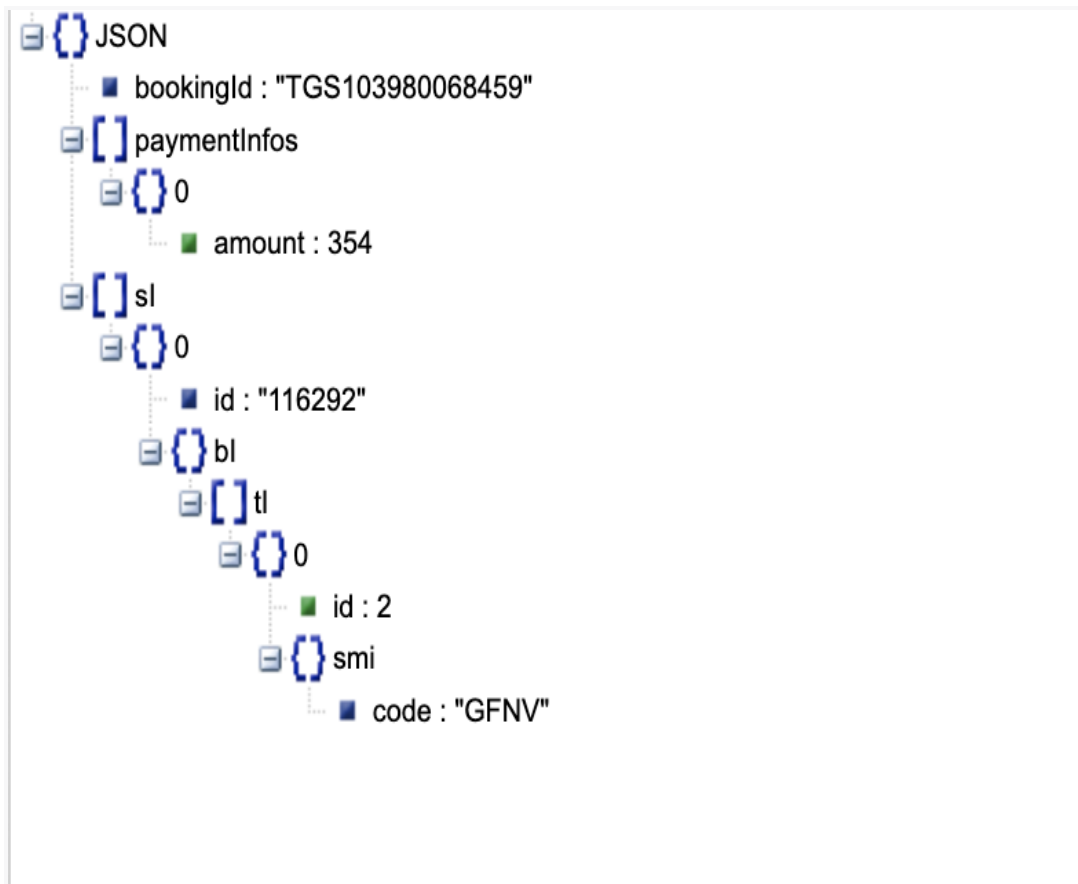


- o **ssi** : This contains information about the seat that needs to be selected.

→ This information should be sent only when a seat needs to be added.

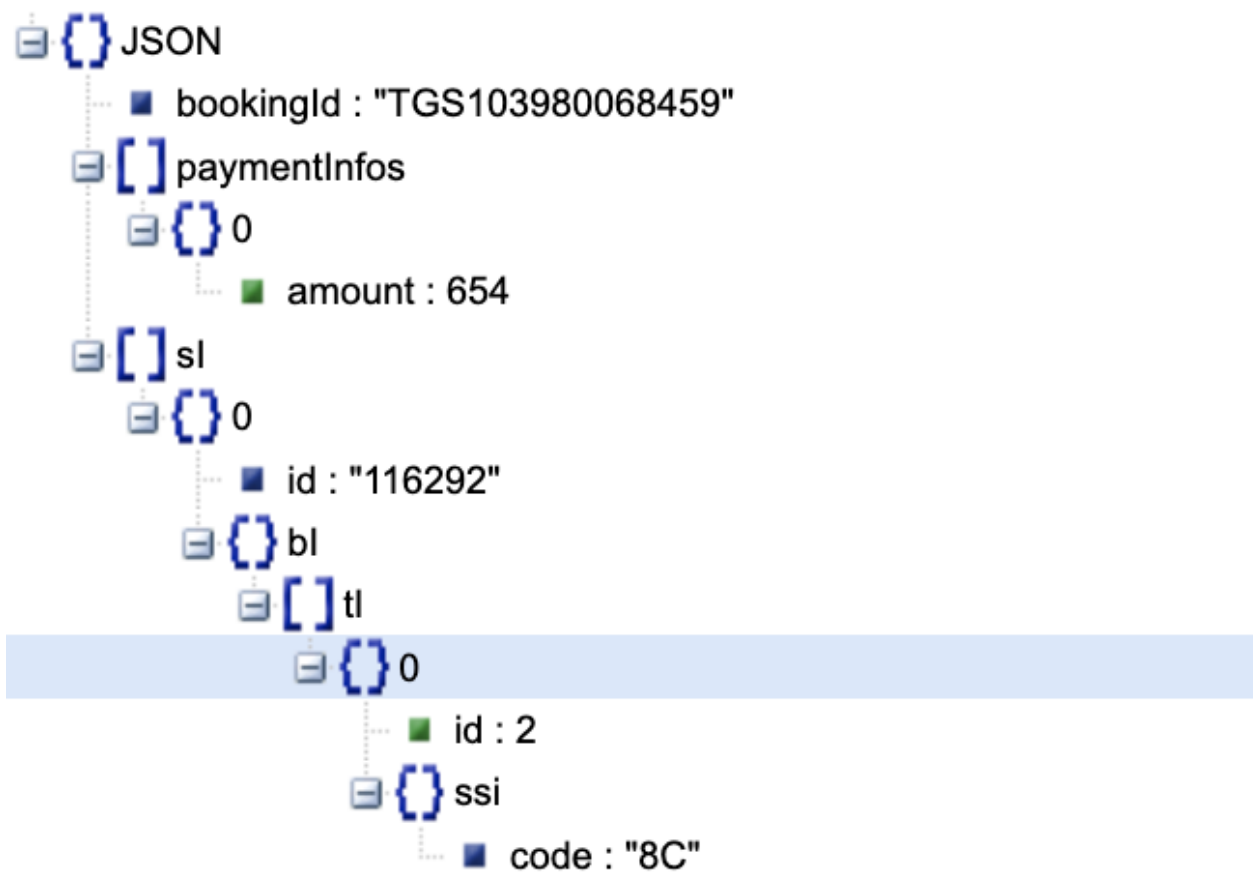

ADD SSR RESPONSE STRUCTURE

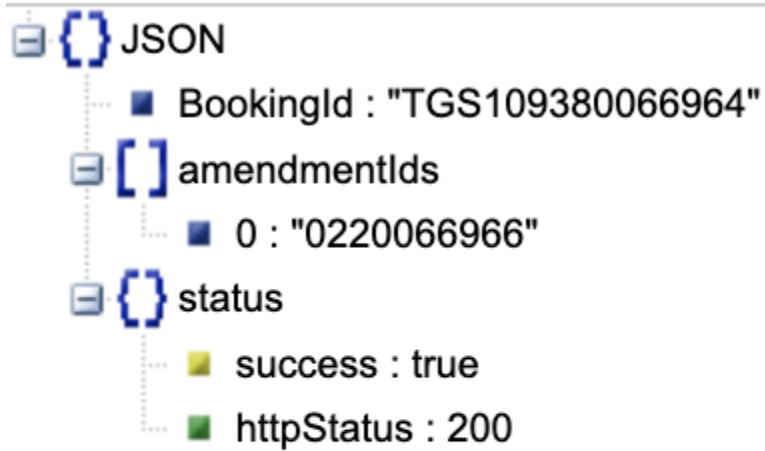

amendmentids: This list contains amendments, with amendment IDs generated on a per-trip basis. A single ID is generated for all SSR amendments within a trip.

1.0.4 Amendment Details:

This request is used to retrieve the status of an amendment, indicating whether it is "SUCCESS" or "REJECTED". To make this request, you need to provide the amendmentId, which can be fetched from the ADD SSR response.

URL: <https://apitest.tripjack.com/oms/v1/air/amendment/amendment-details>

Method: POST

Sample Payloads : [will upload soon](#)


Request Sample:

 **JSON**
amendmentId : "7820068460"

Request Structure

- **amendmentId**: AmendmentId (from ADD SSR Response)

Response Structure :

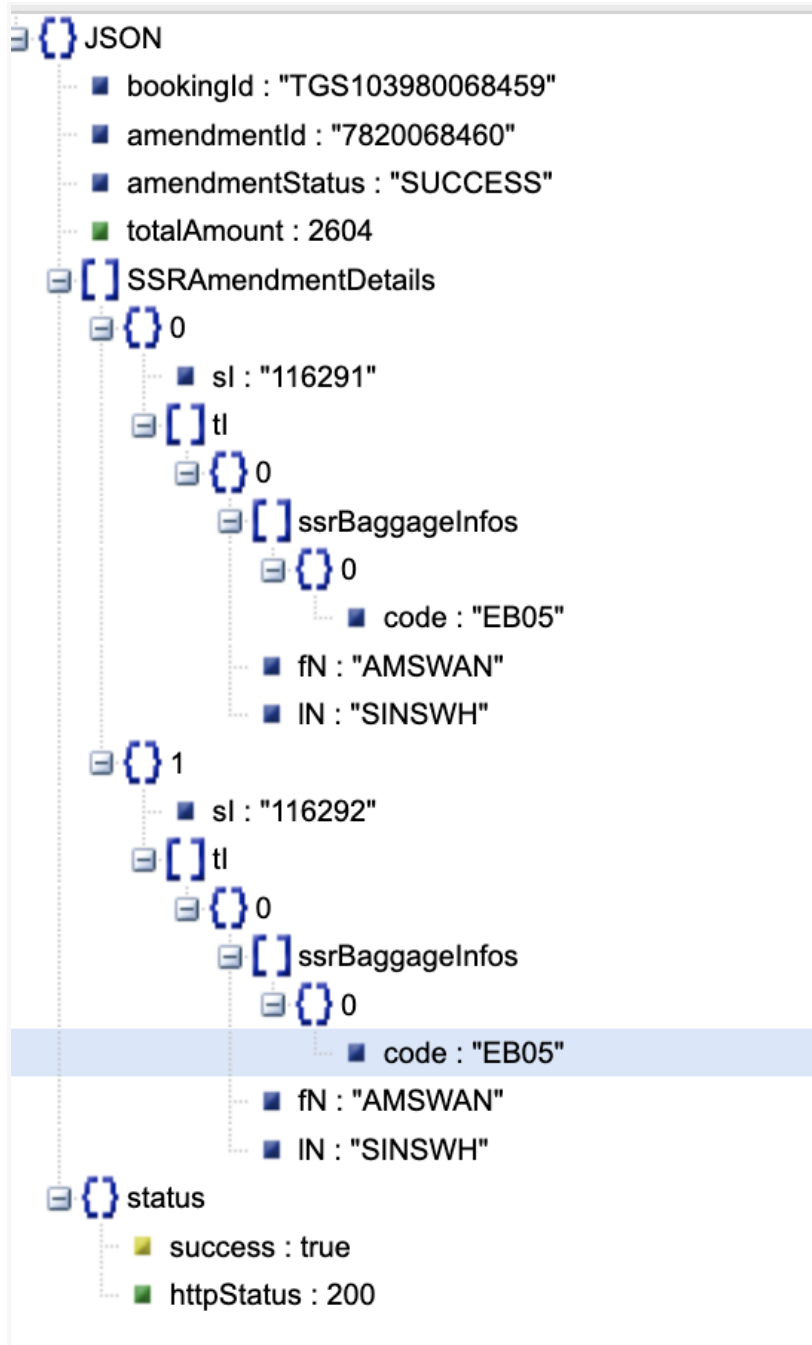

Response Structure : It consists of the amendment details

bookingId-BookingId

amendmentId-Amendmen tId

amendmentStatus-Status of amendment

- ◆ REJECTED - Amendment is rejected.
- ◆ SUCCESS - Amendment modification has been successful with all changes.
- ◆ PENDING - Amendment has been in progress

totalAmount-Total amount paid for SSR

SSRAmendmentDetails - : It will contain array of Segment and segment will contain following information

- ◆ **ID**: Segment Id,id of the segment.
- ◆ **tI** : List of Travelers
- ◆ **Id** : id of a pax for whom the SSR is being added.
- ◆ **ssrSeatInfos**:It will contain information of the already selected seat, and will be empty in case no seat is select
- ◆ **ssrBaggageInfos** : It contains information of already selected Baggage , it will be empty in case no baggage is selected.
- ◆ **ssrMealInfos** : It contains information of an already selected Meal , it will be empty in case no baggage is selected.
- ◆ **fN** - First Name of the Traveler
- ◆ **IN** - Last Name of the Traveler

Submit Amendment : (Full Refund)

This is used to apply an amendment on a booking. After applying, an “amendmentId” will be returned in response which will be used to check/poll the status of the amendment.

Note - Please note that using the below checklist in the remarks would help automate the process of full refunds.

1. Flight Cancelled by Airline
2. Airline rescheduled flight, revised timings are not suitable
3. Already cancelled by directly contacting airline customer support team
4. Airline confirmed, refund is already processed
5. Refund under DGCA policy
6. Personal loss or bereavement
7. Passenger is medically unfit for travel
8. Refund under empowerment policy

URL: <https://apitest.tripjack.com/oms/v1/air/amendment/submit-amendment>

Method: POST

Sample Payloads : [Click Here to take examples.](#)

Request Structure :

- **bookingId**
- **type** - FULL_REFUND
- **remarks**- Mandatory to send some remarks to submit an amendment.
- **trips** : ArrayList of trips for which amendment is to be raised
 - ◆ **src** - departure airport code
 - ◆ **dest** - arrival airport code
 - ◆ **departureDate** - Departure travel date(YYYY-MM-DD)
 - ◆ **travellers** - list of travellers from a particular trip in a booking for which amendment is to be raised.
 - **fn** - first name of traveller
 - **ln** - last name of traveller

Submit amendment request for complete booking: Submitting only the booking id with remark will apply amendment on the complete trip.

```
1  {
2    "bookingId": "XXXXXXXX",
3    "type": "FULL_REFUND",
4    "remarks": "YYYYYYYYYYYYY"
5  }
```

Submit amendment request example in case of DGCA -

```
1  {
2    "bookingId": "TJS10450000651327",
3    "type": "FULL_REFUND",
4    "remarks": "Refund under DGCA policy"
5  }
```

In case of DGCA, add the string “Refund under DGCA policy” in the remarks of the request to automate the process of refund.

Submit amendment request for some selected travellers : Submit travellers details along with their trip details. The amendment will be applicable only on the given trip and given travellers.

```
1  {
2    "bookingId": "XXXXXXXXXX",
3    "type": "FULL_REFUND",
4    "remarks": "YYYYYYYYYY",
5    "trips": [
6      {
7        "src": "AAA",
8        "dest": "BBB",
9        "departureDate": "YYYY-MM-DD",
10       "travellers": [
11         {
12           "fn": "XXXXXXXX",
13           "ln": "YYYYYYYY"
14         }
15       ]
16     },
17     {
18       "src": "BBB",
19       "dest": "CCC",
20       "departureDate": "YYYY-MM-DD",
21       "travellers": [
22         {
23           "fn": "XXXXXXXX",
24           "ln": "YYYYYYYY"
25         }
26       ]
27     }
28   ]
29 }
```

Submit amendment request for a particular trip: If amendment needs to be submitted for all pax types in a particular trip then submit trip details without any traveller details.

```

1  {
2    "bookingId": "XXXXXXXXXX",
3    "type": "FULL_REFUND",
4    "remarks": "YYYYYYYYYY",
5    "trips": [
6      {
7        "src": "AAA",
8        "dest": "BBB",
9        "departureDate": "YYYY-MM-DD",
10       "travellers": [
11         {
12           "fn": "XXXXXXXX",
13           "ln": "YYYYYYYY"
14         },
15         {
16           "fn": "AAAAAAA",
17           "ln": "BBBBBBBB"
18         }
19       ]
20     }
21   ]
22 }

```

Response Structure :

- **bookingId**
- **amendmentId** - Should be used for polling current amendment status

Sample Response

```

1  {
2    "bookingId": "TJ10890000016409",
3    "amendmentId": "900000016410",
4    "status": {
5      "success": true,
6      "httpStatus": 200
7    }
8  }

```

Auto - Reissue :

Below are the available service URL & definition

UAT Environment: Protocol : https

Domain: apitest.tripjack.com

SERVICE NAME	URL
SEARCH	https://apitest.tripjack.com/fms/v1/reissue/poll/searchquery-list
SEARCH	https://apitest.tripjack.com/fms/v1/reissue/search
REVIEW	https://apitest.tripjack.com/fms/v1/reissue/review
BOOK	https://apitest.tripjack.com/oms/v1/air/amendment/auto-reissue

Production Environment: Protocol : https

Domain: tripjack.com

SERVICE NAME	URL
SEARCH	https://tripjack.com/fms/v1/reissue/poll/searchquery-list
SEARCH	https://tripjack.com/fms/v1/reissue/poll/search
REVIEW	https://tripjack.com/fms/v1/reissue/review
BOOK	https://tripjack.com/oms/v1/air/amendment/auto-reissue

Sample Payloads: [Link](#)

These APIs need to be invoked in a mention order.

- SEARCH (SearchQuery Listing)
- SEARCH (with request id)
- REVIEW
- BOOK


1. SEARCH API

This method provides availability information with the cheapest fare option available to be rescheduled. The request includes a single query for all cases (Oneway, Return, Multi-City). When the request is requested, the system starts validating and the reissue search engine will return the request id to retrieve the reissue results.

Note : One trip can be reissued at a time and partial auto-reissue is supported.

URL : <https://apitest.tripjack.com/fms/v1/reissue/poll/searchquery-list>

Request Method : POST

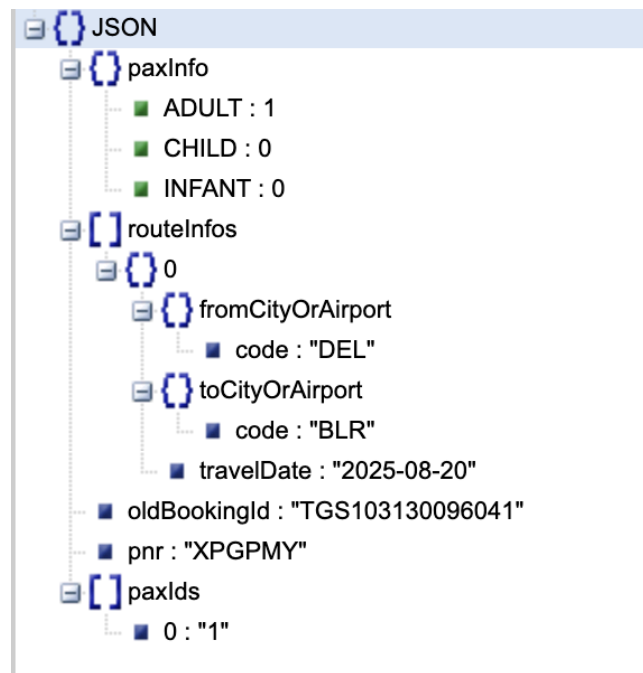


*** Travel Date Format : YYYY-MM-DD**

Request Format Table -

Key	Parent	Type	Description	Mandatory/Optional
paxInfo	searchQuery	Object	Pax count	Mandatory
ADULT	paxInfo	String		Mandatory
CHILD	paxInfo	String		
INFANT	paxInfo	String		
routeInfos	searchQuery	Object		Mandatory
fromCityOrAirport	routeInfos	String		Mandatory

code	fromCityOrAirport	String		Mandatory
toCityOrAirport	routeInfos	String		Mandatory
code	toCityOrAirport	String		Mandatory
travelDate	routeInfos	String	New travel date of the booking	Mandatory
pnr	searchQuery	String	PNR of the booking to be reschedule	Mandatory
oldBookingId	searchQuery	String	BookingId to be reschedule	Mandatory
paxIds	searchQuery	ArrayList of String	Pax Ids of Pax to be rescheduled	Mandatory

NOTE - Pax ids can be found in booking-details API under traveller Info as “id”.

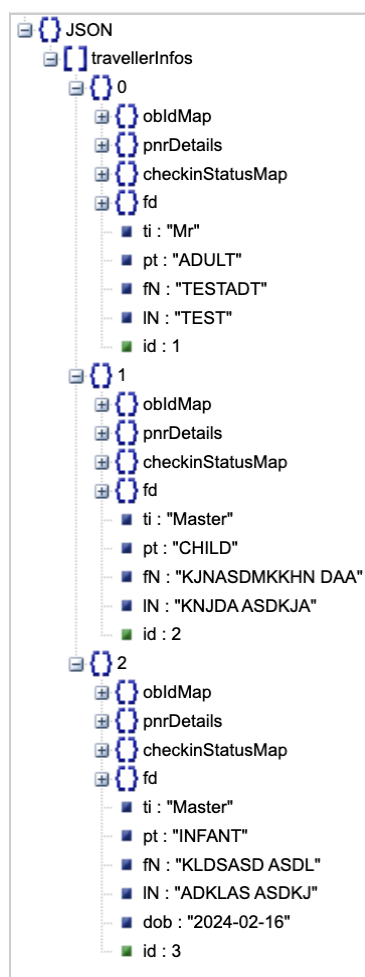

SEARCHQUERY LISTING RESPONSE STRUCTURE :



Response Format Table -

Key	Parent	Type	Description
searchQuery	root	Object	
routeInfos	paxInfo	ArrayList	

fromCityOrAirport	routeInfos	Object	
code	fromCityOrAirport	String	
name	fromCityOrAirport	String	
cityCode	fromCityOrAirport	String	
city	fromCityOrAirport	String	
country	fromCityOrAirport	String	
countryCode	fromCityOrAirport	String	
toCityOrAirport	routeInfos	Object	
travelDate	routeInfos	String	New travel date of the booking
cabinClass	searchQuery	String	
paxInfo	searchQuery	String	
requestId	searchQuery	String	
searchType	searchQuery	String	Type of the journey
searchModifiers	searchQuery	Object	
pft	searchModifiers	String	Preferred Fare Type
pfts	searchModifiers	ArrayList	List of Preferred Fare Type
isDomestic	searchQuery	Boolean	
oldBookingId	searchQuery	String	Booking which is going to be reschedule
pnr	searchQuery	String	PNR of the original booking

searchIds	response	ArrayList	
status	response	Object	


2. SEARCH API (with request Id)

Request -




SEARCHQUERY LISTING RESPONSE STRUCTURE :

Response -

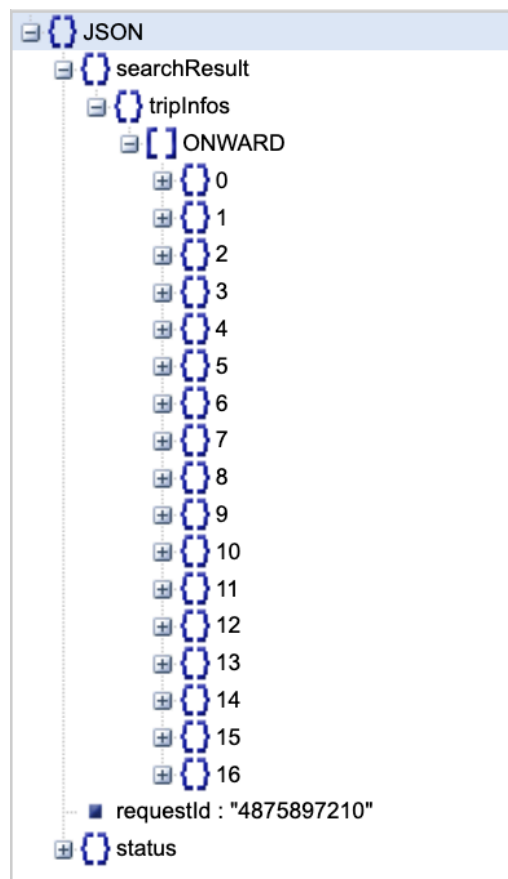

Note : Ancillary applied on original booking will be refundable based on the airline behaviour. If refundable, the average of total ancillary applied on booking will be populated in adults and children.

In Case Of No Search Result From Supplier , then following response will be returned

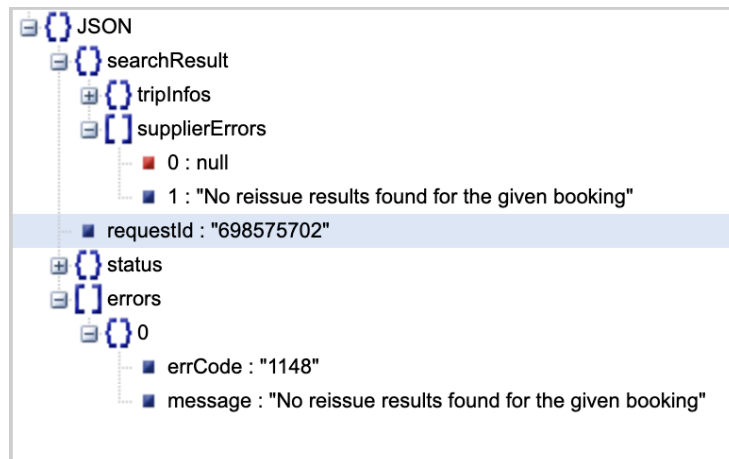

Single Trip Info in response -



TripInfos → Includes List of SegmentInfos

sl (Segment Information) - List<Segments> : which has control of the fields.

- **fd** (Flight Designator) - which has Marketing Airline Information , Airline Equipment type, flight number).
 - **al** - airline info which has code (IATA Airline Code, followed with Airline name).
 - **fN** - Marketing Airline Flight Number
 - **eT** - Marketing Airline Equipment Type
- **duration** - Segment Journey duration
- **da** - Departure Airport Information (which has IATA Airport code,name,country,Terminal)
- **aa** - Arrival Airport Information (which has IATA Airport code,name,country,Terminal)
- **dt** - Departure Time of this segment (YYYY-MM-SS HH:MM Format)
- **at** - Arrival time of this segment (YYYY-MM-SS HH:MM Format)
- **isRs** - isReturnSegment will be true and this field is present only when the segment is returning flight.
- **sN** - segment number

Total Price List in TripInfo -



totalPriceList - Under TripInfo - This is Summarised PriceInformation about the trip

- **fareIdentifier** - what type of fare is this. PUBLISHED, SPECIAL_RETURN.
- **Id** - Unique Trip price Id (which is used for reviewing/revalidating the price which is going to be sold and booked) in upcoming requests and valid for 30 Minutes from search.
- **msri** - matched special return identifier
- **lcca** - is change class allowed
- **fD** - Fare Detail in Per PaxType Wise - (Example : 2Adult, 1 Child Search then have to multiply by 2 for Adult Fare and multiply by 1 for Child Fare)
- **ADULT/CHILD/INFANT** - will be key (Each PayType - Per Pax Fare)
- **fC** - fare Components of Fare to PaxType -
 - TAF - Taxes and Fees
 - NF - Net Fare
 - BF - Difference of New and Old Base Fare
 - TF - Total Fare
 - OTF - Total Fare of original booking to be rescheduled
 - RSSR- Old ancillary amount which has to be refunded
 - AFS- Reissue Fees applied on booking
- **afc** - additional fareComponents in Detail - Break Up of fC Component
- **OT** - Difference of old and new taxes

AGST - Difference of old and new Airline GST

- **ARF** - Airline Reissue fees applied by airline
- **ARFT** - Airline Reissue fees Tax
- **sR** - Seats Remaining
- **cc** - Cabin Class Fare
 - ECONOMY
 - PREMIUM_ECONOMY
 - BUSINESS
 - FIRST
- **cB** - Class Of Booking
- **fB** - Fare Basis
- **rfc** - fare Components regarding reissue
 - **RBF** - The base fare you are reissuing into without difference
 - **RTX** - The total tax you are reissuing into without difference (Does not contain ARFT tax)
 - **OBF** - Original booking base Fare
 - **OTX** - Original Total Tax

NOTE - TC is submission of all the components i.e. difference in BF and Taxes, Airline reissue fee and taxes, refundable ancillaries (if any).

3. REVIEW API


This method provides selected flight information with revalidated fare available from the

supplier. When the request is requested, the system starts validating and the review engine starts validating the selected flight from the supplier and returns the confirmed fare for particular session time with Tripjack Booking Reference Created and returned Tripjack booking reference (reviewed price id) valid for next mentioned seconds in AirReissueReviewResponse (conditions::st).

URL: <https://apitest.tripjack.com/fms/v1/reissue/review>

Request Method : POST

REQUEST

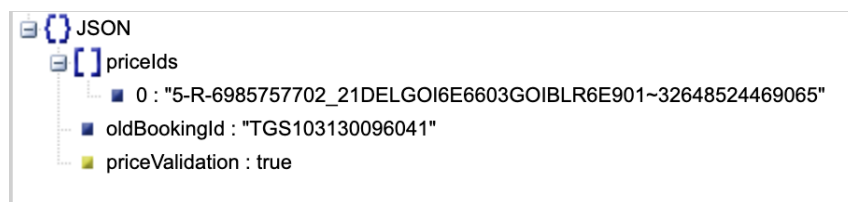

Request Payload


Key	Parent	Type	Description	Mandatory/Optional
pricelds	root	ArrayList	List of Priceld for which itinerary has to be reviewed(price validated).	Mandatory
oldBookingId	root	String	Booking id which is going to be reschedule	Mandatory
priceValidation	root	boolean		Mandatory

Note: A single price id will be passed in the request as one trip can be reissued at a time.

Case - 1 : If pricelds keys are expired (if keys sent in review request are wrong or if expired from system). It will give “Keys Passed if the request is already expired. Please pass valid keys” with httpStatus 400.

Case - 2 : If Selected Flight (Price Id is not available from supplier due to booking class not available,other reasons) then AirReviewResponse will have errors (List<errors> which give description and httpStatus 400).

RESPONSE -

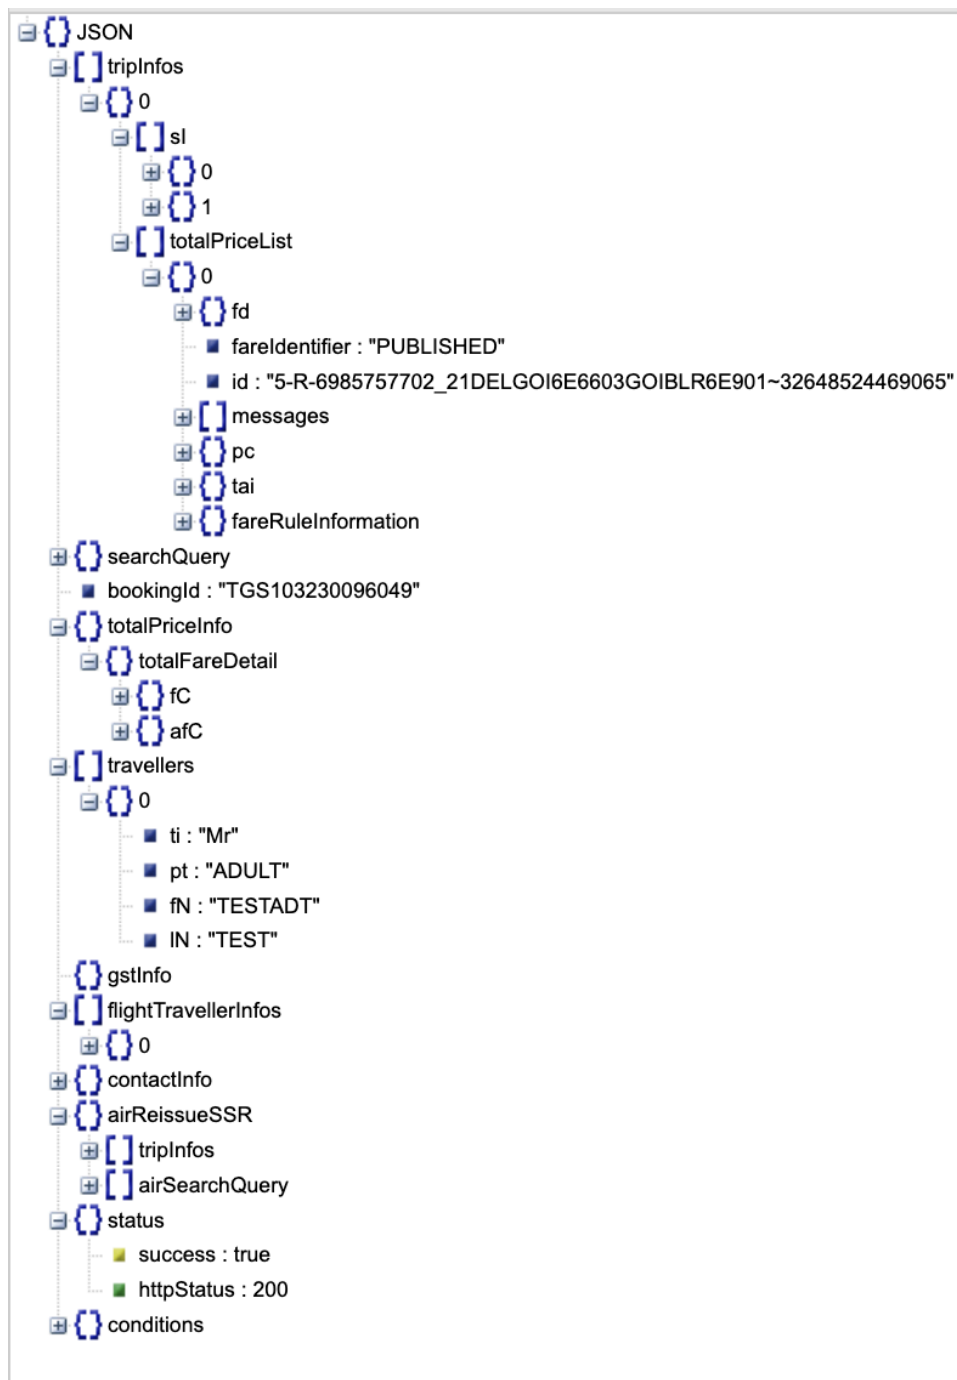

TripInfo Brief : - Each TripInfo which has “sl” (updated segments information and totalPriceList of trip).

1. **sl (Segment Information)** - List<Segments> : which has control of the fields.

→ **Id** - Segment ID - which is used for SSR if any to be selected.

→ **fd** (Flight Designator) - which has Marketing Airline Information , Airline

Equipment

type, flight number).

- **al** - airline info which has code (IATA Airline Code, followed with Airline name).

- **fN** - Marketing Airline Flight Number


- **eT** - Marketing Airline Equipment Type

- **stops** - Number of Stops in this segment.
- **duration** - Segment Journey duration
- **isRs** - isReturnSegment will be true when the segment is returning flight and in other cases it will be false.
- **sN** - segment number
- **dt** - Departure Time of this segment (YYYY-MM-SS HH:MM Format)
- **at** - Arrival time of this segment (YYYY-MM-SS HH:MM Format)
- **aa** - Arrival Airport Information (which has IATA Airport code, name, country, Terminal)
- **da** - Departure Airport Information (which has IATA Airport code,name,country,Terminal)
- **so** - Stop Over airports (which has IATA Airport code,name,country)
- **cT** - Connecting Time (LayOver time)
- **ssrInfo** - Baggage, Meal, Extra Services .. (explained below)

2. **totalPriceList** : Journey Summarised fare


- **fd** - fareDetails of Requested Passenger Types
- **fareIdentifier** - what kind of fare PUBLISHED,CORPORATE,SPECIAL_RETURN.
- **messages** - if any supplier or airline remarks (Object type is list)
 - ◆ **message** - The content of the message
- **id** - unique id of price
- **pc** - Plating Carrier of journeyFare Detail : - PaxType Wise Fare Break Up, Booking class and fare related information.
- **ADULT/CHILD/INFANT** - will be key
- **fc** - fare Components of Fare to PaxType
- **sR** - Seats Remaining
- **bl** - Baggage information (Hand Baggage & Checking baggage Related)
 - ◆ **iB** - Checking Baggage (No format specific example :20Kg , 20 Kg, 1 Piece , 1 Piece)
 - ◆ **cB** - Cabin Baggage
- **cc** - Cabin Class Fare
 - ◆ ECONOMY
 - ◆ PREMIUM_ECONOMY
 - ◆ BUSINESS
 - ◆ FIRST
- **cB** - Class Of Booking
- **fB** - Fare Basis

Conditions -

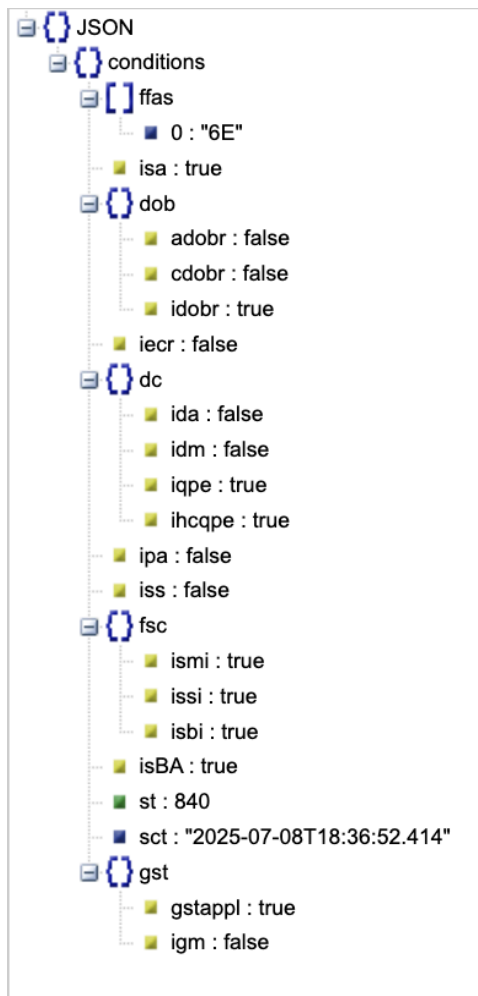

- **ffas** - Frequent Flier Airlines
- **isa** - is Seat Applicable on selected flight (if this true ,another api to fetch seat information)
- **isBA** - is Hold (Block) option applicable for selected flight
- **st** - Session Time In Seconds (Reviewed Price Id is valid for mentioned seconds to make booking)
- **sct** - Session Created Time.
- **dob** - Date Of Birth Required or Not in PaxType wise
 - **adobr** - Adult Date of Birth Required
 - **cdobr** - Child Date of Birth Required
 - **idobr** - Infant Date of Birth Required
- **gst** - GST is Applicable and mandatory information
 - **igm - GST Mandatory (true)** - Valid GST Number and Registered Name and GST Address, GST mobile number has to be passed in Booking request.
 - **gstappl - GST Applicable (true)** - GST Can be passed in this booking but not mandatory.

SSR Info Brief -

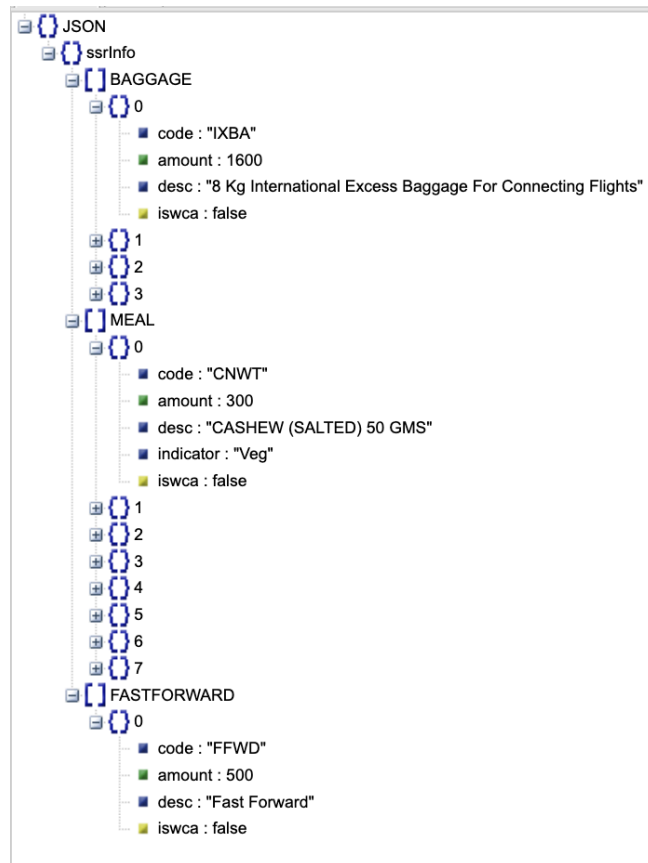

Applicable SSR's are under segment information : BAGGAGE, MEAL, EXTRASERVICES. Each SSR Information has detailed information that needs to be shown and passed to the next request.

→ **code** : which is a unique code of that SSR Received from supplier and that's needed to be sent in booking request if customer selected any.

→ **amount** : Amount of Corresponding SSR.

→ **desc** - Description of Corresponding SSR that needs to be shown to Customer for clear information.

- **In Case connecting Segments , Baggage (SSRType , amount field will not be present) - which means - whatever selected on the first segment of journey applicable to that corresponding journey. (Baggage always works as journey wise, when the amount is present segment wise, then segment wise Baggage applicable, it can be varied).**

- **In Case of Meal (SSR type) - Each segment will have a unique Meal SSR which is applicable only on that segment.**

- **In Case of Meal (SSR type, if the amount field is empty , then any meal can be selected at free of cost).**

If SSR is being selected for any segment then corresponding segment (segment "id" as key has to be passed in booking request field key) - which is explained in below booking flows.

Response Structure -

Key	Parent	Type	Description
tripInfos	root	Array of tripInfo	Array of tripInfo object. Each Object contains details of each trip.
searchQuery	root	Object	Contains details of Search made.
bookingId	root	String	Booking Id generated after setting up the session.
totalPriceInfo	root	Object	Contains the total fare details of the booking
travellers	root	ArrayList of traveller	Pax data of old booking
conditions	root	Object	Details like passport , DOB,GST.
pcs	conditions	Object	Only in case of International search.Passport components
pped	pcs	Boolean	Passport Expiry Date
pid	pcs	Boolean	Passport Issue Date
pm	pcs	Boolean	Passport Mandatory
dobe	pcs	Boolean	DateOfBirth Required

ffas	conditions	ArrayList	Frequent Flier
dob	conditions	Object	Whether date of birth of ADULT, CHILD and INFANT is required or not during booking
adobr	dob	Boolean	Is Adult date of Birth is required in Passengers details
cdobr	dob	Boolean	Is Child date of Birth is required in Passengers details
idobr	dob	Boolean	Is Infant date of Birth is required in Passengers details
isBA	conditions	Boolean	Blocking Allowed (Booking can be put on HOLD)
st	conditions	Integer	Review Session Valid Time in seconds
sct	conditions	String	Session Created Time

gst	conditions	Object	Whether GST is required or not during booking
gstappl	gst	String	GST applicable for current booking.
igm	gst	String	GST Mandatory
dc	conditions		Conditions for document Id
ida	dc	Boolean	Is documentID applicable
idm	dc	Boolean	Is documentID mandatory
status	root	Object	Status of the API call

4. BOOK API -


Book method is Direct Ticketing the reissued booking. After submitting the passenger & contact details for the selected itinerary ,BookingResponse will be given with bookingId and status of submitted request.

1. While submitting the reissue BookingRequest, it will be validated, then taking forward to booking, in case of any validation failure, Error Message will be given in response.
2. After validation,Booking will be created in the Tripjack System by deducting Payment, and the Supplier Side will be done.

URL : <https://apitest.tripjack.com/oms/v1/air/amendment/auto-reissue>

Request Method : POST

REQUEST -

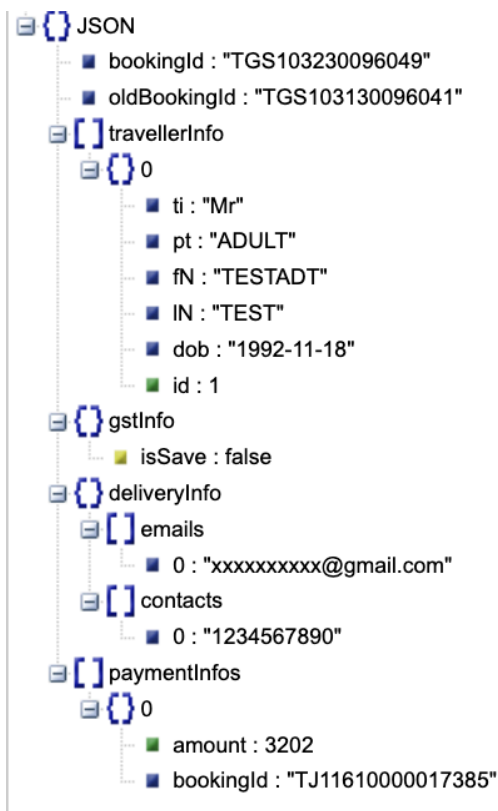

Note - The amount sent in the Book Request should be Gross Fare (TF from AirReissueReviewResponse).

Notes on Booking Request :

Case :1 : SSR - List of Meal, Baggage - In Request code which is selected by customer Vs on segmentkey (AirReissueReviewResponse -> "tripInfos" under segment will be having unique key called id which is key)

Case :2 : In Case of GST (all fields of GST have to be passed) with Valid and as IATA

Standard have to be used.

Case 3 : In case of “iecr” is mandatory in Review Response, in book requests contactInfo (Emergency contact name,contact email and contact number) are mandatory to be passed in request.

Case 5 : Pass the correct data in travellerInfo.This data should match with passenger data of the original booking. It should be the same as returned in the review response.

Description :

- **bookingId** : Booking Id from AirReviewResponse
- **oldBookingId** : old Booking Id which is going to be reschedule
- **paymentInfos** - Payment for the booking to Tripjack (List<PaymentInfos>)
 - **amount** - total payable amount to Tripjack for the booking (TF from AirReviewResponse)
- **deliveryInfo** - Delivery Details Related to Booking (which need to be passed to supplier)
 - **emails** - Booking Email Id (It should be valid email id)
 - **contacts** - Valid Contact Number (Followed with country code and valid mobile number) Example (+919500112233)
- **travellerInfo** - List of Traveller which flight to be booked
- **ti** - Title of the Traveller
 - **Adult:** Mr, Mrs, Ms
 - **Child:** Ms, Master
 - **Infant** : Ms, Master
- **pt** - PaxType - ADULT, CHILD, INFANT (Values should be Caps)
- **fN** - First Name of the Traveller
- **IN** - Last Name of the Traveller (Key : lowercase “L”N)
 - **dob** - Traveller Date Of Birth (YYYY-MM-DD Format)
- **pNum** - Passport Number
- **eD** - Expiry Date of the passport (YYYY-MM-DD Format)
- **pNat** - Passport Nationality (Passport Issued Country) - IATA Country Code(2-Letter)
- **pid** - Passport Issue Date (YYYY-MM-DD Format)
- **ssrBaggageInfos** (List of baggage on segment selected)
 - **key** : Segment Key from AirReviewResponse
 - **code** : Customer Selected SSR Code on Corresponding Segment
- **ssrMealInfos** (List of meal on segment selected)
 - **key** : Segment Key from AirReviewResponse
 - **code** : Customer Selected SSR Code on Corresponding Segment
- **ssrSeatInfos** (List of seat on segment selected)
 - **key** : Segment Key from AirReviewResponse
 - **code** : Customer Selected SSR Code on Corresponding Segment
- **gstInfo** - GST Which needs to be passed for billing and supplier - all fields under GST are mandatory.
 - **gstNumber** - Valid 15 digit GST Number (mandatory)
 - **registeredName** - GST Registered Name (maximum 35 characters as IATA)

standard) (mandatory)

- **Email** - GST Email
- **Mobile** - GST Mobile
- **Address** - GST Registered Address (maximum 70 characters as IATA standard)

Request Payload


Key	Parent	Type	Description	Mandatory/Optional
bookingId	root	String	Booking id which is generated at Review.	Mandatory
oldBookingId	root	String	Old booking id which is going to be reschedule	Mandatory
paymentInfos	root	Array of Objects	Object containing the payment details of Booking.	Mandatory
amount	paymentInfos	number	Total cost for the Booking	Mandatory
travellerInfo	root	Array of Objects	List of traveller details object	Mandatory
gstInfo	root	Object	Object containing GST info	Mandatory
gstNumber	gstInfo	String	GST number	Mandatory
registeredName	gstInfo	String	GST name	Mandatory
contactInfo	root	Object	Object containing the details of delivery emails	Optional
deliveryInfo	root	Object	Object containing the emergency contact details (emails, mobile numbers and contact name)	Mandatory

Response Payload -

Key	Parent	Type	Description	Mandatory/Optional
bookingId	root	String	Booking id which is generated at Review.	Mandatory

status	root	Object	Status of the API call	Mandatory
--------	------	--------	------------------------	-----------

Response -

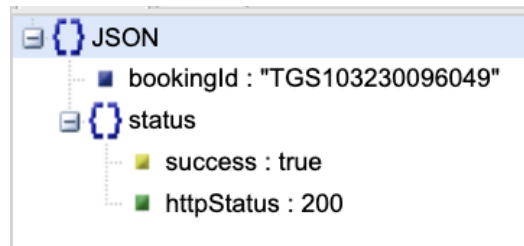

5. FAQ s-

1. How the rescheduled booking amount adjusts the old booking amount in the fare calculation.

Ans - The previous base fare is subtracted from the new Base Fare, and the difference is added to the total. The same is done for the tax components. Then the Airline Reissue Fee and its respective tax components are added to the total.

An example breakdown of this adjustment.

Original Booking Fare Distribution -

BF - 3000

TAX - 1000

Reissue Fare Distribution -

BF - 3200

TAX - 1100

Reissue Fee - 2500

Reissue Fee Tax - 100

TripJack Reissue Fee - 50 (TripJack Reissue Charge)

Total - Difference of Base Fare + Difference of Tax + Reissue Fee + Reissue Fee Tax + TripJack Reissue Fee

- 200 + 100 + 2500 + 100 + 50 = 2900

Any refundable ancillary charges are also subtracted from the total charge.

2. What are paxIds in search requests?

Ans - It is a list of all travellers to be reissued. The specific id for all travellers can be retrieved from the booking-details API under TravellerInfo as "id".

3. Date restrictions for onward reissue in a round trip :

The doc does not state any restriction that forbids reissuing to a date earlier than the original departure or between the original onward and return dates.

It explicitly says:

"One trip can be reissued at a time and partial auto-reissue is supported".

Since you pass the new travel Date in the SEARCH request, the system uses that to check availability and price.

Whether a pre-departure change (like 1-Dec → 28-Nov) is allowed will ultimately depend on airline fare rules — the API will return availability and cost if the airline permits it.

Interpretation:

28-Nov — technically possible in API, but may be rejected if the fare rules prohibit moving to an earlier date.

14-Dec — possible if fare rules allow; still before the return date.

4. Domestic vs. international applicability: Yes, reissues are permitted for both international and domestic journeys, regardless of the airline.

5. Airline restrictions: The doc does not list specific airlines excluded from auto-reissue. However, all functionality depends on airline system support — so certain low-cost or non-participating carriers may fail to return results.

6. Partial reissue: Yes — partial reissue is supported:

“Partial auto-reissue is supported”.

If the onward journey is already flown or cancelled, you can still reissue the remaining journey (like the return leg).

7. Partial reissue for combined round-trip international bookings : The doc does not exclude international cases from partial reissue. So combined round-trip international should also be supported if the airline allows.

8. Selecting seats, meals, or baggage: Yes — SSR (Special Service Request) items are supported during reissue:

Seats, meals, baggage can be selected during the BOOK request, using SSR codes from the REVIEW response.

9. Changing cabin class during reissue : Yes — the search and review results display both the cabin class and booking class in the fare. If Business Class is available and permitted

by the fare rules, you may reissue into it. Upgrading is allowed, but downgrading to a lower cabin class is not permitted.

10. Number of reissues: No, once a booking has been reissued, it cannot be reissued again.

11. Does totalPrice include airline penalty?

Yes — the doc states:

“Total – Difference of Base Fare + Difference of Tax + Reissue Fee + Reissue Fee Tax + TripJack Reissue Fee”

This means the airline penalty (Airline Reissue Fee) is already part of totalPrice.

12. Status of the original booking: You’d have to check via the booking-details API before starting the reissue to know whether it’s “Success,” etc.

13. Processing time: After BOOK, Tripjack issues the new ticket instantly if validations pass.

Status updates for both the old and new bookings happen immediately in the Tripjack system, but airline systems may have a short delay.



Void Api DOCUMENTATION

© Copyright 2023, Tripjack (Powered By Atlas Travels Online).

This document, which contains confidential material, is private and confidential and is the property and copyright of Tripjack. No part of this document may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, chemical, photocopy, recording or otherwise without the prior written permission of Tripjack.

Revision History

Version	Publish date	Revisions
1.0	Jan 18, 2024	Document Creation

1. Amendment API

This method is used to add the VOIDED status to a booking. It consists of three APIs:

1. **Get Amendment Charges (Optional)** -To obtain the charges associated with a void booking. It will not apply amendments to the booking.
2. **Submit Amendment** - To make changes to a booking, you must use this API. It will return an Amendment ID, which may be used to check/poll the status of the amendment.
3. **Get Amendment Details** - To obtain the status and other records of an applied amendment.

1.1 Get Amendment Charges:

This is an optional API request that will return the VOID amendment fees. For any modifications, the booking must be in the SUCCESS state. It will offer amendment fees and refundable amounts for each passenger in the booking, or if the charges are not available, it will respond with "Please contact the support team to know the amendment charges".

URL : [{{host}}](#)/oms/v1/air/amendment/amendment-charges

Method: POST

Sample Payloads: [Link](#)

Request Structure :

→ **bookingId**

→ **Type**

→ **Trips** - ArrayList of trips for which amendment is to be raised (required only If a certain journey is void)

- ◆ **src**: departure airport code
- ◆ **dest**: arrival airport code
- ◆ **departureDate**: Departure travel date (YYYY-MM-DD)
- ◆ **travelers**: list of travelers from a particular trip in a booking for which amendment is to be raised.
 - **fn** - first name of traveler
 - **ln** - last name of traveler

1.1.1 Request amendment charges for the whole booking: Submitting just the booking id will result in prices for all pax categories for the whole booked journeys.

▼ object {2}

bookingId : {{bookingId}}

type : VOIDED

1.1.2 Request amendment charges for specific travelers: Submit traveler information along with trip information. Charges will only be provided for the specified passenger types and trips.

```
▼ object {3}
  bookingId : {{bookingId}}
  type : VOIDED
  ▼ trips [2]
    ▼ 0 {4}
      src : DEL
      dest : SIN
      departureDate : 2024-03-22
      ▼ travellers [1]
        ▼ 0 {2}
          fn : P1
          ln : P1
    ▼ 1 {4}
      src : SIN
      dest : DEL
      departureDate : 2024-02-24
      ▼ travellers [2]
        ▼ 0 {2}
          fn : P1
          ln : P1
        ▼ 1 {2}
          fn : P2
          ln : P2
```

```
▼ object {3}
  bookingId : {{bookingId}}
  type : VOIDED
  ▼ trips [1]
    ▼ 0 {4}
      src : SIN
      dest : DEL
      departureDate : 2024-02-24
      ▼ travellers [2]
        ▼ 0 {2}
          fn : P1
          ln : P1
        ▼ 1 {2}
          fn : P2
          ln : P2
```

```
▼ object {3}
  bookingId : {{bookingId}}
  type : VOIDED
  ▼ trips [1]
    ▼ 0 {4}
      src : DEL
      dest : SIN
      departureDate : 2024-03-22
      ▼ travellers [1]
        ▼ 0 {2}
          fn : P1
          ln : P1
```

1.1.3 Request amendment charges for a particular trip: If charges are required for all passengers in a trip, provide trip data without traveler details.

```
▼ object {3}
  bookingId : {{bookingId}}
  type : VOIDED
  ▼ trips [1]
    ▼ 0 {3}
      src : DEL
      dest : SIN
      departureDate : 2024-03-22
```

Response Structure :

→ **bookingId**

→ **Trips**

- ◆ **Src** - source airport code
- ◆ **dest** - destination airport code
- ◆ **departureDate** - Departure travel date(YYYY-MM-DD)
- ◆ **flightNumbers** - flight numbers list (includes connecting flights flight numbers)
- ◆ **airlines** - airlines code
- ◆ **amendmentInfo** - (Map of PaxType,PaxAmendmentCharges)
 - **amendmentCharges** - Amendment Charges for Particular paxtype
 - **refundAmount** - Refundable Amount for Particular paxtype
 - **totalFare** - Total Fare for Particular paxtype

Sample Response :

```
▼ object {3}
  bookingId : TJS11780000077091
  ▼ trips [1]
    ▼ 0 {6}
      src : DEL
      dest : SIN
      departureDate : 2024-03-22T21:50
      ▼ flightNumbers [1]
        0 : 403
      ▼ airlines [1]
        0 : SQ
      ▼ amendmentInfo {2}
        ▼ CHILD {3}
          amendmentCharges : 950
          refundAmount : 7824
          totalFare : 8774
        ▼ ADULT {3}
          amendmentCharges : 950
          refundAmount : 10307
          totalFare : 11257
      ▼ status {2}
        success : ☒ true
        httpStatus : 200
```

Note: total fare provided in the response will be (total fare) / (number of pax of a particular type in the journey).

1.2 Submit Amendment (VOID) :

This is used to apply an amendment to a booking. After submitting the request, you will receive an "amendmentId" that may be used to check/poll the status of the amendment.

URL: [{{host}}](#)/oms/v1/air/amendment/submit-amendment

Method: POST

Sample Payloads: [Link](#)

Request Structure :

- **bookingId**
- **Type**
- **Remarks** - Comment regarding the amendment.
- **Trips** - ArrayList of trips for which amendment is to be raised (required only If a certain journey is void)
 - ◆ **src**: departure airport code
 - ◆ **dest** : arrival airport code
 - ◆ **departureDate**: Departure travel date (YYYY-MM-DD)
 - ◆ **travelers**: list of travelers from a particular trip in a booking for which amendment is to be raised.
 - **fn** - first name of traveler
 - **ln** - last name of traveler

Sample Request :

```
▼ object {4}
  bookingId : {{booking id}}
  ▼ trips [1]
    ▼ 0 {4}
      src : BOM
      dest : DEL
      departureDate : 2020-10-19
      ▼ travellers [4]
        ▼ 0 {2}
          fn : TESTA
          ln : TESTA
        ▼ 1 {2}
          fn : TESTD
          ln : TESTD
        ▼ 2 {2}
          fn : TESTB
          ln : TESTB
        ▼ 3 {2}
          fn : TESTc
          ln : TESTc
      type : VOIDED
      remarks : this is test void
```

Note : The request structure will remain the same only adding one Key remarks.

[1.1.1 Request amendment charges for the whole booking : Submitting just the booking id will result in prices for all pax categories for the whole booked journeys.](#)

[1.1.2 Request amendment charges for specific travelers : Submit traveler information along with trip information. Charges will only be provided for the specified passenger types and trips.](#)

[1.1.3 Request amendment charges for a particular trip : If charges are required for all passengers in a trip, provide trip data without traveler details.](#)

Response Structure :

- **bookingId**
- **amendmentId** - Should be used for polling current amendment status.

Sample Response :

```
▼ object {3}
  bookingId : bookingId
  amendmentId : amendmentId
  ▼ status {2}
    success : ☒ true
    httpStatus : 200
```

1.3 Get Amendment Details :

This request is used to check the status of amendment, amendment, and refund amount. An amendmentId must be returned with the submit amendment response. If the amendment status is REQUESTED, polling must be done 4-5 times with a 10-second interval to obtain the status. (If the amendment state is still REQUESTED, contact the support staff to find out more about its status).

URL: [{{host}}](#)/oms/v1/air/amendment/amendment-details

Method: POST

Sample Payloads: [Link](#)

Request Sample :

▼ object {1}

amendmentId : 800000009202

Request Structure :

→ **amendmentId** - AmendmentId (from submit amendment response)

Response Structure :

▼ object {6}

bookingId : TJ11310000001169

amendmentId : 520000009115

amendmentStatus : SUCCESS

refundableAmount : 59504

▼ trips [1]

▼ 0 {6}

src : DEL

dest : SIN

departureDate : 2024-02-17T09:55

▼ flightNumbers [1]

0 : 401

▼ airlines [1]

0 : SQ

▼ travellers [2]

▼ 0 {5}

fn : t1

ln : t1

amendmentCharges : 350

refundableamount : 29752

totalFare : 30102

▼ 1 {5}

fn : t2

ln : t2

amendmentCharges : 350

refundableamount : 29752

totalFare : 30102

▼ status {2}

success : ☒ true

httpStatus : 200

Response Structure : It consists of the amendment details

- **bookingId** - Booking Id
- **amendmentId** - Amendment Id
- **amendmentStatus** - Status of amendment
 - ◆ REQUESTED - Amendment is in requested state
 - ◆ REJECTED - Amendment is rejected.
 - ◆ SUCCESS - Amendment modification has been successful with all changes.
 - ◆ PENDING - Amendment has been in progress.
- **refundableAmount** - Total Refund Amount of selected trips
- **totalFare** - Total fare of Booking
- **Trips** - It is a list consisting of the tripwise amendment details.
 - ◆ **src** - source airport code
 - ◆ **dest** - destination airport code
 - ◆ **departureDate** - Departure travel date(YYYY-MM-DD)
 - ◆ **flightNumbers** - flight numbers list (includes connecting flights flight numbers)
 - ◆ **airlines** - airlines list
 - ◆ **Travelers** - list of traveler with amendment charges details
 - **fn** - traveler first name
 - **ln** - traveler last name
 - **amendmentCharges** - traveler amendment charges for particular trip
 - **refundAmount** - traveler refund amount for particular trip
 - **totalFare** - traveler total fare for particular trip

{{host}}

Testenv <https://apitest.tripjack.com>

Prodenv <https://tripjack.com>