Data Ingestion With Event Hub

Data Science Dojo



Typical Event Processing









Devices



Cloud Gateways (WebAPIs)



Scalable Event Broker



Field Gateways



External Data Sources




Web/Thick Client Dashboards



Search and Query



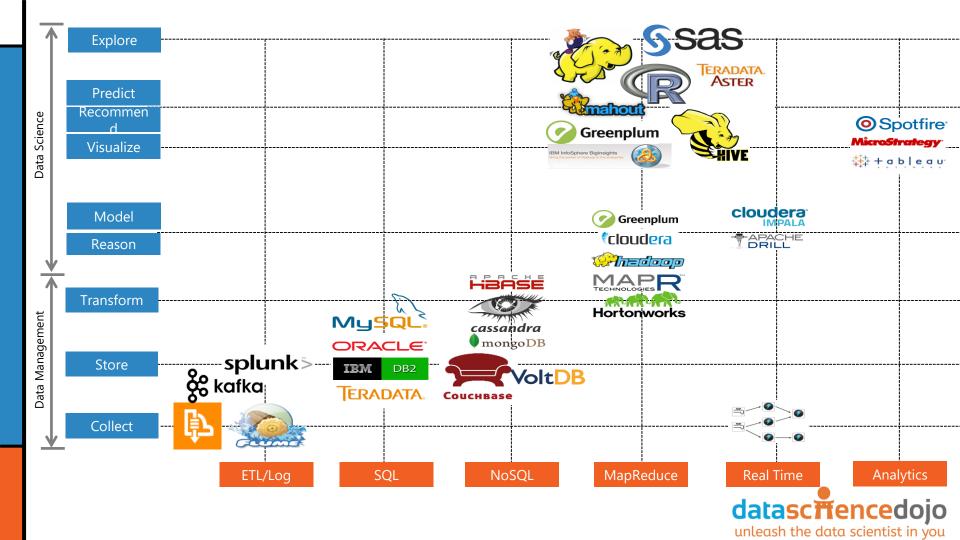

The Post Office & Shipping Centers




- Tracks address changes
- Tries again tomorrow if send failed
- Holds packages in short term
 - Too many failed deliveries
 - Vacations
- Reduces complexity through specialization
- Optimized to send, receive, and temporarily house packages




Hypothetical Scenario



Bureau of Transportation Statistics



Sends Traffic Data






Things Change



Bureau of Transportation Statistics



Sends Traffic Data






Interruption Occurs



Bureau of Transportation Statistics



WAS Server: ABC, Port 123 Now Server: DEF, Port 456 SQL DB **Your Company**




Reactive Remedy

- Call Bureau of Transportation
 Statistics to change their outbound data to funnel into server DEF and port 456
- Bureau makes support ticket
 - Your request enters their task queue
- 4 days later... ports are changed







Preventative Solution: Middleware

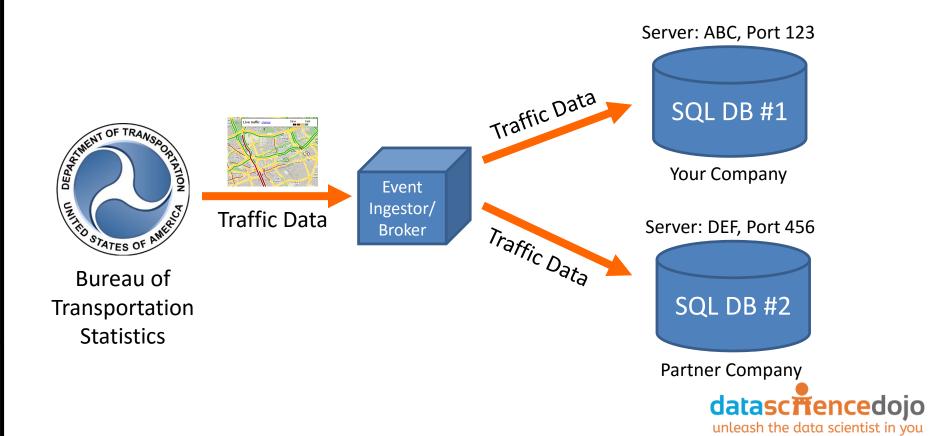

Data Pipeline Complexity at LinkedIn

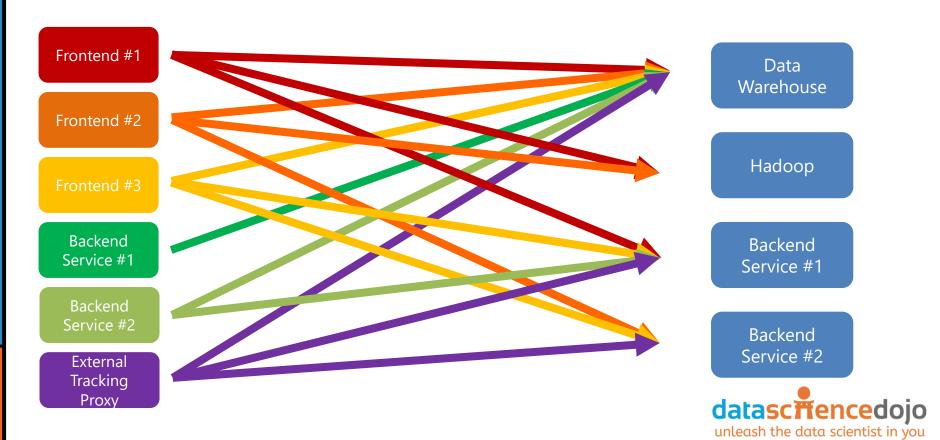

Data Pipeline Complexity at LinkedIn

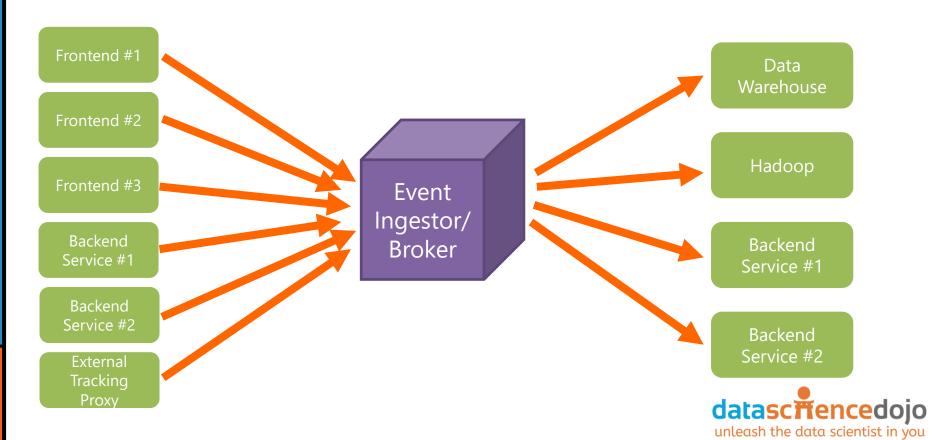

Popular Event Brokers

LRabbitMQ_{TM}










Event Hub for IoT: Big Data Ingestion

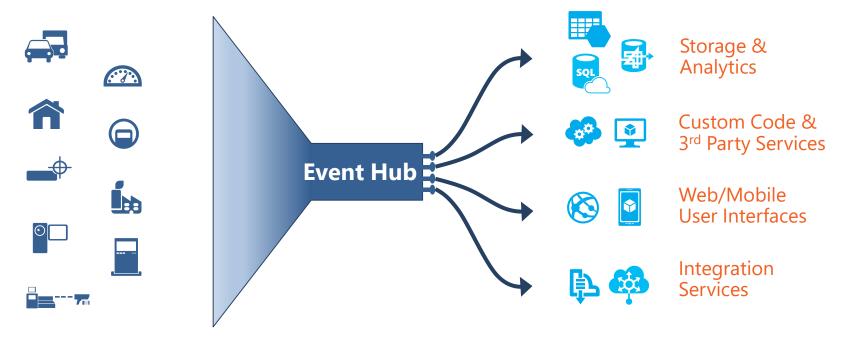

Event Sources

Cloud Services



Server Down

Frontend #1


Frontend #2

Frontend #3

Backend Service #1

Backend Service #2

External Tracking Proxy

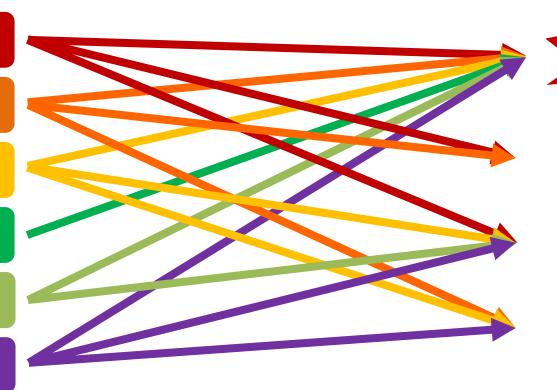




Backend Service #1

Backend Service #2



Temporary Storage

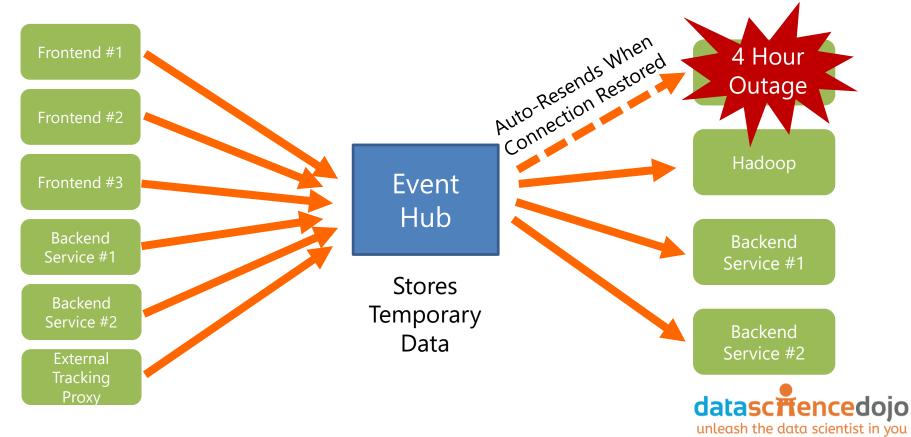


Demo: Normal Scenario






Demo: Output Downage

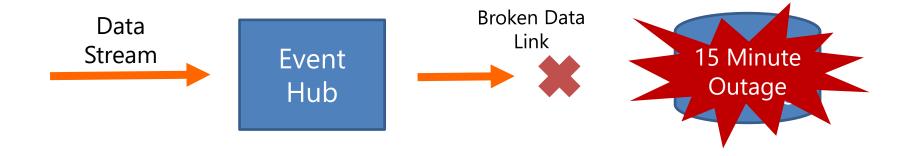



Demo: Output Restored

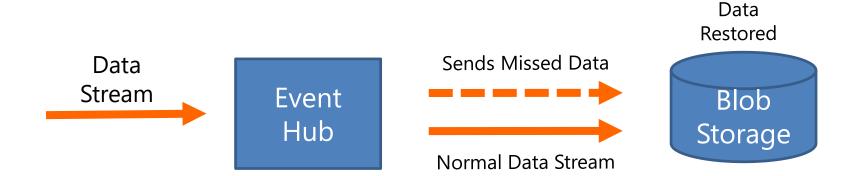




The Post Office



- Tracks address changes
- Tries again tomorrow if send failed
- Holds packages in short term
 - Too many failed deliveries
 - Vacations
- Reduces complexity through specialization



Event Hub, Stream Management

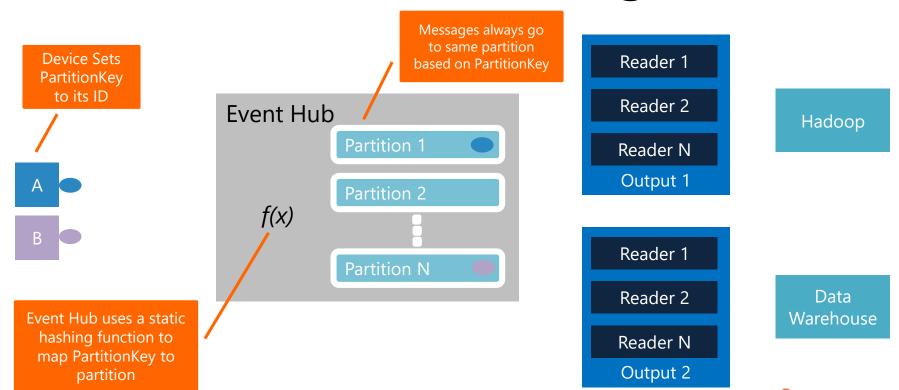



Service Bus Namespace


Service Bus Namespace

Event Hub 1

Event Hub 2




Access Rights, Policy, Keys

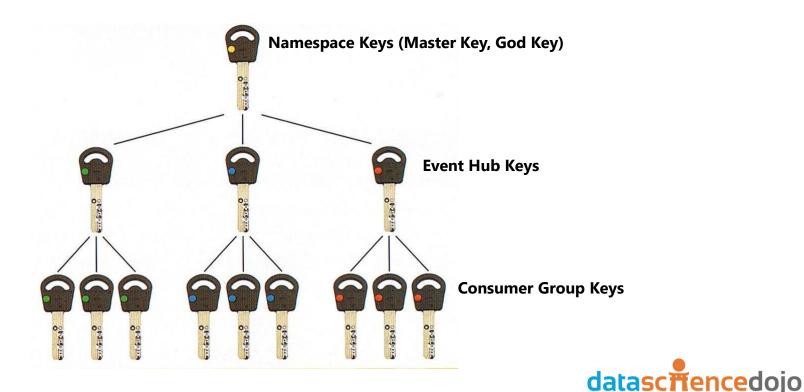

unleash the data scientist in you

Access Rights

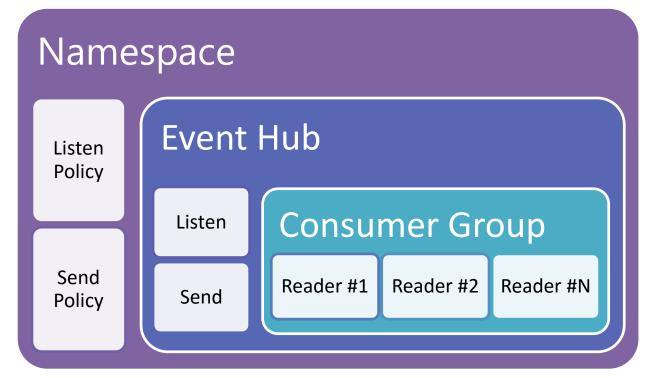



Access Rights

Device Send Event Hub Listen Consumer



Hands-On Lab




Credit Card Transactions (swipes)



- Credit card transactions are usually done in batch as an end-of-the-day send.
- Stream process for insights now.
- US mainland transactions



Streaming to Event Hub

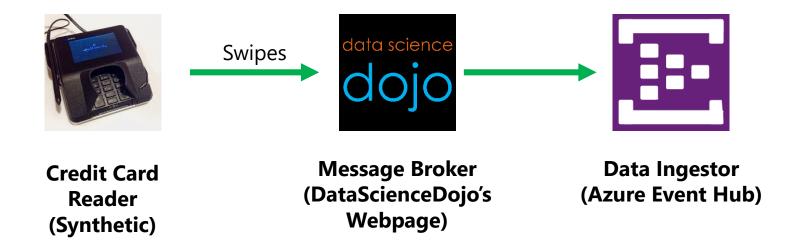



The Data

```
"swipe_date": "2015-05-22T20:16:27.122Z",
"transaction id":3127484,
"card type":"VISA",
"card number":"4913419738164560",
"expiration_month":"02",
"expiration year":"18",
"cvv code":"520",
"user id":"972288",
"user gender": "male",
"user first_name":"Alexander",
"user last name":"Hamilton",
"merchant": "McDonald's",
"transaction amount":13.64,
"balance":336.48,
"merchant fee":.5,
"swipe city":"New York",
"swipe state":"New York",
"swip city state":"New York, NY",
"InstanceNo":1
```

unleash the data scientist in you

The Streamer

http://demos.datasciencedojo.com/app/credit-card-streamer/

Credit Card Streamer


This app will simulate the kind of data streams that banks would encounter, credit card swipe data. The app will generate synthetic data from a credit card transaction (swipe) and pushes it into a given Azure Event Hub as a JSON. The application logic for this app is written entirely in JavaScript so the speed and interval of the transactions is dependent on the processing power of the user device.

▲ Event Hub Credentials	
Event Hub Name (Need help? PDF Guide)	
field required	
Service Bus Namespace (Need help? PDF Guide)	
field required	
Shared Access Policy Name (Need help? PDF Guide)	
field required	

✓ Output Preview	
Display Format (Data is still sent as a JSON):	JSON ⟨/> List III
Successfully loaded database.	Ready to simulate data.




Inside the Event Hub

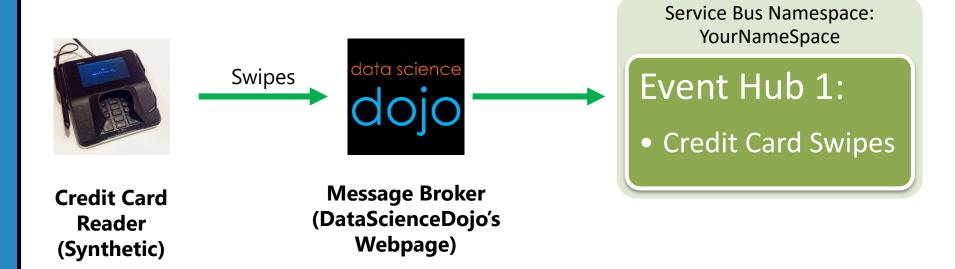



Setting Policies

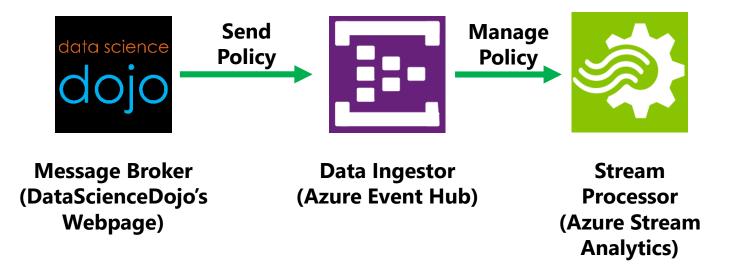





QUESTIONS

