

Image Captioning with LSTM

```
In [1]: import sklearn
import numpy as np
import lasagne
import skimage.transform

from lasagne.utils import floatX

import theano
import theano.tensor as T

import matplotlib.pyplot as plt
%matplotlib inline

import json
import pickle
```

Using gpu device 0: Tesla K80 (CNMeM is enabled with initial size: 91.0% of memory, cuDNN 5105)

```
In [2]: import googlenet
```

```
In [3]: cnn_layers = googlenet.build_model()
cnn_input_var = cnn_layers['input'].input_var
cnn_feature_layer = cnn_layers['loss3/classifier']
cnn_output_layer = cnn_layers['prob']

get_cnn_features = theano.function([cnn_input_var],
lasagne.layers.get_output(cnn_feature_layer))
```

```
In [4]: model_param_values = pickle.load(open('blvc_googlenet.pkl'))['param values']
lasagne.layers.set_all_param_values(cnn_output_layer, model_param_values)
```

```
In [5]: MEAN_VALUES = np.array([104, 117, 123]).reshape((3,1,1))

def prep_image(im):
    if len(im.shape) == 2:
        im = im[:, :, np.newaxis]
        im = np.repeat(im, 3, axis=2)
        # Resize so smallest dim = 224, preserving aspect ratio
        h, w, _ = im.shape
        if h < w:
            im = skimage.transform.resize(im, (224, w*224/h), preserve_range=True)
        else:
            im = skimage.transform.resize(im, (h*224/w, 224), preserve_range=True)

        # Central crop to 224x224
        h, w, _ = im.shape
        im = im[h//2-112:h//2+112, w//2-112:w//2+112]

        rawim = np.copy(im).astype('uint8')

        # Shuffle axes to c01
        im = np.swapaxes(np.swapaxes(im, 1, 2), 0, 1)

        # Convert to BGR
        im = im[::-1, :, :]

        im = im - MEAN_VALUES
        return rawim, floatX(im[np.newaxis])
```

Grab a random photo (not from ImageNet or MSCOCO as far as I know)

```
In [6]: im = plt.imread('/datadrive/DeepLearning/IMML/DeepLearning/Samples/FashionKDD/
RNN_CNN_Fashion/fashion_data/acs/funny-shirts-at-the-right-moment-03-730x430.j
pg')
```

```
In [7]: plt.imshow(im)
```


```
Out[7]: <matplotlib.image.AxesImage at 0x7fe5c6615a10>
```



```
In [8]: rawim, cnn_im = prep_image(im)
```

```
In [9]: plt.imshow(rawim)
```

```
Out[9]: <matplotlib.image.AxesImage at 0x7fe5ba54fa50>
```

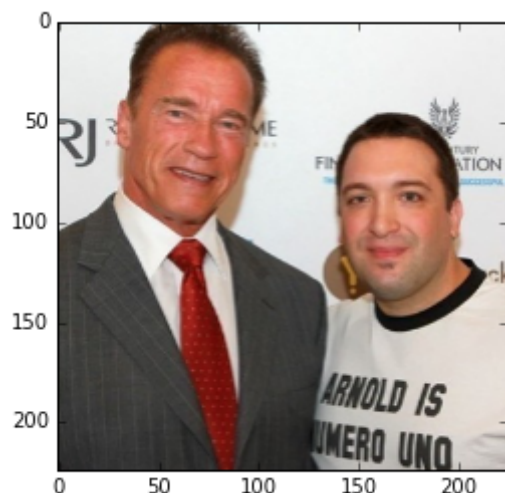

```
In [10]: p = get_cnn_features(cnn_im)
CLASSES = pickle.load(open('blvc_googlenet.pkl'))['synset words']
print(CLASSES[p.argmax()])
```

Windsor tie

```
In [11]: SEQUENCE_LENGTH = 32
MAX_SENTENCE_LENGTH = SEQUENCE_LENGTH - 3 # 1 for image, 1 for start token, 1
for end token
BATCH_SIZE = 1
CNN_FEATURE_SIZE = 1000
EMBEDDING_SIZE = 256

d = pickle.load(open('/datadrive/DeepLearning/IMML/DeepLearning/Samples/Fashio
nKDD/RNN_CNN_Fashion/fashion_data/acs/lstm_acs_trained.pkl'))
vocab = d['vocab']
word_to_index = d['word_to_index']
index_to_word = d['index_to_word']
```

```

In [12]: l_input_sentence = lasagne.layers.InputLayer((BATCH_SIZE, SEQUENCE_LENGTH -
1))
l_sentence_embedding = lasagne.layers.EmbeddingLayer(l_input_sentence,
                                                    input_size=len(vocab),
                                                    output_size=EMBEDDING_SIZE,
                                                    E,
                                                    )

l_input_cnn = lasagne.layers.InputLayer((BATCH_SIZE, CNN_FEATURE_SIZE))
l_cnn_embedding = lasagne.layers.DenseLayer(l_input_cnn, num_units=EMBEDDING_SIZE,
                                           nonlinearity=lasagne.nonlinearities.identity)

l_cnn_embedding = lasagne.layers.ReshapeLayer(l_cnn_embedding, ([0], 1, [1]))

l_rnn_input = lasagne.layers.ConcatLayer([l_cnn_embedding, l_sentence_embedding])
l_dropout_input = lasagne.layers.DropoutLayer(l_rnn_input, p=0.5)
l_lstm = lasagne.layers.LSTMLayer(l_dropout_input,
                                  num_units=EMBEDDING_SIZE,
                                  unroll_scan=True,
                                  grad_clipping=5.)
l_dropout_output = lasagne.layers.DropoutLayer(l_lstm, p=0.5)
l_shp = lasagne.layers.ReshapeLayer(l_dropout_output, (-1, EMBEDDING_SIZE))
l_decoder = lasagne.layers.DenseLayer(l_shp, num_units=len(vocab), nonlinearity=lasagne.nonlinearities.softmax)

l_out = lasagne.layers.ReshapeLayer(l_decoder, (BATCH_SIZE, SEQUENCE_LENGTH, len(vocab)))

```

```

In [13]: lasagne.layers.set_all_param_values(l_out, d['param values'])

```

```

In [14]: x_cnn_sym = T.matrix()
x_sentence_sym = T.imatrix()

output = lasagne.layers.get_output(l_out, {
    l_input_sentence: x_sentence_sym,
    l_input_cnn: x_cnn_sym
})

f = theano.function([x_cnn_sym, x_sentence_sym], output)

```

```
In [15]: def predict(x_cnn):
x_sentence = np.zeros((BATCH_SIZE, SEQUENCE_LENGTH - 1), dtype='int32')
words = []
i = 0
while True:
    i += 1
    p0 = f(x_cnn, x_sentence)
    pa = p0.argmax(-1)
    tok = pa[0][i]
    word = index_to_word[tok]
    if word == '#END#' or i >= SEQUENCE_LENGTH - 1:
        return ' '.join(words)
    else:
        x_sentence[0][i] = tok
        if word != '#START#':
            words.append(word)
```

```
In [16]: x_cnn = get_cnn_features(cnn_im)
```

```
In [17]: # Sample some predictions
for _ in range(5):
    if (predict(x_cnn)!=''):
        print(predict(x_cnn))
```

cloak

```
In [18]: im = plt.imread('/datadrive/DeepLearning/IMML/DeepLearning/Samples/FashionKDD/
RNN_CNN_Fashion/fashion_data/acs/image2.jpg')
```

```
In [19]: plt.imshow(im)
```

```
Out[19]: <matplotlib.image.AxesImage at 0x7fe5c02eaad0>
```



```
In [20]: rawim, cnn_im = prep_image(im)
plt.imshow(rawim)
```

Out[20]: <matplotlib.image.AxesImage at 0x7fe5be9a1550>



```
In [21]: p = get_cnn_features(cnn_im)
CLASSES = pickle.load(open('blvc_googlenet.pkl'))['synset words']
print(CLASSES[p.argmax()])
```

hoopskirt, crinoline

```
In [22]: x_cnn = get_cnn_features(cnn_im)
```

```
In [23]: # Sample some predictions
for _ in range(5):
    if (predict(x_cnn)!=''):
        print(predict(x_cnn))
```

cloak uniform

long dress vest, waistcoat long dress short dress


```
In [25]: im = plt.imread('/datadrive/DeepLearning/IMML/DeepLearning/Samples/FashionKDD/
RNN_CNN_Fashion/fashion_data/acs/image3.jpg')
plt.imshow(im)
```

Out[25]: <matplotlib.image.AxesImage at 0x7fe5be8e9d90>



```
In [26]: rawim, cnn_im = prep_image(im)
plt.imshow(rawim)
```

Out[26]: <matplotlib.image.AxesImage at 0x7fe5be7d5fd0>

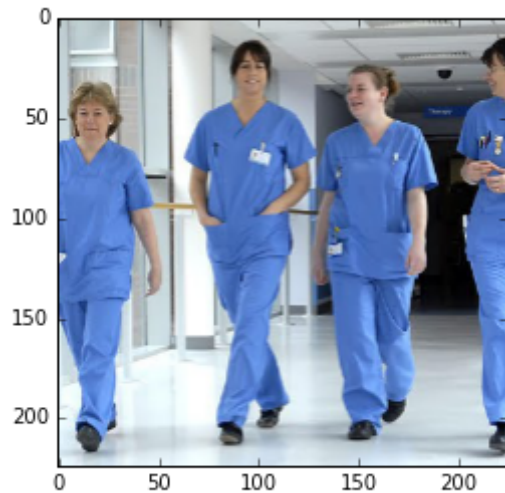

```
In [27]: p = get_cnn_features(cnn_im)
CLASSES = pickle.load(open('blvc_googlenet.pkl'))['synset words']
print(CLASSES[p.argmax()])
```

crutch

```
In [28]: x_cnn = get_cnn_features(cnn_im)
```

```
In [35]: # Sample some predictions
for _ in range(5):
    if (predict(x_cnn)!=''):
        print(predict(x_cnn))
```

robe

```
In [36]: im = plt.imread('/datadrive/DeepLearning/IMML/DeepLearning/Samples/FashionKDD/
RNN_CNN_Fashion/fashion_data/acs/image4.jpg')
plt.imshow(im)
```

Out[36]: <matplotlib.image.AxesImage at 0x7fe5be78cd10>



```
In [37]: rawim, cnn_im = prep_image(im)
plt.imshow(rawim)
```

Out[37]: <matplotlib.image.AxesImage at 0x7fe5be60d990>



```
In [38]: p = get_cnn_features(cnn_im)
CLASSES = pickle.load(open('blvc_googlenet.pkl'))['synset words']
print(CLASSES[p.argmax()])
```

bow tie, bow-tie, bowtie

```
In [39]: x_cnn = get_cnn_features(cnn_im)
```



```
In [49]: # Sample some predictions
for _ in range(5):
    if (predict(x_cnn)!=''):
        print(predict(x_cnn))
```

```
robe
coat
uniform
```