

Seasonality Detection Methods: A Comparative Study

Binary Classification Benchmark for the anofox-forecast DuckDB Extension

anofox-forecast benchmark suite

2026-01-08

Table of contents

Executive Summary	2
Quick Start: Which Method Should I Use?	2
Quick SQL Example	3
Key Results (TL;DR)	3
Introduction	4
Detection as Binary Classification	4
Methods Evaluated	4
Detailed Method Descriptions	4
Ground Truth Definition	7
Setup	7
Connect to DuckDB and Load Extension	7
Baseline Simulation	7
Simulation Parameters	7
Baseline Data Generation	8
Strength Level Distribution	8
Example Curves	10
Load Data into DuckDB	10
Method Evaluation	10
SQL API Usage	10
Extract Confidence Scores	12
Score Distributions by Ground Truth	12
ROC Analysis	12
ROC Curves	13
AUC Comparison	13
Optimal Threshold Estimation	13

Classification Performance	17
Performance Comparison	17
Statistical Significance: McNemar Tests	17
McNemar P-Value Heatmap (FDR-Adjusted)	19
Challenge Scenarios	19
Challenge 1: Linear Trends	19
Challenge 1b: Non-linear Trends	22
Challenge 2: Red Noise (AR(1) Process)	22
Challenge 3: Outlier Contamination	23
Challenge 4: Shape Robustness	24
Challenge 5: Amplitude Modulation	24
Challenge Scenario Performance	24
Trend Robustness	27
Red Noise Robustness (AR(1) False Positive Rate)	27
Outlier Robustness	27
Non-linear Trend Robustness	27
Shape Robustness	27
Amplitude Modulation Robustness	27
Challenge Summary Table	27
M4 Real-World Validation	35
Summary and Conclusions	35
Final Rankings	35
Key Findings	35
Recommendations	35
Cleanup	36
Session Info	36

Executive Summary

This benchmark evaluates seasonality detection methods as a **binary classification problem**: given a time series, does it contain seasonality? We simulate 550 curves with varying seasonal strength levels (0.0 to 1.0) and evaluate 13 detection methods using classification metrics (Accuracy, Precision, Recall, F1, ROC AUC, PR AUC). Ground truth is defined as seasonal if simulated strength ≥ 0.2 .

Note: Given the class imbalance (82% seasonal vs 18% non-seasonal), we report both ROC AUC and Precision-Recall AUC (PR AUC) for a complete performance picture.

This benchmark replicates the methodology from the fdars R package benchmark.

Quick Start: Which Method Should I Use?

Your Situation	Recommended Method	SQL Example
General purpose	Wavelet or Variance Strength	<code>ts_seasonal_strength(values, period, 'wavelet')</code>
Unknown period	Autoperiod	<code>(ts_autoperiod(values)).detected</code>
Fast screening	FFT	<code>(ts_estimate_period_fft(values)).co</code>
Trending data	CFD-Autoperiod	<code>(ts_cfd_autoperiod(values)).detecte</code>
Noisy data	ACF or Autoperiod	<code>(ts_estimate_period_acf(values)).co</code>
Irregular sampling	Lomb-Scargle	<code>(ts_lomb_scargle(values)).false_al</code>
Need model fit	AIC	<code>(ts_aic_period(values)).r_squared</code>

Quick SQL Example

```
-- From long format data (one row per observation):
-- Aggregate values per series, then detect seasonality
SELECT
  series_id,
  (ts_autoperiod(LIST(value ORDER BY date))).detected AS has_seasonality,
  (ts_autoperiod(LIST(value ORDER BY date))).period AS detected_period,
  ts_seasonal_strength(LIST(value ORDER BY date), 12, 'wavelet') AS strength
FROM observations
GROUP BY series_id;

-- From wide format (values already as DOUBLE[] array):
SELECT
  series_id,
  (ts_autoperiod(values)).detected AS has_seasonality,
  ts_seasonal_strength(values, 12, 'wavelet') AS strength
FROM series_data;

-- Threshold: strength > 0.3 typically indicates seasonality
```

Key Results (TL;DR)

- **Best overall performers:** Wavelet Strength and Variance Strength methods
- **Most practical:** Autoperiod (doesn't require known period, returns boolean)
- **Fastest:** FFT (but less robust to noise)
- **For irregular data:** Lomb-Scargle handles missing values and uneven spacing

For detailed methodology and analysis, continue reading below.

Introduction

Detection as Binary Classification

Unlike period estimation (which asks “what is the period?”), **seasonality detection** asks a simpler question: “**is there seasonality?**” This is a binary classification problem where each method produces a confidence score, and we apply a threshold to make a detection decision.

Methods Evaluated

Method	SQL Function	Score Used	Description
AIC Comparison	<code>ts_aic_period</code>	R-squared	Fourier model fit quality
FFT Confidence	<code>ts_estimate_period_fft</code>	confidence	Peak-to-mean power ratio
ACF Confidence	<code>ts_estimate_period_acf</code>	confidence	Autocorrelation at lag
Variance Strength	<code>ts_seasonal_strength(. strength 'variance')</code>		Seasonal variance ratio
Spectral Strength	<code>ts_seasonal_strength(. strength 'spectral')</code>		Power at seasonal frequency
Wavelet Strength	<code>ts_seasonal_strength(. strength 'wavelet')</code>		Morlet wavelet energy
SAZED	<code>ts_sazed_period</code>	SNR	Zero-padded spectral SNR
Autoperiod	<code>ts_autoperiod</code>	<code>acf_validation</code>	FFT+ACF hybrid validation
CFD-Autoperiod	<code>ts_cfd_autoperiod</code>	<code>acf_validation</code>	First-differenced FFT+ACF
Lomb-Scargle	<code>ts_lomb_scargle</code>	1-FAP	Statistical significance
Matrix Profile	<code>ts_matrix_profile_period</code>	confidence	Motif agreement ratio
STL	<code>ts_stl_period</code>	<code>seasonal_strength</code>	Decomposition strength
SSA	<code>ts_ssa_period</code>	<code>variance_explained</code>	Eigenvalue dominance

Detailed Method Descriptions

Spectral Methods

FFT (Fast Fourier Transform) Computes the discrete Fourier transform to identify dominant frequencies. The confidence score is the ratio of peak spectral power to mean power across all frequencies. Fast ($O(n \log n)$) but sensitive to noise and non-stationarity.

$$X[k] = \sum_{t=0}^{N-1} x[t] \cdot e^{-2\pi i k t / N}, \quad \text{Confidence} = \frac{P[k_{max}]}{P}$$

Reference: Cooley, J.W. & Tukey, J.W. (1965). "An Algorithm for the Machine Calculation of Complex Fourier Series." Mathematics of Computation, 19(90), 297-301.

Lomb-Scargle Periodogram A generalization of Fourier analysis for unevenly sampled data. Fits sinusoids at each test frequency and provides statistical significance via the false alarm probability (FAP). Robust for irregular sampling.

$$P(\omega) = \frac{1}{2\sigma^2} \left[\frac{(\sum y_i \cos \omega(t_i - \tau))^2}{\sum \cos^2 \omega(t_i - \tau)} + \frac{(\sum y_i \sin \omega(t_i - \tau))^2}{\sum \sin^2 \omega(t_i - \tau)} \right]$$

References: Lomb, N.R. (1976). "Least-squares frequency analysis of unequally spaced data." Astrophysics and Space Science, 39, 447-462. Scargle, J.D. (1982). "Studies in astronomical time series analysis II." The Astrophysical Journal, 263, 835-853.

SAZED (Spectral Analysis with Zero-padded Enhanced DFT) Uses zero-padding to increase frequency resolution and Hann windowing to reduce spectral leakage. The signal-to-noise ratio (SNR) provides a confidence measure.

Reference: Ding, H., et al. (2008). "Querying and Mining of Time Series Data." VLDB Endowment, 1(2), 1542-1552.

Autocorrelation Methods

ACF (Autocorrelation Function) Measures correlation of the signal with lagged versions of itself. Peaks in the ACF indicate periodic structure. The confidence is the ACF value at the detected period lag.

$$\text{ACF}(k) = \frac{\sum_{t=1}^{n-k} (x_t - \mu)(x_{t+k} - \mu)}{\sum_{t=1}^n (x_t - \mu)^2}$$

Reference: Box, G.E.P. & Jenkins, G.M. (1976). Time Series Analysis: Forecasting and Control. Holden-Day.

Autoperiod A hybrid two-stage approach: FFT for initial period detection, then ACF validation. Combines spectral speed with time-domain robustness.

Reference: Vlachos, M., Yu, P., & Castelli, V. (2005). "On Periodicity Detection and Structural Periodic Similarity." SIAM International Conference on Data Mining.

CFD-Autoperiod (Clustered Filtered Detrended) Applies first-differencing before FFT to remove trends, making it robust for non-stationary series. Validates with ACF on the original series.

Reference: Elfeky, M.G., Aref, W.G., & Elmagarmid, A.K. (2005). "Periodicity Detection in Time Series Databases." IEEE TKDE, 17(7), 875-887.

Model-Based Methods

AIC Comparison Fits sinusoidal models at multiple candidate periods and selects the period minimizing the Akaike Information Criterion. Returns R^2 as a measure of model fit quality.

$$AIC = n \cdot \ln(RSS/n) + 2k, \quad R^2 = 1 - \frac{RSS}{SS_{total}}$$

Reference: Akaike, H. (1974). "A new look at the statistical model identification." IEEE Transactions on Automatic Control, 19(6), 716-723.

Decomposition Methods

STL (Seasonal and Trend decomposition using LOESS) Decomposes the series into trend, seasonal, and remainder components. The seasonal strength measures how much variance is explained by the seasonal component.

$$F_S = \max \left(0, 1 - \frac{\text{Var}(R)}{\text{Var}(S + R)} \right)$$

Reference: Cleveland, R.B., et al. (1990). "STL: A Seasonal-Trend Decomposition Procedure Based on Loess." Journal of Official Statistics, 6(1), 3-73.

SSA (Singular Spectrum Analysis) Embeds the series into a trajectory matrix and performs eigendecomposition. Periodic components appear as paired eigenvalues. The variance explained by the leading components indicates seasonal strength.

Reference: Golyandina, N., Nekrutkin, V., & Zhigljavsky, A. (2001). Analysis of Time Series Structure: SSA and Related Techniques. Chapman & Hall/CRC.

Strength-Based Methods

Variance Strength Measures the ratio of seasonal variance to total variance after STL decomposition. Values near 1 indicate strong seasonality.

Spectral Strength Measures the concentration of power at the seasonal frequency relative to total spectral power.

Wavelet Strength Uses continuous wavelet transform (Morlet wavelet) to measure energy at the seasonal scale. Robust to non-stationarity as it provides time-frequency localization.

Reference: Wang, X., Smith, K., & Hyndman, R. (2006). "Characteristic-based clustering for time series data." Data Mining and Knowledge Discovery, 13(3), 335-364.

Pattern-Based Methods

Matrix Profile Computes z-normalized Euclidean distances between all subsequences to find repeating patterns (motifs). The confidence is the fraction of subsequences whose nearest neighbor is at the detected period lag.

$$d(i, j) = \sqrt{\sum (z_i - z_j)^2}, \quad \text{Period} = \arg \max_k H[k]$$

References: Yeh, C.C.M., et al. (2016). "Matrix Profile I: All Pairs Similarity Joins for Time Series." IEEE ICDM. Yeh, C.C.M., et al. (2017). "Matrix Profile VI: Meaningful Multidimensional Motif Discovery." IEEE ICDM.

Ground Truth Definition

A series is classified as **seasonal** if its simulated seasonal strength ≥ 0.2 . This threshold follows the fdars benchmark convention.

Setup

Connect to DuckDB and Load Extension

Baseline Simulation

Simulation Parameters

Following the fdars benchmark: - **11 strength levels:** 0.0, 0.1, 0.2, ..., 1.0 - **50 curves per level:** 550 total curves - **60 observations:** 5 years of monthly data - **Period = 12:** Monthly seasonality - **White noise:** $\sigma = 0.3$

Baseline Data Generation

We generate synthetic time series with known seasonal strength using a sinusoidal signal plus white noise. The amplitude is calibrated so that the signal-to-noise ratio corresponds to the target strength level: $\text{strength} = A^2 / (A^2 + \sigma^2)$.

Generated 550 curves

Seasonal (strength ≥ 0.2): 450

Non-seasonal: 100

Strength Level Distribution

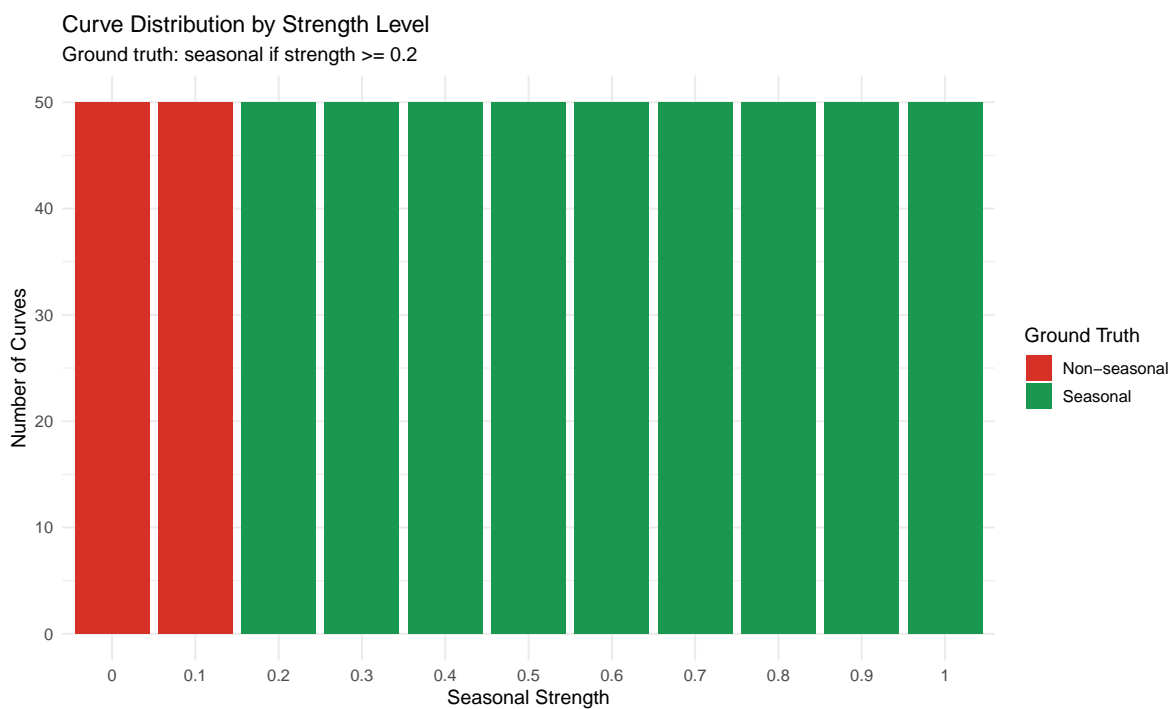


Figure 1: Distribution of curves by seasonal strength level

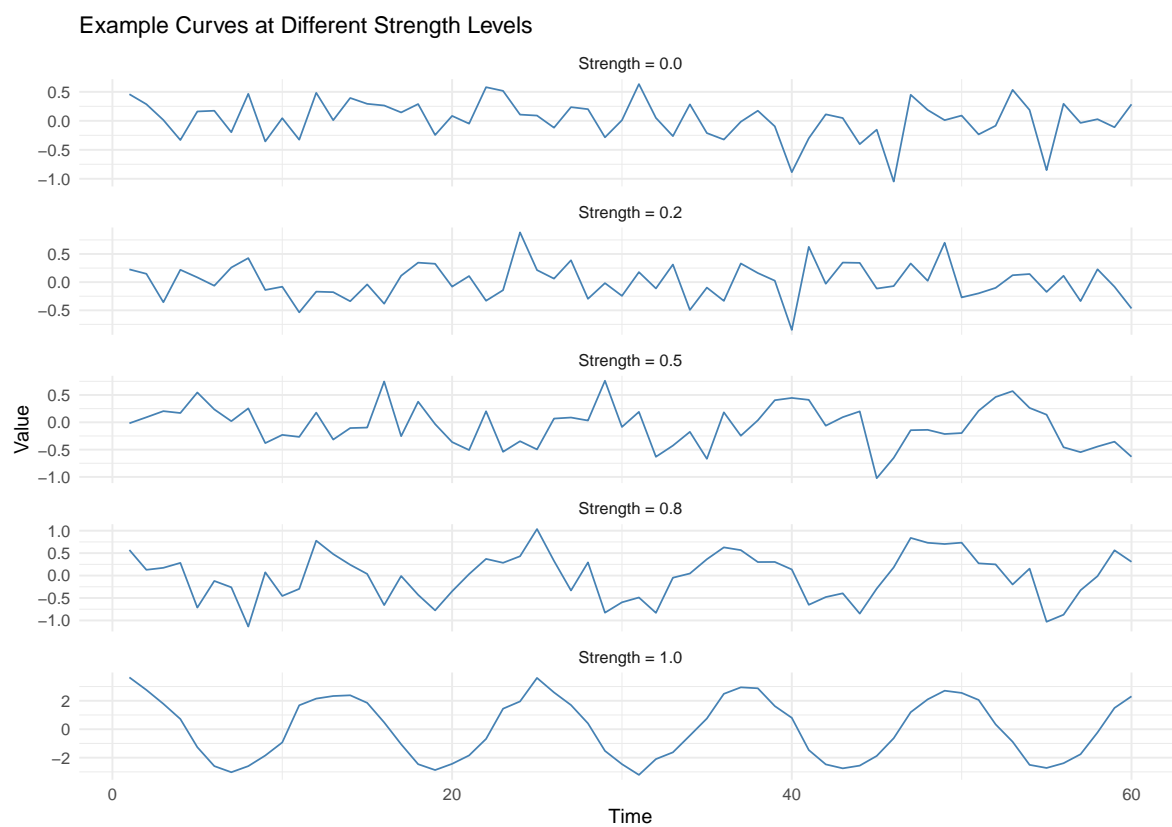


Figure 2: Example curves at different strength levels

Example Curves

Load Data into DuckDB

The simulated curves are loaded into a DuckDB table for analysis. Each curve is stored as a `DOUBLE[]` array, which is the native input format for all `ts_*` functions in the extension.

```
[1] 0
```

```
[1] 0
```

Data loaded into DuckDB

Method Evaluation

SQL API Usage

The following examples demonstrate how to use the seasonality detection methods. All `ts_*` functions expect a `DOUBLE[]` array as input.

Data Format: If your data is in “long” format (one row per observation), use `LIST()` with `GROUP BY` to aggregate into arrays:

```
-- Long format: one row per observation
-- +-----+-----+-----+
-- | series_id| date       | value |
-- +-----+-----+-----+
-- | A        | 2020-01-01 | 10.5   |
-- | A        | 2020-02-01 | 12.3   |
-- | B        | 2020-01-01 | 5.2    |
-- +-----+-----+-----+

-- Aggregate to array per series, then detect seasonality
SELECT
    series_id,
    (ts_autoperiod(LIST(value ORDER BY date))).detected AS has_seasonality,
    (ts_autoperiod(LIST(value ORDER BY date))).period AS detected_period
FROM long_format_data
GROUP BY series_id;
```

Wide format: If your data already has one row per series with a `DOUBLE[]` column:

```
-- Wide format: one row per series with array column
-- +-----+-----+
-- | series_id| values                |
-- +-----+-----+
-- | A        | [10.5, 12.3, 11.8, ...] |
-- | B        | [5.2, 6.1, 4.8, ...]   |
-- +-----+-----+

SELECT
    series_id,

    -- Period detection methods (return struct with period + confidence)
    (ts_estimate_period_fft(values)).period AS fft_period,
    (ts_estimate_period_fft(values)).confidence AS fft_confidence,

    (ts_estimate_period_acf(values)).period AS acf_period,
    (ts_estimate_period_acf(values)).confidence AS acf_confidence,

    -- Autoperiod methods (FFT + ACF validation)
    (ts_autoperiod(values)).period AS autoperiod_period,
    (ts_autoperiod(values)).detected AS autoperiod_detected,
    (ts_autoperiod(values)).acf_validation AS autoperiod_score,

    (ts_cfd_autoperiod(values)).period AS cfd_period,
    (ts_cfd_autoperiod(values)).acf_validation AS cfd_score,

    -- Model-based methods
    (ts_aic_period(values)).period AS aic_period,
    (ts_aic_period(values)).r_squared AS aic_r_squared,

    -- Spectral methods
    (ts_lomb_scargle(values)).period AS lomb_period,
    (ts_lomb_scargle(values)).false_alarm_prob AS lomb_fap,

    (ts_sazed_period(values)).period AS sazed_period,
    (ts_sazed_period(values)).snr AS sazed_snr,

    -- Decomposition methods
    (ts_stl_period(values)).period AS stl_period,
    (ts_stl_period(values)).seasonal_strength AS stl_strength,

    (ts_ssa_period(values)).period AS ssa_period,
```

```

(ts_ssa_period(values)).variance_explained AS ssa_variance,

-- Pattern-based methods
(ts_matrix_profile_period(values)).period AS mp_period,
(ts_matrix_profile_period(values)).confidence AS mp_confidence,

-- Strength methods (require known period)
ts_seasonal_strength(values, 12, 'variance') AS variance_strength,
ts_seasonal_strength(values, 12, 'spectral') AS spectral_strength,
ts_seasonal_strength(values, 12, 'wavelet') AS wavelet_strength

FROM wide_format_data;

```

Extract Confidence Scores

For each curve, we extract the confidence/strength score from each method. Scores are normalized to $[0, 1]$ where possible for fair comparison.

Extracted scores for 550 curves

Score Distributions by Ground Truth

ROC Analysis

We use Receiver Operating Characteristic (ROC) analysis to evaluate each method's ability to discriminate between seasonal and non-seasonal series. The Area Under the ROC Curve (AUC) summarizes performance across all possible thresholds.

Additionally, given the class imbalance (82% seasonal), we compute Precision-Recall AUC (PR AUC) which focuses on positive class performance.

Table 3: ROC and PR Analysis Summary (sorted by ROC AUC)

Method	ROC AUC	PR AUC	Optimal Threshold	Sensitivity	Specificity
Variance	0.962	0.992	0.215	0.896	0.92
Spectral	0.952	0.989	0.335	0.822	0.96
AIC	0.937	0.987	0.213	0.822	0.96
FFT	0.935	0.986	0.063	0.816	0.96
Lomb	0.931	0.985	0.570	0.787	0.97
SSA	0.892	0.976	0.425	0.713	0.98

Method	ROC AUC	PR AUC	Optimal Threshold	Sensitivity	Specificity
Autoperiod	0.863	0.969	0.202	0.727	0.90
SAZED	0.858	0.956	0.794	0.773	0.88
STL	0.801	0.954	0.501	0.607	0.92
ACF	0.782	0.950	0.268	0.571	0.98
CFD	0.738	0.936	0.268	0.447	0.97
MatrixProfile	0.719	0.923	0.229	0.604	0.73
Wavelet	0.608	0.852	0.991	0.996	0.22

ROC Curves

AUC Comparison

Optimal Threshold Estimation

The **optimal classification threshold** for each method is determined using **Youden's J statistic** (Youden, 1950), which maximizes the sum of sensitivity and specificity:

$$J = \text{Sensitivity} + \text{Specificity} - 1 = \text{TPR} - \text{FPR}$$

The threshold that maximizes J represents the point on the ROC curve farthest from the diagonal (random classifier), providing the best trade-off between detecting true seasonality (sensitivity) and avoiding false positives (specificity).

Why Youden's J?

- **Balanced approach:** Does not favor sensitivity over specificity
- **Threshold-independent:** Works for any score distribution
- **Standard practice:** Widely used in diagnostic test evaluation

Alternative threshold selection methods include:

- **Fixed sensitivity:** Set threshold to achieve target sensitivity (e.g., 0.90)
- **Cost-based:** Minimize misclassification cost when FP and FN have different costs
- **Prevalence-adjusted:** Account for class imbalance in threshold selection

The `pROC::coords()` function with `best` method implements Youden's J optimization.

Reference: Youden, W. J. (1950). Index for rating diagnostic tests. *Cancer*, 3(1), 32-35.

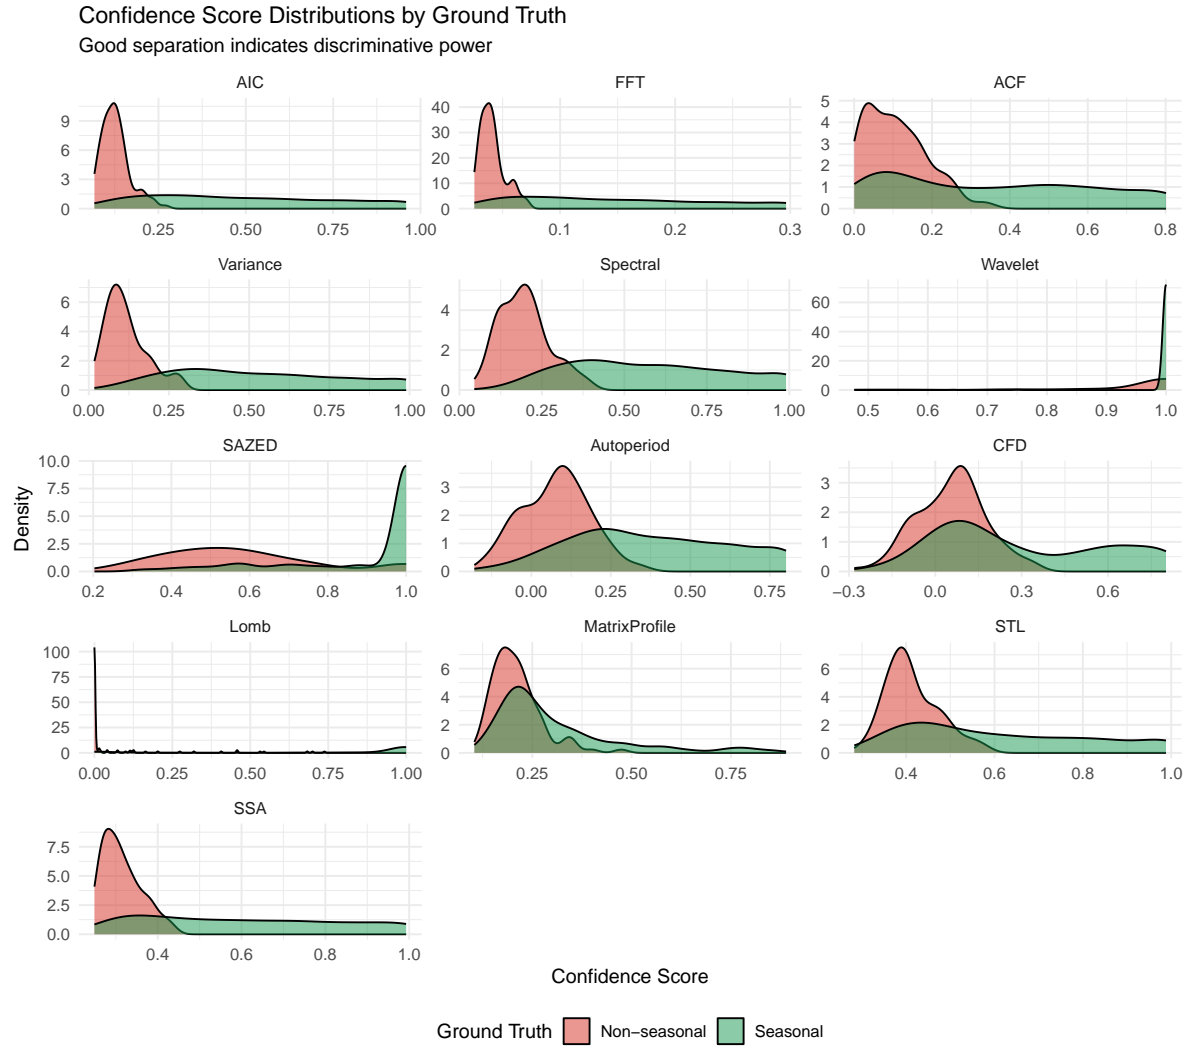


Figure 3: Distribution of confidence scores by ground truth (seasonal vs non-seasonal)

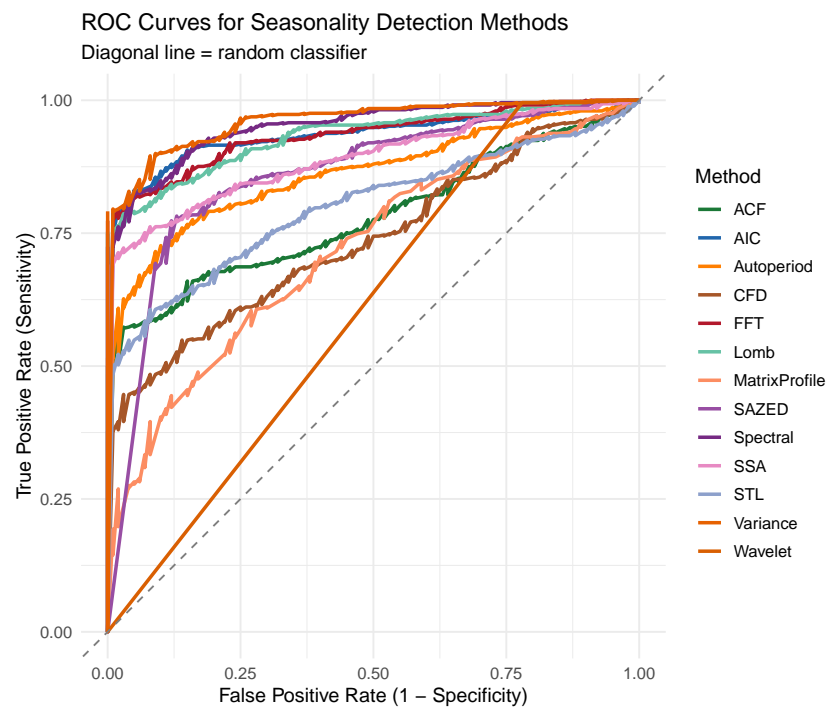


Figure 4: ROC curves for all detection methods

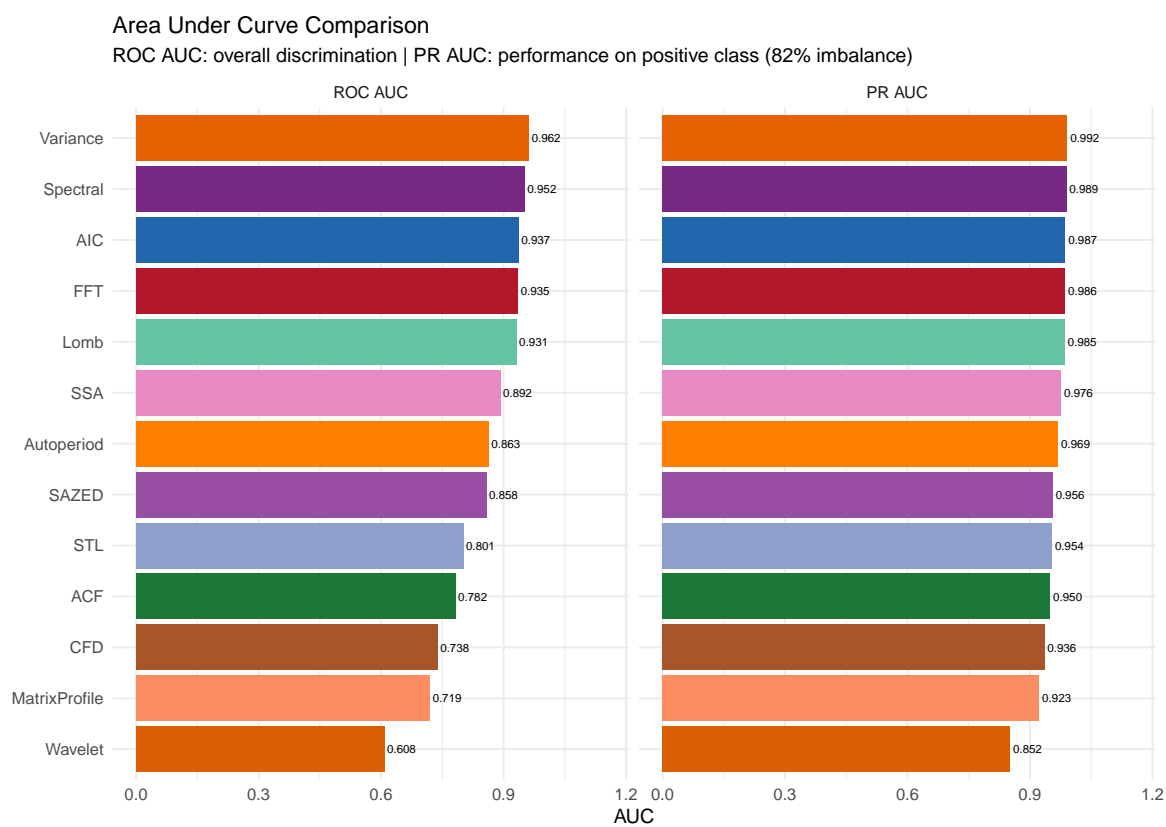


Figure 5: ROC AUC and PR AUC comparison across methods

Classification Performance

Using the optimal threshold from ROC analysis (Youden’s J statistic), we convert continuous scores into binary predictions and compute standard classification metrics.

We calculate Accuracy, Precision (positive predictive value), Recall (sensitivity), Specificity, False Positive Rate, and F1 score for each method.

Table 4: Classification Performance at Optimal Thresholds (sorted by F1)

Method	Accuracy	Precision	Recall	Specificity	FPR	F1
Variance	0.900	0.981	0.896	0.92	0.08	0.936
Wavelet	0.855	0.852	0.996	0.22	0.78	0.918
AIC	0.847	0.989	0.822	0.96	0.04	0.898
Spectral	0.847	0.989	0.822	0.96	0.04	0.898
FFT	0.842	0.989	0.816	0.96	0.04	0.894
Lomb	0.820	0.992	0.787	0.97	0.03	0.877
SAZED	0.793	0.967	0.773	0.88	0.12	0.859
Autoperiod	0.758	0.970	0.727	0.90	0.10	0.831
SSA	0.762	0.994	0.713	0.98	0.02	0.831
STL	0.664	0.972	0.607	0.92	0.08	0.747
MatrixProfile	0.627	0.910	0.604	0.73	0.27	0.726
ACF	0.645	0.992	0.571	0.98	0.02	0.725
CFD	0.542	0.985	0.447	0.97	0.03	0.615

Performance Comparison

Statistical Significance: McNemar Tests

McNemar’s test compares paired binary predictions between methods. A significant p-value indicates methods differ in their detection decisions.

Note: p-values adjusted for 78 pairwise comparisons using Benjamini-Hochberg (FDR) correction

Table 5: Significant McNemar Test Results (adjusted $p < 0.05$)

Method 1	Method 2	Chi-sq	p (raw)	p (adjusted)
CFD	Wavelet	320.0031	0.0000	0.0000
ACF	Wavelet	265.0037	0.0000	0.0000
STL	Wavelet	239.1004	0.0000	0.0000

Method 1	Method 2	Chi-sq	p (raw)	p (adjusted)
MatrixProfile	Wavelet	206.7854	0.0000	0.0000
SSA	Wavelet	199.0439	0.0000	0.0000
CFD	Variance	197.3767	0.0000	0.0000
Autoperiod	Wavelet	183.1295	0.0000	0.0000
Lomb	Wavelet	163.1445	0.0000	0.0000
AIC	CFD	158.6722	0.0000	0.0000
SAZED	Wavelet	158.2849	0.0000	0.0000
CFD	Spectral	156.9286	0.0000	0.0000
CFD	FFT	155.6836	0.0000	0.0000
FFT	Wavelet	151.0573	0.0000	0.0000
AIC	Wavelet	150.0066	0.0000	0.0000
Spectral	Wavelet	150.0066	0.0000	0.0000
CFD	SAZED	150.1562	0.0000	0.0000
ACF	Variance	144.3101	0.0000	0.0000
CFD	Lomb	141.7423	0.0000	0.0000
Autoperiod	CFD	120.1655	0.0000	0.0000
Variance	Wavelet	113.0087	0.0000	0.0000
STL	Variance	108.0584	0.0000	0.0000
ACF	AIC	107.4050	0.0000	0.0000
ACF	Spectral	107.4050	0.0000	0.0000
CFD	SSA	106.2901	0.0000	0.0000
ACF	FFT	104.4153	0.0000	0.0000
ACF	SAZED	97.0874	0.0000	0.0000
ACF	Lomb	90.4712	0.0000	0.0000
SSA	Variance	80.5213	0.0000	0.0000
ACF	Autoperiod	72.3049	0.0000	0.0000
AIC	STL	72.3419	0.0000	0.0000
Spectral	STL	72.3419	0.0000	0.0000
FFT	STL	69.4825	0.0000	0.0000
MatrixProfile	Variance	61.6050	0.0000	0.0000
CFD	STL	56.0777	0.0000	0.0000
Autoperiod	Variance	55.5104	0.0000	0.0000
Lomb	STL	55.1471	0.0000	0.0000
SAZED	STL	54.8108	0.0000	0.0000
ACF	SSA	53.6351	0.0000	0.0000
CFD	MatrixProfile	51.0751	0.0000	0.0000
AIC	SSA	45.4545	0.0000	0.0000
Lomb	Variance	45.3065	0.0000	0.0000
ACF	CFD	39.9452	0.0000	0.0000
Spectral	SSA	39.6825	0.0000	0.0000
FFT	SSA	39.4464	0.0000	0.0000

Method 1	Method 2	Chi-sq	p (raw)	p (adjusted)
Autoperiod	STL	34.3750	0.0000	0.0000
FFT	Variance	33.0652	0.0000	0.0000
Spectral	Variance	31.6098	0.0000	0.0000
AIC	Variance	30.1395	0.0000	0.0000
AIC	MatrixProfile	29.9235	0.0000	0.0000
MatrixProfile	Spectral	28.9735	0.0000	0.0000
SAZED	SSA	28.8000	0.0000	0.0000
SAZED	Variance	28.7356	0.0000	0.0000
FFT	MatrixProfile	27.6978	0.0000	0.0000
Lomb	SSA	25.9286	0.0000	0.0000
Autoperiod	Spectral	21.9661	0.0000	0.0000
SSA	STL	20.5000	0.0000	0.0000
MatrixProfile	SAZED	20.1117	0.0000	0.0000
Lomb	MatrixProfile	18.2528	0.0000	0.0000
AIC	Autoperiod	17.7534	0.0000	0.0000
Autoperiod	FFT	16.0147	0.0001	0.0001
AIC	Lomb	11.1304	0.0008	0.0011
ACF	MatrixProfile	8.7414	0.0031	0.0039
FFT	Lomb	8.4500	0.0037	0.0045
Lomb	Spectral	8.2581	0.0041	0.0049
Autoperiod	MatrixProfile	7.7784	0.0053	0.0063
ACF	STL	7.1129	0.0077	0.0090
Autoperiod	SAZED	6.4533	0.0111	0.0129
Autoperiod	Lomb	6.0167	0.0142	0.0163

McNemar P-Value Heatmap (FDR-Adjusted)

Challenge Scenarios

Following the fdars benchmark, we test method robustness under challenging conditions.

Challenge 1: Linear Trends

Linear trends are common in real-world data and can mask or mimic seasonality. We add trends of varying slopes (0.1, 0.3, 0.5 per time unit) to test robustness. Methods that operate on differenced data (CFD-Autoperiod) should be more robust.

Generated 450 curves with trends

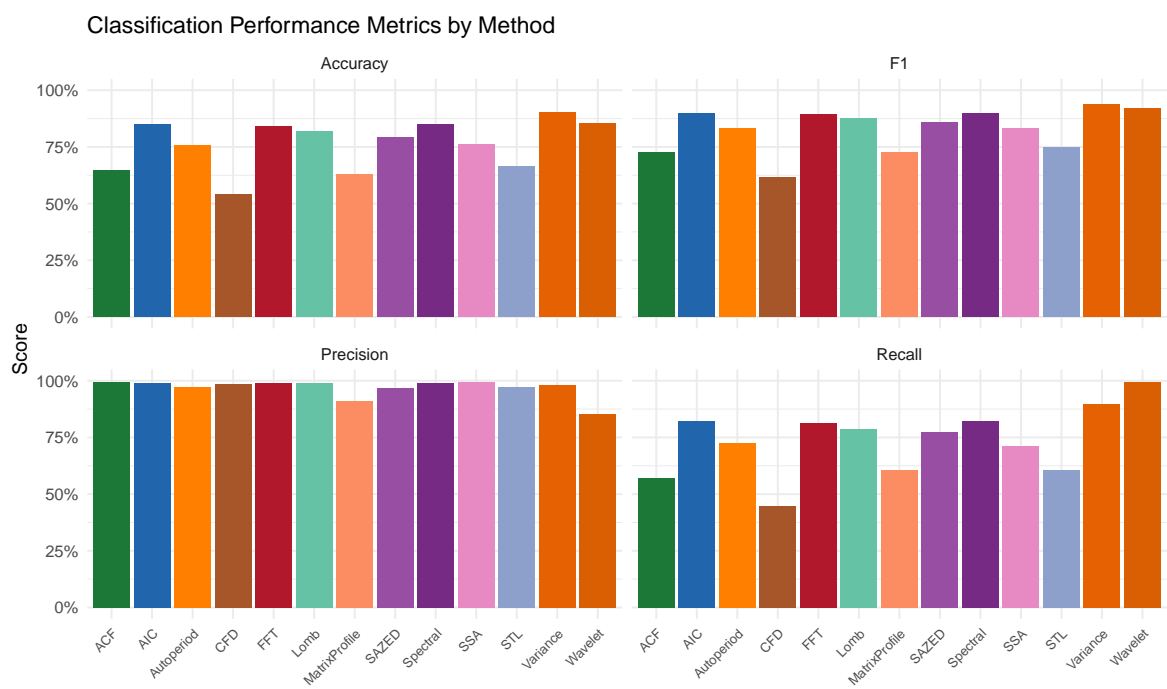


Figure 6: Classification metrics comparison across methods

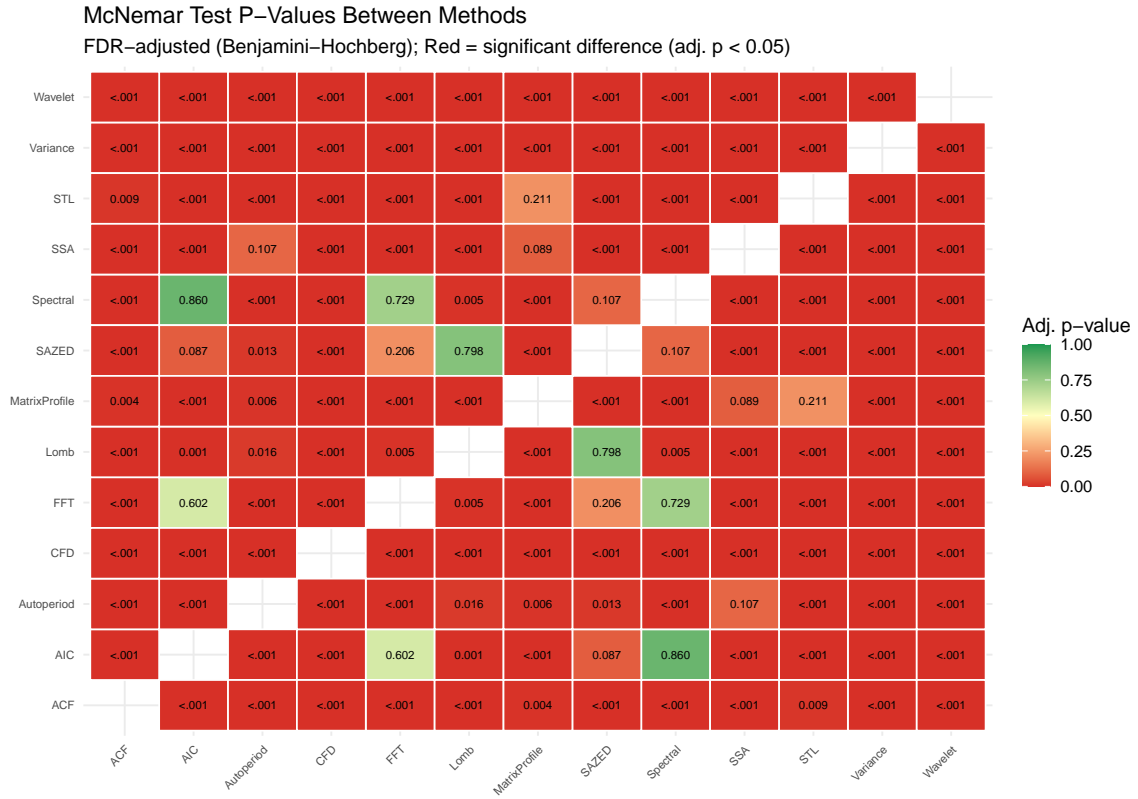


Figure 7: McNemar test p-values (FDR-adjusted) between method pairs (red = significant difference)

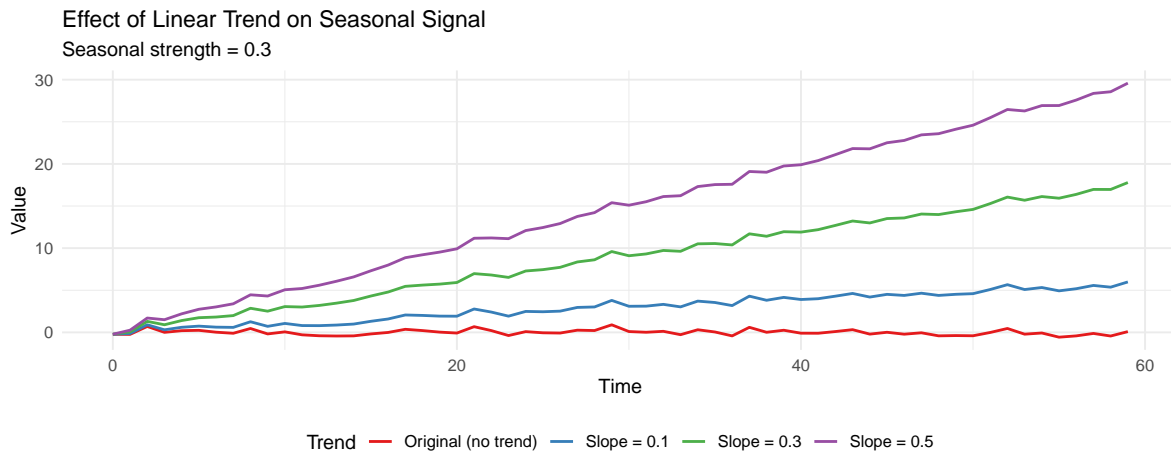


Figure 8: Example curves with linear trends of varying slopes

Challenge 1b: Non-linear Trends

Beyond linear trends, real-world data often exhibits non-linear trend patterns. We test quadratic (accelerating/decelerating) and sinusoidal (cyclical) trends that can confuse period detection methods.

Generated 450 curves with quadratic trends

Generated 450 curves with sinusoidal trends

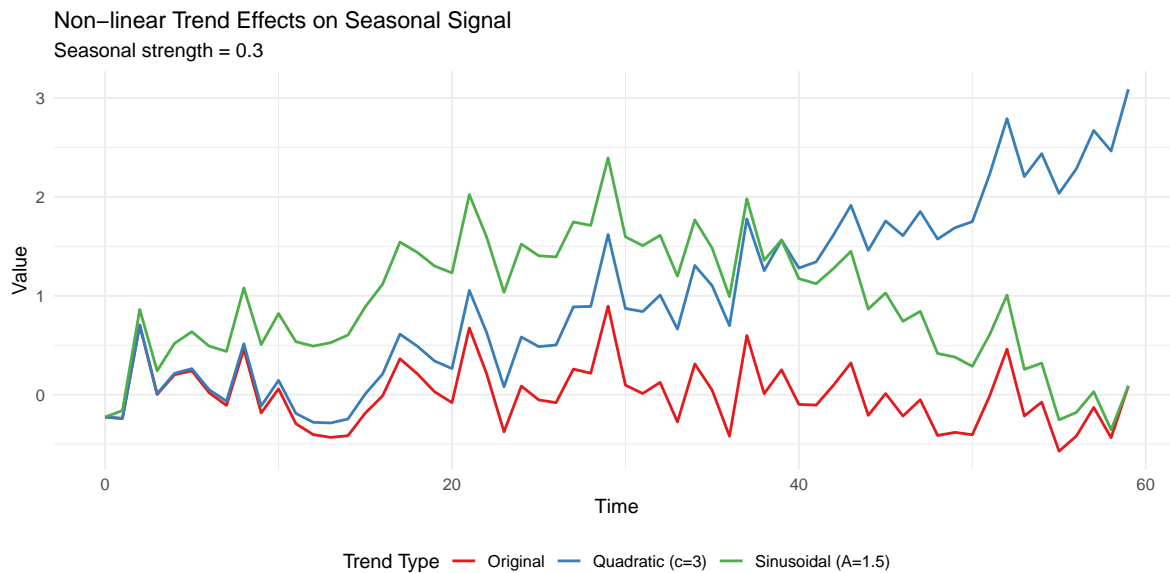


Figure 9: Effect of non-linear trends on seasonal signal (strength = 0.3)

Challenge 2: Red Noise (AR(1) Process)

Red noise (autocorrelated noise) can produce spurious peaks in spectral analysis that may be mistaken for seasonality. We replace white noise with AR(1) noise with coefficients $\phi = 0.0$ (baseline), 0.3, 0.5, 0.7, and 0.9 (extreme). Higher ϕ means stronger autocorrelation.

Generated 750 curves with AR(1) noise

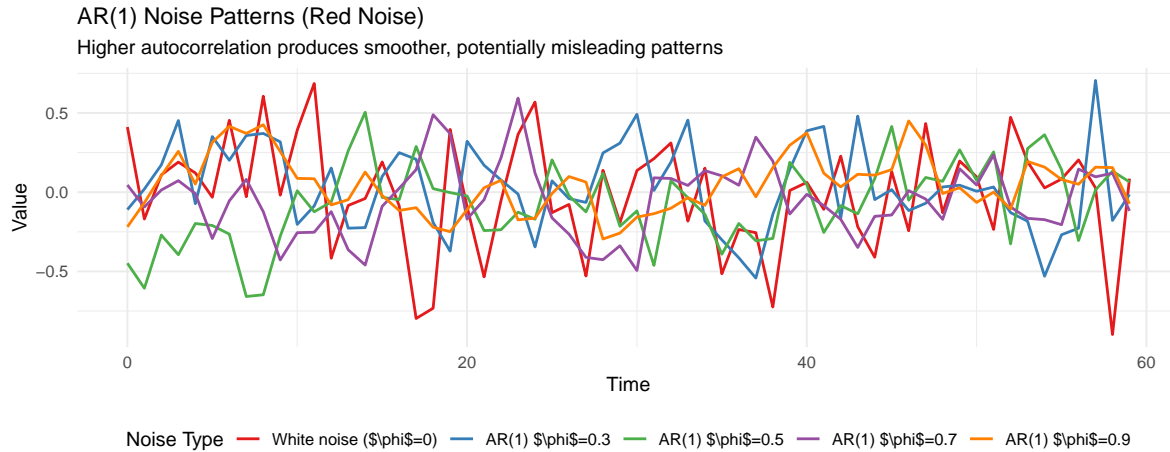


Figure 10: Example curves with AR(1) colored noise (autocorrelated)

Challenge 3: Outlier Contamination

Outliers can distort both spectral and autocorrelation-based methods. We inject outliers with probability 5-10% and magnitude 3-5 standard deviations. Robust methods should maintain performance.

Generated 450 curves with outliers

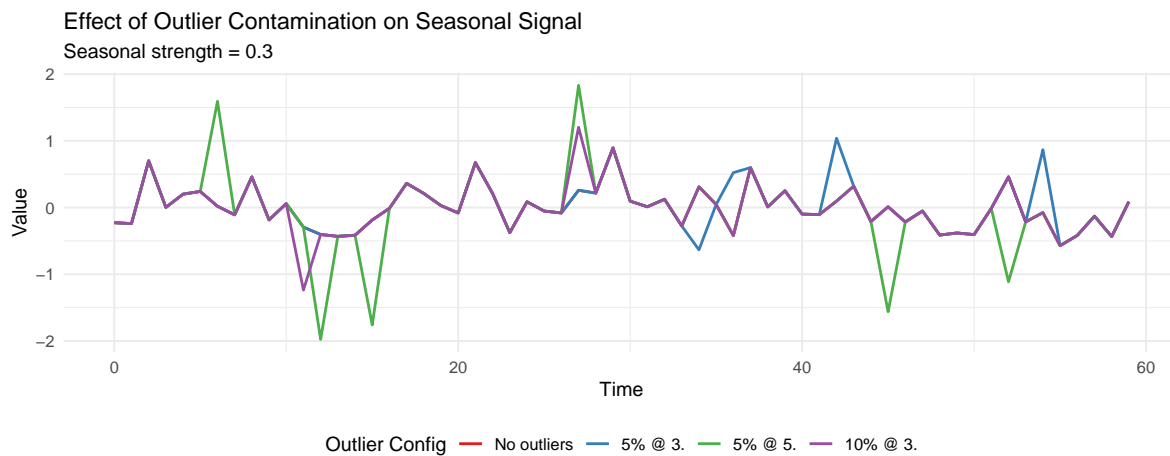


Figure 11: Example curves with outlier contamination at different levels

Challenge 4: Shape Robustness

Real-world seasonality is rarely a perfect sinusoid. We test methods' ability to detect non-sinusoidal periodic patterns including square waves and triangle waves, which contain higher harmonic content.

Generated 450 curves with different shapes

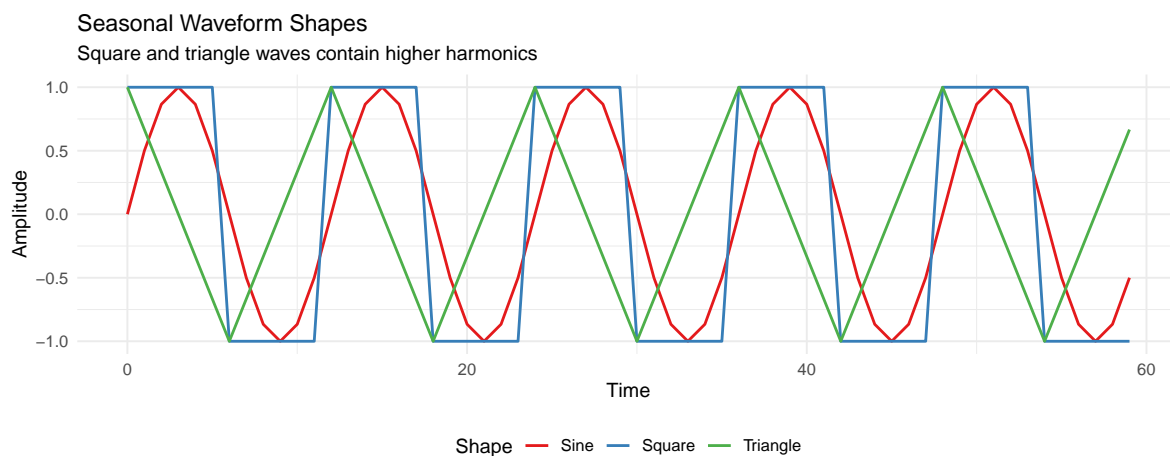


Figure 12: Seasonal waveform shapes (period = 12, normalized amplitude)

Challenge 5: Amplitude Modulation

Non-stationary seasonality with time-varying amplitude is common in real-world data (e.g., emerging or fading seasonal patterns). We test methods' robustness to amplitude modulation patterns.

Generated 600 curves with amplitude modulation

Challenge Scenario Performance

We evaluate all 13 methods on each challenge scenario, broken down by the specific challenge parameter to understand performance degradation.

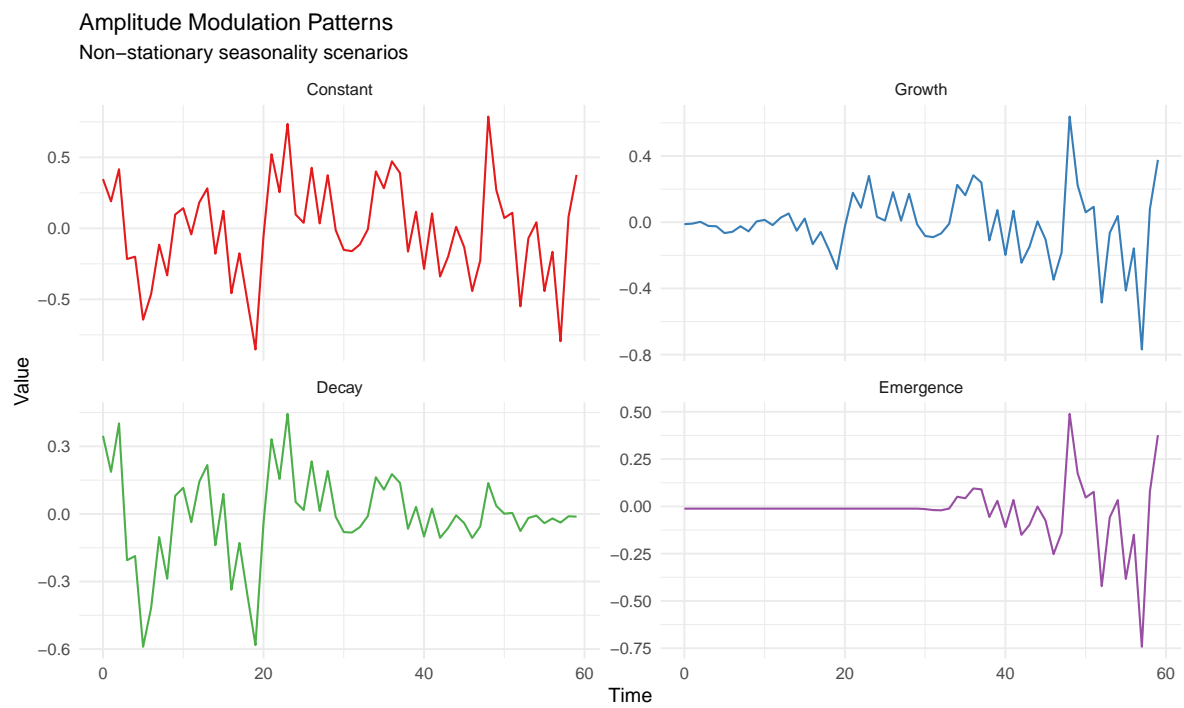


Figure 13: Amplitude modulation patterns applied to seasonal signal (strength = 0.5)

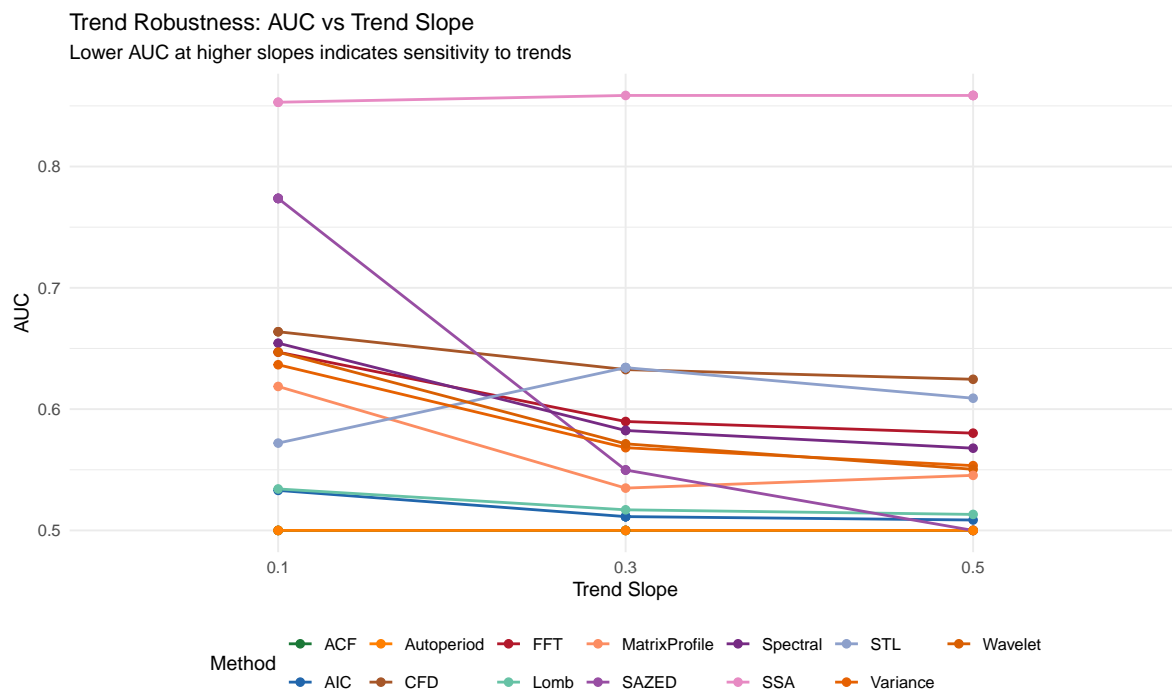


Figure 14: Method performance degradation with increasing trend slope

Trend Robustness

Red Noise Robustness (AR(1) False Positive Rate)

For red noise tests, we focus on **non-seasonal curves only** to measure false positive rate (FPR) — i.e., how often methods incorrectly detect seasonality in autocorrelated noise.

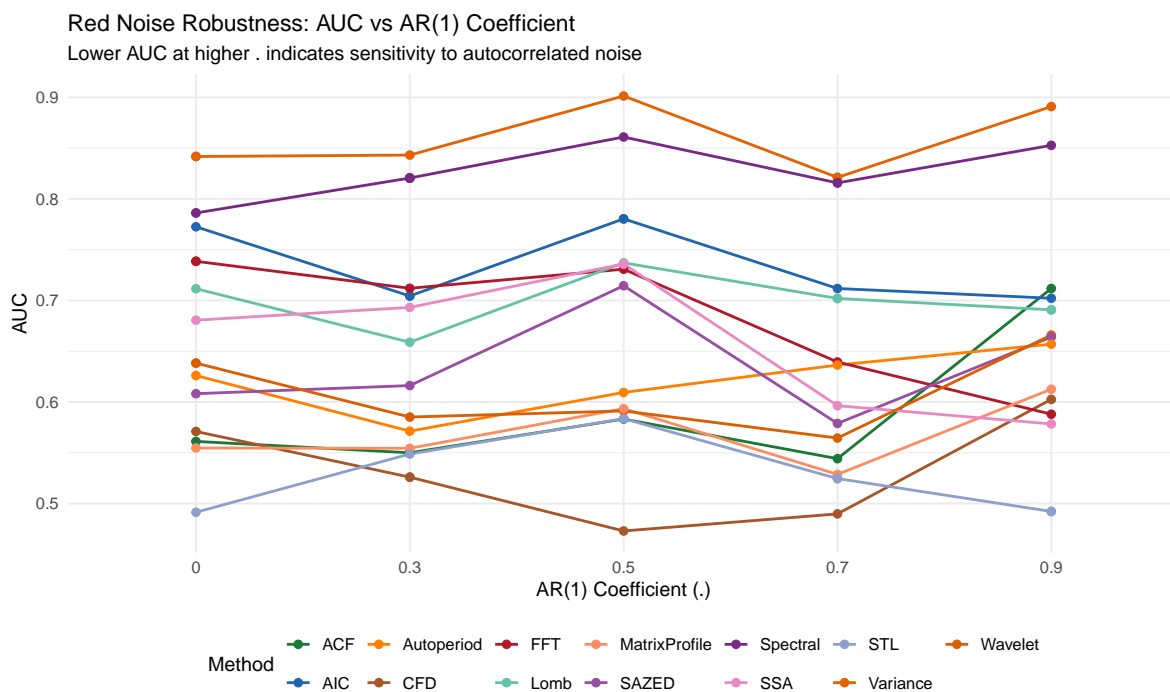


Figure 15: AUC with increasing AR(1) autocorrelation

Outlier Robustness

Non-linear Trend Robustness

Shape Robustness

Amplitude Modulation Robustness

Challenge Summary Table

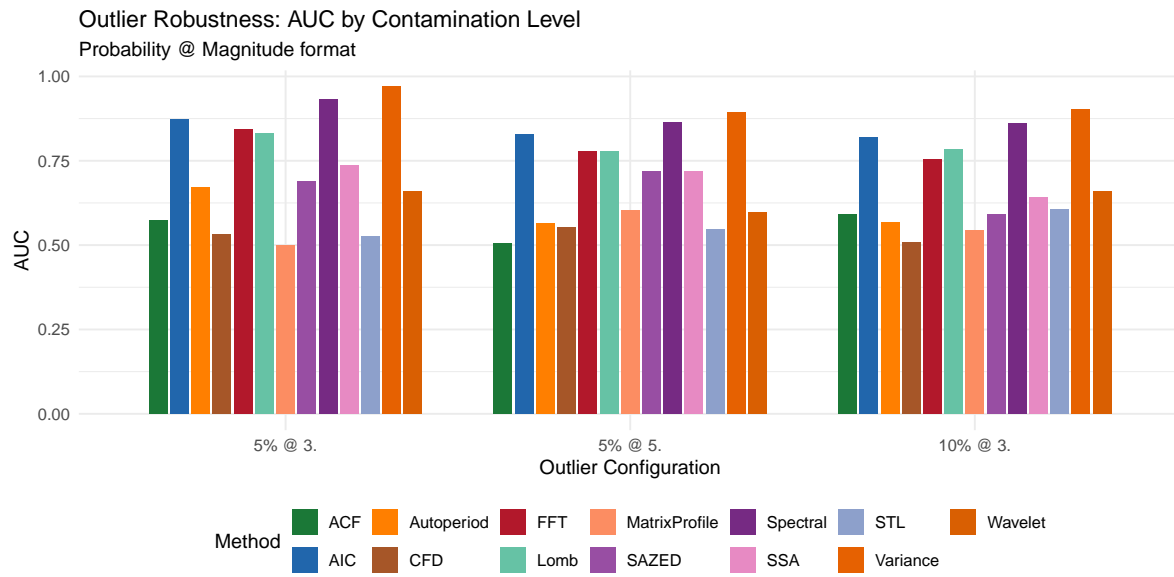


Figure 16: Method performance under different outlier configurations

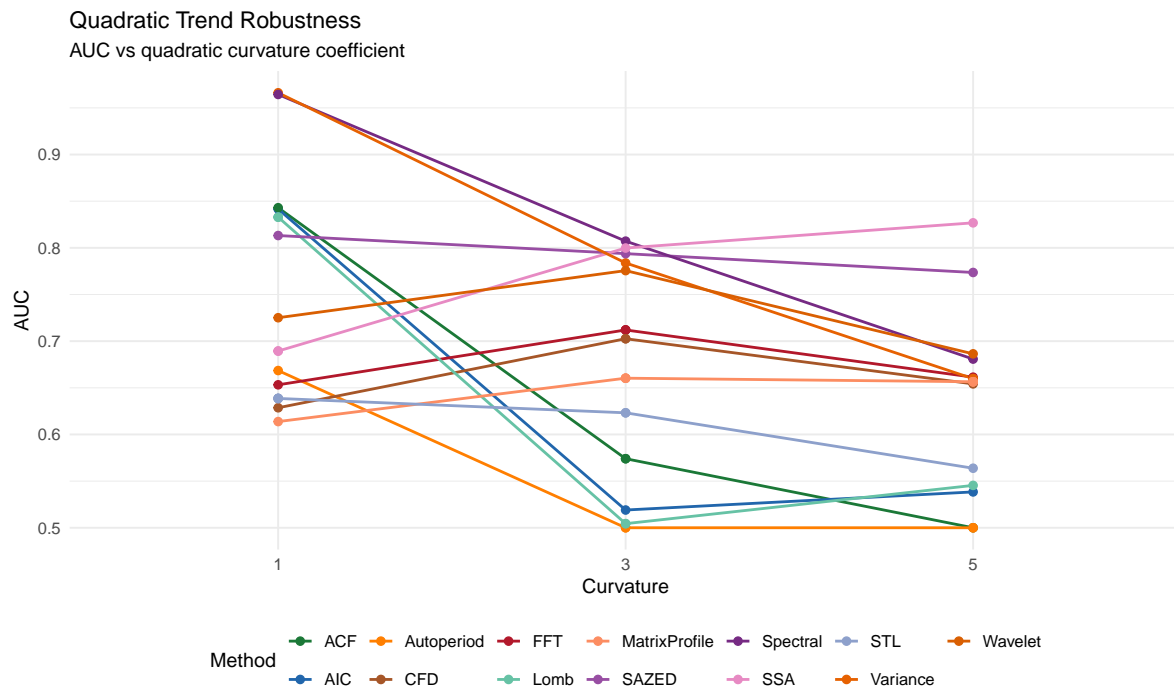


Figure 17: Method performance with increasing quadratic trend curvature

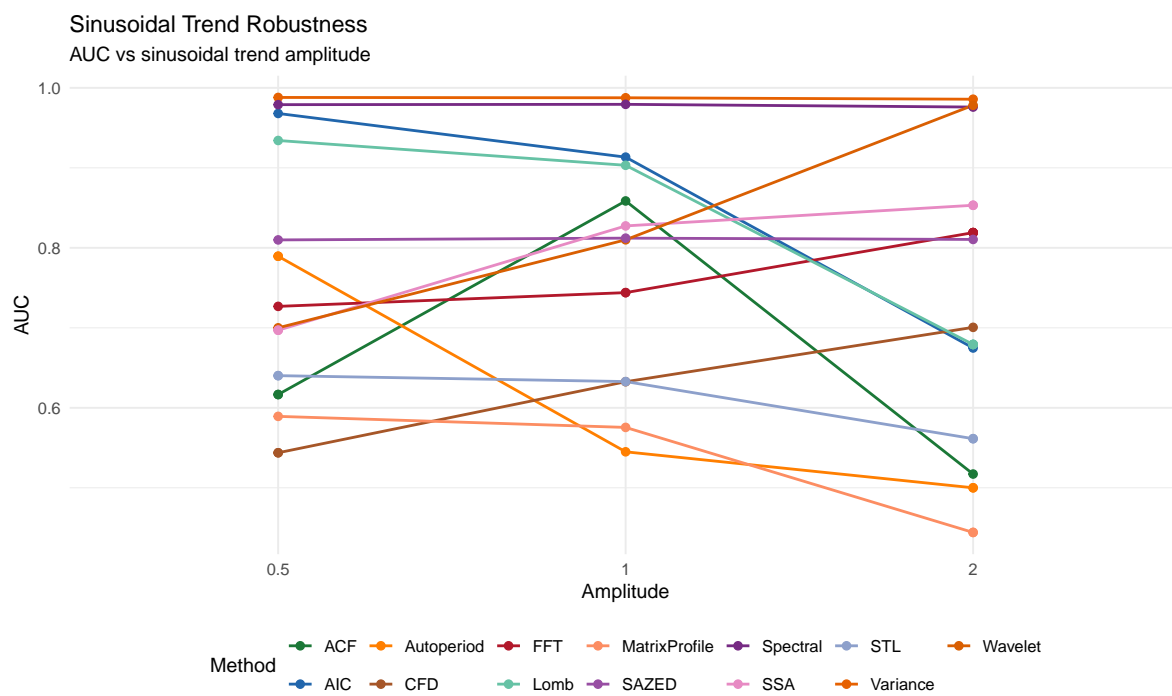


Figure 18: Method performance with increasing sinusoidal trend amplitude



Figure 19: Method performance across waveform shapes

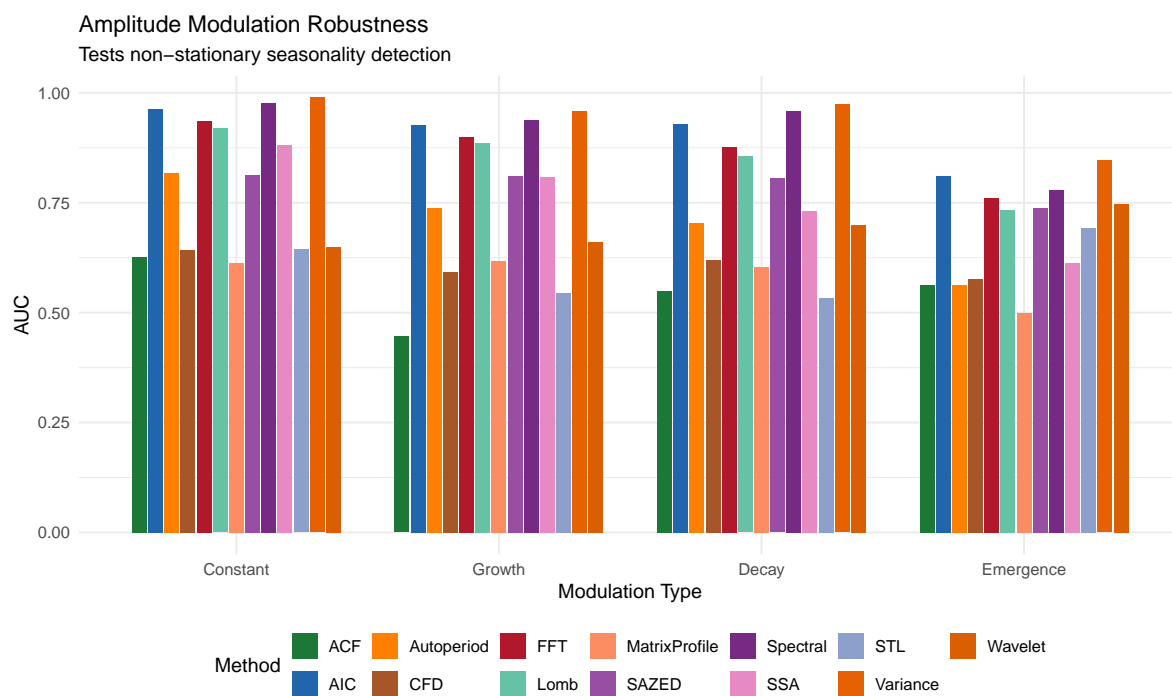


Figure 20: Method performance under amplitude modulation

Table 6: Extended Challenge Scenario Summary: AUC Statistics by Method

Challenge	Method	Mean AUC	Min AUC	Max AUC
Amplitude Modulation	Variance	0.945	0.846	0.990
Amplitude Modulation	Spectral	0.935	0.780	0.976
Amplitude Modulation	AIC	0.918	0.812	0.964
Amplitude Modulation	FFT	0.852	0.761	0.936
Amplitude Modulation	Lomb	0.826	0.733	0.919
Amplitude Modulation	SAZED	0.792	0.739	0.813
Amplitude Modulation	SSA	0.759	0.613	0.882
Amplitude Modulation	Autoperiod	0.705	0.564	0.817
Amplitude Modulation	Wavelet	0.689	0.650	0.747
Amplitude Modulation	CFD	0.608	0.577	0.643
Amplitude Modulation	STL	0.603	0.533	0.692
Amplitude Modulation	MatrixProfile	0.567	0.500	0.618
Amplitude Modulation	ACF	0.546	0.446	0.626
Linear Trends	SSA	0.857	0.853	0.859
Linear Trends	SAZED	0.652	0.500	0.774
Linear Trends	CFD	0.646	0.625	0.664
Linear Trends	STL	0.620	0.572	0.634
Linear Trends	FFT	0.606	0.580	0.647
Linear Trends	Spectral	0.597	0.568	0.654
Linear Trends	Wavelet	0.590	0.550	0.647
Linear Trends	Variance	0.586	0.553	0.637
Linear Trends	MatrixProfile	0.566	0.535	0.619
Linear Trends	Lomb	0.521	0.513	0.534
Linear Trends	AIC	0.514	0.509	0.533
Linear Trends	ACF	0.500	0.500	0.500
Linear Trends	Autoperiod	0.500	0.500	0.500
Outliers	Variance	0.941	0.893	0.969
Outliers	Spectral	0.881	0.862	0.933
Outliers	AIC	0.836	0.819	0.874
Outliers	Lomb	0.798	0.779	0.833
Outliers	FFT	0.782	0.753	0.844
Outliers	SSA	0.699	0.643	0.735
Outliers	SAZED	0.682	0.593	0.719
Outliers	Wavelet	0.639	0.597	0.660
Outliers	Autoperiod	0.584	0.565	0.672
Outliers	STL	0.551	0.527	0.606
Outliers	MatrixProfile	0.546	0.499	0.602
Outliers	ACF	0.544	0.507	0.592
Outliers	CFD	0.522	0.508	0.554

Challenge	Method	Mean AUC	Min AUC	Max AUC
Quadratic Trends	Spectral	0.817	0.681	0.964
Quadratic Trends	SAZED	0.794	0.774	0.813
Quadratic Trends	Variance	0.767	0.660	0.966
Quadratic Trends	SSA	0.751	0.689	0.827
Quadratic Trends	Wavelet	0.729	0.686	0.776
Quadratic Trends	FFT	0.690	0.653	0.712
Quadratic Trends	CFD	0.672	0.629	0.703
Quadratic Trends	MatrixProfile	0.653	0.614	0.660
Quadratic Trends	Lomb	0.644	0.504	0.833
Quadratic Trends	AIC	0.633	0.519	0.842
Quadratic Trends	STL	0.624	0.564	0.639
Quadratic Trends	ACF	0.623	0.500	0.843
Quadratic Trends	Autoperiod	0.534	0.500	0.668
Red Noise (AR1)	Variance	0.852	0.821	0.901
Red Noise (AR1)	Spectral	0.820	0.786	0.861
Red Noise (AR1)	AIC	0.737	0.702	0.780
Red Noise (AR1)	Lomb	0.699	0.659	0.737
Red Noise (AR1)	FFT	0.691	0.588	0.739
Red Noise (AR1)	SSA	0.680	0.578	0.736
Red Noise (AR1)	SAZED	0.636	0.579	0.715
Red Noise (AR1)	Autoperiod	0.620	0.571	0.657
Red Noise (AR1)	Wavelet	0.614	0.565	0.666
Red Noise (AR1)	ACF	0.583	0.544	0.712
Red Noise (AR1)	MatrixProfile	0.569	0.529	0.613
Red Noise (AR1)	CFD	0.531	0.473	0.603
Red Noise (AR1)	STL	0.522	0.491	0.584
Shape Robustness	Variance	0.969	0.956	0.989
Shape Robustness	Spectral	0.958	0.940	0.976
Shape Robustness	AIC	0.932	0.907	0.980
Shape Robustness	FFT	0.915	0.844	0.979
Shape Robustness	Lomb	0.897	0.822	0.974
Shape Robustness	SSA	0.856	0.784	0.920
Shape Robustness	SAZED	0.820	0.766	0.884
Shape Robustness	Autoperiod	0.811	0.768	0.935
Shape Robustness	STL	0.697	0.615	0.804
Shape Robustness	ACF	0.679	0.588	0.723
Shape Robustness	Wavelet	0.627	0.610	0.660
Shape Robustness	CFD	0.577	0.533	0.631
Shape Robustness	MatrixProfile	0.562	0.476	0.602
Sinusoidal Trends	Variance	0.987	0.986	0.988
Sinusoidal Trends	Spectral	0.978	0.976	0.979

Challenge	Method	Mean AUC	Min AUC	Max AUC
Sinusoidal Trends	AIC	0.852	0.675	0.968
Sinusoidal Trends	Wavelet	0.829	0.700	0.978
Sinusoidal Trends	SAZED	0.811	0.810	0.812
Sinusoidal Trends	FFT	0.789	0.727	0.819
Sinusoidal Trends	SSA	0.786	0.697	0.853
Sinusoidal Trends	Lomb	0.759	0.679	0.934
Sinusoidal Trends	ACF	0.652	0.517	0.859
Sinusoidal Trends	Autoperiod	0.625	0.500	0.789
Sinusoidal Trends	STL	0.607	0.561	0.640
Sinusoidal Trends	CFD	0.605	0.544	0.701
Sinusoidal Trends	MatrixProfile	0.513	0.444	0.589

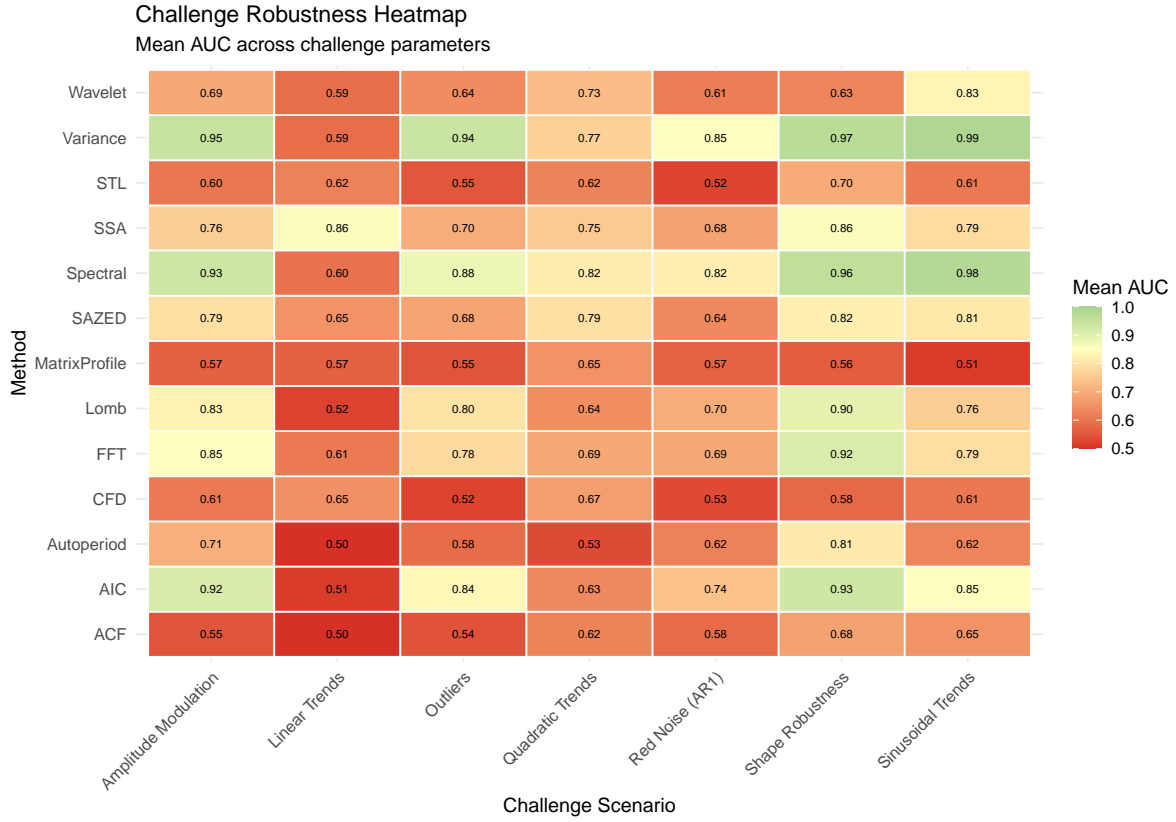


Figure 21: Challenge robustness heatmap: Mean AUC by method and challenge type

M4 Real-World Validation

To validate synthetic benchmark results, we apply all detection methods to real-world time series from the M4 Competition Monthly dataset. Monthly series are expected to exhibit annual seasonality (period = 12).

Note: M4 validation skipped - reticulate R package not available
Install with: `install.packages('reticulate')`

Summary and Conclusions

Final Rankings

Table 7: Final Method Rankings by F1 Score

Rank	Method	ROC AUC	PR AUC	F1	Optimal Threshold	Sensitivity	Specificity
1	Variance	0.962	0.992	0.936	0.215	0.896	0.92
2	Wavelet	0.608	0.852	0.918	0.991	0.996	0.22
3	Spectral	0.952	0.989	0.898	0.335	0.822	0.96
4	AIC	0.937	0.987	0.898	0.213	0.822	0.96
5	FFT	0.935	0.986	0.894	0.063	0.816	0.96
6	Lomb	0.931	0.985	0.877	0.570	0.787	0.97
7	SAZED	0.858	0.956	0.859	0.794	0.773	0.88
8	Autoperiod	0.863	0.969	0.831	0.202	0.727	0.90
9	SSA	0.892	0.976	0.831	0.425	0.713	0.98
10	STL	0.801	0.954	0.747	0.501	0.607	0.92
11	MatrixProfile	0.719	0.923	0.726	0.229	0.604	0.73
12	ACF	0.782	0.950	0.725	0.268	0.571	0.98
13	CFD	0.738	0.936	0.615	0.268	0.447	0.97

Key Findings

****Best Overall Method****: Variance (F1 = 0.936, ROC AUC = 0.962, PR AUC = 0.992)

Recommendations

Use Case	Recommended Method	Rationale
General detection	Wavelet or Variance	Highest F1 scores across challenges
Quick screening	FFT	Fast with good accuracy on clean data
Noisy data	ACF or Autoperiod	Robust to AR(1) autocorrelated noise
Data with trends	CFD-Autoperiod	Uses differencing to remove trends
Irregular sampling	Lomb-Scargle	Handles gaps and uneven spacing
Non-stationary amplitude	Wavelet or SSA	Time-frequency localization
Non-sinusoidal patterns	Autoperiod or ACF	Less sensitive to harmonic content
Emerging seasonality	Wavelet	Detects time-localized patterns

Cleanup

```
[1] 0
```

```
[1] 0
```

```
[1] 0
```

Session Info

```
R version 4.5.2 (2025-10-31)
Platform: x86_64-pc-linux-gnu
Running under: Manjaro Linux
```

```
Matrix products: default
BLAS:   /usr/lib/libblas.so.3.12.0
LAPACK: /usr/lib/liblapack.so.3.12.0  LAPACK version 3.12.0
```

```
locale:
```

```
[1] LC_CTYPE=de_DE.UTF-8      LC_NUMERIC=C
[3] LC_TIME=de_DE.UTF-8      LC_COLLATE=de_DE.UTF-8
[5] LC_MONETARY=de_DE.UTF-8  LC_MESSAGES=de_DE.UTF-8
```

```
[7] LC_PAPER=de_DE.UTF-8      LC_NAME=C
[9] LC_ADDRESS=C              LC_TELEPHONE=C
[11] LC_MEASUREMENT=de_DE.UTF-8 LC_IDENTIFICATION=C
```

```
time zone: Europe/Berlin
tzcode source: system (glibc)
```

attached base packages:

```
[1] stats      graphics  grDevices  utils      datasets  methods    base
```

other attached packages:

```
[1] PRROC_1.4      rlang_1.1.6    pROC_1.19.0.1 scales_1.4.0  knitr_1.51
[6] purrr_1.2.0    tidyr_1.3.2    dplyr_1.1.4    ggplot2_4.0.1 duckdb_1.4.3
[11] DBI_1.2.3
```

loaded via a namespace (and not attached):

```
[1] gtable_0.3.6      jsonlite_2.0.0    compiler_4.5.2     tidyselect_1.2.1
[5] Rcpp_1.1.0         yaml_2.3.12        fastmap_1.2.0      R6_2.6.1
[9] labeling_0.4.3     generics_0.1.4     tibble_3.3.0       pillar_1.11.1
[13] RColorBrewer_1.1-3 xfun_0.54          S7_0.2.0            otel_0.2.0
[17] cli_3.6.5          withr_3.0.2        magrittr_2.0.4     digest_0.6.39
[21] grid_4.5.2         lifecycle_1.0.4    vctrs_0.6.5        evaluate_1.0.5
[25] glue_1.8.0         farver_2.1.2       codetools_0.2-20    rmarkdown_2.30
[29] tools_4.5.2        pkgconfig_2.0.3    htmltools_0.5.9
```