


How To Calculate if an Initialization Attempt Has Failed

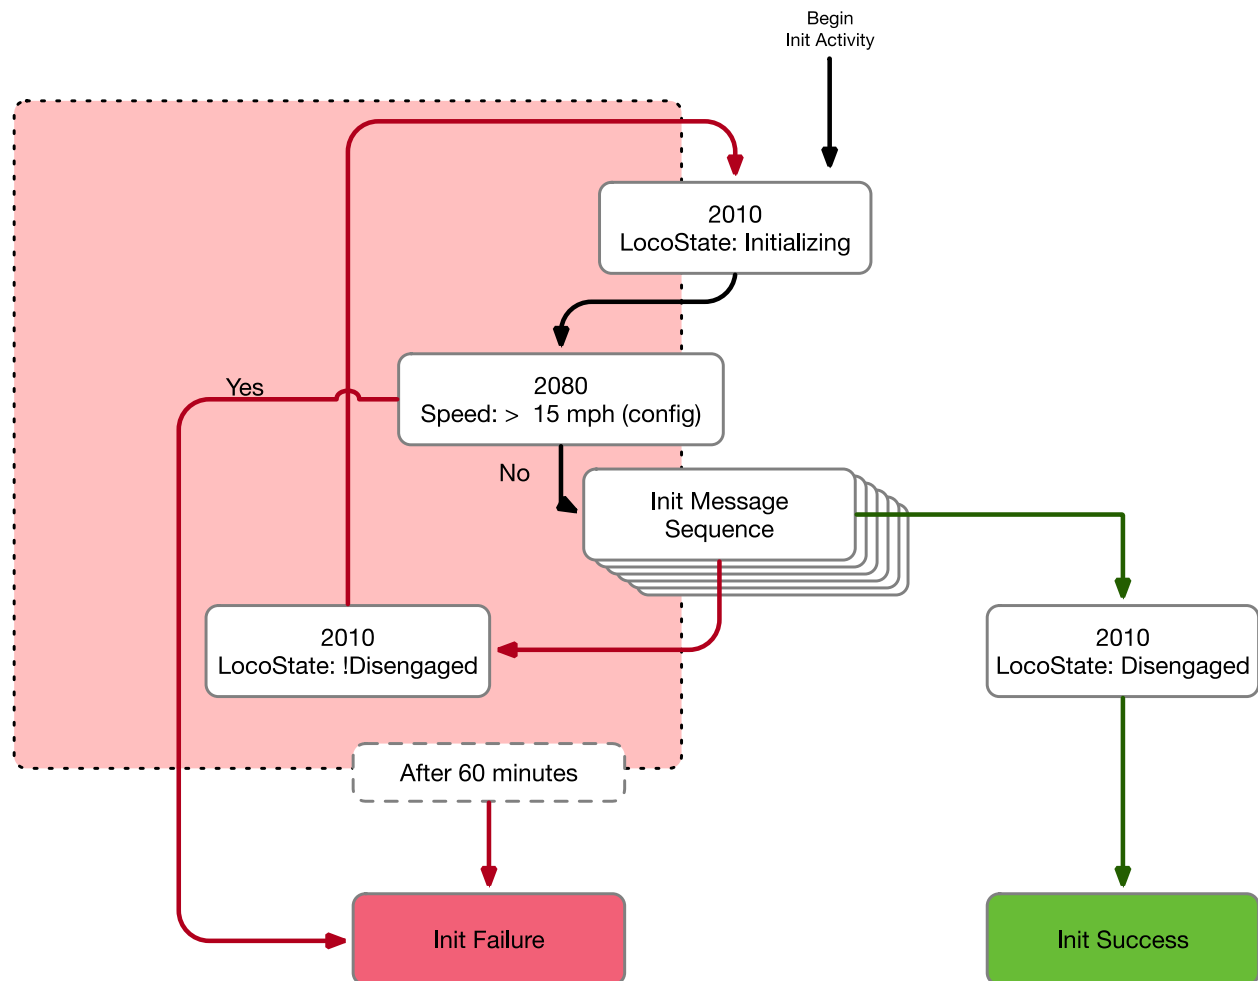

- If a 2010 message (INITIALIZING) has a 2080 (speed > 15 mph) before sending a 2010 (DISENGAGED), all messages including the 2010 (INITIALIZING), initializing messages including additional 2010 (INITIALIZING) and the 2080 (speed > 15 mph), the entire series of messages will be registered as a FAILED INITIALIZATION.
- If a 2010 message (INITIALIZATION) is followed by a 2010 message (DISENGAGED) within 60 minutes, the series as message will be registered as a SUCCESSFUL INITIALIZATION.
- If a 2010 message (INITIALIZATION) is followed by a 2010 message (DISENGAGED), but the attempt takes longer than 6 minutes, the initialization attempt will be registered as a FAILED INITIALIZATION.
- If a 2010 (DISENGAGED) has no known matching 2010 (INITIALIZING), the initialization attempt will be registered as SUCCESSFUL INITIALIZATION.


Notes:

- The number of 2010 (DISENGAGED) must equal the number of successful initializations.


- If an initialization takes over 60 minutes but is successful, it will be logged as both a failed and a successful attempt
- As long as the locomotive does not move (2080 speed > 15 mph), the locomotive can go through as many 2010 (INITIALIZING). If the locomotive successfully sends a 2010 (DISENGAGED), it will be listed as a successful initialization.

Examples

Example 1

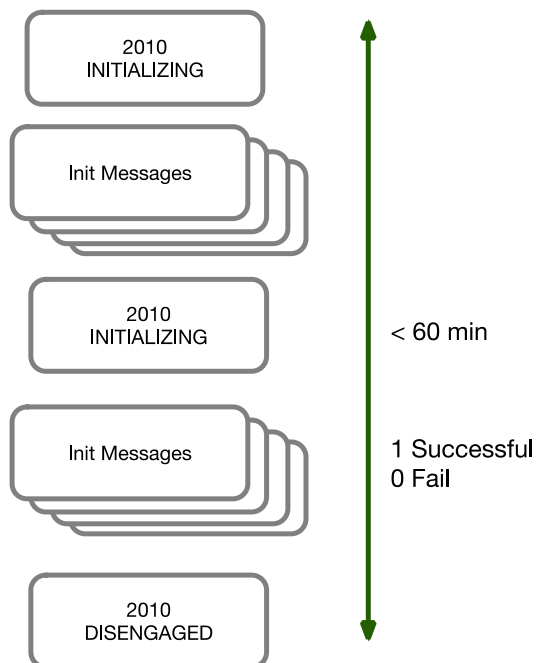

Example 2

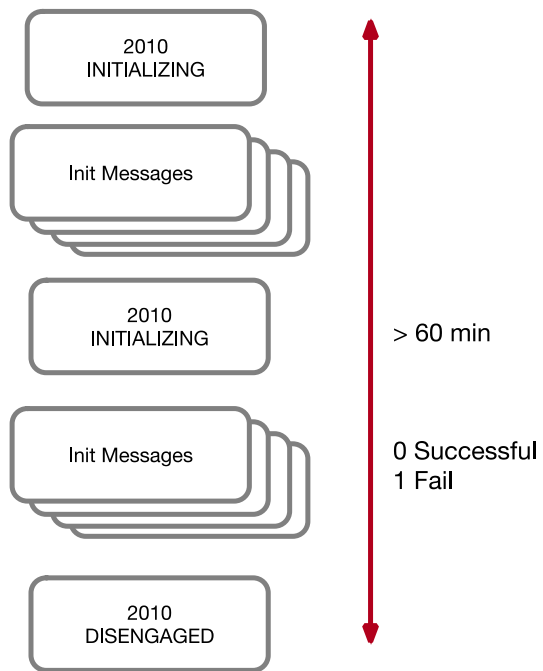

Example 3

