



or in logical expressions they can be accessed with the help of any of the nested loops. But nested for loops are the best suitable loop.

### Defining two dimensional Array

<data type> <array name> [Row size] [Col size];

Ex

int a[3][2];

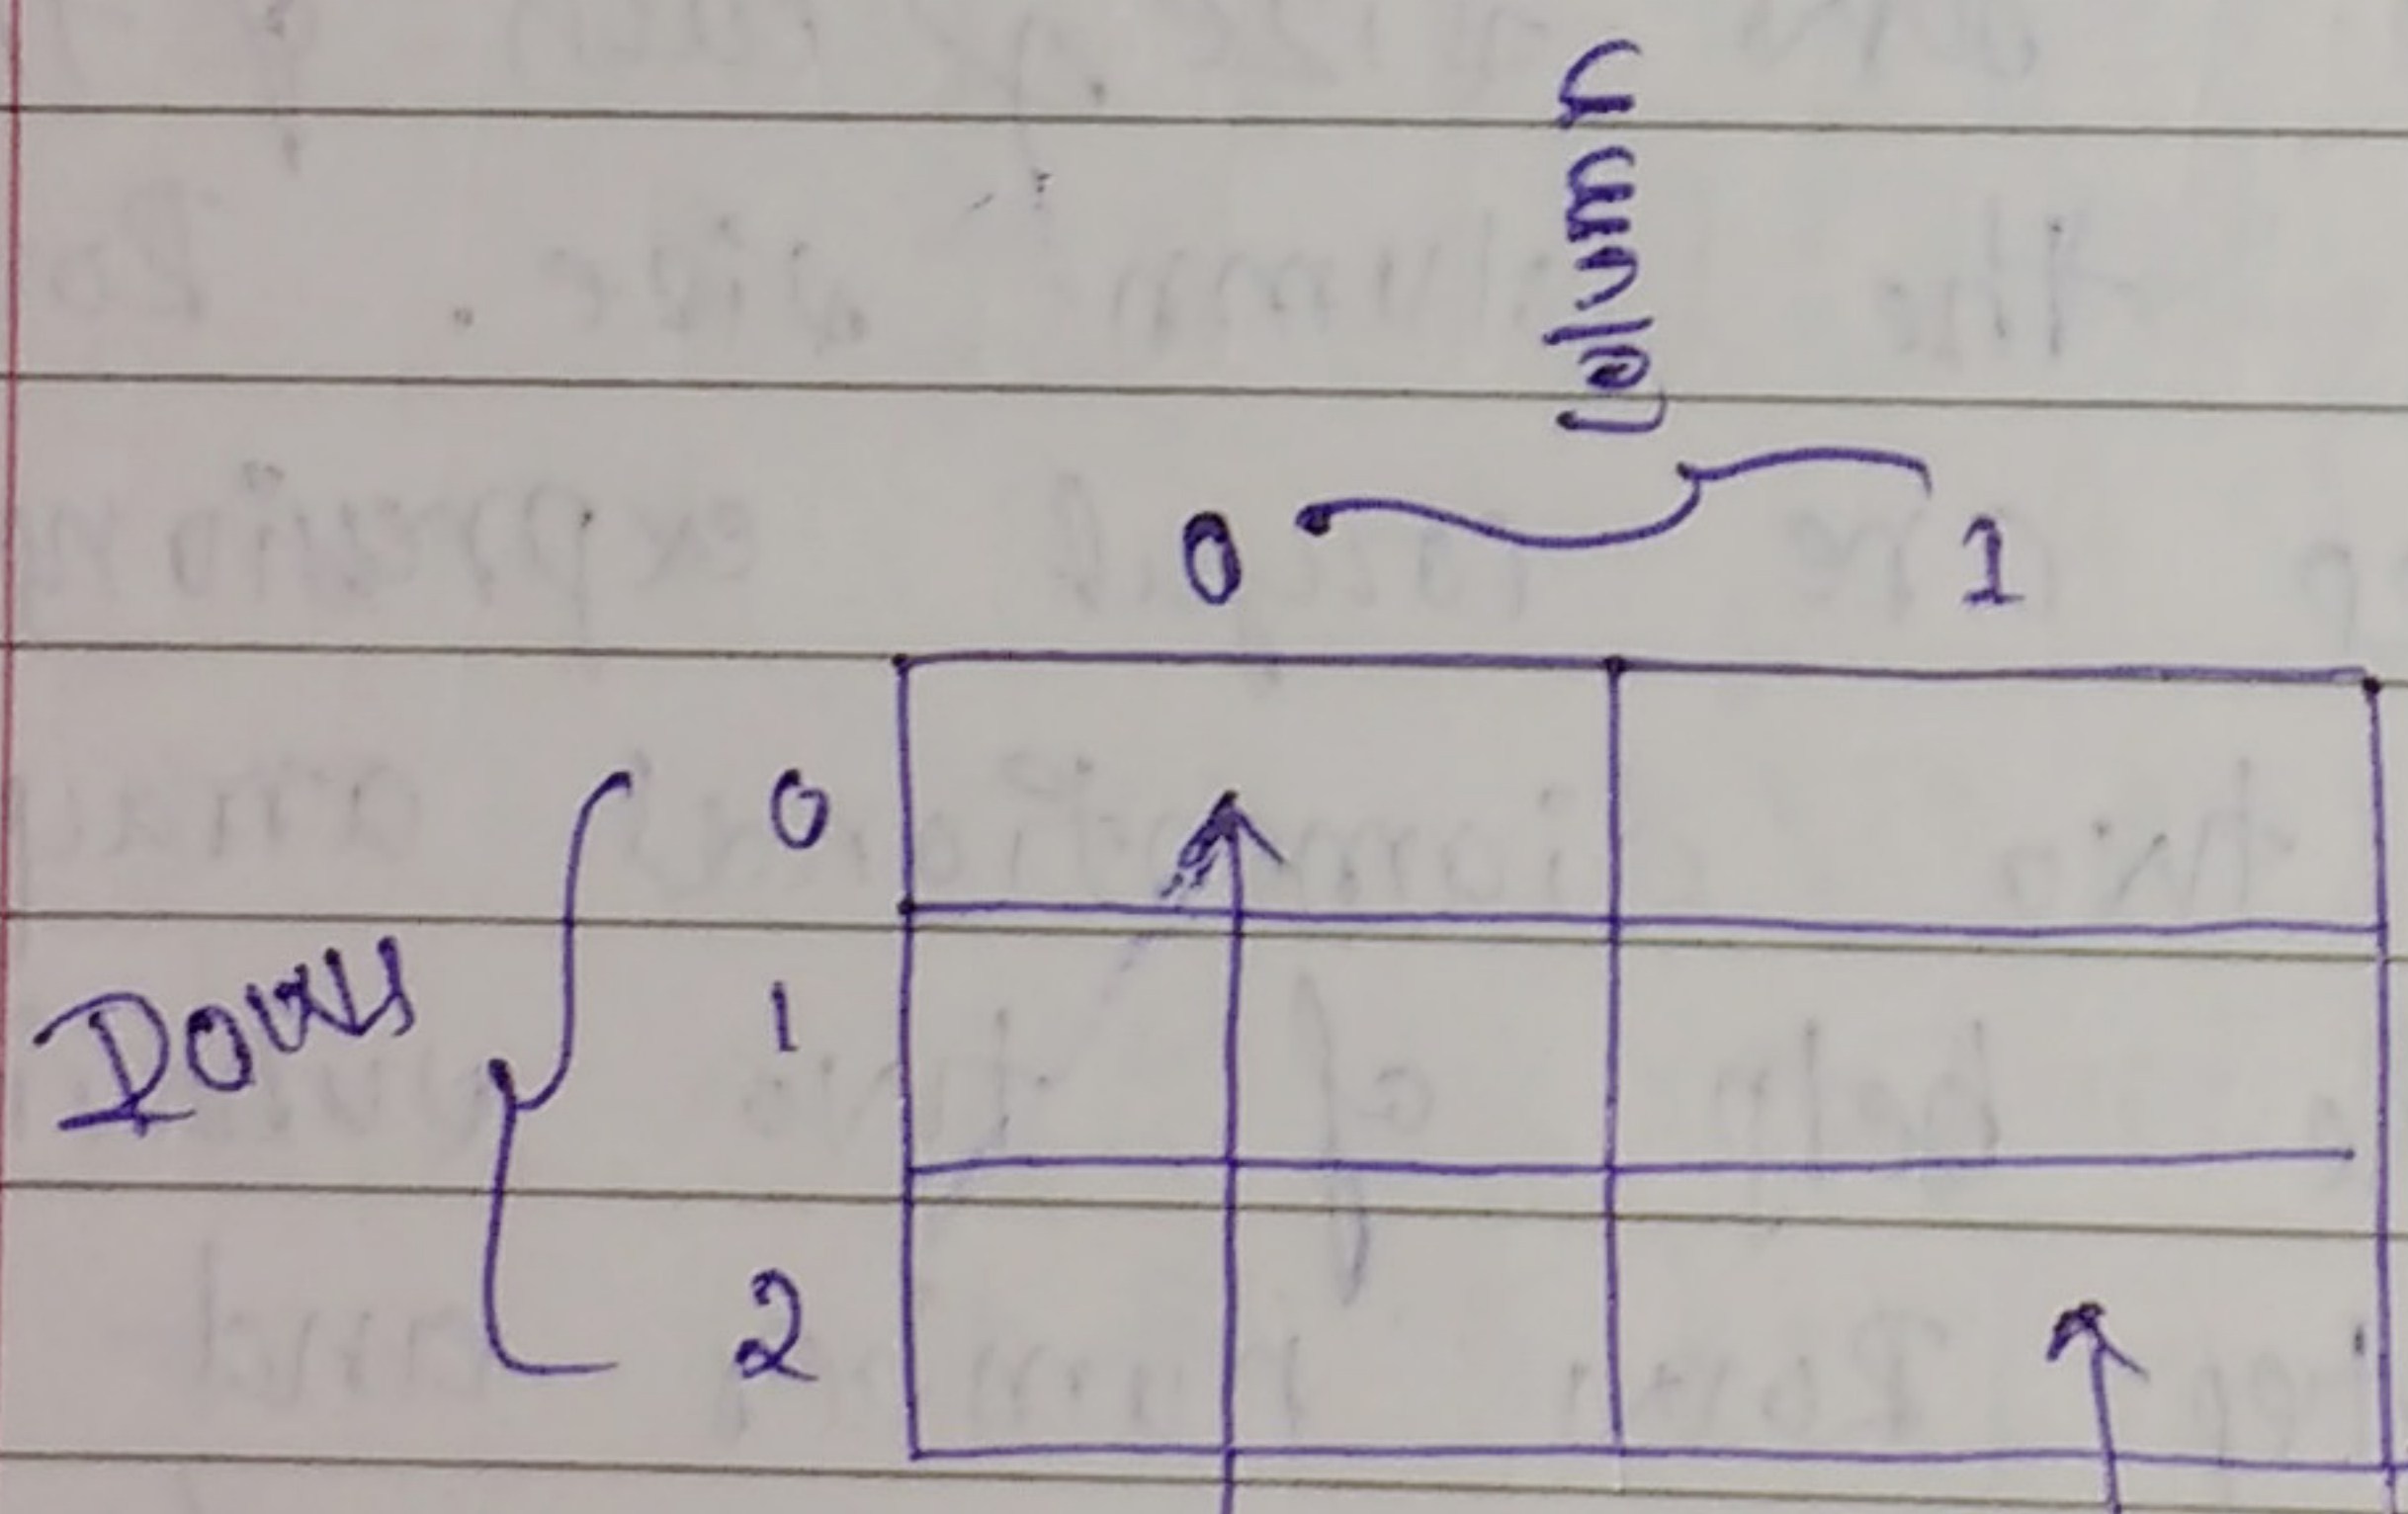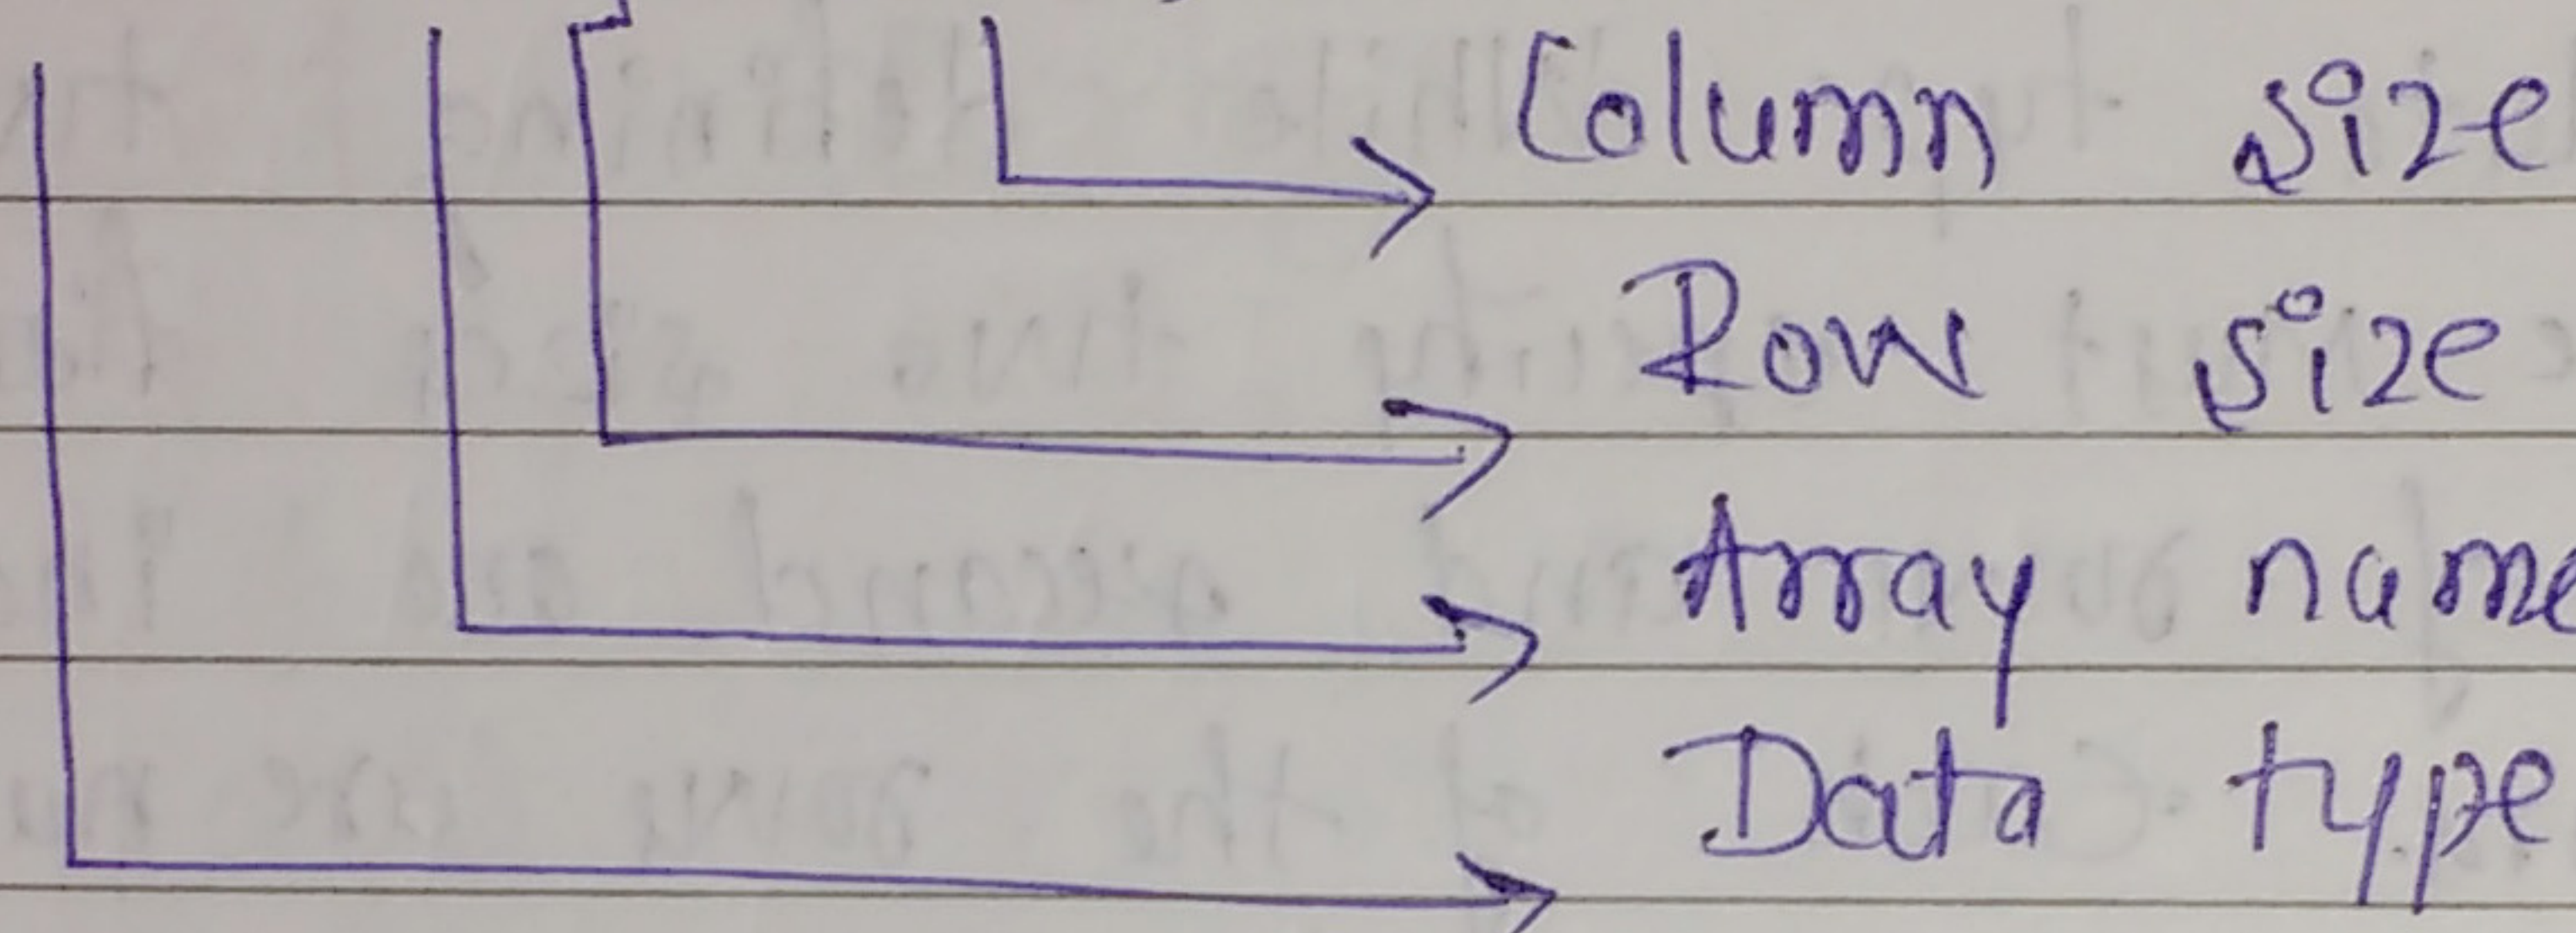

Row no. / column no. /  $a[0][0]$  /  $a[2][1]$  } subscript values.

If the initial values are not provided then the elements of two dimensional array will have undefined value initial values can