


C++

```
int a;
```

cin >> a;

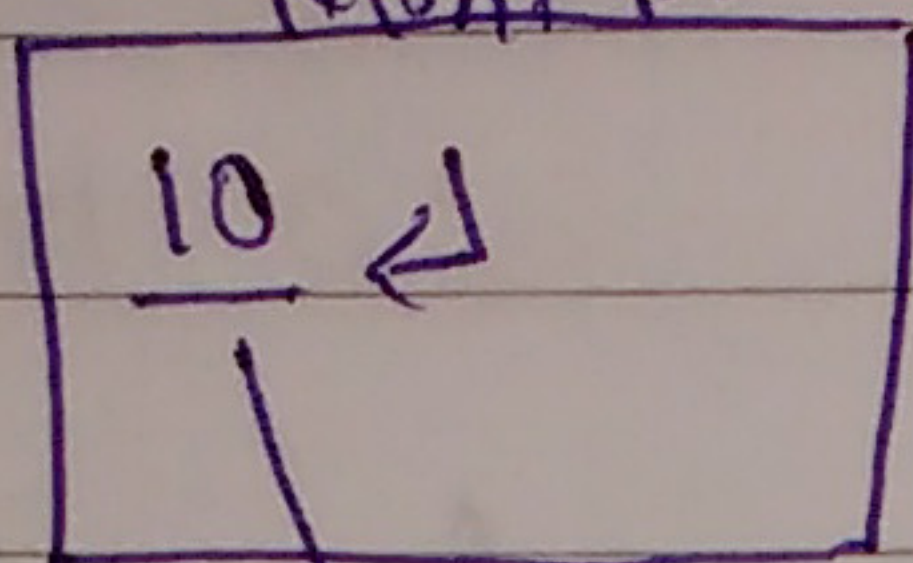

65240

When the above statement is executed, a prompt will appear on the screen for the user to input data. When the user enters the data & presses the enter key, the data will be accepted & stored in the specified variable.

Example "C"

```
int a, b, c;
```

```
scanf("%d", &a);
```

```
scanf("%d", &b);
```

```
scanf("%d", &c);
```

```
scanf("%d %d %d", &a, &b, &c);
```

```
int usn;
```

```
char sname[10];
```

for loop arg

```
scanf("%d %s", &usn, sname, &arg);
```

C++

```
int a, b, c;
```

```
cin >> a;
```

```
cin >> b;
```

```
cin >> c;
```

```
cin >> a
```

```
>> b
```

```
>> c;
```

```
cin >> a >> b >> c;
```

→ usually