
AV1 / Projection and operator display

Four reported 1920 x 1200 feeds; direct HDMI operation and planned display-end ATEN branches.

R5 · 2026-11-13
AV1 legibility redesign

Solid teal · Reported | Solid slate · Documented | Amber dashed · Planned | Gray dashed · Unresolved | Device tags repeat across sheets | Generic component illustrations

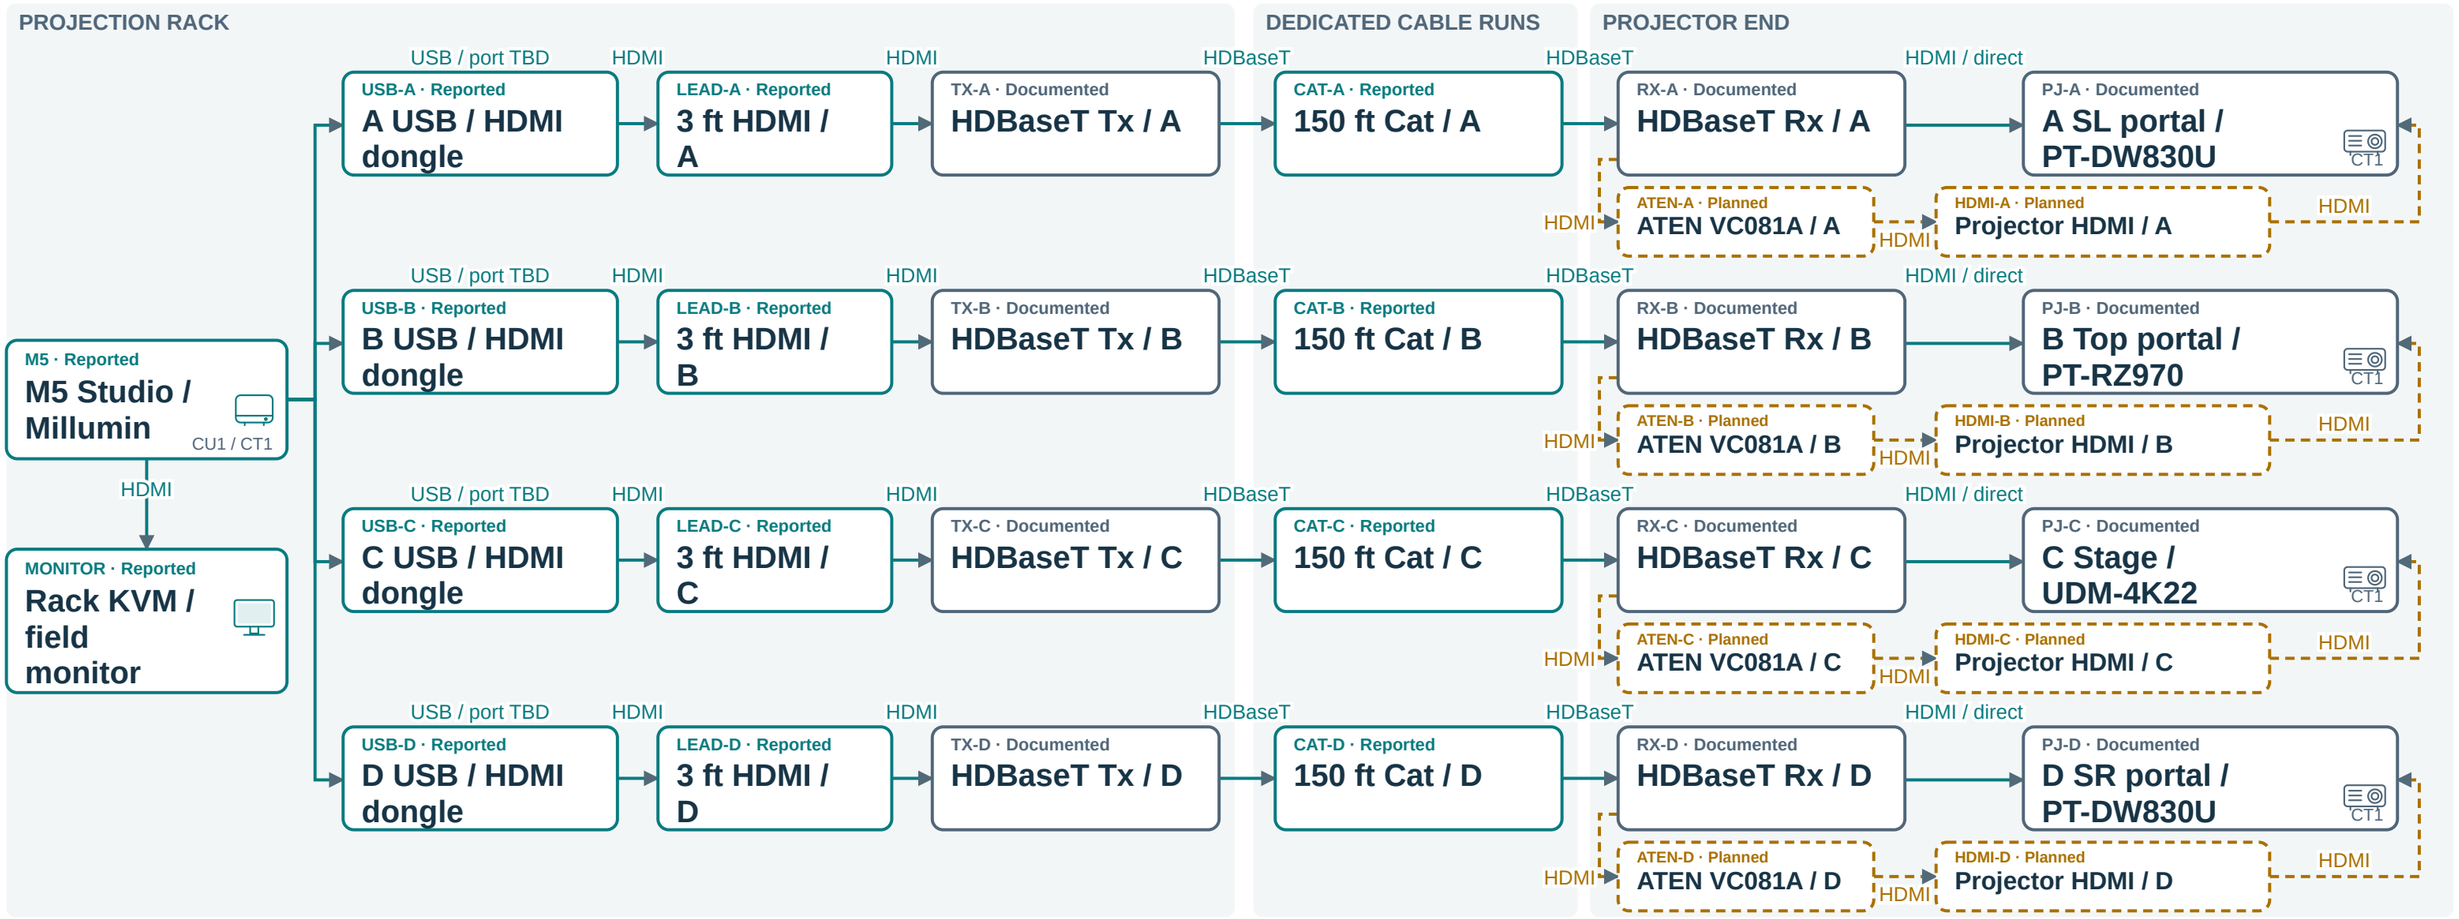

A to D connection schedule

Lane / surface	Mac / adapter	Rack lead / TX	Category run	RX / projector input
A / SL portal	USB socket TBD / dongle TBD	3 ft HDMI / TX-A suffix TBD	150 ft / cable label TBD	RX-A suffix TBD / HDMI socket TBD
B / Top portal	USB socket TBD / dongle TBD	3 ft HDMI / TX-B suffix TBD	150 ft / cable label TBD	RX-B suffix TBD / HDMI socket TBD
C / Stage	USB socket TBD / dongle TBD	3 ft HDMI / TX-C suffix TBD	150 ft / cable label TBD	RX-C suffix TBD / HDMI socket TBD
D / SR portal	USB socket TBD / dongle TBD	3 ft HDMI / TX-D suffix TBD	150 ft / cable label TBD	RX-D suffix TBD / HDMI socket TBD

Field verification and acceptance

Check	State	Owner / date
Label all sockets, adapters and cable ends	Pending	TBD / TBD
Confirm received refresh, mapping and recovery	Pending	TBD / TBD
Learn/test one ATEN route and record final installed state	Pending	TBD / TBD


Solid direct RX-to-projector routes reflect the reported ATEN-removed configuration. Amber branches show planned ATEN insertion.
Projector addresses are control-LAN references. Refresh and physical output acceptance remain pending.

CU1 / Gio and network MIDI cues

Recorded cue destinations; unresolved physical connections and sessions are dashed.

R5 · 2026-11-13
AV1 legibility redesign

Solid teal · Reported | Solid slate · Documented | Amber dashed · Planned | Gray dashed · Unresolved | Device tags repeat across sheets | Generic component illustrations

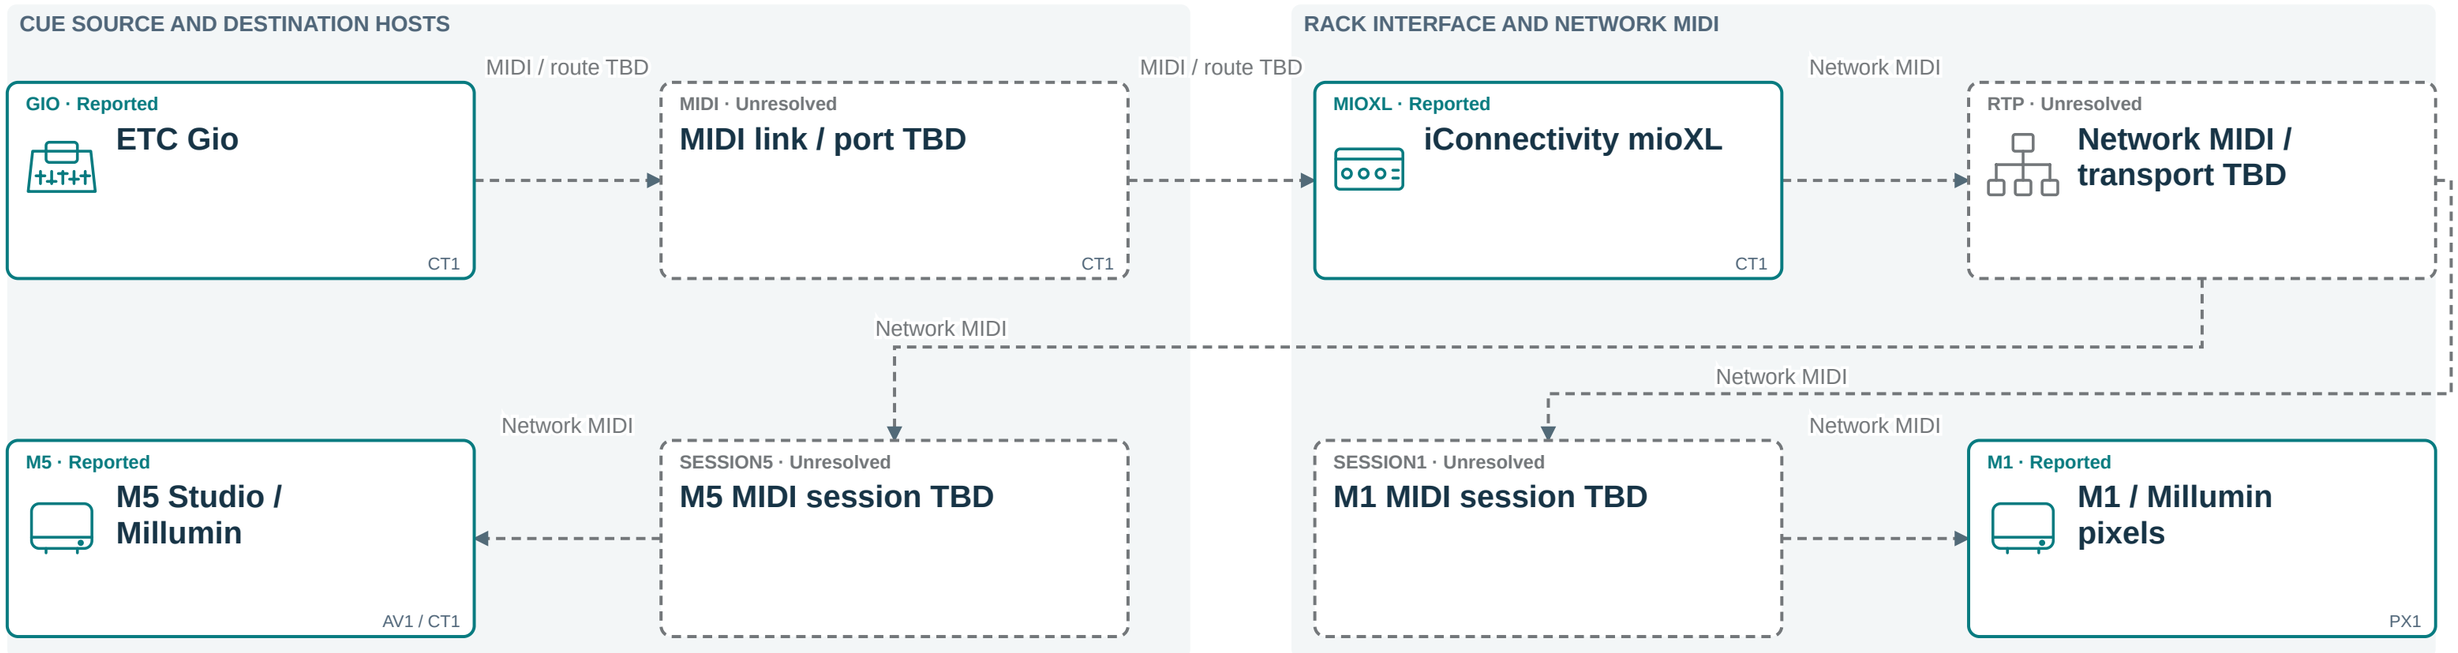

Cue routing record

Destination	mioXL port / session	Channel / note
M5 / Millumin / AV1 + CT1	TBD / TBD	TBD / TBD
M1 / Millumin / PX1	TBD / TBD	TBD / TBD

Field verification and acceptance

Check	State	Owner / date
Trace Gio physical connection and mioXL ports	Pending	TBD / TBD
Read network transport, session names and reconnect behavior	Pending	TBD / TBD
Witness one coordinated cue and audio-safe recovery	Pending	TBD / TBD

Millumin on the M1 drives pixels. Millumin on the M5 drives the four projector picture feeds.
The mioXL photo confirms model identity; it does not confirm the routed ports or active sessions.
A1/audio cue dependencies and coordinated cue replay remain to confirm with the house team.


Source SHA-256 3a73e575f6a39b537ef1ad82554034c8a9c8314677e5a3e9830dcb1efd96395e · Graph Explorer d94683f599c3d1aaa62cd31b40b3a3c701e2d1ee

CT1 / Projector commands and monitoring

PJLink for A/B/D, Pulse JSON-RPC or PJLink for C, and the Projctl manual/monitoring path, independent of picture transport.

R5 · 2026-11-13
AV1 legibility redesign

Solid teal · Reported | Solid slate · Documented | Amber dashed · Planned | Gray dashed · Unresolved | Device tags repeat across sheets | Generic component illustrations

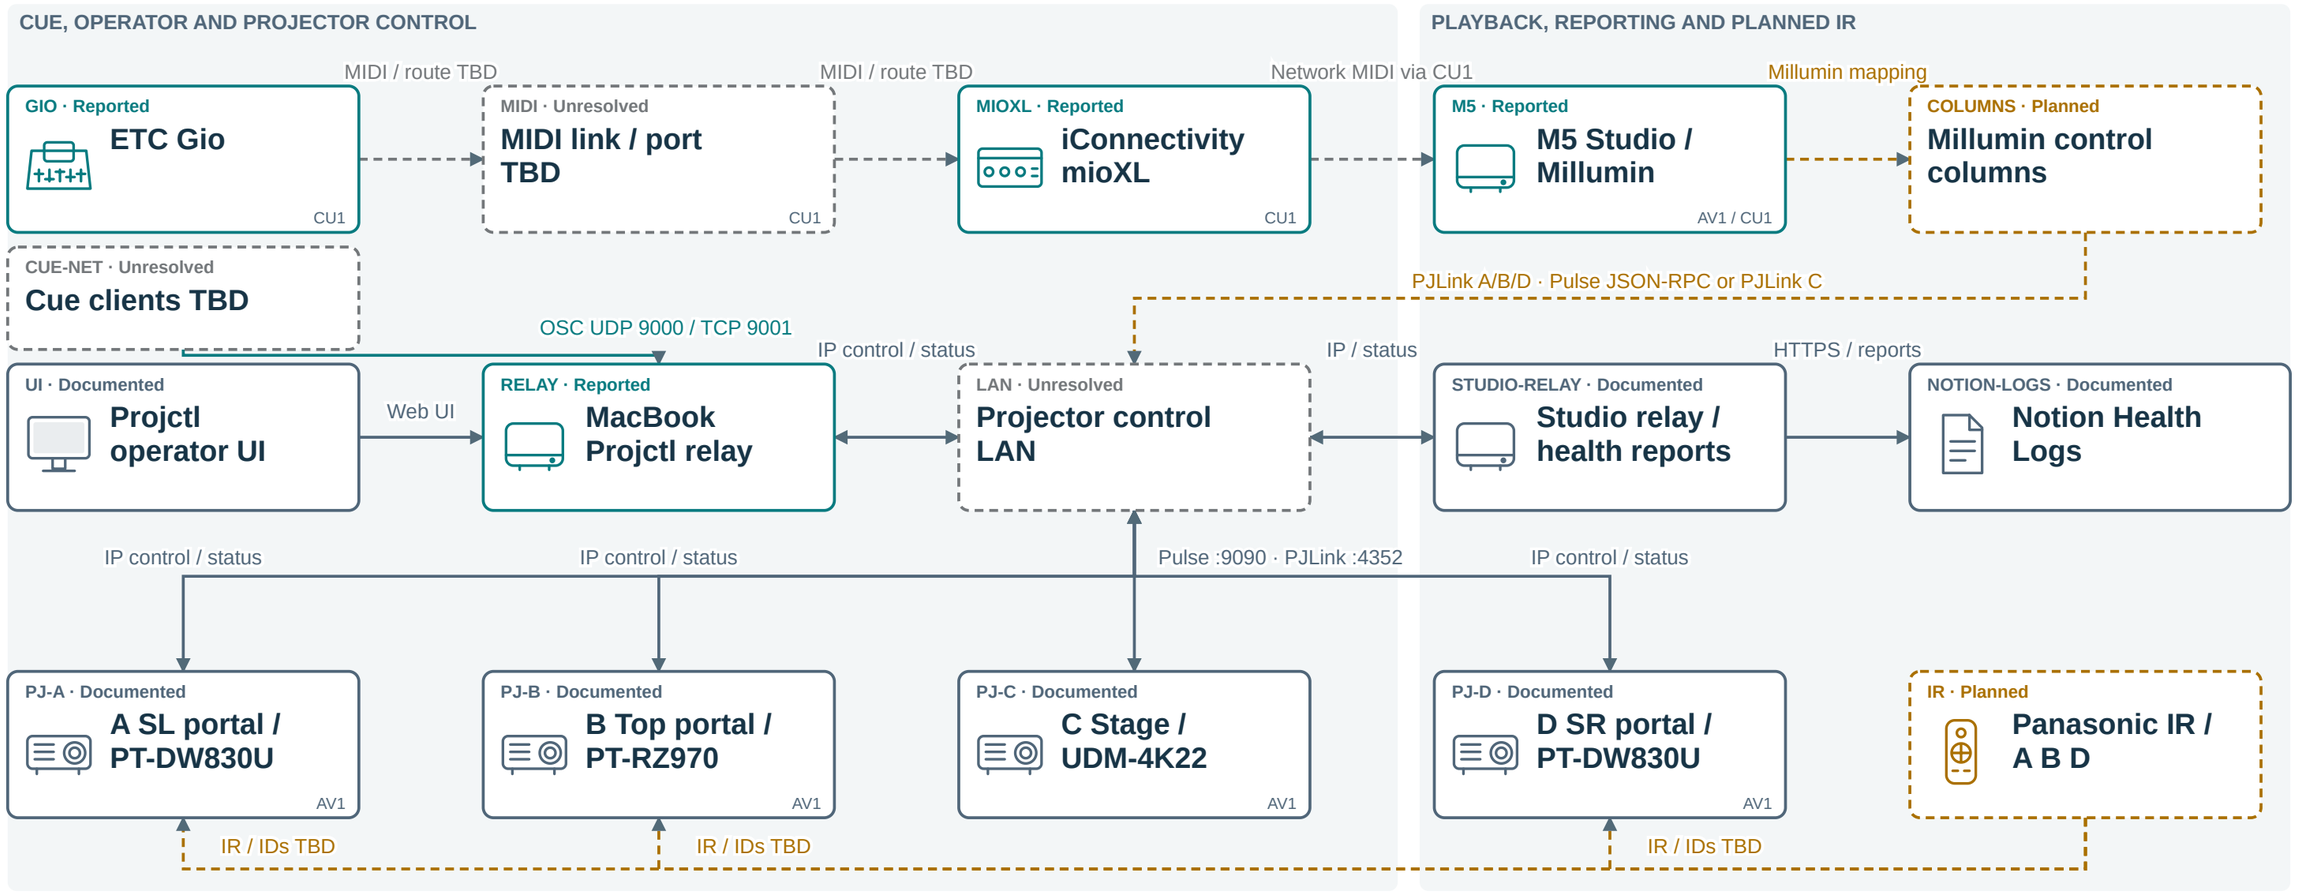

Projector control addresses

Tag / surface	IP address	Command route
PJ-A / SL portal	Private LAN	PJLink :4352
PJ-B / Top portal	Private LAN	PJLink :4352
PJ-C / Stage	Private LAN	Pulse :9090 / PJLink :4352
PJ-D / SR portal	Private LAN	PJLink :4352

Access record

Field	Readback
Recorded control endpoint	MacBook / Private LAN :8080
Studio reporting cadence	60 s selected; application pending
LAN switch / ports	TBD
IR remote IDs	TBD

Field verification and acceptance

Check	State	Owner / date
Confirm active relay arrangement and live endpoints	Pending	TBD / TBD
Verify power/shutter per lane; record C route (Pulse or PJLink)	Pending	TBD / TBD
Record Show Lock scope and approved cue recovery	Pending	TBD / TBD
Read cue listener source restrictions and approved hosts	Pending	TBD / TBD

LAN links carry outbound commands and returning status. The drawing does not establish current telemetry.
C records Pulse JSON-RPC :9090 and PJLink :4352. The saved Current Rig file uses Pulse. Validate both routes independently and record the selected route and resulting state for each cue.
Projctl Show Lock applies to its own command path. Independently issued Millumin projector commands (PJLink or Pulse) remain separate.
November 13 hub records both relays. MacBook is the selected control surface; Studio 60 s polling is a pending change. Read current settings before use.


Source SHA-256 3a73e575f6a39b537ef1ad82554034c8a9c8314677e5a3e9830dcb1efd96395e · Graph Explorer d94683f599c3d1aaa62cd31b40b3a3c701e2d1ee

PX1 / Pixel data and addressing

R5 · 2026-11-13
AV1 legibility redesign

Recorded Millumin Art-Net unicast target Private LAN (the November 7 OCTO bench address); LeDMX2 IP readback pending. Two recorded 300-cell RGBW lines.

Solid teal · Reported | Solid slate · Documented | Amber dashed · Planned | Gray dashed · Unresolved | Device tags repeat across sheets | Generic component illustrations

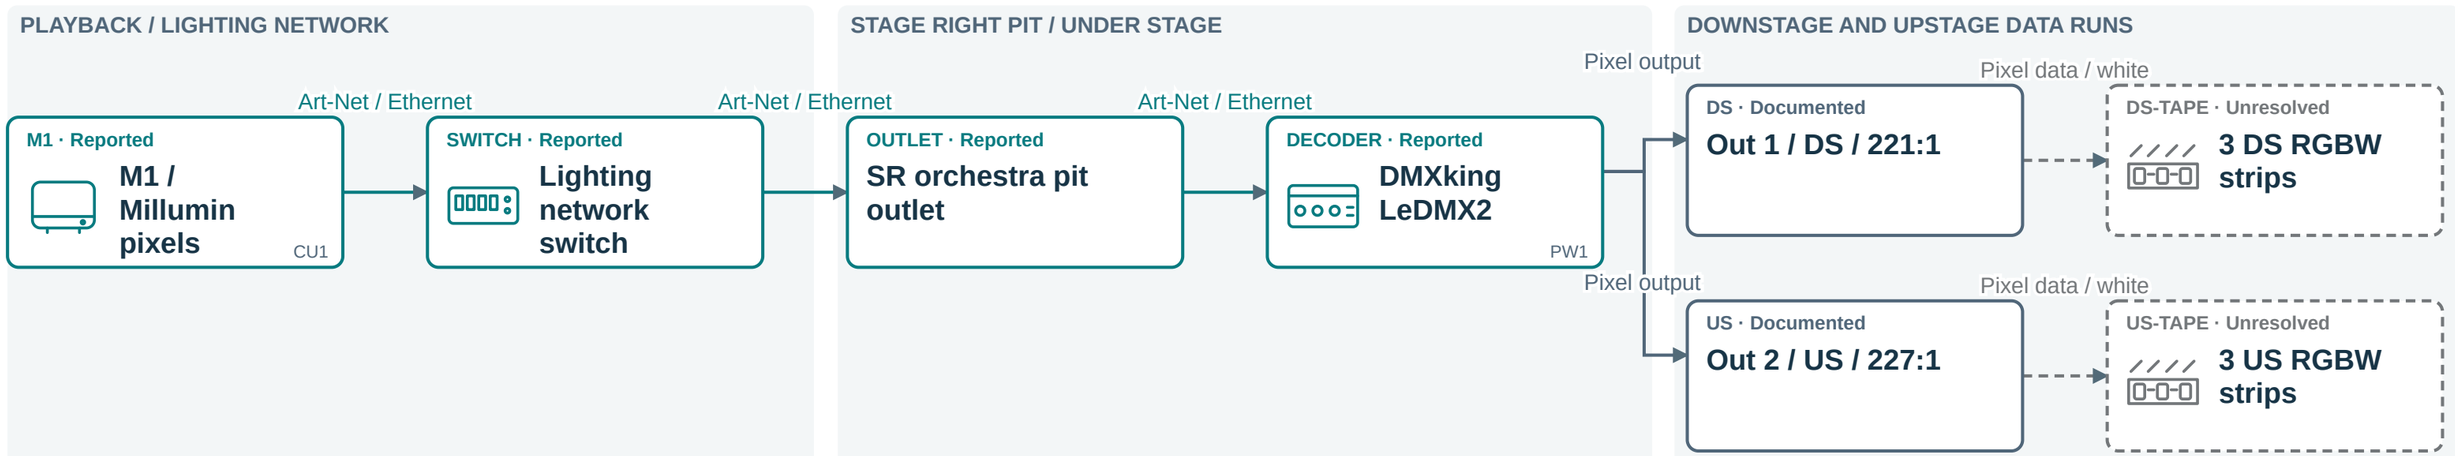

Port 1 / DS patch / 221:1 to 223:176

Slice	Cells / channels	Start	Physical strip(s)
DS 1	48 / 192	221:1	TBD
DS 2	52 / 208	221:193	TBD
DS 3	50 / 200	221:401	TBD
DS 4	50 / 200	222:89	TBD
DS 5	50 / 200	222:289	TBD
DS 6	50 / 200	222:489	TBD

Port 2 / US patch / 227:1 to 229:176

Slice	Cells / channels	Start	Physical strip(s)
US 1	50 / 200	227:1	TBD
US 2	50 / 200	227:201	TBD
US 3	50 / 200	227:401	TBD
US 4	50 / 200	228:89	TBD
US 5	50 / 200	228:289	TBD
US 6	50 / 200	228:489	TBD

Installed physical strips

Run	Quantity	Labels / lengths / direction
Downstage	3 reported	TBD / TBD / TBD
Upstage	3 reported	TBD / TBD / TBD

Field verification and acceptance

Check	State	Owner / date
Read LeDMX2 IP, firmware, port settings and numbering	Pending	TBD / TBD
Trace six physical strips to the twelve slices	Pending	TBD / TBD
Witness RGBW order, white, blackout and restore	Pending	TBD / TBD


Bench reel label: ENTTEC 8PXB60-RGBW-12V-W; installed strips not yet matched. Three physical LEDs per RGBW cell; four channels per cell. A full 5 m reel has 100 cells / 400 channels.
Each port has 300 cells / 1200 channels. Universe remapping is recorded off; installed numbering requires readback.

PW1 / Pixel power and unresolved feeds

Recorded two-supply arrangement and explicit controller power gap.

R5 · 2026-11-13
AV1 legibility redesign

Solid teal · Reported | Solid slate · Documented | Amber dashed · Planned | Gray dashed · Unresolved | Device tags repeat across sheets | Generic component illustrations

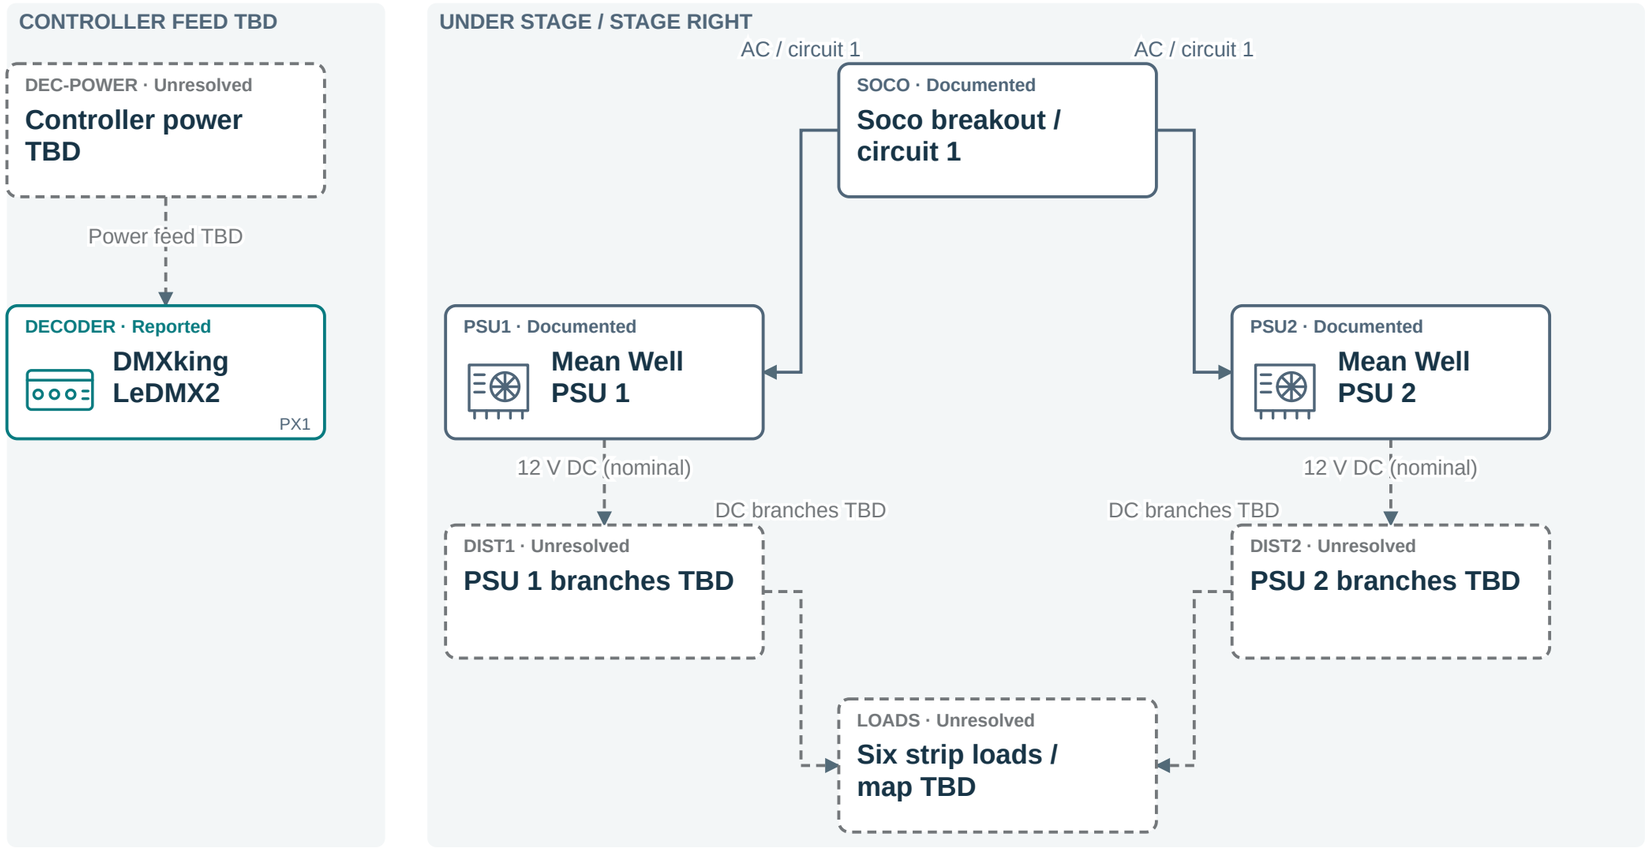

Power trace record

Field	PSU 1	PSU 2
Nameplate model	TBD	TBD
Recorded output	12 V / nominal 350 W	12 V / nominal 350 W
AC circuit	Soco circuit 1 reported	Soco circuit 1 reported
Switch / isolation point	TBD	TBD
DC branches / strip labels	TBD	TBD
Branch fuses / ratings	TBD	TBD
Wire / connector ratings	TBD	TBD
Injection / return routing	TBD	TBD

Controller feed

Field	Readback
Source / voltage / protection	TBD
Ground reference / isolation	TBD

Field verification and acceptance

Check	State	Owner / date
Record electrician inspection outcome	Pending	TBD / TBD
Trace each DC branch, return and injection point	Pending	TBD / TBD
Confirm controller power and intended maximum load	Pending	TBD / TBD

Decoder and supplies recorded under stage, wall-mounted stage right at the far side of the orchestra pit.
Separate branch nodes avoid implying paralleled PSU outputs. Actual strip assignments and returns require tracing.
Notion retains an unresolved electrician inspection item for exposed strands at PSU terminals.
Signal schematic, not to scale. Electrical capacity, protection and operational acceptance remain open.

Revision history R1 · Historical · Five-sheet Graph Explorer issue. Earlier Revision 0 and v0.2 retained as history. | R2 · 2026-11-13 · DMXking LeDMX2 identity and complete recorded control paths | R3 · 2026-11-13 · Ten handoff updates, enlarged diagrams and component illustrations | R4 · 2026-11-13 · Dual C routes, qualified pixel evidence, cue listener, field check IDs and documentation reconciliation | R5 · 2026-11-13 · AV1 redesigned: 20 px device labels, cleared zone headings and connector labels

Source SHA-256 3a73e575f6a39b537ef1ad82554034c8a9c8314677e5a3e9830dcb1efd96395e · Graph Explorer d94683f599c3d1aaa62cd31b40b3a3c701e2d1ee