


A. The module changes what it calls open


numbers above bars = within-task ranking vs the convention arm; 0.50 = context ignored

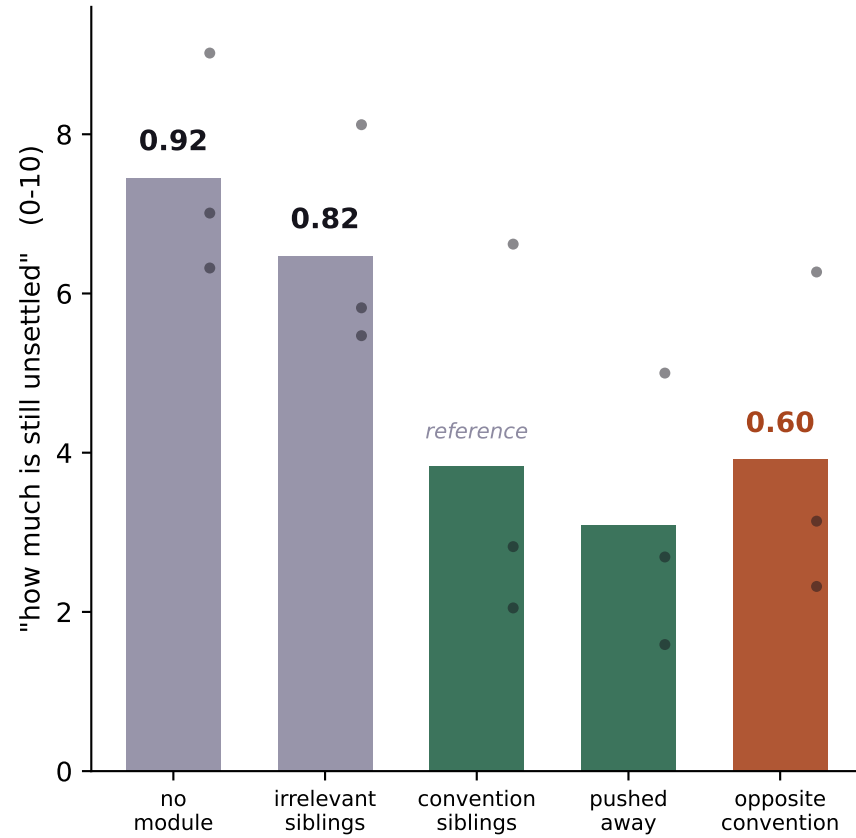

bars = mean of 3 model families, dots = each family

B. Handed the exact question, without enumerating

dashed rule = the correct answer for that arm

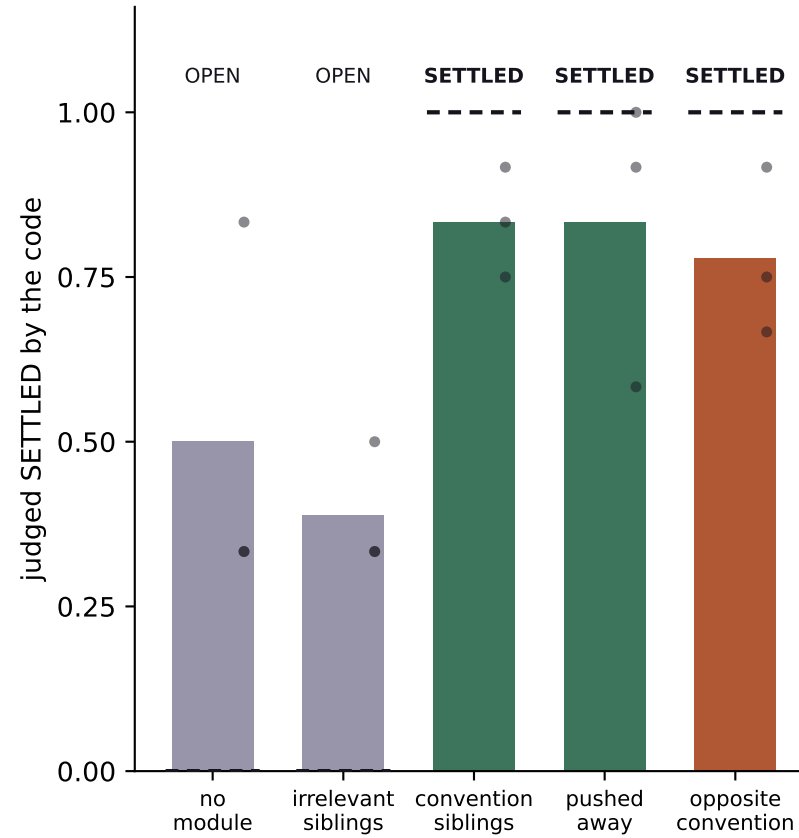

anti is correct at SETTLED: the code really does settle it

C. A wrong convention is invisible

both detectors read the two arms identically; the outcomes are not identical

