


/home/mahan/UMNChessChamps
/chess/client/src/tui.c

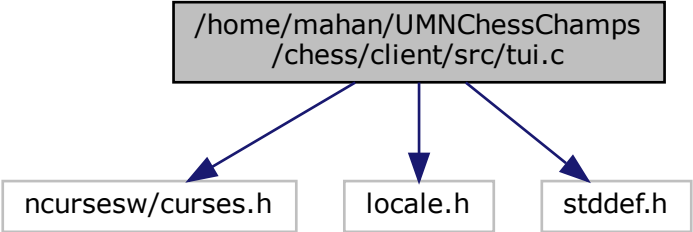

```
graph TD; A["/home/mahan/UMNChessChamps  
/chess/client/src/tui.c"] --> B["ncursesw/curses.h"]; A --> C["locale.h"]; A --> D["stddef.h"];
```

The diagram illustrates the header file dependencies for the source file `tui.c`. A central box at the top represents the source file, with three arrows pointing downwards to three separate boxes representing the header files it includes: `ncursesw/curses.h`, `locale.h`, and `stddef.h`.

ncursesw/curses.h

locale.h

stddef.h