Análise dos falsos positivos pela detecção de incidentes

https://www.skills.google/focuses/46509586?parent=lti_session

Tarefa 1: criar uma conta de serviço

Observação*: verifique se você está em* ***nome de usuário 1: Google Cloud username 1*** *console do Google Cloud.*

Nesta tarefa, você vai criar uma conta de serviço e conceder a ela permissões suficientes para acionar uma descoberta de ameaça anômala no SCC.

1. No console do Google Cloud, no **Menu de navegação** (☰), clique em **IAM e administrador > Contas de serviço**.
2. Na barra de ações, clique em **+ Criar conta de serviço**.
3. Na seção dos **Detalhes da conta de serviço**:
    - No campo **Nome da conta de serviço**, digite **test-account**.

Observe que o **ID da conta de serviço** é preenchido automaticamente.

- Clique em **Criar e continuar**.

Observe a mensagem de pop-up "Conta de serviço criada".

4. Na seção **Conceda a essa conta de serviço acesso ao projeto**, expanda o menu suspenso **Selecione uma função**, escolha **Básica** e depois **Proprietário**.
5. Clique em **Continuar** e depois em **Concluído**.

Observe a conta de serviço **test-account** listada em **Contas de serviço**.

Clique em **Verificar meu progresso** para confirmar que você concluiu a tarefa corretamente.

Criar uma conta de serviço

Tarefa 2: criar uma chave de autenticação JSON para a conta de serviço

Observação*: verifique se você está em* ***nome de usuário 1: Google Cloud username 1*** *console do Google Cloud.*

Nesta tarefa, você vai criar e fazer o download de uma chave de autenticação JSON para a nova conta de serviço que você criou na tarefa anterior. Em seguida, você usará o Cloud Shell para fazer upload dessa chave para sua conta do Google Cloud. Isso acionará uma descoberta de ameaça no SCC.

1. Ainda na página **Contas de serviço**, na conta de serviço **test-account**, clique em **Ações** (⋮) **> Gerenciar chaves**. A página **test-account** é aberta.
2. Na seção **Chaves**, clique em **Adicionar chave > Criar nova chave**.
3. Na caixa de diálogo **Criar chave privada**, defina o **Tipo de chave** como **JSON**.
4. Clique em **Criar**.

O console solicita que você faça o download da chave para seu dispositivo local. Assim que o download for concluído, você usará o Cloud Shell para fazer upload da chave para sua conta (de estudante) do Google Cloud.

5. No seu dispositivo local, navegue até o arquivo da chave de que acabou de fazer o download e a renomeie como **test-account**.
6. No console do Google Cloud, clique no ícone Ativar o Cloud Shell (▶).
7. Clique em **Continuar**.

O provisionamento e a conexão ao ambiente do Cloud Shell devem levar só alguns instantes.

8. Na barra de título do Cloud Shell, clique em **Mais** (⋮) **> Fazer upload > Escolher arquivos**.
9. Navegue até o arquivo e selecione-o na sua máquina local. Em seguida, na caixa de diálogo **Fazer upload**, clique em **Fazer upload**.
10. Copie o comando a seguir no terminal do Cloud Shell:

ls

Copiado.

Esse comando lista o arquivo de chave de que você acabou de fazer upload.

11. Pressione **ENTER**.

Na página **test-account**, na lista **Chave**, observe a chave que você acabou de criar com a **Data de criação da chave** como a data atual.

Clique em **Verificar meu progresso** para confirmar que você concluiu a tarefa corretamente.

Criar uma chave de autenticação JSON para a conta de serviço

Tarefa 3: acionar a descoberta do falso positivo

***Observação**: verifique se você está em **nome de usuário 1: Google Cloud username 1** console do Google Cloud.*

Nesta tarefa, você vai reconfigurar o ambiente do Cloud Shell para usar a nova conta de serviço **test-account** que você criou na Tarefa 1. Isso acionará uma descoberta de ameaça no SCC. Logo depois, você vai atribuir permissões excessivas ao projeto do laboratório.

1. Copie o comando a seguir no terminal do Cloud Shell:
2. export PROJECT_ID=$(gcloud info --format='value(config.project)')
3. export SA_NAME="test-account@${PROJECT_ID}.iam.gserviceaccount.com"

gcloud auth activate-service-account ${SA_NAME} --key-file=test-account.json

Copiado.

Esse comando ativa a nova conta de serviço.

2. Pressione **ENTER**.
3. Copie o comando a seguir no terminal do Cloud Shell:

gcloud auth list

Copiado.

Esse comando confirma que você ativou a conta de serviço e que o gcloud está usando essa conta de serviço.

4. Pressione **ENTER**.

Na saída, o comando seguinte confirma que a conta de serviço está ativa:

Saída:

ACTIVE: *

ACCOUNT: test-account@"Google Cloud project ID".iam.gserviceaccount.com

5. Copie o comando a seguir no terminal do Cloud Shell:
6. export STUDENT2="Google Cloud username 2"

gcloud projects add-iam-policy-binding $PROJECT_ID --member user:$STUDENT2 --role roles/editor

Copiado.

Esse comando concede o papel de editor ao usuário 2 para que você possa acessar e corrigir o falso positivo na próxima tarefa.

6. Pressione **ENTER**.

Clique em **Verificar meu progresso** para confirmar que você concluiu a tarefa corretamente.

Atribuir permissões excessivas para acionar a detecção de ameaças

Tarefa 4: fazer login como o segundo usuário

Você vai precisar trocar as contas do Cloud, fazendo login no console do Google Cloud com a segunda conta de usuário fornecida no painel de **Detalhes do laboratório**. Vamos usá-la para realizar as tarefas restantes.

1. No console do Google Cloud, clique no ícone do usuário no canto superior direito da tela e, depois, clique em **Adicionar conta**.
2. Navegue de volta para o painel **Detalhes do laboratório**, copie o **nome de usuário 2 do Google Cloud**: Google Cloud username 2 e a **senha**. Depois cole o nome de usuário e a senha na caixa de diálogo **Fazer login** do console do Google Cloud.

Tarefa 5: visualizar a descoberta de ameaça no SCC

Observação*: verifique se você está em* ***nome de usuário 2: Google Cloud username 2*** *console do Google Cloud.*

Nesta tarefa, você vai localizar e examinar a descoberta do SCC gerada pelo serviço Event Threat Detection. Essa descoberta é um falso positivo que foi acionado pela atividade que você gerou nas Tarefas 1 a 3.

Para ver a descoberta do Event Threat Detection no SCC:

1. No **Menu de navegação** (☰), clique em **Segurança > Descobertas**.
2. No painel **Filtros rápidos**, encontre a seção **Categoria**. Depois selecione **Chave da conta de serviço gerenciada pelo usuário**. Se necessário, clique em **Ver mais** para encontrá-la.

O painel **Resultados da consulta de descobertas** é atualizado para mostrar apenas a categoria de descoberta selecionada.

3. No painel **Resultados da consulta de descobertas**, acesse os detalhes da descoberta clicando na **Chave da conta de serviço gerenciada pelo usuário** mais recente na coluna **Categoria** (confira o **Horário do evento**). O painel de detalhes da descoberta é aberto e mostra a guia **Resumo**.

Saia da página **Chave da conta de serviço gerenciada pelo usuário** para responder às perguntas a seguir.

1. What is the severity of the alert?

Critical

Low

High

Medium

2. What is the threat finding class for the alert?

Observation

Vulnerability

Threat

Misconfiguration

3. When is it important to monitor for threats?

Whenever you device is on site

Whenever your device is connected to the internet

Whenever you access the corporate network on your tablet or smartphone

Whenever your device is on

4. Which tab in the **User managed service account key** page provides compliance standards, explanation of the threat, and a recommendation on how to handle the threat?

JSON

Summary

Source Properties

Tarefa 6: corrigir a descoberta

Observação*: verifique se você está em* ***nome de usuário 2: Google Cloud username 2*** *console do Google Cloud*.

Nesta tarefa, você vai corrigir o falso positivo excluindo a chave de autenticação JSON da conta de serviço **test-account**.

1. No console do Google Cloud, no **Menu de navegação** (☰), clique em **IAM e administrador > Contas de serviço**.
2. Na página **Contas de serviço**, clique no endereço de e-mail da conta de serviço **test-account**.

3. Clique na guia **Chaves**.

4. Na lista de chaves, clique no ícone **Excluir chave da conta de serviço** (🗑) para excluir a chave. Um pop-up para você confirmar a ação vai aparecer. Clique em **Excluir**.

Clique em **Verificar meu progresso** para confirmar que você concluiu a tarefa corretamente.

Excluir a chave

Conclusão

Bom trabalho!

Você concluiu este laboratório! Você usou o SCC para investigar um falso positivo e agiu para corrigi-lo. Trabalhando como analista de segurança na nuvem, você provavelmente vai encontrar alertas de falsos positivos. É importante entender como e por que eles são acionados e como você pode agir para corrigi-los.

Tarefa 1: criar uma conta de serviço

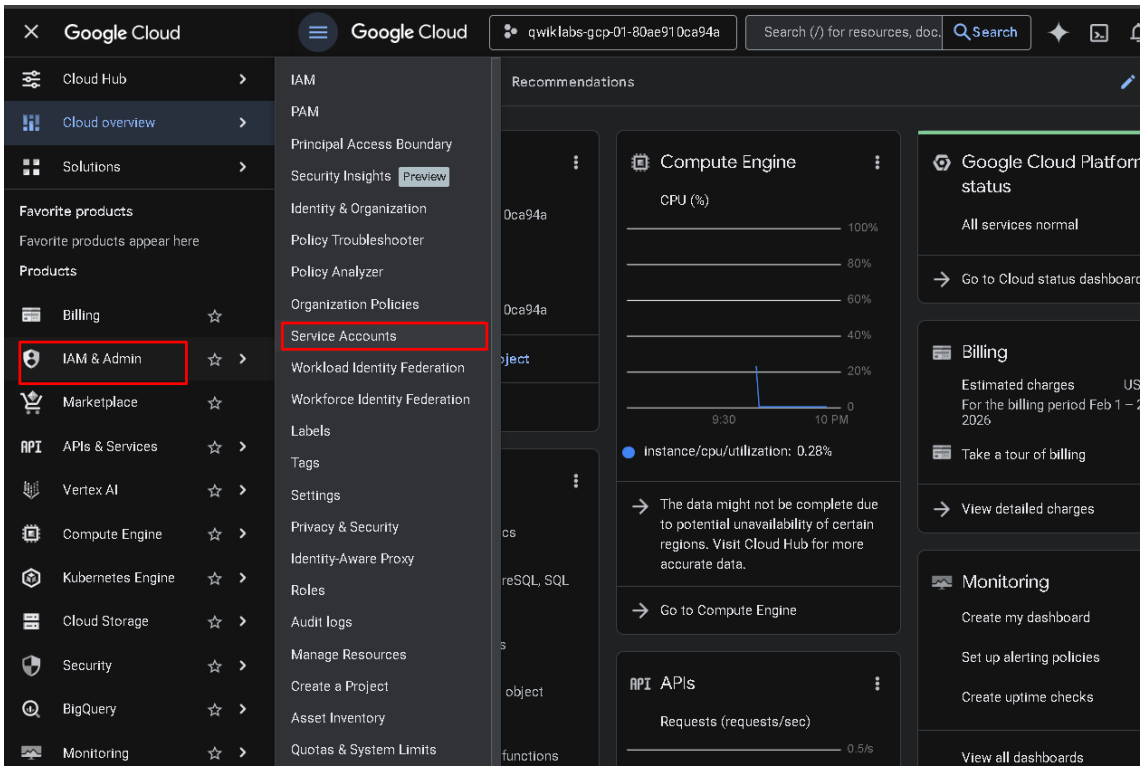

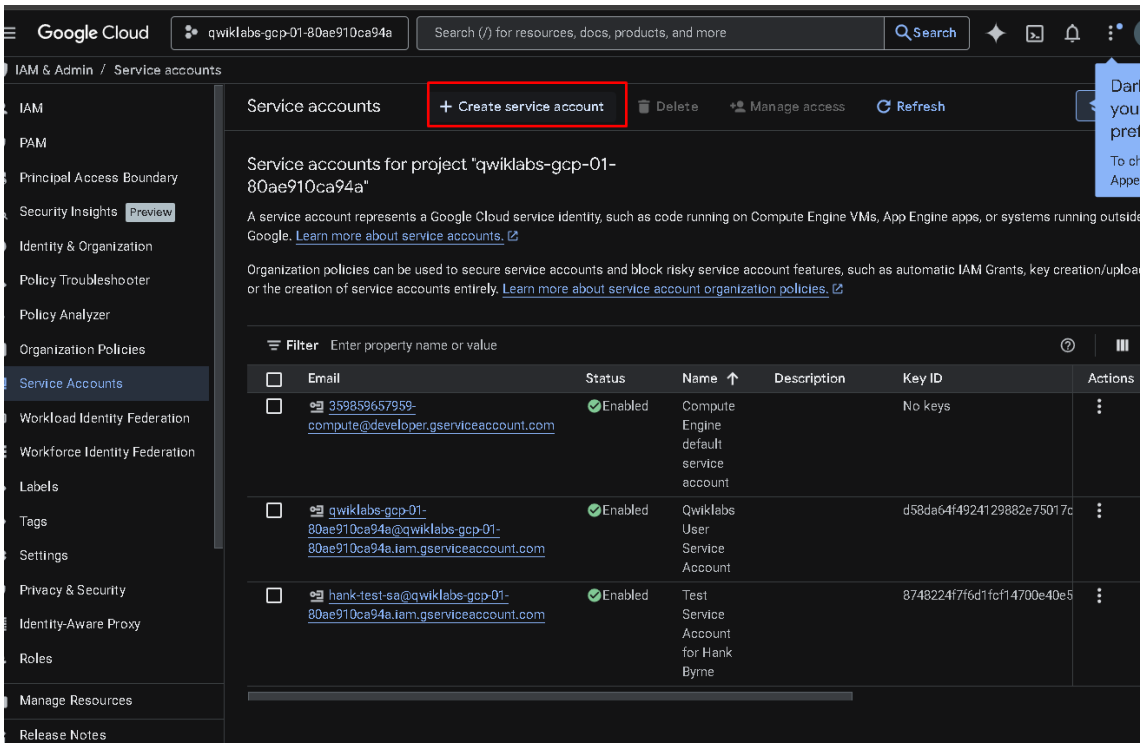
Google Cloud
qwiklabs-gcp-01-80ae910ca94a
Search (/) for resources, docs, products, and more
Search
IAM & Admin / Service accounts
IAM
PAM
Principal Access Boundary
Security Insights Preview
Identity & Organization
Policy Troubleshooter
Policy Analyzer
Organization Policies
Service Accounts
Workload Identity Federation
Workforce Identity Federation
Labels
Tags
Settings
Privacy & Security
Identity-Aware Proxy
Roles
Manage Resources
Release Notes
Service accounts
+ Create service account
Delete
Manage access
Refresh
Service accounts for project "qwiklabs-gcp-01-80ae910ca94a"
A service account represents a Google Cloud service identity, such as code running on Compute Engine VMs, App Engine apps, or systems running outside Google. Learn more about service accounts.
Organization policies can be used to secure service accounts and block risky service account features, such as automatic IAM Grants, key creation/upload or the creation of service accounts entirely. Learn more about service account organization policies.
Filter Enter property name or value
Email
Status
Name
Description
Key ID
Actions
359859657959-compute@developer.gserviceaccount.com
Enabled
Compute Engine default service account
No keys
qwiklabs-gcp-01-80ae910ca94a@qwiklabs-gcp-01-80ae910ca94a.iam.gserviceaccount.com
Enabled
Qwiklabs User Service Account
d58da64f4924129882e75017c
hank-test-sa@qwiklabs-gcp-01-80ae910ca94a.iam.gserviceaccount.com
Enabled
Test Service Account for Hank Byrne
8748224f7f6d1fcf14700e40e5

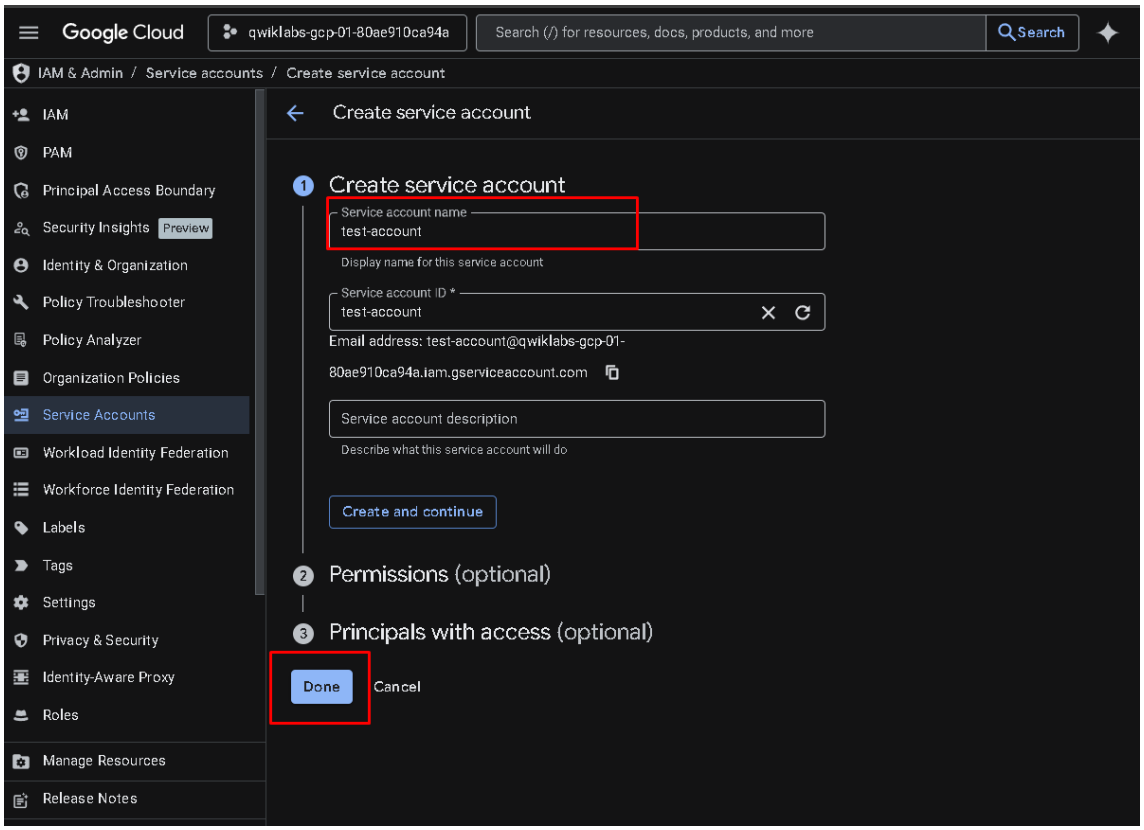
Google Cloud
qwiklabs-gcp-01-80ae910ca94a
Search (/) for resources, docs, products, and more
Search
IAM & Admin / Service accounts / Create service account
IAM
PAM
Principal Access Boundary
Security Insights Preview
Identity & Organization
Policy Troubleshooter
Policy Analyzer
Organization Policies
Service Accounts
Workload Identity Federation
Workforce Identity Federation
Labels
Tags
Settings
Privacy & Security
Identity-Aware Proxy
Roles
Manage Resources
Release Notes
Create service account
1 Create service account
Service account name
test-account
Display name for this service account
Service account ID *
test-account
Email address: test-account@qwiklabs-gcp-01-80ae910ca94a.iam.gserviceaccount.com
Service account description
Describe what this service account will do
Create and continue
2 Permissions (optional)
3 Principals with access (optional)
Done
Cancel

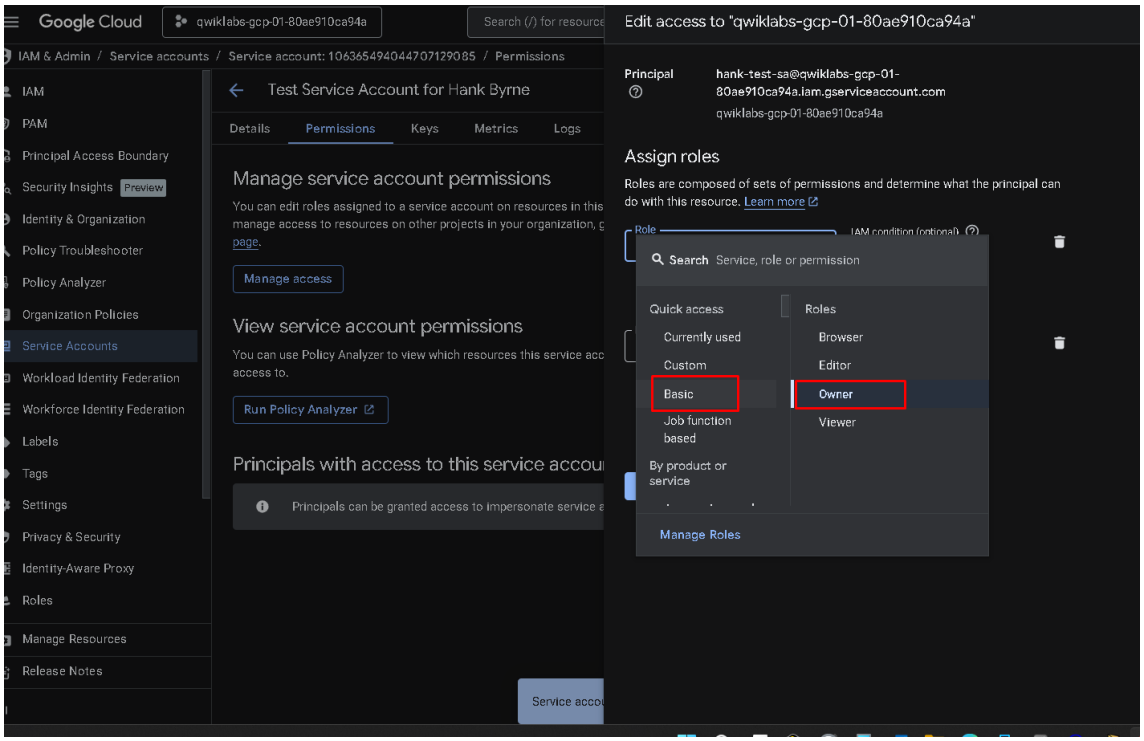
Google Cloud
qwiklabs-gcp-01-80ae910ca94a
Search (/) for resource
IAM & Admin / Service accounts / Service account: 106365494044707129085 / Permissions
IAM
PAM
Principal Access Boundary
Security Insights Preview
Identity & Organization
Policy Troubleshooter
Policy Analyzer
Organization Policies
Service Accounts
Workload Identity Federation
Workforce Identity Federation
Labels
Tags
Settings
Privacy & Security
Identity-Aware Proxy
Roles
Manage Resources
Release Notes
Test Service Account for Hank Byrne
Details
Permissions
Keys
Metrics
Logs
Manage service account permissions
You can edit roles assigned to a service account on resources in this
manage access to resources on other projects in your organization,
page.
Manage access
View service account permissions
You can use Policy Analyzer to view which resources this service acc
access to.
Run Policy Analyzer
Principals with access to this service accou
Principals can be granted access to impersonate service
Edit access to "qwiklabs-gcp-01-80ae910ca94a"
Principal
hank-test-sa@qwiklabs-gcp-01-80ae910ca94a.iam.gserviceaccount.com
qwiklabs-gcp-01-80ae910ca94a
Assign roles
Roles are composed of sets of permissions and determine what the principal can do with this resource. Learn more
Role
Search Service, role or permission
Quick access
Currently used
Custom
Basic
Job function based
By product or service
Roles
Browser
Editor
Owner
Viewer
Manage Roles

Principal

hank-test-sa@qwiklabs-gcp-01-80ae910ca94a.iam.gserviceaccount.com

qwiklabs-gcp-01-80ae910ca94a

Assign roles

Roles are composed of sets of permissions and determine what the principal can do with this resource. Learn more

Role

Owner

Full access to most Google Cloud resources. See the list of included permissions.

IAM condition (optional)

+ Add IAM condition

Role

Storage Admin

Grants full control of buckets and objects.

IAM condition (optional)

+ Add IAM condition

+ Add another role

Save

Test changes

Cancel

Tarefa 2: criar uma chave de autenticação JSON para a conta de serviço

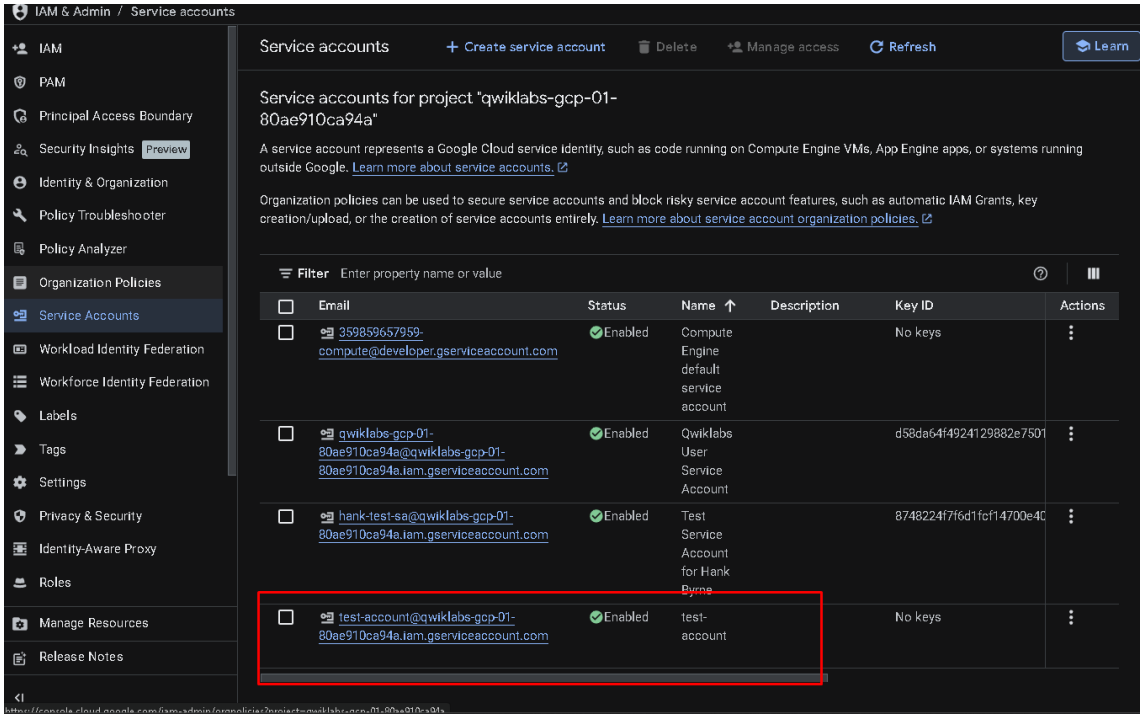

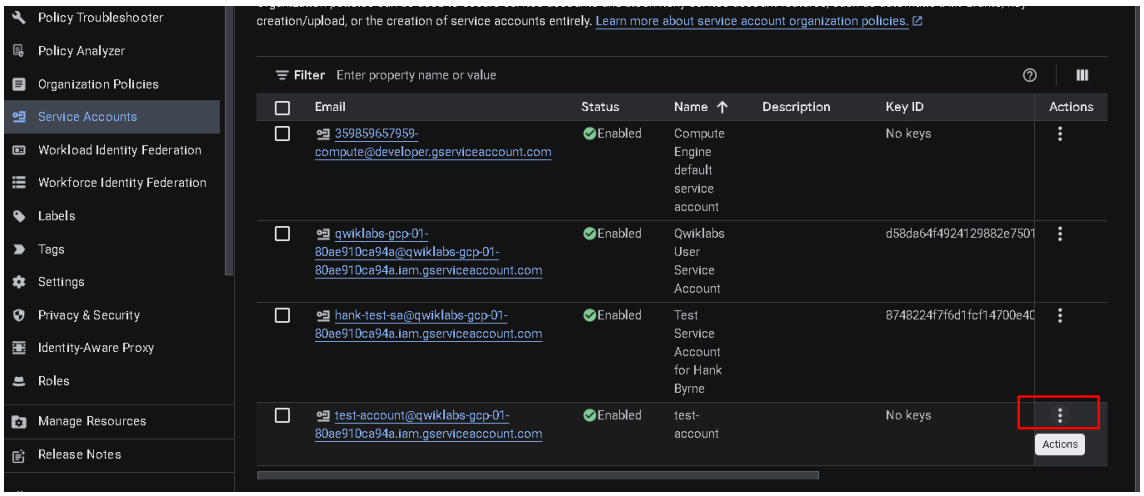

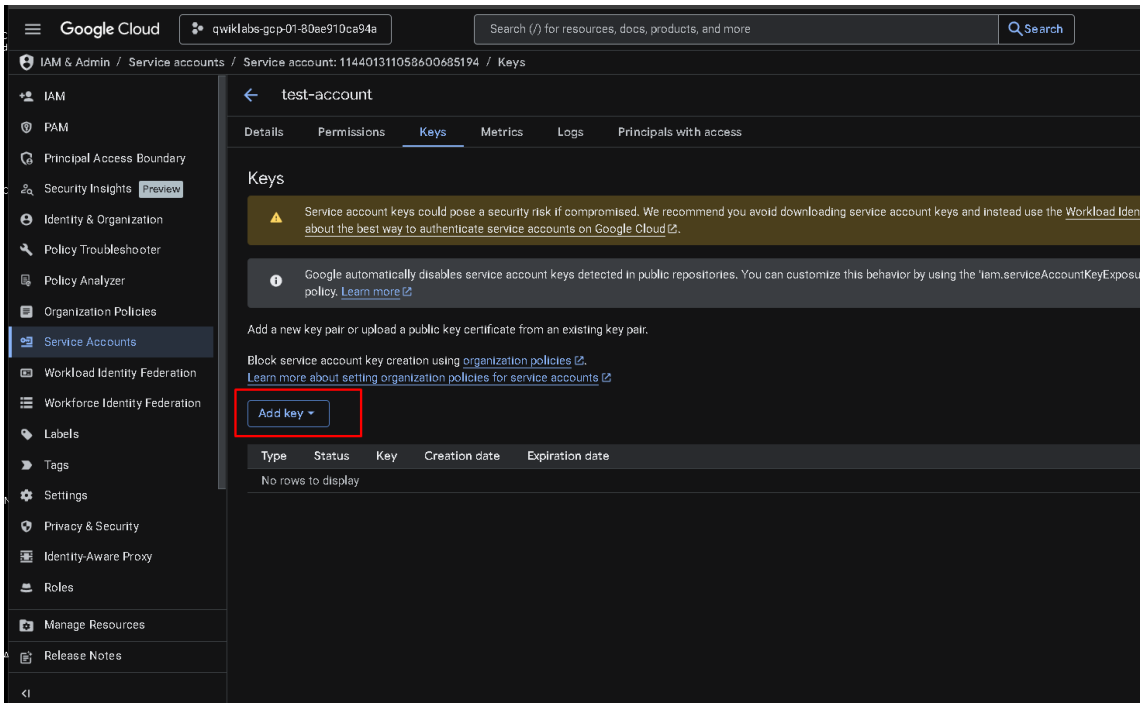
Google Cloud
qwiklabs-gcp-01-80ae910ca94a
Search (/) for resources, docs, products, and more
Search
IAM & Admin / Service accounts / Service account: 114401311058600685194 / Keys
IAM
PAM
Principal Access Boundary
Security Insights Preview
Identity & Organization
Policy Troubleshooter
Policy Analyzer
Organization Policies
Service Accounts
Workload Identity Federation
Workforce Identity Federation
Labels
Tags
Settings
Privacy & Security
Identity-Aware Proxy
Roles
Manage Resources
Release Notes
test-account
Details
Permissions
Keys
Metrics
Logs
Principals with access
Keys
Service account keys could pose a security risk if compromised. We recommend you avoid downloading service account keys and instead use the Workload Iden
about the best way to authenticate service accounts on Google Cloud.
Google automatically disables service account keys detected in public repositories. You can customize this behavior by using the 'iam.serviceAccountKeyExposu
policy. Learn more
Add a new key pair or upload a public key certificate from an existing key pair.
Block service account key creation using organization policies.
Learn more about setting organization policies for service accounts
Add key
Type
Status
Key
Creation date
Expiration date
No rows to display

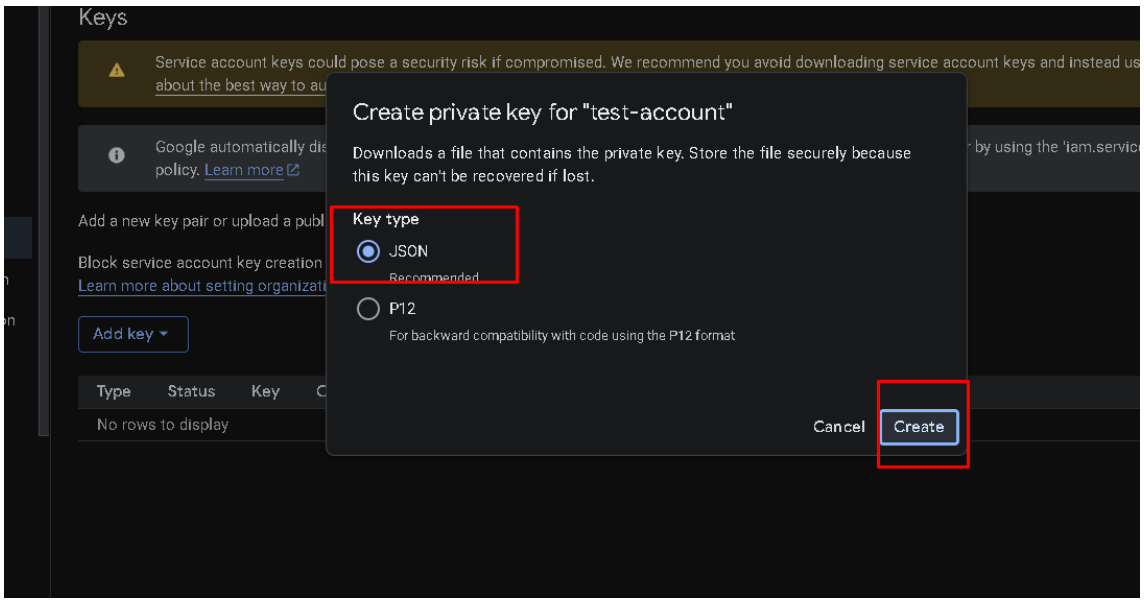
Keys
Service account keys could pose a security risk if compromised. We recommend you avoid downloading service account keys and instead us
about the best way to au
Google automatically di
policy. Learn more
by using the 'iam.servic
Add a new key pair or upload a publ
Block service account key creation
Learn more about setting organizati
Add key
Type
Status
Key
No rows to display
Create private key for "test-account"
Downloads a file that contains the private key. Store the file securely because this key can't be recovered if lost.
Key type
JSON
Recommended
P12
For backward compatibility with code using the P12 format
Cancel
Create

Nome
Hoje
test-account.json

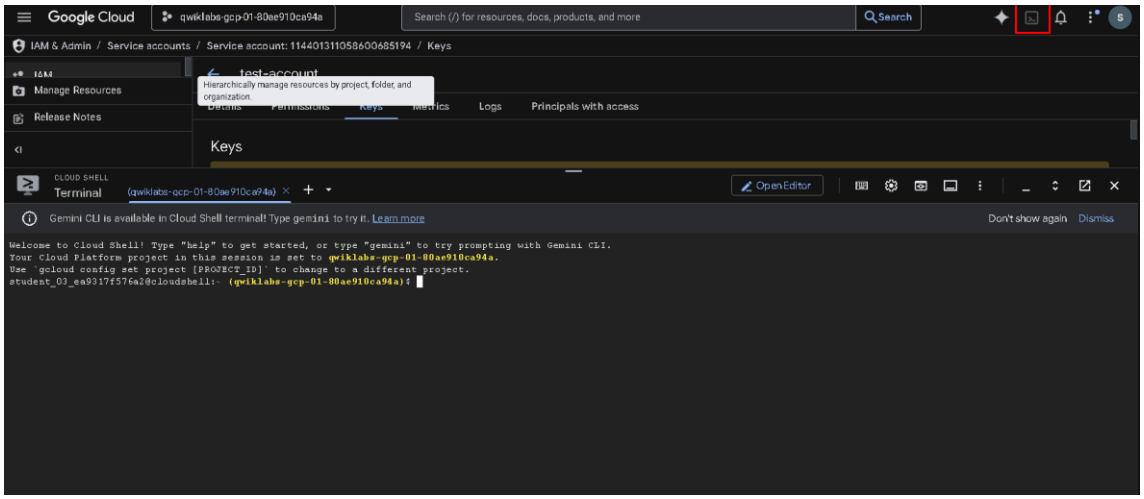

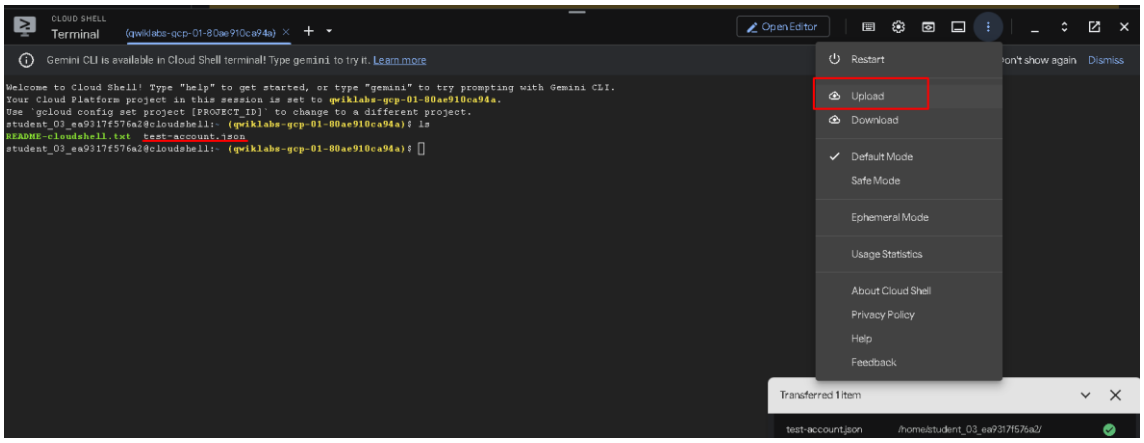

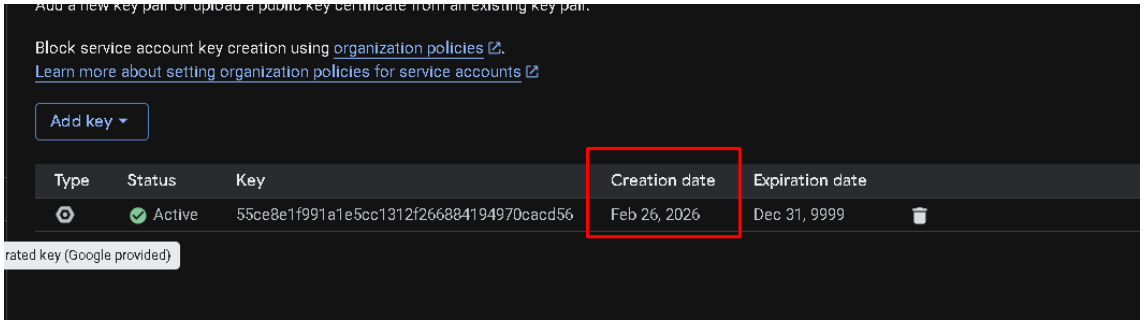

Tarefa 3: acionar a descoberta do falso positivo

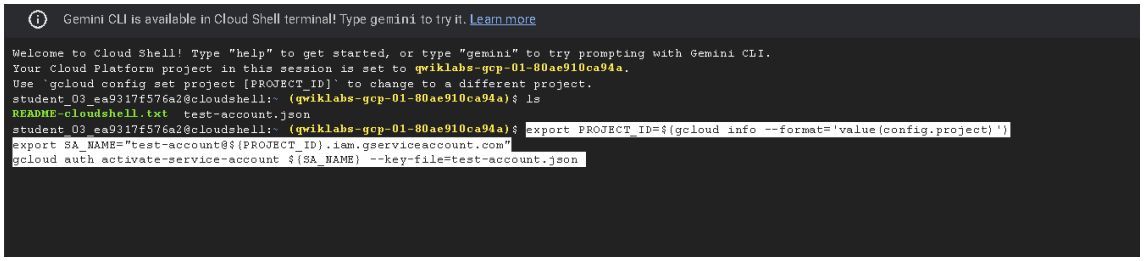

```
Welcome to Cloud Shell! Type "help" to get started, or type "gemini" to try prompting with Gemini CLI.
Your Cloud Platform project in this session is set to qwiklabs-gcp-01-80ae910ca94a.
Use `gcloud config set project [PROJECT_ID]` to change to a different project.
student_03_ea9317f576a2@cloudshell:~ (qwiklabs-gcp-01-80ae910ca94a)$ ls
README-cloudshell.txt  test-account.json
student_03_ea9317f576a2@cloudshell:~ (qwiklabs-gcp-01-80ae910ca94a)$ export PROJECT_ID=$(gcloud info --format='value(config.project)')
export SA_NAME="test-account@${PROJECT_ID}.iam.gserviceaccount.com"
gcloud auth activate-service-account ${SA_NAME} --key-file=test-account.json
Activated service account credentials for: [test-account@qwiklabs-gcp-01-80ae910ca94a.iam.gserviceaccount.com]
student_03_ea9317f576a2@cloudshell:~ (qwiklabs-gcp-01-80ae910ca94a)$ gcloud auth list
Credentialed Accounts

ACTIVE:
ACCOUNT: student-03-ea9317f576a2@qwiklabs.net

ACTIVE: *
ACCOUNT: test-account@qwiklabs-gcp-01-80ae910ca94a.iam.gserviceaccount.com

To set the active account, run:
    $ gcloud config set account `ACCOUNT`

student_03_ea9317f576a2@cloudshell:~ (qwiklabs-gcp-01-80ae910ca94a)$
```

```
ACTIVE:
ACCOUNT: student-03-ea9317f576a2@qwiklabs.net

ACTIVE: *
ACCOUNT: test-account@qwiklabs-gcp-01-80ae910ca94a.iam.gserviceaccount.com

To set the active account, run:
    $ gcloud config set account `ACCOUNT`

student_03_ea9317f576a2@cloudshell:~ (qwiklabs-gcp-01-80ae910ca94a)$ export STUDENT2=student-04-63aef9845c24@qwiklabs.net
gcloud projects add-iam-policy-binding $PROJECT_ID --member user:$STUDENT2 --role roles/editor
```

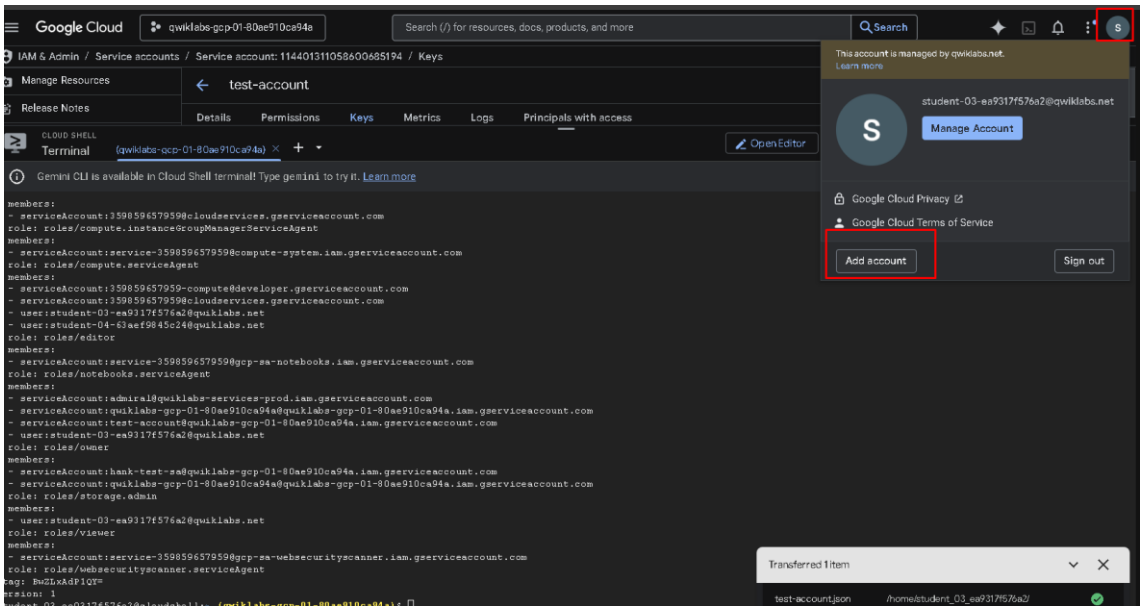

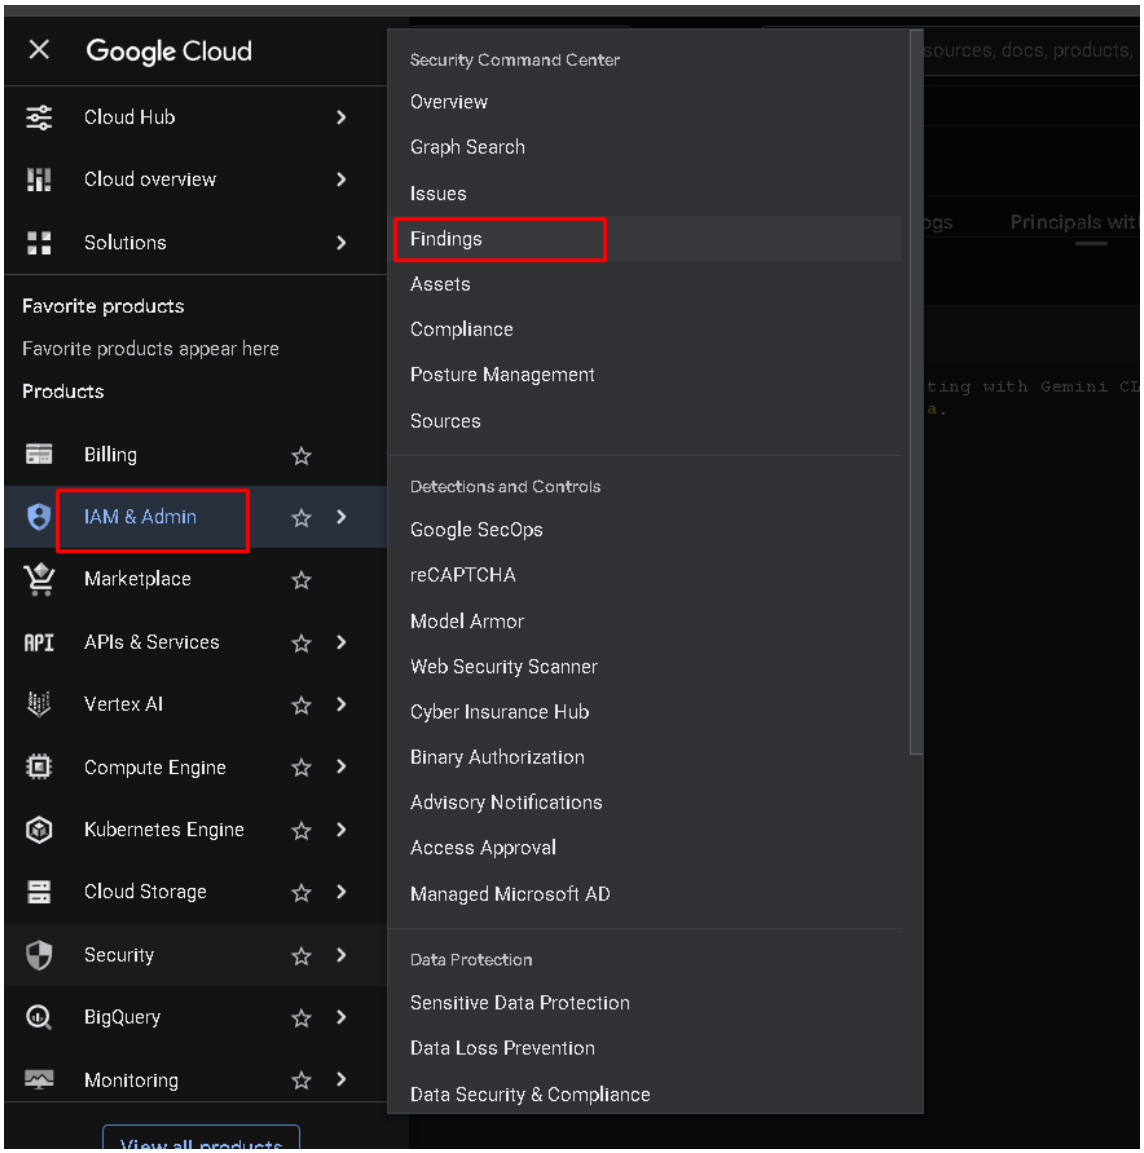
Google Cloud
Cloud Hub
Cloud overview
Solutions
Favorite products
Favorite products appear here
Products
Billing
IAM & Admin
Marketplace
APIs & Services
Vertex AI
Compute Engine
Kubernetes Engine
Cloud Storage
Security
BigQuery
Monitoring
Security Command Center
Overview
Graph Search
Issues
Findings
Assets
Compliance
Posture Management
Sources
Detections and Controls
Google SecOps
reCAPTCHA
Model Armor
Web Security Scanner
Cyber Insurance Hub
Binary Authorization
Advisory Notifications
Access Approval
Managed Microsoft AD
Data Protection
Sensitive Data Protection
Data Loss Prevention
Data Security & Compliance

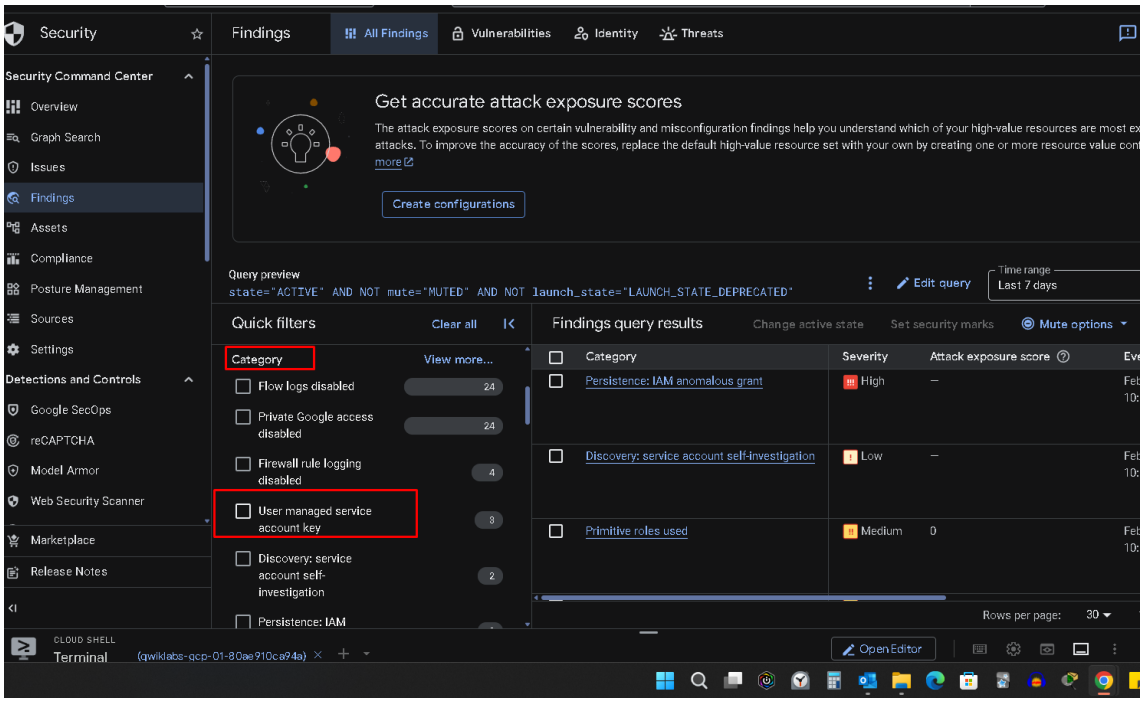
Security
Findings
All Findings
Vulnerabilities
Identity
Threats
Security Command Center
Overview
Graph Search
Issues
Findings
Assets
Compliance
Posture Management
Sources
Settings
Detections and Controls
Google SecOps
reCAPTCHA
Model Armor
Web Security Scanner
Marketplace
Release Notes
Get accurate attack exposure scores
The attack exposure scores on certain vulnerability and misconfiguration findings help you understand which of your high-value resources are most ex
attacks. To improve the accuracy of the scores, replace the default high-value resource set with your own by creating one or more resource value con
more
Create configurations
Query preview
state="ACTIVE" AND NOT mute="MUTED" AND NOT launch_state="LAUNCH_STATE_DEPRECATED"
Edit query
Time range
Last 7 days
Quick filters
Clear all
Category
View more...
Flow logs disabled 24
Private Google access disabled 24
Firewall rule logging disabled 4
User managed service account key 3
Discovery: service account self-investigation 2
Persistence: IAM
Findings query results
Change active state
Set security marks
Mute options
Category
Severity
Attack exposure score
Persistence: IAM anomalous grant
High
Discovery: service account self-investigation
Low
Primitive roles used
Medium
0
Rows per page:
30
CLOUD SHELL
Terminal
(qwiklabs-gcp-01-80ae910ca94a)
Open Editor

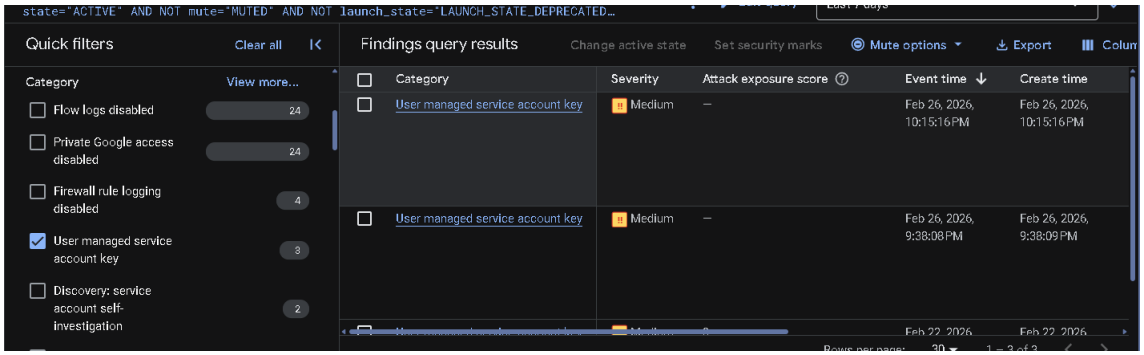
state="ACTIVE" AND NOT mute="MUTED" AND NOT launch_state="LAUNCH_STATE_DEPRECATED...
Quick filters
Clear all
Category
View more...
Flow logs disabled 24
Private Google access disabled 24
Firewall rule logging disabled 4
User managed service account key 3
Discovery: service account self-investigation 2
Findings query results
Change active state
Set security marks
Mute options
Export
Category
Severity
Attack exposure score
Event time
Create time
User managed service account key
Medium
Feb 26, 2026, 10:15:16 PM
Feb 26, 2026, 10:15:16 PM
User managed service account key
Medium
Feb 26, 2026, 9:38:08 PM
Feb 26, 2026, 9:38:09 PM
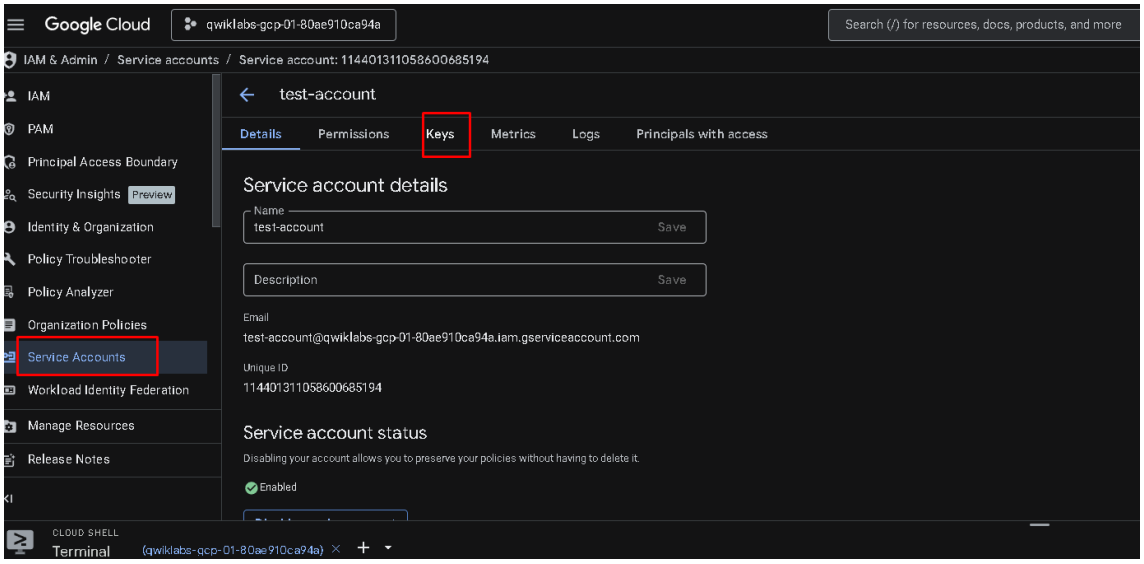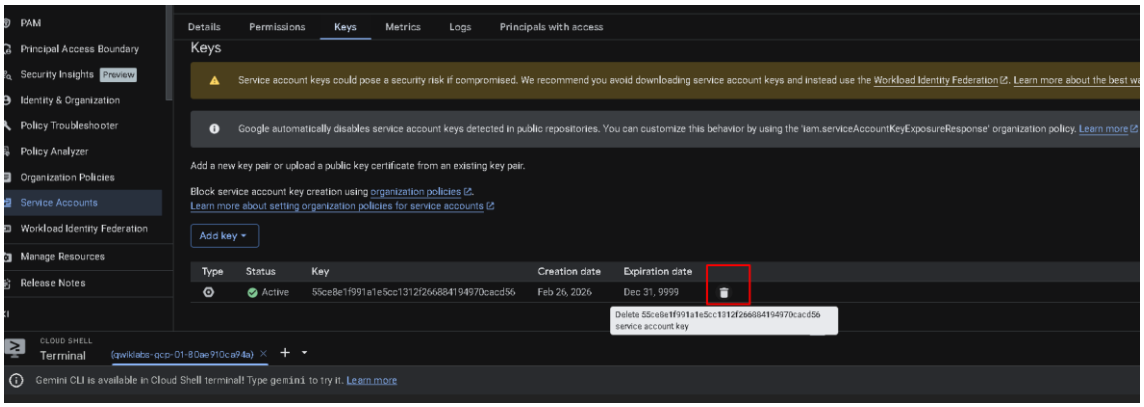
Tarefa 6: corrigir a descoberta