


Table of Contents

1. Overview • Getting started • Palantir
2. Overview • Getting started • Palantir
3. Introductory concepts • Palantir
4. Log in to the platform • Palantir
5. Orientation and navigation • Palantir
6. Projects and resources • Palantir
7. Authentication • Palantir
8. Delivering a use case • Palantir
9. Application reference • Palantir
10. Next steps by user role • Palantir
11. Training application • Palantir
12. Start with examples • Palantir
13. Foundry platform summary for LLMs • Palantir

Getting started / Overview

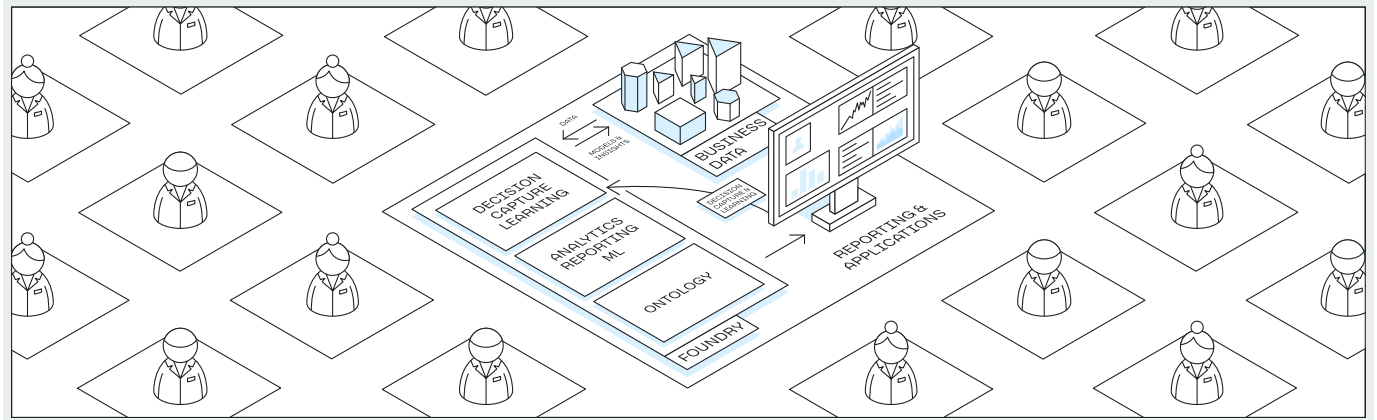

Getting started with Palantir

The Palantir platform is designed to help you use data to solve real-world problems. The Palantir platform is used by:

- **All types of organizations:** From early-stage startups, to multinational companies, to governments around the world.
- **All types of users:** From IT administrators, software engineers, and data scientists, to nurses, technicians, and operators.

Get access

If you are ready to begin, but do not yet have access to the Palantir platform, you can:

- [Sign up for AIP Developer Tier](#) to get access to the platform and start building with a trial account.

[Sign up for an AIP Bootcamp](#) to go from zero to use case in hours or days, working

API Reference ↗

for engineers.



Send feedback

Understand the platform

To help you navigate this documentation, here is a summary of what you will find on the following pages:

- **Introductory concepts**: This page introduces the Ontology and discusses the difference between the data layer and the object layer.
- **Authentication**: Learn about authenticating to your Palantir enrollment, using either your own identity provider or our self-service user directory.
- **Log in to the platform**: Learn how to configure and use a passkey to log in to Palantir.
- **Orientation and navigation**: This page provides a brief guide to the primary user interface for the Palantir platform.
- **Delivering a use case**: Provides guidance on building a use case for your organization.
- **Application reference**: The Palantir platform provides you with many applications and capabilities to help achieve your goals. This page is intended to help you determine which application in the Palantir platform is best suited for your needs and use case.
- **Next steps by role**: Depending on your role or the type of work you perform, there are different recommendations for which applications or workflows you might find most useful.
- **Training application**: Describes an in-platform application offering a set of courses from learn.palantir.com ↗.
- **Foundry platform summary for LLMs**: Provides a high-level overview of Foundry's architecture, core terminology, data integration patterns, applications, AI platform features, developer tools, security, and governance—designed to help LLMs and AI agents understand and interact with the platform.

Start building your use case

Once you have platform access, we recommend the following resources to help you get started in the Palantir platform:

- **Examples** is a comprehensive library of reference examples, tutorials, and starter kits for quickly developing new applications, designed to facilitate learning and effective

API Reference ↗

- The **Palantir Learning** ↗ portal provides courses, workflow tutorials, and more to help you get the most value out of the platform.

Send feedback

- **[AIP Assist](#)** is an LLM-powered tool designed to help you navigate, understand, and generate value with the Palantir platform. AIP Assist can be accessed from within the platform through a dedicated icon in the lower-left corner of the interface.
- **[Solution Designer](#)** is an interactive tool for creating architectural representations of solutions for the Palantir platform. If you already have access to an enrollment, Solution Designer can be found at `<your-enrollment-URL>/workspace/solution-design`.

Get in touch on the Developer Community

Learn more about the Palantir platform from the following resources:

- The [Palantir Developer Community](#) is a space to ask and answer questions from your fellow users.

NEXT
Introductory concepts →

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement](#)

[Privacy Statement](#)


[Terms of Use](#)

—[Cookies Settings](#)

[API Reference](#)

[Send feedback](#)

Getting started / Overview

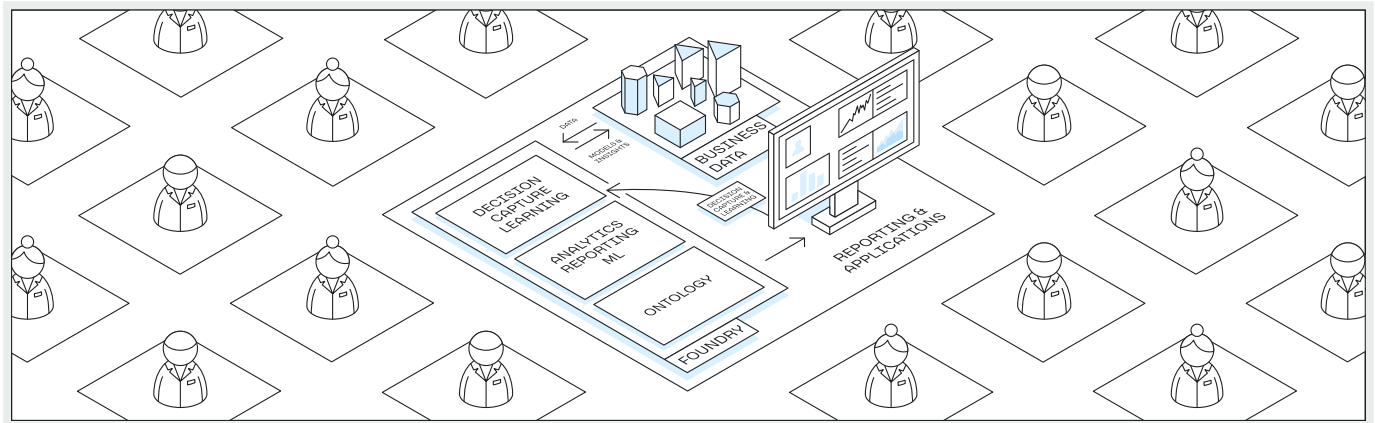

Getting started with Palantir

The Palantir platform is designed to help you use data to solve real-world problems. The Palantir platform is used by:

- **All types of organizations:** From early-stage startups, to multinational companies, to governments around the world.
- **All types of users:** From IT administrators, software engineers, and data scientists, to nurses, technicians, and operators.

Get access

If you are ready to begin, but do not yet have access to the Palantir platform, you can:

- [Sign up for AIP Developer Tier](#) to get access to the platform and start building with a trial account.

[Sign up for an AIP Bootcamp](#) to go from zero to use case in hours or days, working

API Reference ↗

for engineers.



Send feedback

Understand the platform

To help you navigate this documentation, here is a summary of what you will find on the following pages:

- **Introductory concepts**: This page introduces the Ontology and discusses the difference between the data layer and the object layer.
- **Authentication**: Learn about authenticating to your Palantir enrollment, using either your own identity provider or our self-service user directory.
- **Log in to the platform**: Learn how to configure and use a passkey to log in to Palantir.
- **Orientation and navigation**: This page provides a brief guide to the primary user interface for the Palantir platform.
- **Delivering a use case**: Provides guidance on building a use case for your organization.
- **Application reference**: The Palantir platform provides you with many applications and capabilities to help achieve your goals. This page is intended to help you determine which application in the Palantir platform is best suited for your needs and use case.
- **Next steps by role**: Depending on your role or the type of work you perform, there are different recommendations for which applications or workflows you might find most useful.
- **Training application**: Describes an in-platform application offering a set of courses from learn.palantir.com ↗.
- **Foundry platform summary for LLMs**: Provides a high-level overview of Foundry's architecture, core terminology, data integration patterns, applications, AI platform features, developer tools, security, and governance—designed to help LLMs and AI agents understand and interact with the platform.

Start building your use case

Once you have platform access, we recommend the following resources to help you get started in the Palantir platform:

- **Examples** is a comprehensive library of reference examples, tutorials, and starter kits for quickly developing new applications, designed to facilitate learning and effective

API Reference ↗

- The **Palantir Learning** ↗ portal provides courses, workflow tutorials, and more to help you get the most value out of the platform.

Send feedback

- **[AIP Assist](#)** is an LLM-powered tool designed to help you navigate, understand, and generate value with the Palantir platform. AIP Assist can be accessed from within the platform through a dedicated icon in the lower-left corner of the interface.
- **[Solution Designer](#)** is an interactive tool for creating architectural representations of solutions for the Palantir platform. If you already have access to an enrollment, Solution Designer can be found at `<your-enrollment-URL>/workspace/solution-design`.

Get in touch on the Developer Community

Learn more about the Palantir platform from the following resources:

- The [Palantir Developer Community ↗](#) is a space to ask and answer questions from your fellow users.

NEXT
Introductory concepts →

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

—[Cookies Settings](#)

[API Reference ↗](#)


[Send feedback](#)

Getting started / Introductory concepts

Introductory concepts

As you get started in the Palantir platform, it can be helpful to think about data in the platform living in two places: the *data layer* and the *object layer*.

Data Layer

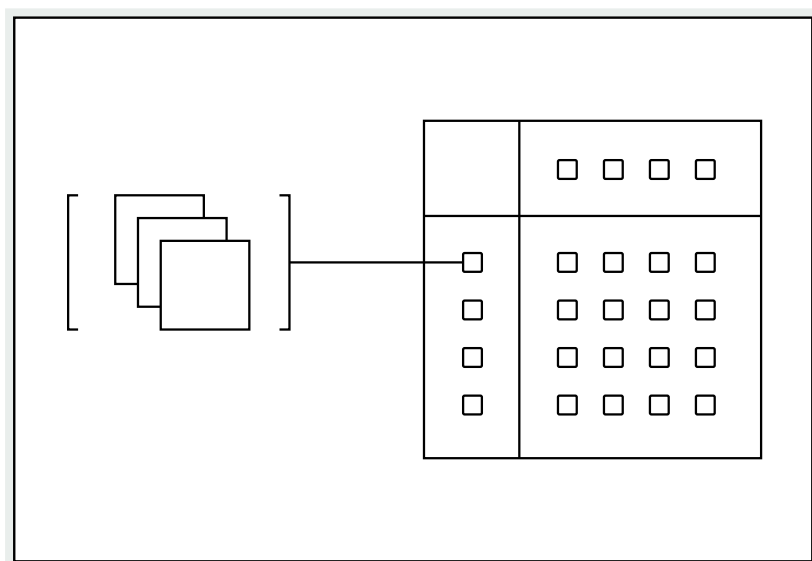

In the data layer, data is stored inside **datasets**, which typically represent tabular data like you might find in a spreadsheet, but support data at any scale. Datasets usually come from organizational data sources that are synced into the platform, but you can also create your own datasets by uploading approved or notional data.

Palantir platform maintains a record of how it was produced, so that the origins of data are always preserved and accessible. This concept is known as **data lineage**.

API Reference ↗




Send feedback

- Palantir keeps track of which **input datasets** were used to produce which **output datasets**. This allows you to always know where a piece of data came from, and understand how data is used.
- Palantir tracks the **logic** that was applied to produce each output dataset. For example, an input dataset might be *filtered* to produce a smaller output dataset; that filtering logic is preserved and visible in the platform. There are many ways to write logic in the platform, ranging from code repositories to point-and-click tools.

You can interact with data using one of Palantir's many **applications**. When you use applications, anything you produce, whether it is a dataset, code, or analysis, is stored in the platform as a **resource**. Resources are organized into **Projects**, which serve as permission boundaries for grouping and organizing related work. We will cover the details of how to access and use Projects in one of the upcoming sections.

Object Layer (Ontology)

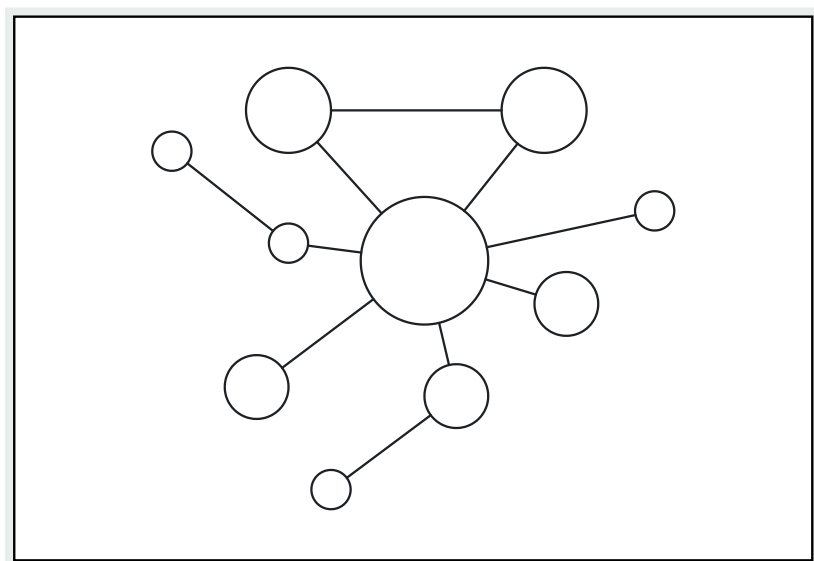

In the object layer, or Ontology, data is stored in **objects** and **links**. Objects represent real-world concepts like an airplane, vehicle, or customer, while links represent the relationships between objects. The object layer takes the data stored in tabular datasets—rows and columns of data—and converts it into a series of concepts that anyone in the organization

[API Reference ↗](#)

In addition to helping make data more understandable, converting data to objects and links unlocks a broad set of tools for interacting with objects. You can define

[Send feedback](#)

actions that describe how objects can be changed by people in your organization. This enables you to build **applications** that access data from objects and capture user decisions back into the system.

The definitions of objects, links, and actions together make up what is called the Ontology, a digital representation of your organization. Developing and using the Ontology to translate data into operational outcomes is a key part of getting value out of the Palantir platform.

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

— [Cookies Settings](#)

API Reference ↗

Send feedback

Getting started / Log in to the platform

Log in to the platform

The Palantir platform supports SSO authentication and passwordless login using passkeys. If your organization uses SSO, proceed with the steps from your SSO provider. To learn more, refer to the [authentication documentation](#). To log in to the platform with a passkey or manage your passkeys, review the sections below.

Set up and configure a passkey

To configure and log in with a passkey, you must first receive an email from Palantir titled "Set up your Palantir account and log in". This email will contain a one-time password and a link to set up your account. You will be prompted to verify your phone number and create a passkey, which you can then use to log in. Review the sections below for more detailed instructions.

When configuring a passkey, you will have various storage options:

- **Save a passkey to the device you are using:** Depending on your device and browser, the options to save a passkey on the device you are using will vary. For example, if you are using an iPhone, you can save the passkey to your iCloud Keychain, and if you are using Google Chrome, you can save the passkey to your Chrome profile or to the Google Password Manager. It is up to you to select your preferred credential store. This may be the one you are most familiar with, or the one that offers the easiest identity verification option for you.
- **Save a passkey to a security key:** Security keys are physical devices that enhance account security by adding an extra layer of authentication. When you save a passkey to a security key's sensor every time you need to log in.
- **Save a passkey to a mobile device:** When you save a passkey to a mobile device, you will need to scan a QR code with that device to log in. You will also be able to log in directly

API Reference ↗

Send feedback

from that device without scanning a QR code. For example, if you add a passkey from a laptop and save it on your mobile device by scanning a QR code, the stored passkey can be used to log in directly from that mobile device. Ensure that Bluetooth is enabled on your device(s) when using this option.

Note that some devices may automatically offer the default option for storing a passkey, such as Windows Hello or iCloud Keychain. You do not need to choose the device's default option to store your passkey. You have the option to back out of the default dialog and select your preferred passkey storage option.

You do not need to use a specific authentication application. Your device's built-in security features such as facial recognition or fingerprint scanning can be used along with your device's native camera.

Depending on your device, the option to select a security key or a mobile device may appear slightly differently. For example, on iOS, the option may read **iPhone, iPad, or Android device** and list security key separately, while other devices may read **Use a phone, tablet, or security key**. Read the options carefully and select the option that reflects your desired passkey storage method.

Device and browser support

Ensure that your mobile device and browser are supported before attempting to store a passkey. The following versions are supported for iOS and Android devices:

- **iOS devices:** The latest version of iOS and one prior version are supported. For example, If the latest version of iOS is iOS 18, iOS 18 and 17 are supported.
- **Android devices:** Devices running Android 13 and later are supported.


The Palantir platform is [fully supported](#) on Google Chrome and Microsoft Edge versions released within the last six months. Mobile usage requires Google Chrome, Microsoft Edge, or Apple Safari. For best results, use Google Chrome or Microsoft Edge if possible.

For more information, see the [API Reference](#) below to continue configuring your passkey:

[API Reference ↗](#)

1. Navigate to the email from Palantir titled "Set up your account and **Set up account** option.

[Send feedback ↗](#)

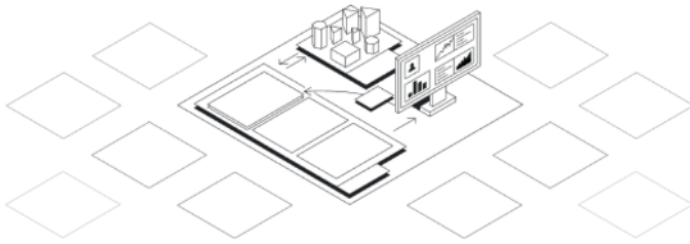

Set up your Palantir account and log in

Please use the following one-time password to set up your account. It expires in 4 days.

The one-time password is:



Set up account

Your account will be passwordless, leveraging FIDO2 passkeys to offer unparalleled security and a seamless user experience. Learn more in the [documentation](#).

— The Palantir Team

2. Enter the email address that you used to register and the temporary password included in the email, then select **Next**.

A screenshot of a dark-themed sign-in screen. At the top is the Palantir logo and the text 'Welcome to AIP'. Below this is a 'Sign in' section with the instruction 'Enter the one-time password that was sent to your email to create an account.' There are two input fields: the first has a person icon, and the second has a lock icon and is labeled 'One-time password'. A blue 'Next' button is below the fields. At the bottom right is a 'Need help?' link.

- API Reference ↗ and last name, then choose between verifying your account with SMS or with a phone call.

Send feedback


Welcome to AIP

Create your account

Verify your profile details. Contact your administrator if they are incorrect.

First name

Last name

Verification method

☒ Send a code via SMS ✓ ☐ Receive a call

Phone number



This number will only be used for verification purposes.

[Need help?](#)

4. Verify your phone number by entering the six digit authentication code provided by SMS or phone call. If you did not receive a verification code through SMS or phone call, select **Resend code** under the verification number input.


Welcome to AIP


Verify phone number

We sent a 6 digit code to [redacted]. The code will expire in 10 minutes.


[Need help?](#)

5. If you were invited to an existing enrollment, agree to the terms and conditions to [API Reference ↗](#)se, skip to step 6.

[Send feedback](#)

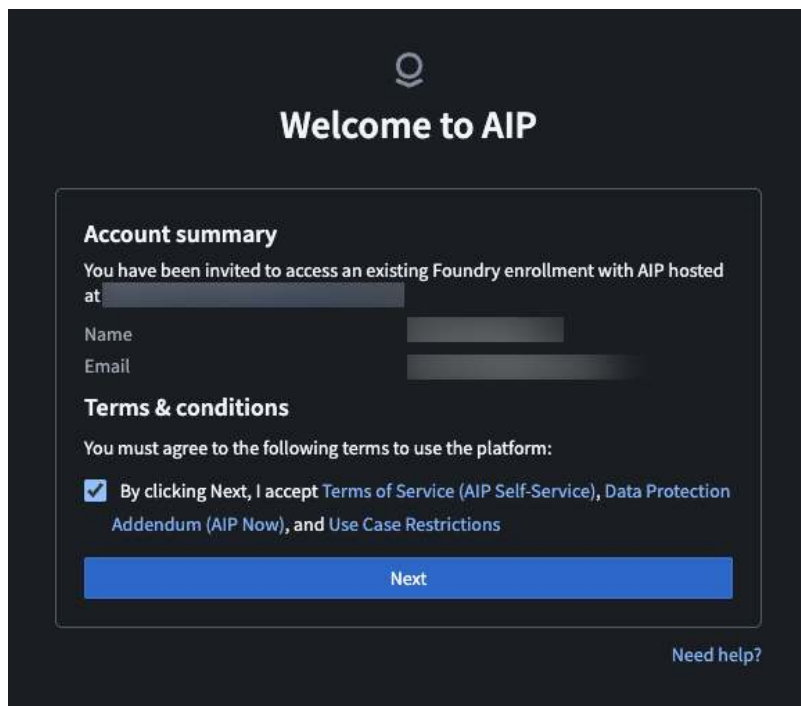


6. Select **Add passkey**.

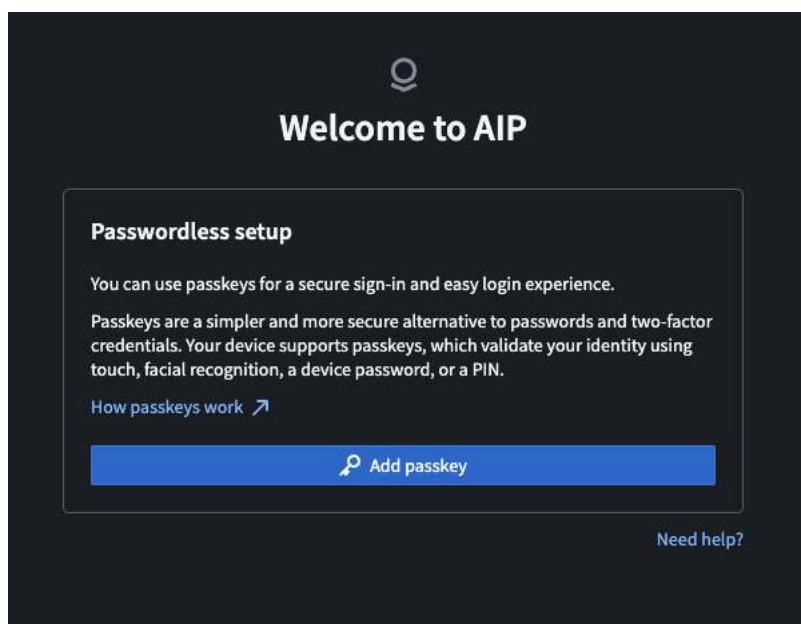

7. Select a destination to save your passkey, then follow the on-screen instructions. Your device may automatically suggest the default credential store, but you can choose a different option by selecting **Save another way**. Pay special attention to whether your passkey will only be available on one device.

API Reference ↗

Send feedback

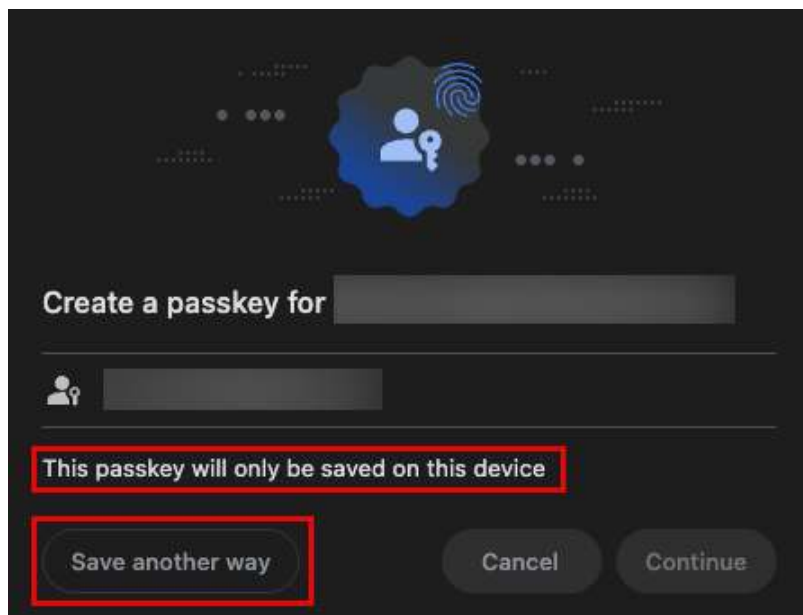

- **Save a passkey to the device you are using:** Select your preferred credential store and follow the instructions on your device to verify your identity. This may involve a fingerprint scan, facial recognition, or entering a PIN. Choose a credential store that you are familiar with, or one that offers the easiest identity verification option for you.
- **Save your passkey to a security key:** Select **Use a phone, tablet, or security key**. You will then need to insert the security key and enter your PIN and/or touch the security key's sensor.
- **Save your passkey to a mobile device:** Select **Use a phone, tablet, or security key**. Then, scan the QR code with your mobile device's camera and follow the instructions on your mobile device to verify your identity.

[API Reference ↗](#)

[Send feedback](#)

Create a passkey on a phone or tablet

Scan this QR code with a camera on the device where you want to create a passkey for palantirfoundry.com




If you want to create a passkey for .palantirfoundry.com on a USB security key, insert and touch it now

Back

Cancel

- To avoid issues, ensure that you are using a [supported browser](#).

8. Once your passkey has been successfully added, you will see the following screen:

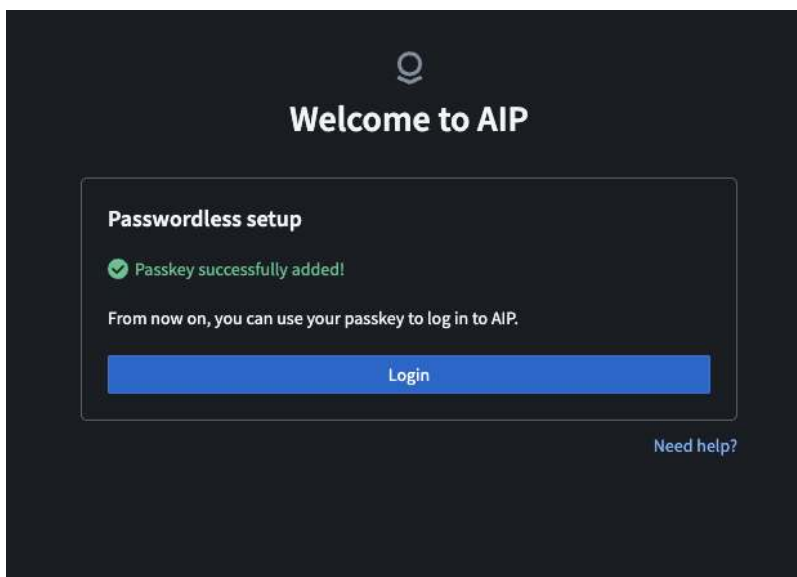

Next, [API Reference](#) successfully configured a passkey, follow the instructions below to log in with your passkey.

Send feedback

Log in with a passkey

To log in with a passkey, review the section below that applies to your situation. If you navigated away from the login page and do not remember the URL, check your registration email. After successful creation of a passkey, you will receive an email titled "Your Palantir account was successfully set up". Select the **Log in** option in this email to navigate to the platform login page.

Log in with a passkey stored on your device

If your passkey is stored on the same device that you are using to log in, follow the instructions below.

1. On the Palantir login page, enter the email address that you registered with and select **Next**.
2. Select **Use passkey** to log in to your account using the passkey stored on your device. Your device will automatically recognize that a passkey is configured for this URL and guide you to verify your identity.
3. Follow the on-screen passkey instructions to unlock your device and select your passkey. This may involve facial recognition or a fingerprint scan to verify your identity. Once verified, you should have access to the platform.

Log in with a passkey stored on a mobile device

If your passkey is stored on a mobile device that is not the device you are using to log in, follow the instructions below.

1. On the Palantir login page, enter the email address you registered with and select **Next**.
2. Select **Use passkey**, then **Use a phone, tablet, or security key**. Select **Continue**.
3. A QR code will appear on screen, which you can scan from the mobile device where your passkey is stored. After you scan the QR code, follow the instructions on your mobile device to verify your identity. After verification, you should have access to the platform.

[API Reference ↗](#)

Log in with a passkey stored on a security key

[Send feedback](#)

If your passkey is stored on a security key, follow the instructions below.

1. On the Palantir login page, enter the email address you registered with and select **Next**.
2. Select **Use passkey**, then **Use a phone, tablet, or security key**. Select **Continue**.
3. A dialog will appear on screen instructing you to insert the security key and enter your PIN and/or touch the security key's sensor. After following the instructions, you should have access to the platform.

Add additional passkeys

We recommend that you add more than one passkey to your account as backup. You may add up to four passkeys per account, but you may only have one passkey per credential store. This means that you can only store one passkey in Windows Hello, iCloud Keychain, Samsung Pass, or other credential store. If you are attempting to create a new passkey, ensure that you do not already have a passkey stored with that credential store. For example, if you have already stored a passkey in your iCloud Keychain, attempting to store a second passkey in your iCloud Keychain will result in an error.

Before adding additional passkeys, make sure that existing passkeys have descriptive names to avoid confusion. A good naming convention for passkeys is the device it was created on plus the credential store, for example, "Work Laptop Chrome" or "Personal iPhone Keychain".

 Passkey names are visible to your organization's administrators during account lockout recovery. Do not include personal or sensitive information in passkey names.


To add an additional passkey to your account, select **Account** at the bottom of the right toolbar, then select **Settings**. On the settings page, navigate to the **User settings** section on the top right and select **Authentication**. You can also access the authentication page using the following URL:

API Reference ↗

...ent-URL>/workspace/settings/authentication



Send feedback

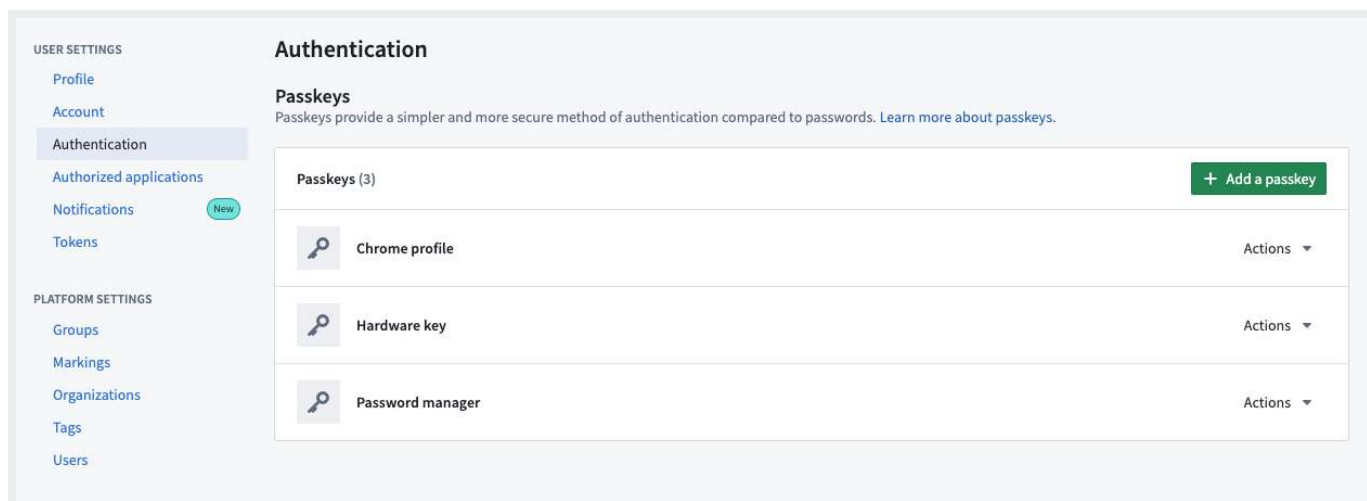


On the **Authentication** page:

1. Select the **Add a passkey** option.
 - You may be asked to re-authenticate before adding an additional passkey.
2. Select a destination to save your passkey, then follow the on-screen instructions.
 - To save your passkey on the device you are using, select your preferred credential store and follow the instructions to verify your identity.
 - To save your passkey on a security key or mobile device, select **Use a phone, tablet, or security key**. You will then need to scan the QR code with your desired mobile device, or insert a security key and enter your PIN and/or touch the security key's sensor.

Remove a passkey

To remove a registered passkey, select **Account** at the bottom of the right toolbar, then select **Settings**. On the settings page, navigate to the **User settings** section on the top right and select **Authentication**. You can also access the authentication page using the following URL:

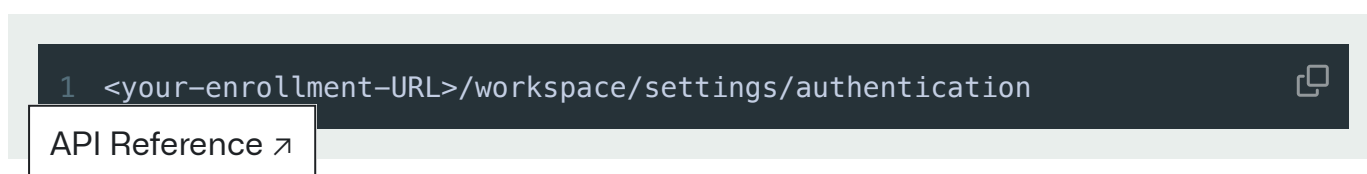

1. Use the **Actions** dropdown menu next to the passkey you would like to remove.

[Send feedback](#)

2. Select **Delete**, then **Confirm** you want to remove the passkey. Once removed, you will no longer be able to use this passkey to log in.
3. After deleting a passkey from the platform, navigate to the credential store that the passkey is stored in and delete it there as well. If you do not delete the passkey from the credential store, you will **not** be able to register a new passkey with that credential store.

Reset your account

If you cannot access any of your passkeys, depending on your enrollment type, you can use the self-service passkey reset or contact an enrollment administrator. To avoid this scenario, we recommend registering at least two passkeys in case access to one passkey is lost. Make sure to add descriptive names for your passkeys for easy identification.

If you created your enrollment, use the **Reset passkey** option found on the login page below the login form and complete the verification steps. Depending on your enrollment, this passkey reset may be immediate, or it may be submitted for review.

If you were added as a user to an existing enrollment, contact your enrollment administrator to [manage your passkeys](#).

Support

If you have trouble accessing your account, select the **Need help?** link under the login form and fill out the form on the **AIP/Developer Tier support** page.

Provide the following information to help us identify the problem:

- The browser you are using, for example, Google Chrome, Microsoft Edge, or Firefox.
- The kind of device you are using; this could be a Macbook, Windows PC, iPhone, or Android device.
- The device you are saving the passkey to; this could be the device you are using, a separate mobile device, or a security key.

API Reference ↗

ore you are using, such as Windows Hello, Samsung Pass, or iCloud

Send feedback

Recommended passkey types and best practices

We recommend that you maintain at least two different passkeys for your account. For example, you can store one passkey on your phone and one in your Chrome profile.

On **Windows** computers, we recommend the following approaches to managing passkeys:

- [Create and store a passkey on a phone or a YubiKey ↗](#).
- [Create and store a passkey directly in Google Chrome ↗](#).

On a **macOS** device, you can create and store passkeys that are synced across your devices using iCloud:

- [Ensure your iCloud passkey is enabled and use an iCloud passkey ↗](#).
- [Manage passkeys ↗](#).

On **mobile** devices, you can create and store passkeys in Google Password Manager or iCloud keychain:

- [Create and store passkeys on iOS ↗](#).
- [Create and store passkeys on Android devices ↗](#).

Troubleshooting

Lost access to passkeys

If you cannot access any of your passkeys, your account needs to be reset. This process may vary depending on whether you created your own enrollment, or if you were added to an existing enrollment. For detailed instructions, refer to the [account reset](#) section.

My one-time password is expired

[API Reference ↗](#)

If your one-time password (OTP) expired before you were able to [configure your account](#), you must request a new one. If you were added to an existing enrollment by an enrollment administrator for a new OTP.

[Send feedback](#)

If you created your own enrollment, navigate to the email from Palantir titled “Set up your Palantir account and log in”. Select the **Set up account** option to open the **Welcome to AIP** page. Here, you can select the **Need help?** link under the sign in form and fill out the support form to request a new OTP.

Unable to create a passkey

There are multiple reasons why a passkey may fail to register, including verification time out, failure to authenticate before passkey creation, or connection issues with the device where you are trying to store the passkey. Ensure that you verify your identity within the time window, and that bluetooth is enabled on your device(s).

If you are still having issues, ensure that you do not already have a passkey for this account in the credential store you are trying to use. For example, if you delete an existing Windows Hello passkey from the platform, then attempt to register a new Windows Hello passkey before deleting the old one from **your device**, you will get an error. You must first delete existing passkeys from a given credential store (for example, iCloud Keychain, Windows Hello, or Google Password Manager) before you can store a new passkey in that credential store.

Some devices may need to have certain features enabled in order to store passkeys.

- On Apple devices, enable iCloud Keychain in System Settings and ensure that your settings allow passkeys to be synced across devices. For more information refer to the [iCloud Keychain documentation ↗](#).
- On Android devices, the screen lock feature must be enabled. The presence of a screen lock is a prerequisite for using passkeys on Android devices for security reasons. For more information refer to the [Android screen lock documentation ↗](#).

Each device, browser, or operating system has its own default credential store, such as iCloud Keychain or Samsung Pass. Ensure that the credential store of your choice is enabled on your device.

For more information, see [Working on mobile](#)

API Reference ↗

Some passkeys are device-specific and will only work when you use them if they are stored. These device-specific passkeys will alert you during creation that they can

Send feedback

only be used on one device. Other passkeys may be accessible on multiple devices, such as passkeys stored in password managers. To ensure that you are able to use passkeys across devices, make sure that you have enabled autofill for the credential store provider on your device(s).

For example, if you wish to use Google Password Manager passkeys on multiple devices, Google Password Manager must be enabled as the autofill provider in your device settings. For more information on using Google Password Manager passkeys across devices, visit the official [Google Password Manager documentation](#).

Forgotten username

Your username is the email account you used to register for a Palantir account. The first email you will receive from Palantir is titled “Set up your Palantir account and log in”. Search your email account(s) for this email to verify that you have the right account.

Client-side passkey issues

If you are having issues with passkeys and are not sure whether this is due to the Palantir platform or software/hardware limitations, you can test whether you are able to use passkeys in general on [webauthn.io](#). Register and use a passkey on this site to identify whether passkeys work on your device. If you are still having issues, or the issue appears to originate from the Palantir platform, select the **Need help?** link under the sign in form and fill out the form on the **AIP/Developer Tier support** page to get help with your issue.

In some cases, a browser or operating system may be too outdated to support passkeys. Ensure that you are using an updated operating system and a browser such as Google Chrome, Microsoft Edge, or Apple Safari, with a version that has been released in the past six months. Review our [supported browsers](#) for more information.

My organization does not support passkeys

If [API Reference](#) does not support physical or digital passkeys in any capacity, it may not be possible to create a self-service Palantir account, including AIP Developer Tier accounts. If you will be attending a Palantir event and require access to the platform, contact the event organizer to check if compatible hardware can be provided for you.

[Send feedback](#)

Phone number is unavailable

During account creation, you will be asked for a phone number. If you get the error message **Phone number is unavailable**, you will need to enter a different number. Phone numbers can only be used once per enrollment.

Email domain restrictions

Your enrollment may restrict which email domains can be used to register or log in. If your email domain is not permitted, you may encounter an error during sign-up indicating that your domain is restricted or that your invitation is no longer valid. During login, domain restrictions may result in a general login failure without additional details.

This can occur when an enrollment administrator updates domain restrictions after an invitation was sent or after your account was created. If you previously had access or received an invitation link that is no longer working, contact your enrollment administrator to verify which email domains are currently permitted and to request a new invitation if needed.

The authenticator used to register the passkey is not allowed

If you are using an outdated operating system or browser, you may receive the following error when trying to use a passkey:

The authenticator used to register the passkey is not allowed or its details could not be verified. Please confirm you are using a supported browser before trying again.

Passkeys from outdated operating systems or browsers are blocked for security reasons. To resolve this issue, update your operating system or browser, or use a device with up-to-date software. Ensure that you are using a [supported browser](#) to avoid issues.

 [API Reference ↗](#) not meet security requirements

[Send feedback](#)

Some enrollments enforce security policies that restrict which types of passkeys can be used. If your passkey does not satisfy these requirements, you will encounter an error when attempting to log in or register a new passkey indicating that the passkey does not meet the enrollment's security requirements. If a policy was changed after you registered your passkey, the error may indicate that it no longer meets the requirements.

This typically means your enrollment requires specific authenticators, such as hardware security keys, rather than built-in device passkeys. If you have multiple passkeys registered, try using a different one. Contact your enrollment administrator to confirm which passkey types are approved for your enrollment.

PREVIOUS

← [Introductory concepts](#)

NEXT

[Orientation and navigation](#) →

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement](#) ↗

[Privacy Statement](#) ↗

[Terms of Use](#) ↗

— [Cookies Settings](#)

[API Reference](#) ↗

[Send feedback](#)

Getting started / Orientation and navigation

Orientation and navigation

You can think of the Palantir platform as an operating system for the data in your organization. This page provides information about how to navigate and find the tools and resources required to work effectively in this operating system.

This page provides information about the [workspace navigation sidebar](#) that serves as a home base for moving around the platform and the [search](#) feature for locating resources or data of interest. You will also learn about the [support](#) options available to you while working in the platform. Finally, your [Palantir account settings](#) will allow you to configure your public user and platform settings.

Workspace navigation sidebar


The sidebar is your constant companion in the platform and the starting point for navigation. Open and collapse the sidebar with the icon in the upper right or with the keyboard shortcut `Cmd+0` (macOS) or `Ctrl+0` (Windows).

The sidebar has five primary sections that allow you to navigate to different features and tools within the platform:

API Reference ↗



Send feedback

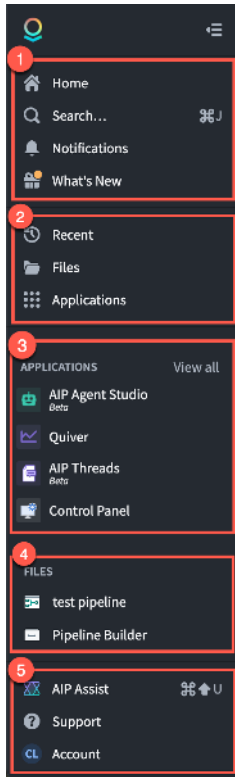

- ① **Home:** Return to your organization's landing page
- ① **Search...:** Open the Quicksearch dialog
- ① **Notifications:** View platform and application notifications
- ① **What's New:** Read product announcements and release notes in the platform
- ② **Recent:** Quickly navigate to recently accessed resources
- ② **Files:** Jump to the Projects landing page, powered by Compass
- ② **Applications:** Find and access all platform applications using this portal
- ③ **Applications (Favorited):** Find applications you have previously added a star to. Organize and access your favorite applications
- ④ **Files (Favorited):** Find files you have previously added a star to. Organize and access your favourite resources and objects
- ⑤ **AIP Assist:** LLM-powered assistant for getting help
- ⑤ **Support:** Access Palantir documentation, training resources, and help
- ⑤ **Account:** Find account details and review permissions and groups
- ⑤ **Other Workspaces:** Access custom Workspaces and the Control Panel (availability depends on permissions)

AIP Assist

We recommend **AIP Assist**, Palantir's LLM-powered assistant, as your first stop in getting help regarding the Palantir platform. AIP Assist can answer questions about the platform in multiple languages and can provide guidance about how to use the platform, including tutorials.

You can access AIP Assist from the lower-right corner of the sidebar or by using the keyboard shortcut **Cmd+U** (macOS) or **Ctrl+U** (Windows).

API Reference ↗


AIP Assist is "context-aware" in that it can detect which application you are working in, but AIP Assist does not have access to any of the data you are working with.

Send feedback

Home

New Palantir enrollments come with a default home page that helps users orient themselves and learn about the platform. Administrators or builders can also create custom landing pages for various user groups on the platform. Some enrollments may use a completely customized home page, while others may use standard components to provide access to frequently-used parts of the platform.

While most home pages focus on navigation, you may also find announcements about the platform, starting points for common workflows within your organization, or links to custom documentation on the landing page.

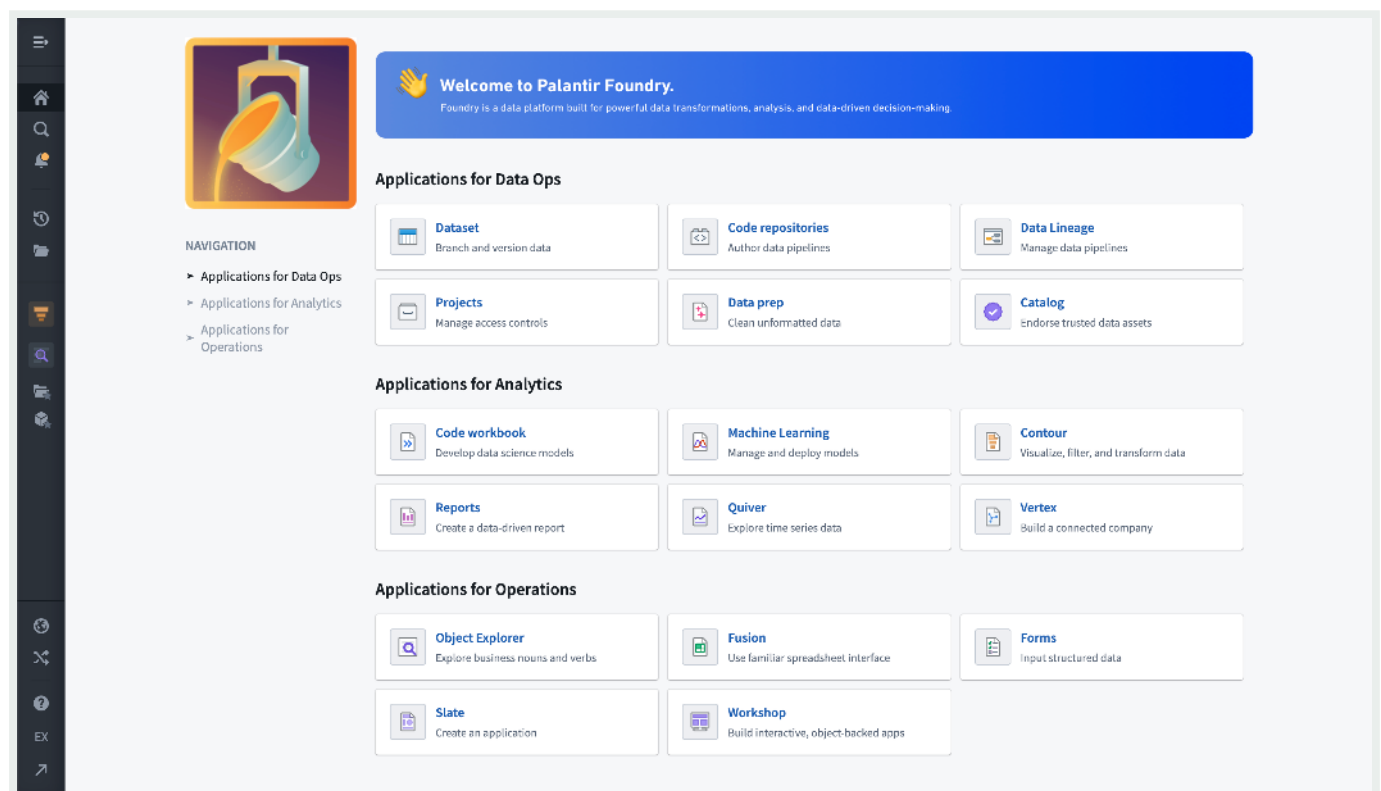

Search

Search, also known as [Quicksearch](#), is a tool for navigation and discovery of elements in the platform. Search is made of two parts:

[API Reference ↗](#) provides a short list of personalized results to directly navigate users to the main types of available content: platform applications, custom applications, datasets, and other resources.


[Send feedback](#)

2. **Full results mode:** Designed to help users find content and discover what exists in the platform. Users can perform searches of platform apps, objects, datasets, and other files with advanced filters, rich metadata, and a ranking algorithm to highlight the most relevant results.

i To open Quicksearch, select **Search...** in the navigation sidebar, or use **⌘ + J** (macOS) or **Ctrl+J** (Windows).

Notifications


The Notifications panel collects notices from across the platform, ordered from newest to oldest. Most notifications include links to navigate directly to the relevant resources. Some, such as access requests, can be responded to inline without needing to navigate to another page.

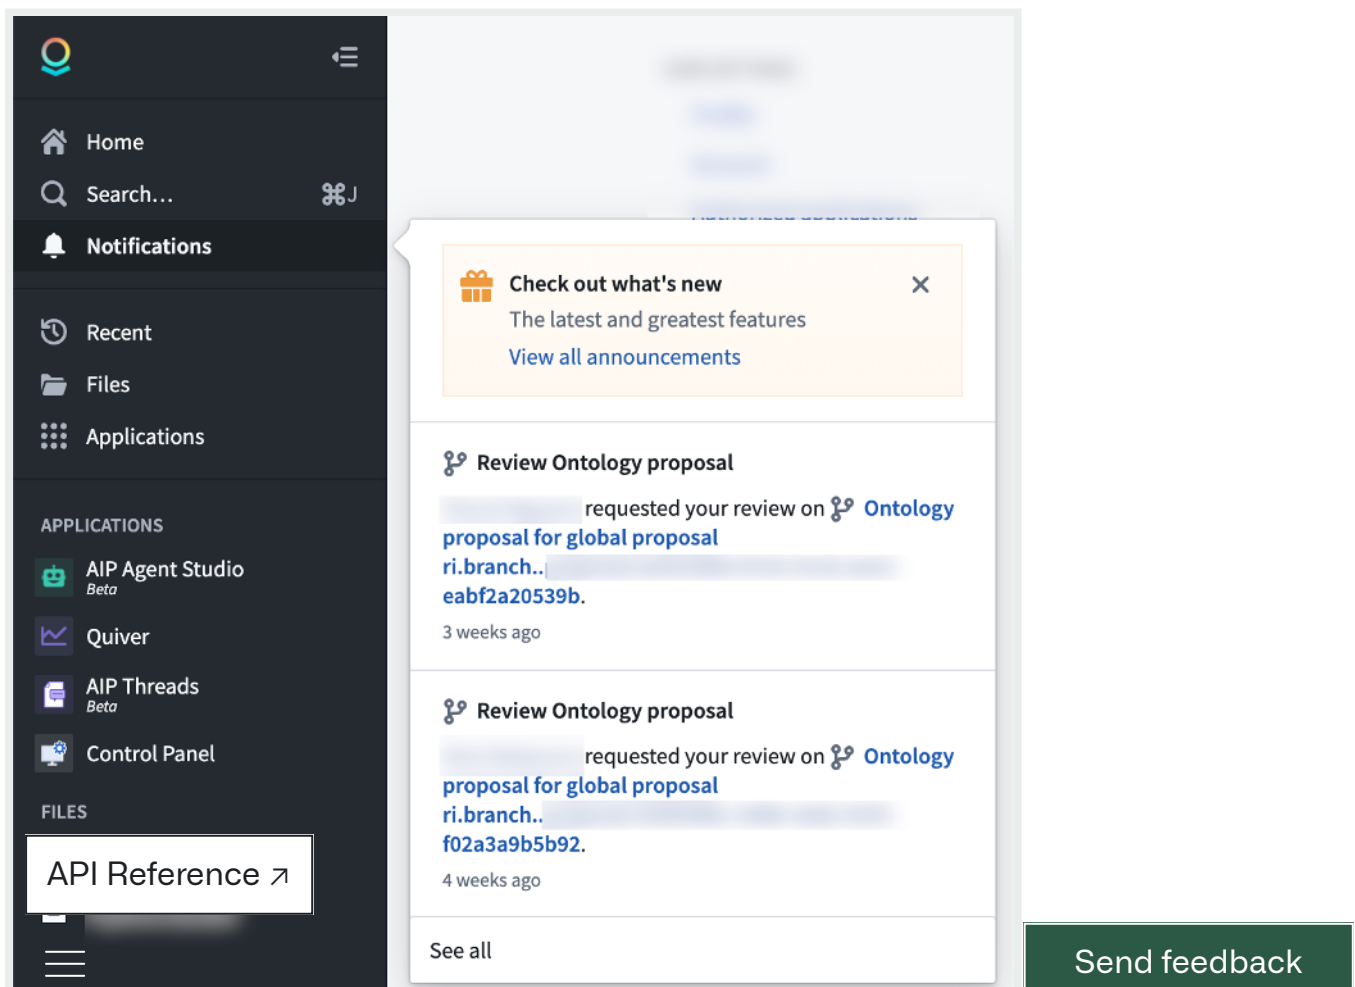

By default, notifications are delivered both within the platform in the Notifications panel and by email. Under the **See all** link, notifications are grouped by type for easier navigation. The notification **Settings** give you granular control over global and per-notification-type delivery preferences. If notifications are unread, the bell icon will have a small, yellow badge. If a notification occurs while you're using the platform, a small pop-up in the lower left corner will briefly show the message.

Recent

The Recent panel simply lists the last 20 resources you have opened or interacted with. Between **Favorites** and **Recent**, it's possible to quickly navigate between primary resources in use for any project without needing to return to **Search** or browse through the Project folder structure.

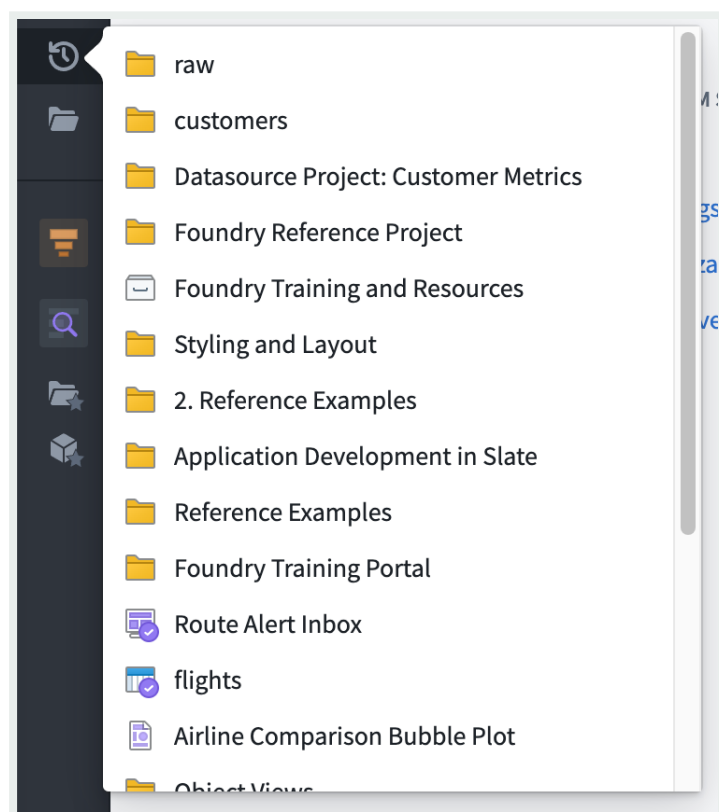

API Reference ↗


[Files, powered by the Compass application](#) takes you to the landing page, where you can access top-level **Portfolios**, **Projects**, **Your files**, and **Shared**

Send feedback

with you shortcuts. You will learn more about Projects in the next step of this guide.

Applications portal

The [Applications portal](#) is a tool for finding and accessing all apps in the platform, including both platform apps and custom promoted applications.

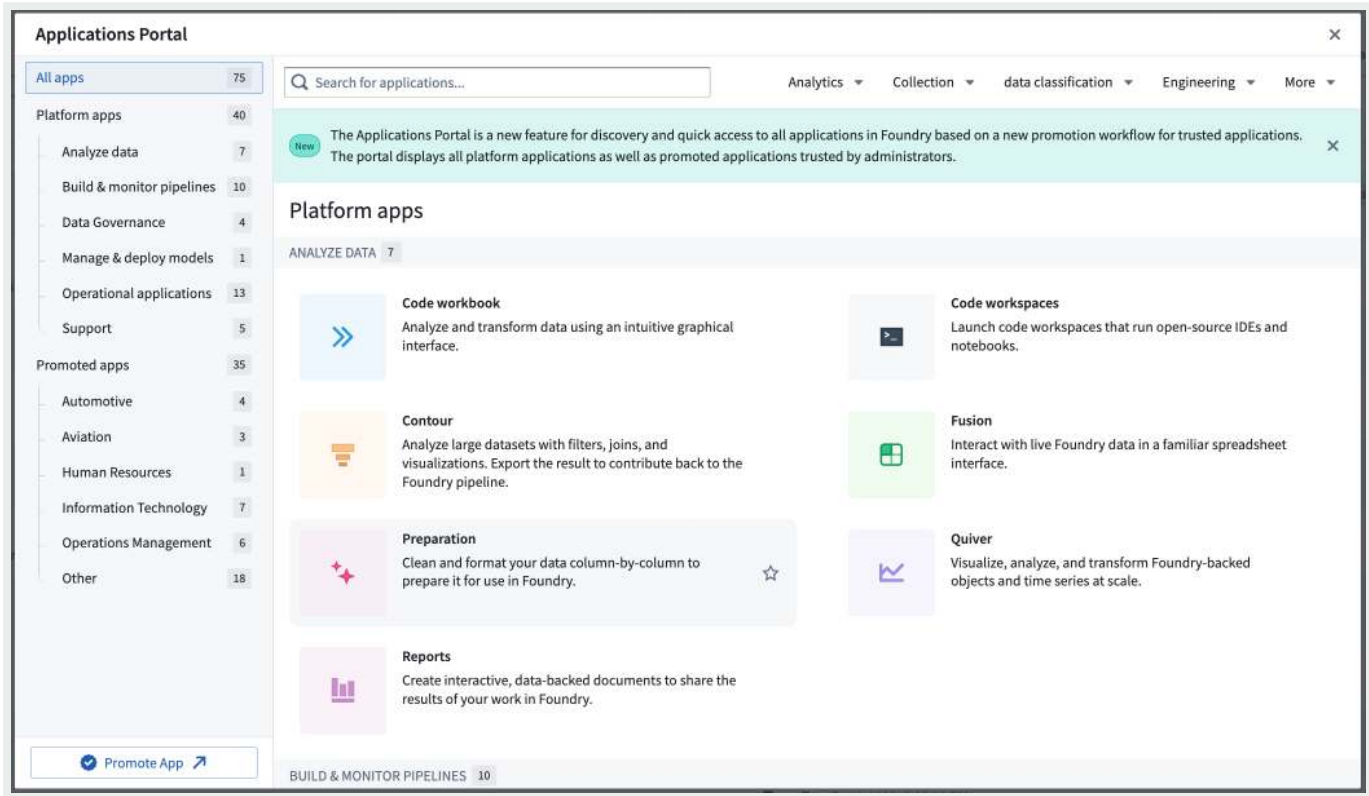

Favorites

The **Favorites** section of the sidebar keeps links to specific applications, resources, and individual objects for quick navigation. Use `Ctrl + Click` on Windows or `Cmd + Click` on macOS to open a favorited resource in a new browser tab.


When you first use the platform, your **Favorites** section is empty and only **Applications** will show in the sidebar. Hover over the **Applications** header and select **View all** to see all the different applications in the platform.

API Reference ↗

Send feedback

APPS · [View all](#)

Your favorited apps will appear here.

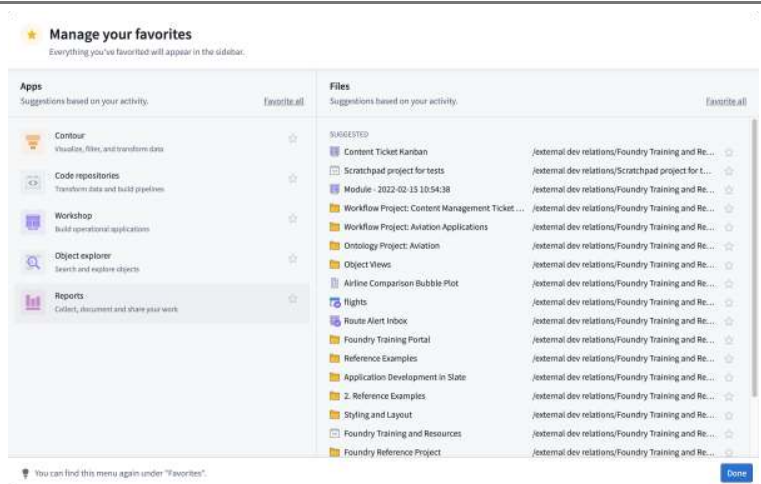

In this view, you will see suggested applications and resources based on your recent usage. We will cover which applications we recommend based on your role later in this guide. To learn more, consider looking at the application reference.

Promoted applications

From the Applications portal, you can pin useful applications to mark them as "promoted" for easier access on screen. From the portal, find your desired application and select the star icon on the portal (see left), or find the **Promoted apps** heading on the left sidebar and use the **✓ Add** option. Promoted apps appear under a dedicated section for quick access (see right).

Promoted apps

AUTOMOTIVE 4



Aircraft Maintenance Inbox ★

Inbox of maintenance events of active aircrafts, updates daily with data from the entire fleet.

By example-group

API Reference ↗

PLATFORM APPS · [View all](#)

- Object explorer
- Workshop

PROMOTED APPS · [View all](#)


- Aircraft Maintenance...** ★
- Alert Investigator

PROJECTS & FILES · [View all](#)

- Flight Alert management
- flight
- aircraft

OBJECTS · [View all](#)

- John F Kennedy Internati...

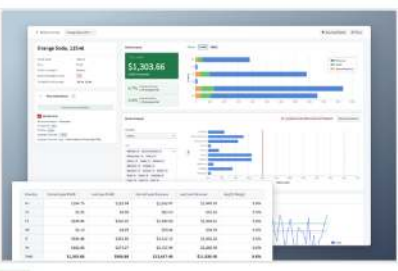

Aircraft Maintenance Inbox



Inbox of maintenance events of active aircrafts, updates daily with data from the entire fleet.

By example-group

Send feedback

Favorites


You can add and remove favorites with the star icon while navigating the folder structure or from within an open resource in a Palantir platform application.



Think of favorites as shortcuts that you can add and remove to keep frequently used resources close at hand.

Favorite objects, object types, and object type groups

Object Explorer is an application you can use to explore objects and links in the platform. When you navigate to an individual object view, you can select the star next to its title to save it as a favorite. This will add the object to your sidebar.



Support

Palantir has a wide range of capabilities, features, and components available for your use cases and workflows. To help you understand how the platform can best serve your needs, the [API Reference](#) is a starting point for learning more and getting answers to your questions. From here, you can access:

[Send feedback](#)

- **Ask AIP Assist:** Ask AIP questions.

- **Training:** Learn about the platform through the Training application, in conjunction with the [Palantir Learning portal ↗](#).
- **Explore Examples:** Find motivation from an existing use case solution.
- **Platform documentation:** Review documentation.
- **Report issue:** Submit a platform issue to the Issues application.
- **View support tickets:** View existing tickets.
- **Platform updates:** In-platform announcements and release notes.
- **Status page:** Access your Palantir platform's status page (where enabled).
- **About:** License information.

The [Palantir Customer Success Services team ↗](#) offers support, training, and consultation services to help you and your organization get the most out of the platform. If included in your agreement, you can contact the team with questions using the **Report issue** option to create a support ticket in the **Issues** application.

[Review the documentation on getting help.](#)

Account

Select **Account** in the Account panel to bring up your account overview. Here, you can select your name to see your **User ID** and permission **Groups**, navigate to **Settings** to edit your user and platform settings, change platform language, log out, and more.

You can customize your profile with a profile image and additional information to be stored in the platform for viewing by users in your organization. This information will appear when other users hover over your name in Projects and resources. Adding distinguishing information is helpful for operational workflows that rely on assigning work or sharing resources, especially in cases where you share the same name with another coworker.

Within **Settings**, the **Notifications** section is a control center for changing notification delivery settings.

Other workspaces

[API Reference ↗](#)

The main platform workspace is defined by the Workspace sidebar that you are currently exploring. You can access other workspaces by selecting **Open other workspaces**.

[Send feedback](#)

Control Panel

Administrators can access the **Control Panel** workspace for managing an enrollment. See the [Administration documentation](#) for further resources.

Carbon Workspaces

Application builders can use **Carbon** to create curated, custom workspaces for their end users. A wide range of applications can be combined to provide a tailored experience.

Getting started / Projects and resources

Projects and resources

Projects and resources are the building blocks of the Palantir platform, powered by the [Compass application](#).

Resources

Working in the platform often involves creating **resources**. These include datasets which are the outputs of a data connection or a transform, or manually uploaded data, and the artifacts from various platform applications like repositories, analyses, reports, or applications.

A *resource* is analogous to a *file* in a traditional system. In the Palantir platform, we use the term "resource" to avoid confusion, as some resources, such as a dataset or a code repository, can contain files within them.

While each resource type opens in a different platform application, resources share some common information. Some examples include who last updated a resource and when; which users have access at different levels; features like leaving comments and marking favorites; and interactions like moving, sharing, and trashing. Additionally, each resource has a unique identifier called a resource identifier, or RID, which is standardized across applications.

Projects

[API Reference ↗](#) **Projects**, which form boundaries between groups of related resources and features to enable collaboration. These features include [Send feedback](#) for access the project resources; showing you the latest project about usage; and curating project metadata like documentation, key resources, and data

health. Each project has a list of users or groups who have access to the project and are assigned **Viewer**, **Editor**, or **Owner** permissions on project resources. Within projects, resources can be organized into **folders** to provide further structure and keep things clean.

In addition to projects created for collaboration, every user has a personal project. You can access your Project by navigating to **Files** from the workspace navigation sidebar and then selecting **Projects**. As you start to use applications, resources you create will appear in your personal Project by default.

Learn more

You can learn more about how to manage your Foundry resources, upload data, and navigate projects by reviewing the [documentation for the Compass application](#).

PREVIOUS

← [Orientation and navigation](#)

NEXT

[Authentication](#) →

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement](#) ↗

[Privacy Statement](#) ↗

[Terms of Use](#) ↗

—[Cookies Settings](#)

[API Reference](#) ↗

[Send feedback](#)

Getting started / Authentication

Authentication

There are two options for authentication on the Palantir platform. Enrollment administrators can integrate an existing identity provider, or you can use Palantir's self-service passwordless identity provider for AIP Developer Tier and AIP Bootcamp enrollments.

[Learn more about logging in to a Palantir enrollment.](#)

Your own identity provider

The Palantir platform can integrate seamlessly with your existing identity provider, allowing full end-to-end access administration and management through your existing system. Review the [administration documentation](#) for detailed instructions on how to configure your identity provider for use with the Palantir platform.

Palantir self-service user directory

In some scenarios, your enrollment may be automatically configured with a built-in identity provider. Palantir's self-service user directory is **passwordless**, leveraging FIDO2 passkeys to offer unparalleled security and a seamless user experience.

If you signed up for a new enrollment with the Palantir self-service user directory, you will receive an email with the subject "Set up your Palantir account and log in" shortly after signing up. After [completing the instructions to set up your account](#), you can invite additional users to your enrollment in Control Panel by navigating to **Authentication > API Reference ↗ user directory**. Then, select **Manage users**.

When you end that you configure more than one [enrollment administrator](#) account recovery as a backup.

Send feedback

What are passkeys?

FIDO2 (Fast IDentity Online) passkeys are a passwordless login method that use cryptography and a device's built-in security features, such as facial recognition, to verify your identity. A passkey is not the same as a password, and you do not need to remember it or enter it into a login form. Instead, your device will verify your identity using security features such as biometrics, and provide a private cryptographic key to authenticate you, allowing you to log in. Passkeys eliminate the need to remember complex passwords and allow you to sign in with your fingerprint, face scan, security key, or password manager.

How do passkeys work?

A FIDO2 passkey is a physical security key or a platform authenticator, such as a biometric device or a smartphone, that can be used for passwordless authentication. Devices such as smartphones generate a unique pair of public and private keys for each service or application. The public key is registered with the service, and the private key remains securely stored on the device.

When you use a FIDO2 passkey for authentication, the service will send a challenge to your device. The device will sign the challenge using the private key and send the signed response back to the service. The service then verifies the response using the public key to confirm your identity.

Passkeys provide several benefits:

- **Strong security:** Public-key cryptography provides a high level of security, and since the private key never leaves the device, it is less vulnerable to attacks.
- **Passwordless authentication:** FIDO2 passkeys eliminate the need for passwords, making authentication more convenient and reducing the risk of phishing and other password-related attacks.
- **Privacy:** The unique key pairs generated for each service ensure that your authentication information cannot be used to track your activities across different services.
- **Ease of use:** Passkeys provide a simple, user-friendly authentication experience that requires a single action, such as inserting the security key or using a biometric fingerprint or face scan.

API Reference ↗

Send feedback

For detailed instructions on logging in with a passkey, review the [login instructions](#).

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

— [Cookies Settings](#)

[API Reference ↗](#)

[Send feedback](#)

Getting started / Delivering a use case

Delivering a use case

To create value for your organization using the Palantir platform, you need to work across the platform to build tools that support operational decision-making processes. A **use case** is a time-bound effort by a dedicated team to support a specific decision-making process. Use cases are central to the delivery of new capabilities on the platform for a set of users.

Examples of use cases

Use cases in the Palantir platform can involve a wide range of different activities and workflows, such as:

- Generating, investigating, and resolving alerts related to important operational processes.
- Optimizing inventory across a network of your facilities to improve resilience and mitigate supply chain uncertainty.
- Helping you make decisions about how to optimize the allocation of salespeople to all the different regions you serve.

Use cases require a structured and thoughtful approach to building in the platform along with gaining an understanding of some new ideas and terminology. You can find all the details of our solution design methodology as well as case studies and reference architectures in the [use case lifecycle](#) section.

A data-driven mindset

API Reference ↗

In a world where data scientists, quality analysts, assembly line
e use data as their daily communication language. Palantir

Send feedback

communication language by:

- Maintaining data lineage and attribution so people can trust what they discover and learn.
- Meeting users where they are, regardless of technical ability or experience, so everyone can bring data into their daily work.

This vision of collaboration is the driving force behind the Palantir platform.

The Palantir platform was built to create **data-driven loops** across an organization, in sync with your colleagues and collaborators: use data to make a decision, capture the decision that was made, and then use data to assess the decision's impact over time. Rather than relying on emailed spreadsheets and static analyses, you and your colleagues can collaborate directly on data in real time.

Project success on the Palantir platform involves creativity and thoughtfulness. There are often several solutions to any given analytical question, organizational workflow, or operational need. To choose the right path, you will need to balance three factors: the desired outcome, the available data, and platform tools.

Outcome

As you break down your project, it's more important to think about the outcome rather than the method you use to get there. For example, instead of starting with a need to build a sales dashboard, seek to understand what decisions and outcomes your work might enable. For example, is the outcome about making decisions on time and resource allocation to different sales regions, or something else?

This level of understanding might involve more work at the start of your project, especially if you are building a tool, report, or analysis for someone else to use. Consider an outcome-oriented framing to help you move towards a realistic goal.

Flexibility and adaptation can help ensure a successful Palantir project. Identifying a clear, outcome-oriented goal makes it easier to break your project into small, logical steps. This position is an important skill, as projects will often require multiple sources of data and several platform tools working together.

[API Reference](#)

[Send feedback](#)

Data

Figuring out the right data to back your project can be a daunting task. However, if you have an outcome-oriented framing and decompose your project into smaller steps, it's easier to work backwards from that outcome and identify the necessary data.

If your organization has been using the Palantir platform for a while, the data you need may already be in the platform. Try exploring datasets curated in the [Data Catalog](#) or objects and links in [Object Explorer](#). From our outcome example, we might identify that we need data on our sales force, sales territories, products, and individual sales. Each of these objects should have a primary representation in the Ontology.

If you are unable to identify the key dataset for each type of data you need, contact your platform administrator. Sometimes, it is necessary to expand the Ontology to include new organizational objects or to add new properties to those that already exist. As we will discuss later, you can use the tools in the data integration layer to connect external data sources and bring new data into the Palantir platform.

Tools

Each application is designed to operate as part of the entire platform. It will take time to familiarize yourself with the different capabilities in the platform and which tools are best for a given job.

Once you understand the outcomes of your project and the necessary data, it's easier to map each step to a particular tool. For instance, suppose that in your project you recognize that one sub-project is to generate new sales metrics for each region. This sub-project creates several additional steps:

- Identify the key relevant metrics
- Source the data
- Develop logic to transform the data
- Develop logic to aggregate the data into the metrics

[API Reference](#) ↗ or consumption by the sales team

Each of these steps will map to different tools in the platform, and then as your project matures. For instance, you might start by prototyping transforms and metrics

[Send feedback](#)

in **Contour**, an application for point-and-click analysis and data transformation. Contour makes it easy to understand the shape of your data and generate charts or metrics. You can add these metrics to a **dashboard** and create a quick prototype for the sales team to provide feedback. This could be a great end point for this project: a few well crafted dashboards that provide new insights to drive decisions for the sales resource allocation process.

For larger projects or those focused on production usage you can convert your logic to a pipeline in **Code Repositories**. There, you can collaborate with other technical users and use robust platform tools to schedule your data to update regularly. To create a more tailored user experience, you can set up **Object Views** or build a custom application in **Workshop** or **Slate** to enable the sales team to not only view data in dashboards, but also capture their decisions back into the system.

While many projects in the platform will not need this level of complexity, it is useful to understand how framing and decomposing your project will help you identify the data and tools you need to succeed.

Application reference

You can interact with the Palantir platform using **applications** accessible via the [sidebar](#). This page provides a reference for the range of applications available and describes when you may want to use each one.

Data connectivity and integration

Data connectivity and integration in the Palantir platform goes beyond traditional ETL/ELT solutions by offering a comprehensive suite of tools designed to enhance data team capabilities and reduce integration costs over time. Foundry serves as a robust data integration backbone for complex environments, providing an extensible framework that connects to various source systems and supports diverse data transfer methods. With integrated data transformation, management, and pipeline capabilities, Foundry ensures secure, scalable, and high-quality data delivery for critical operations.

Application	Description	Use
Data Lineage	Data Lineage shows a graph of how different resources interacts with and flows through the platform.	Explore the origins or downstream usage of any data or resource in the Palantir platform.
Pipeline Builder	Pipeline Builder creates end-to-end pipelines from data sources to final outputs using LLMs and other built-in data transformations.	Integrate data towards analysis and application building with batch and streaming pipelines.
Code Repositories	Code Repositories is a web-based code authoring	Create data pipelines or write Functions in

API Reference ↗



Send feedback

Application	Description	Use
	environment with support for versioning and collaboration.	
Dataset Preview	Dataset Preview shows the contents and history of a dataset.	Browse a dataset and understand its history and other metadata.
Data Health	Data Health lets you define health checks to ensure datasets are high-quality.	Add or monitor health checks on datasets.
Data Connection	Data Connection allows you to connect to data sources and sync data into the Palantir platform.	Connect to organizational data sources or sync new datasets into the Palantir platform.
HyperAuto (SDDI)	HyperAuto generates end-to-end data pipelines on top of common ERP systems.	Generate an Ontology from enterprise systems without needing to develop pipelines manually.
Linter	Linter analyzes the state of your enrollment to identify anti-patterns and offers recommendations for optimizing resources, enhancing cost-efficiency, and improving pipeline stability and resilience.	Identify the highest impact recommendations, which can then be assigned to users for action using guided or automated workflows. Periodically review the expected impact using the impact summary feature.

[1] Code Workbook or Code Workspaces may be more suitable for certain data science workflows. [Learn more about the difference between Code Workbook, Code Workspaces, and Code Repositories.](#)

[2] Pipeline Builder may be a better fit if you are a less-technical user.

Model connectivity and development

Model development and development involve creating and integrating machine learning models that can be utilized across data pipelines, Ontology, and application layers to support diverse use cases. Models can be developed within the platform or imported from external environments, and once integrated, they benefit from

API Reference ↗

Send feedback

platform features like inference, deployment, governance, and ML Ops. The platform ensures that every step of model development and deployment adheres to stringent standards for lineage, security, versioning, and auditing, enabling robust operationalization and continuous feedback loops for model improvement.

Application	Description	Use
Model Assets	Model Assets enable integration of many model types into the Palantir platform.	Train models, and connect to externally hosted models in the Palantir platform.
Modeling Objectives	A modeling objective allows organizational stakeholders and model developers to collaborate on and deploy machine learning models.	Submit models; discuss modeling objectives, and deploy models into production.

Ontology building

Ontology building in the Palantir platform involves creating an operational layer that maps datasets and models to their real-world counterparts, serving as a digital twin of the organization with both semantic and kinetic elements. By defining object types, link types, action types, and functions, the Ontology allows for robust end-user workflows, comprehensive metadata management, and dynamic security and governance. This integration empowers organizations to enhance decision-making at scale through Palantir's analytical and operational tools, enabling efficient data exploration, analysis, and application development.

Application	Description	Use
Ontology Manager	Ontology Manager enables you to define your organization's Ontology.	Create new ontology resources such as objects, links or action types.
Object Views	Object Views represent the canonical way to display an object type.	Define user interfaces that can be used across use cases.
Object Explorer	Object Explorer allows you to visualize your Ontology.	Search, explore, and analyze your ontology.

API Reference ↗

Send feedback

Application	Description	Use
Vertex	Vertex enables you to explore object relationships and run simulations.	Create system graphs of related objects and run end-to-end simulations using models.
Machinery	Machinery is a framework that enables the understanding and management of processes by identifying unwanted behaviors and facilitating improvements, while leveraging AIP's LLM capabilities to orchestrate multi-step automations in AIP workflows.	Use to optimize processes across various domains, such as procurement, sales, and customer service, by resolving inefficiencies, managing AI-driven workflows, mining event logs, monitoring performance metrics, and enabling real-time human intervention.
Foundry Rules	Foundry Rules enables users to actively manage complex business logic in the platform.	Create and apply rules to datasets, objects, and time series for a variety of use cases.
Map	Map provides powerful geospatial and temporal analysis and visualization capabilities.	Integrate data from across the platform into a cohesive geospatial experience.
Dynamic scheduling	Dynamic scheduling capabilities allow builders to create tailored scheduling and resource allocation workflows that accommodate the complex needs of their organization by leveraging the Ontology and modeling resource constraints and interdependencies.	Optimize employee schedules, enhance resiliency in transportation and logistics, and improve manufacturing output by providing interactive scheduling tools, real-time resolutions, and machine learning-backed recommendations.

Developer toolchain

The Palantir platform's developer toolchain provides a comprehensive set of tools, including [API Reference](#) development environments, and Compute Modules, enabling developers to build applications that leverage the Ontology's full capabilities. The Ontology SDK (OSDK) supports Python, Java, and TypeScript, allowing developers to interact with Ontology data and execute AIP Logic functions, while APIs facilitate programmatic

Send feedback

management of platform access and data. Additionally, integrated development environments like VS Code and Compute Modules allow for scalable, containerized deployments, enhancing the development and integration of third-party applications and workflows.

Application	Description	Use
Ontology SDK	The Ontology Software Development Kit (SDK) provides developers with direct access to the full capabilities of the Ontology from their development environment, supporting multiple languages and enabling seamless integration with Palantir APIs for application creation and management.	Accelerate application development by providing easy access to Ontology APIs, ensuring type-safety, reducing maintenance, and enhancing security, allowing developers to efficiently build applications powered by the Palantir platform.
Compute modules [Beta]	Compute modules allow you to deploy interactive containers on the Palantir platform, enabling you to run your existing code base, regardless of language, as serverless Docker images that can scale horizontally based on load in applications like Workshop and Slate.	Use compute modules to interact with code or third-party code by enabling container-backed functions, data integration, and hosting models, while integrating existing code bases in any language with dynamic scaling and connectivity.
Code Workspaces [3]	Code Workspaces brings the JupyterLab® and RStudio® Workbench third-party IDEs to Palantir.	Accelerate data science, statistics, and code-based workflows with industry-standard tools integrated into the Palantir platform.
VS Code workspaces API Reference ↗ 	VS Code Workspaces integration on the Palantir platform uses the open-source VS Code to provide an IDE for writing and collaborating on production-	Efficiently develop code by accessing a pre-configured VS Code environment directly from within the Palantir platform, leveraging features like code integration, debugging support,

Send feedback

Application	Description	Use
	ready code, with native support for Python transforms and OSDK React applications.	and automatic setup of Python environments, and get access to a pre-configured AI Coding Assistant which understands Foundry and its APIs.
Palantir extension for Visual Studio Code	The Palantir extension for Visual Studio Code integrates features from Code Repositories into VS Code, with a current focus on supporting Python transforms, providing a seamless development experience within the Palantir ecosystem.	Enhance the coding workflow by accessing Palantir repositories directly in VS Code, enabling features like authoring Python transforms and running Builds in Foundry.
Palantir MCP	Palantir MCP enables external AI IDEs and agents to connect to the Palantir platform and gain context on your Ontology and Foundry tools.	Use Palantir MCP to let external AI systems query data, access documentation, and build applications more efficiently.
Ontology MCP (OMCP)	Ontology MCP (OMCP) exposes application ontology resources as MCP tools, enabling external AI agents to read objects, execute actions, and query ontology data through controlled access.	Use Ontology MCP to enable external AI agents to safely interact with production ontology data through predefined actions and application restrictions.

Use case development

The Palantir platform facilitates use case development by providing a suite of tools, such as application and workflow building tools, integrated analytics, and developer tools, all built on Foundry's data and data management features. These tools allow teams to enhance operational capabilities, rather than dealing with infrastructure complexities, by continuously enriching a consistent set of data and

API Reference ↗

Send feedback

Ontology. This approach ensures that knowledge compounds as operational workflows are expanded across the enterprise, fostering scalable and efficient development.

Application building

Application	Description	Use
Workshop [1]	Workshop enables the creation of interactive and high-quality applications for end users.	A point-and-click application builder that support pro-code customizations.
Slate [2]	Slate is an extensible application development framework.	Create a customized application using HTML, CSS, and JavaScript.
OSDK React applications	OSDK React applications allow developers to create fully customizable user interfaces using React, powered by the Ontology Software Development Kit, enabling seamless integration with Foundry as the backend for high-scale queries and secure application development.	Rapidly build and customize user interfaces by leveraging React's developer-friendly environment and Palantir's robust backend capabilities, ensuring efficient and secure application development in an organization.
Pilot	Pilot is an AI-powered application builder that creates applications from natural language prompts, automatically generating ontology entities, design specifications, frontend code, and seed data.	Describe the application you want to build in natural language and deploy production-grade hosted applications using OSDK and React through Developer Console.

[1] Slate may be a better fit if heavy customization is needed for your application.

[2] Workshop is a better fit for applications of low to moderate complexity, and generally poses a lower maintenance cost over time.

API Reference ↗

Workflow building

Send feedback

Application	Description	Use
Automate	Automate allows end users and application builders to see when data changes in the Palantir Ontology.	Configure automations to send notifications or submit Actions when certain conditions are met.
Solution Designer	Solution Designer is an interactive tool for crafting architectural representations of solutions on the Palantir platform, offering integration points, links to resources, and access to documentation and best practices.	Develop and refine solution architectures by exploring industry patterns, creating and comparing proposals, and facilitating project collaboration and knowledge transfer within an organization.
Carbon	Carbon lets you combine apps and other resources in the platform to create curated workspaces for end users.	Deliver a use case to end users that combines multiple applications or dashboards.

Analytics

Palantir offers comprehensive analytical capabilities for all organizational users, integrating seamlessly with the Foundry Ontology to support both point-and-click and code-based analyses, such as table-based, geospatial, and temporal analysis. Its core applications—Contour, Quiver, Code Workbook, Notepad, and Fusion—facilitate diverse analytical tasks, from top-down data exploration and multimodal charting to machine learning and spreadsheet-driven computations, while enabling data to be written back into the Ontology for enriched insights. Additionally, Foundry supports deep integration with existing analytical tools through out-of-the-box connectors, REST APIs, ODBC/JDBC drivers, and SDKs for Python and R, enhancing connectivity with platforms like Power BI, Tableau, and Excel.

Learn more about [analytical applications and the available types of analysis in the platform](#).

API Reference ↗	Description	Use
Contour [1]	Contour enables high-scale, top-down analysis on datasets.	To analyze tabular and-click fashion

Send feedback

Application	Description	Use
Quiver [2]	Quiver enables analysis on object data and time series.	Analyze Ontology data and time series in a point-and-click fashion.
Insight [3]	Insight enables point-and-click analysis on Ontology objects with step-by-step analysis paths.	Perform analysis on Ontology data with link traversal, aggregations, visualizations, maps, SQL queries, and data writeback.
Code Workbook [Legacy] [4]	Code Workbook is a web-based environment for code-based analysis.	Analyze datasets in code, conduct data science workflows, or develop models.
Notepad	Notepad is an ontology-aware collaborative rich-text editor and document templating system.	Create rich-text documents with data and visualizations from Foundry applications. Use templates to add automated reporting to your workflows.
Fusion	Fusion is a bidirectional spreadsheet application for the Palantir platform.	Sync data from an editable spreadsheet to a dataset, or query and display data from the ontology in a spreadsheet.

[1] Quiver or Insight may be a better fit for some workflows. [Learn more](#).

[2] Contour may be a better fit for some workflows. [Learn more](#).

[3] Insight is suited for analysis on known Ontology data with an intuitive workflow; Object Explorer is better for discovery and searching across unfamiliar Ontology data.

[4] Code Repositories and Pipeline Builder are recommended for developing production data pipelines. Learn more about [Pipeline Builder](#) and [the difference between Code Workbook, Code Workspaces, and Code Repositories](#).

Product delivery

Foundry DevOps accelerates the development and deployment of data-driven workflows by packaging [API Reference](#)—such as ontologies, AI models, and pipelines—into flexible products, with automated version and dependency management ensuring seamless scalability. Key features include tagging product versions with release channels, managing

[Send feedback](#)

installations, and supporting use cases like product distribution, ecosystem building, release management, and bootstrapping new applications.

Marketplace further enhances product delivery by offering a storefront for easy discoverability and installation of published data products, complete with guided installation and related product recommendations.

Application	Description	Use
DevOps	Create Foundry products for release management or workflow distribution.	Create Foundry products, manage installations, and release versions via release channels.
Marketplace	Discover and install Foundry products.	Customize installations of Foundry products, Examples, and workflow starter packs. Manage installations and configure upgrades to ensure installations stay up-to-date with minimal effort.

Security and governance

Palantir’s platform is designed with security and governance as foundational pillars. This approach provides robust protection for sensitive data across industries such as healthcare, finance, and government. Moreover, Palantir's solutions are aligned with global regulatory frameworks like HIPAA, GDPR, and ITAR, ensuring comprehensive compliance and safeguarding of sensitive information.

The platform enforces strict access controls through a sophisticated security model that includes mandatory and discretionary permissions, granular access controls, and mandatory encryption, ensuring users only access authorized data. Palantir's enterprise security features include strong authentication measures, comprehensive audit logging, and extensive information governance.

Application	Description	Use
API Reference ↗	The Approvals application manages the workflow of requesting, approving, and invoking changes in	Handle change requests in the Palantir p and approving changes, tracking

Send feedback

Application	Description	Use
	Foundry, consolidating compliance, governance, and peer-review processes for efficient management of tasks like project access requests and ontology proposals.	request status, and ensuring compliance with governance policies, all while staying informed through notifications about request progress and required actions.
Checkpoint	The Checkpoints tool is a data governance application that prompts users for justifications during potentially sensitive interactions, ensuring adherence to data protection, governance, and compliance policies through real-time review and auditability.	Customize prompts and gather justifications for user interactions, and review justifications in real-time and ensure compliance with organizational policies, while gaining insights into user behavior across various workflows.
Cipher	Cipher is a service that enables users to obfuscate data through cryptographic operations like encryption, decryption, and hashing. It provides easy-to-use tooling to manage algorithms and keys via Channels and Licenses, enabling the secure and accessible deployment of privacy-enhancing tools.	Apply cryptographic operations and manage permissions in workflows, enhancing privacy and governance by securely encrypting, decrypting, or hashing data within the Palantir platform's operational environment.
Sensitive Data Scanner	Sensitive Data Scanner (SDS) is a tool that enables organizations to discover and secure sensitive information within Foundry by specifying patterns of sensitive data to identify. It further allows organizations to automate appropriate actions to manage such data once detected, thereby reinforcing compliance with global data protection regulations.	Conduct singular or recurring scans across datasets to allow for enhanced control over sensitive data management and ensure compliance with privacy laws by automating the identification and handling of sensitive information.

API Reference ↗



Send feedback

Application	Description	Use
Data Lifetime [Beta]	Data Lifetime is a service that enables the application of lineage-aware retention policies on datasets in the Palantir platform. This service governs the deletion of transactions and manages their downstream impacts, reinforcing compliance with the highest industry standards.	Set and manage retention policies that control the deletion of datasets and their downstream derivatives, ensuring comprehensive data removal and compliance with regulatory requirements by leveraging Foundry's data lineage capabilities.

Management and enablement

Management and enablement capabilities are centralized within the Control Panel, offering a comprehensive suite for governance, resource management, and security administration, which supports enterprise data architectures like data mesh and data fabric. Control Panel allows administrators to configure and manage enrollments, map administrative functions to existing governance systems, and manage access through identity providers using SAML 2.0, ensuring seamless integration and security as the platform scales. Additionally, resource management tools provide granular insights into resource utilization, while customizable platform experiences ensure alignment with organizational branding and user-specific needs.

Application	Description	Use
In-platform custom documentation	Custom documentation is a feature that allows users to create, publish, and manage documentation hosted on the Palantir platform, which can be indexed by AIP Assist to enhance query responses using your organization's documentation.	Develop and manage specific internal documentation within your organization, making it accessible through various platform entry points.
API Reference ↗ ☰	Walkthroughs is a tool that allows users to create custom, step-by-step tutorials on the	Design and share interactive tutorials guided learning across

Send feedback

Application	Description	Use
	Palantir platform, guiding end-users through applications or workflows with tailored, on-demand resources.	multiple applications, incorporating rich media and progress tracking to enhance user engagement and support organizational workflows.

Artificial Intelligence Platform (AIP) application reference

See the [AIP application reference](#) for a list of AIP applications.

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

—[Cookies Settings](#)

API Reference ↗

Send feedback

Getting started / Next steps by user role

Next steps by user role

Now that you are oriented in the Palantir platform and understand its core concepts, you can explore the platform capabilities that are most relevant for your role.

The boundaries between roles in the Palantir platform can shift, and some responsibilities and workflows may not align perfectly into a single role. You may end up performing different roles; if your organization is just getting started with Palantir, or if you are working on a small implementation team, you may use many parts of the platform in your day-to-day work.

Alternatively, you can explore the Palantir platform by reviewing the [application reference](#), which provides a high-level overview of the major platform applications.

Standard user roles

With this in mind, the following roles are generally adopted at most organizations using Palantir. Below, we discuss these high-level roles and how each type of user can get started:

- [Data engineer](#)
- [Application builder](#)
- [Analyst](#)
- [Data scientist](#)
- [Platform administrator](#)
- [Data governance](#)

If you would like to get started right away, [jump into the Palantir platform](#).

API Reference ↗

Palantir's data integration layer provides the foundation for all the other work that happens in the platform. By building and maintaining data pipelines, data engineers produce datasets that are high-quality, relevant, and frequently updated to serve the needs of the organization. A wide variety of tools are available to maintain the durability of data pipelines over time, including programmatic health checks and transparency into the underlying computation.

The primary tools used by data engineers include [Pipeline Builder](#) and [Code Repositories](#) for authoring data pipelines, and [Data Lineage](#) for visualizing them end-to-end. Data engineers should also understand how to use [recommended health checks](#), [monitoring views](#), and lineage to operate pipelines after they are deployed. Data engineers will need to be familiar with the concept of data pipelines and develop an understanding of what makes for a high-quality pipeline in the platform.

[Learn more about data pipelines.](#)

Application builder

Palantir's Ontology and application building capabilities enable you to create tailored applications for end users. These end users are usually operators in an organization, making decisions that can be informed by data. Beyond just presenting data to users, you can use custom applications to capture information from users in the form of action types configured in the Ontology.

Application builders will need to be familiar with the Palantir [Ontology](#), which is usually the layer at which application builders collaborate with data engineers to establish a data foundation for workflow development. Builders can create and maintain their organization's Ontology in [Ontology Manager](#), then use [Workflow Lineage](#) to understand how objects, actions, functions, large language models (LLMs), and applications fit together.

To create and deliver applications, builders can use [Workshop](#) for point-and-click application building on top of the Ontology, extend Workshop with [custom widgets](#), or use [Pilot](#) to start from a natural language description. For code-first development, builders can use the [OSDK](#) and [OSDK React applications](#), manage application configuration and SDK g API Reference [per Console](#), write [Functions](#) for shared business logic, or build applications in [State](#). Builders can also create LLM-backed workflows with [AIP Logic](#) and trigger ontology-driven work with [Automate](#).

Send feedback

[Learn more about application building.](#)

Data scientist

The Palantir platform includes support for analyzing data using code and developing, evaluating, and deploying machine learning models. This functionality builds on top of the rigor of the data integration layer to provide lineage and reproducibility for models in the same way as datasets. The result is an environment where analytics and machine learning can build on high-quality data and shared modeling workflows.

In the Palantir platform, data scientists often use [Code Workbook](#), an application designed to enable code-based analysis and the development of machine learning models. Code Workbook enables you to write code in Python, R, and SQL to access, normalize, and analyze high-quality datasets prepared by data engineers. The resulting analyses and models can then be connected to [model integration](#), shared through [Model Catalog](#), evaluated with [AIP Evals](#), and integrated into the Ontology for use in applications and workflows.

As an alternative, data scientists can work in their preferred third-party IDEs with [Code Workspaces](#). Code Workspaces containers are integrated with the rest of the Palantir ecosystem to combine JupyterLab® and RStudio® Workbench IDEs with the security, branching, and resource management benefits of the Palantir platform.

Learn more about [model integration](#) and [code-based analysis](#).

Analyst

As Palantir can be used to build a secure and high-quality data foundation, analysts can find and explore data that is relevant to the questions they need to answer. A rich set of tools is available for analyzing data in a wide variety of formats—tabular, relational, temporal, geospatial, and more. Once your analysis yields insight, you can make it repeatable by creating [dashboards](#) or present your findings using [reporting](#) tools.

API Reference ↗ [Contour](#) to explore datasets in the platform and conduct open-ended analysis at high-scale, and use [Quiver](#) to analyze data in the Ontology and time series. Analysts can also use [AIP Analyst](#) to explore ontology-based

Send feedback

natural language. These applications support moving from ad-hoc analysis into dashboards, reports, or [Notepad](#) documents that share results with colleagues.

[Learn more about analytics.](#)

Platform administrator

Platform administrators can use Palantir's dedicated administrative tooling to configure the platform, manage and understand how it is being used, and ensure that the organization's data is being managed securely.

Platform administrators typically set up [authentication](#) to connect to an organization's identity provider, configure [application access](#), then set up [Data Connection](#) to enable data to flow into the platform. As use of the platform matures, administrators can use [Resource Management](#) to manage resource consumption, [Developer Console](#) to support custom application development, and [monitoring views](#) to help teams observe operational health. Administrators should also understand access considerations for [Palantir MCP](#) and [Ontology MCP](#) when those capabilities are enabled.

[Learn more about platform administration.](#)

Data governance

Palantir provides tools for securing data and providing transparency to data governance leads. These tools provide guarantees about how data is protected as it is transformed in the Palantir platform and used for user-facing applications. They also preserve the ability for you to introspect and validate who has access to what information.

Users in data governance roles should learn about the broad set of data security workflows in the platform, ranging from [securing a data foundation](#) to [protecting sensitive data](#). These capabilities are built on Palantir's data security concepts, namely [Projects](#) and [Markings](#). Governance leads should also understand [object permissioning](#), [application restrictions](#), [OSDK permissions](#), [Ontology MCP restrictions](#), and [Workflow Lineage security visibility](#).
w [API Reference ↗](#) are part of their organization's workflows.

[Learn more about data protection and governance.](#)

Send feedback

Jump into the platform

Now that you have learned how to navigate through the platform, start building by:

- Learning with the [Training application, a curated set of courses from learn.palantir.com](#).
- Using [Examples](#), a comprehensive library designed to facilitate learning and effective platform usage with reference examples, tutorials, and starter kits.

PREVIOUS
← Application reference

NEXT
Training application →

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

— [Cookies Settings](#)

API Reference ↗

Send feedback

Getting started / Training application

Start with Training and Palantir Learning portal

The Training application presents you a curated set of courses from [the Palantir Learning portal at learn.palantir.com ↗](#), and links to all in-platform and public material for learning how to use the Palantir platform.

API Reference ↗



Send feedback

Training

Welcome,

Learn Foundry and AIP with curated and personalized training material.

New to Foundry?
 Speedrun your first end-to-end workflow

Training tracks

Dive into training tracks to explore the courses, video tutorials, and reference use-cases most relevant to your work.

Application Developer

Application Developers in Foundry create operational applications on top of the Ontology using tools like Workshop and Quiver. By building business-oriented...

Frontend and OSDK Developer

Frontend & OSDK Developers leverage the Ontology Software Development Kit to get the full power of the Ontology directly in whatever custom frontend or...

Data Analyst

Data Analysts use Foundry to discover, join, analyze, and visualize data, from both tabular datasets and Ontology Objects. These are often key steps in...

Data Engineer

Data Engineers are responsible for making data assets useful, accessible, and reliable. They own ingesting data from various systems and transforming, cleaning, and...

AI Engineer

AI Engineers leverage the capabilities of Foundry and AIP to design, develop, and deploy sophisticated workflows using LLMs. Similar to Data Engineers, they...

Data Scientist

Data Scientists are technical individuals who utilize Foundry's modeling tools for the purposes of creating, evaluating, deploying and managing models. With...

Additional resources

Continue learning Foundry and AIP with resources provided by Palantir.

Platform documentation
 Official reference documentation of Foundry and AIP

Palantir Learn
 Public learning material provided by Palantir

Build with Foundry and AIP
 Reference examples and starter packs for Foundry and AIP

Solution designer
 Solution design application with a library of reference architecture diagrams

Developer videos
 Public videos from Palantir for developers in Foundry and AIP

Developer community
 Public forum for developers in Foundry and AIP

We also recommend a visit to learn.palantir.com for a variety of courses that can help you familiarize with the platform and in its usage.

API Reference
Training documents for your organization

[Send feedback](#)

The Training application allows you to surface Notepad documents with information about trainings relevant for your organization.

To surface Notepad documents with training material and instructions, [create a tag category](#) named `Training application`. Every Notepad document that is accessible by a user and tagged with a tag under the tag category `Training application` will be shown in the training application. You can freely name tags within the category which will be shown in-line to the link to the document.

Training documents


View documents with information about trainings relevant for your organization.

Name	Tags
 Get started with trainings	Getting started material

Getting started / Start with examples

Start with Examples

To get started on the Palantir platform, you can use Examples, an in-platform component of Build with AIP. Examples is a comprehensive library designed to facilitate learning and effective platform usage. Examples provides application builders and developers with reference examples, tutorials, and starter kits for quickly developing new applications.

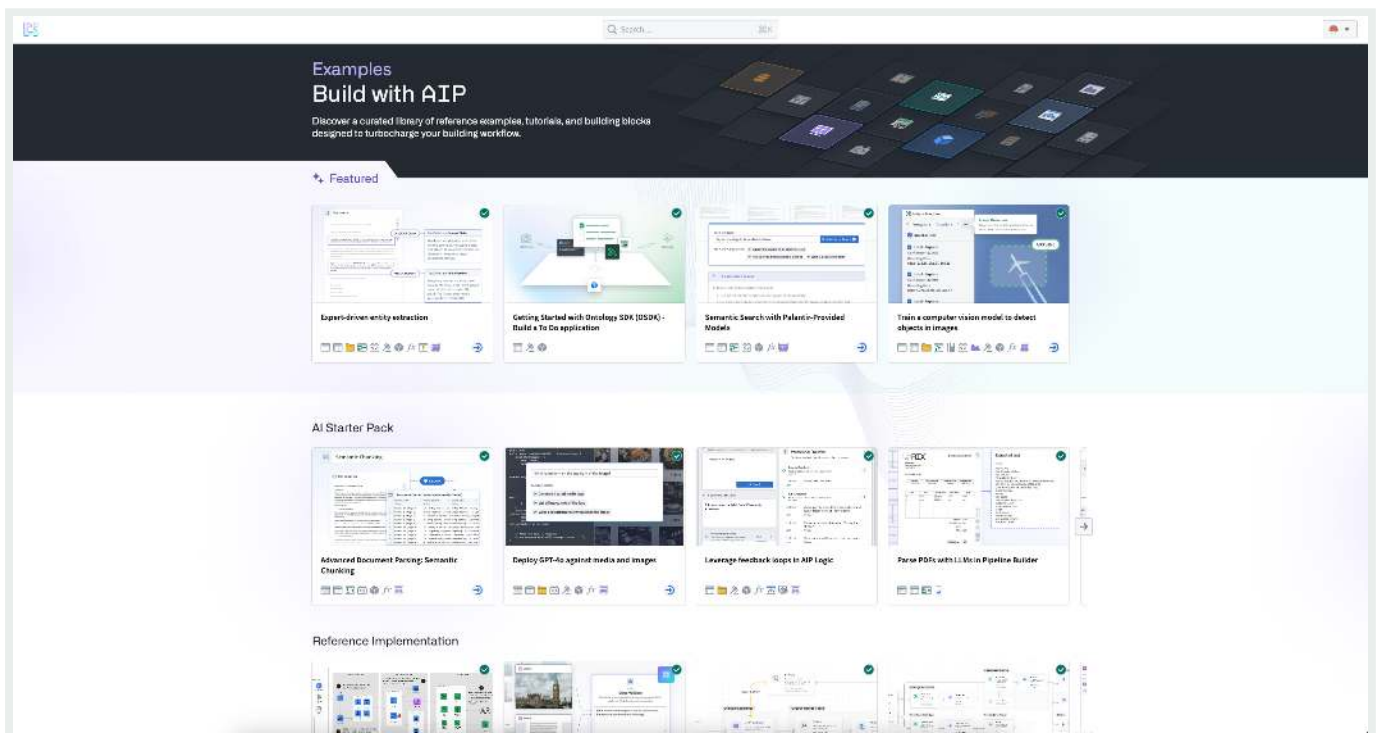

Key features

Examples is built with two features to support user learning:

API Reference ↗

☰

🔍

Bring your own data: Examples tagged with "Bring your own data" allows you to easily build complex workflows using your own data. Find the **Using your own data** example, click **Install**, then drag and drop from your desktop (or upload files) into Foundry).

Send feedback

Subject: Urgent Property Claim - Policy No. IN1223344

Dear DEF Insurance Claims Department,

I hope this message finds you well. I am writing to report an urgent property damage incident that took place on the evening of October 10, 2023, due to a severe storm.

During the storm, a large tree branch fell onto the roof of my house, causing substantial damage and trapping in a leak. The impact has compromised the roof structure, and water is now seeping into the attic and upper floors, raising significant concerns about further damage.

My insurance policy number is IN1223344. Given the urgency of the situation, I would appreciate your immediate guidance on how to proceed with this claim. I am prepared to provide any additional information or documentation necessary to expedite the process.

Thank you for your swift attention to this matter.

Best regards,
Michael Johnson

CAUSE OF CLAIM

Field Definition: **Cause of Claim**

The document describes an incident where a severe storm caused a large tree branch to fall onto the roof of the claimant's house, resulting in substantial damage.

POLICY NUMBER

Field Definition: **Policy Number**

The policy number is clearly stated twice in the email, once in the subject line and once in the body of the

Installed ✓

Expert-driven entity extraction

Take live entity extraction to the next level by defining complex hierarchical fields to extract from PDFs throu...




 Bring your own data

- **Walkthroughs:** Get a step-by-step walkthrough of how the specific workflow was made with AIP Assist.

[API Reference ↗](#)

[Send feedback](#)

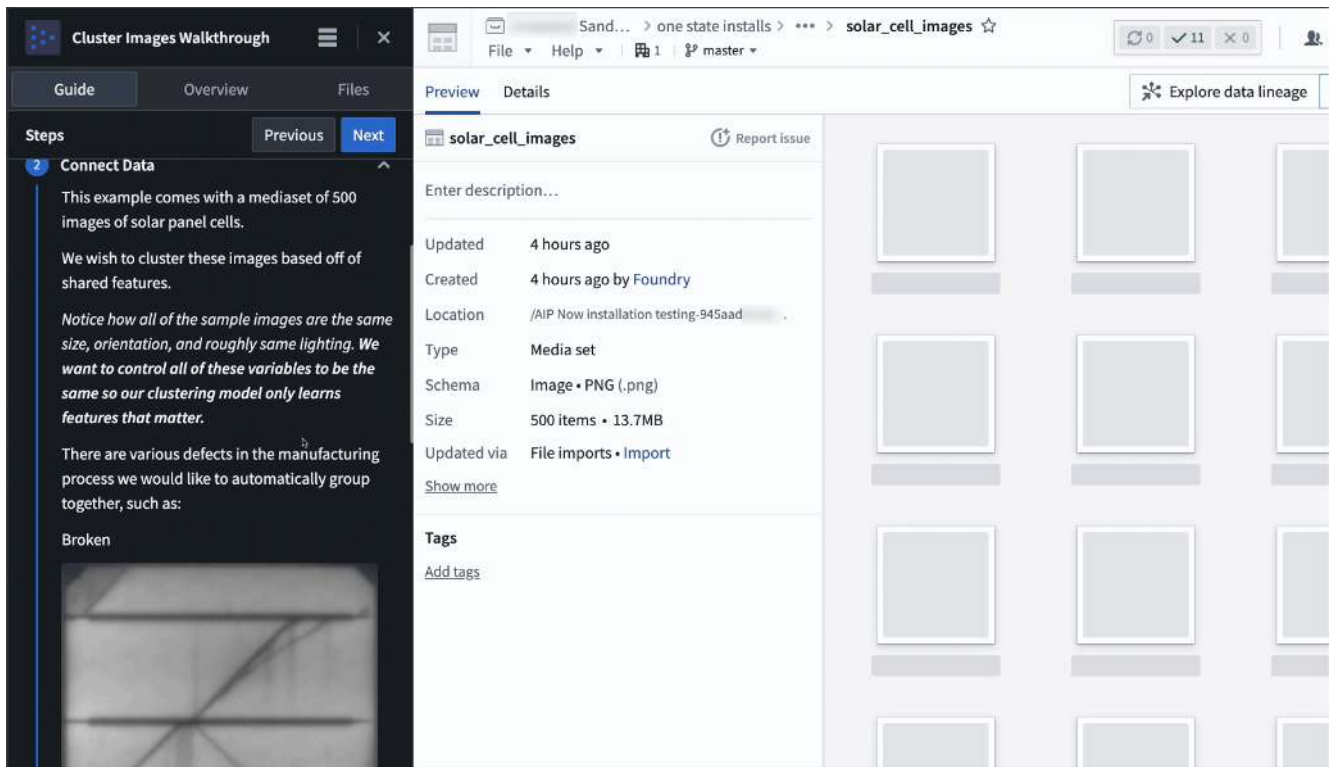

Access Examples

You can access Examples from the Workspace navigation bar on the left, then **Support > Explore Examples**. Additionally, you can explore application-specific examples directly from application splash pages.

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

[API Reference ↗](#)

Send feedback

Getting started / Foundry platform summary for LLMs

Foundry platform summary for LLMs

This page provides a summary of Palantir's Foundry platform for use with LLMs and AI agents, covering the platform's architecture, core terminology, and data integration patterns.

Select the copy icon in the top right corner of the code block below to copy the content to your clipboard. Next, paste the content into your AI agent's conversation window to provide it with helpful context about the Foundry platform. If your agent is configured with the [Palantir MCP](#), it can use the [search foundry documentation tool](#) to explore the documentation about topics covered in this summary.

i The summary below was generated by an LLM and has been reviewed by Palantir engineers to ensure its accuracy as a high-level explanation of the Foundry platform for use by LLMs and AI agents.

This content was last updated on Thursday, July 2, 2026.

```
1 # Palantir Foundry
2
3 > Palantir Foundry is an enterprise data operating system that enables
4
5 ## Platform Architecture
6
```



API Reference ↗

Enterprise Operating System



Send feedback

11 Palantir's standard architecture consists of three integrated platforms

```

12
13 - **Apollo:** The continuous delivery platform that manages infrastru
14 - **Foundry:** The foundational data operations platform providing core
15 - **AIP:** The generative AI platform providing secure LLM connectivity
16
17 These platforms work together to power mission-critical operations acro
18
19 **Forward Deployed Engineering:** Palantir's product development paradig
20
21 **Pursuing Alpha:** The goal of the platform is to deliver extreme diff
22
23 ### 1. Data Layer
24
25 Raw data is stored in **datasets**, which typically represent tabular d
26
27 ### 2. Ontology Layer (Object Layer)
28
29 The Ontology maps datasets and models to real-world concepts. It transf
30
31 The Ontology is not a semantic layer. The Ontology is designed to repre
32
33 The Ontology includes:
34 - **Object types:** Schema definitions for real-world entities or event
35 - **Link types:** Relationship definitions between object types
36 - **Action types:** Definitions for sets of changes users can make to o
37 - **Functions:** Server-side business logic that operates on the Ontolo
38 - **Interfaces:** Abstract types describing the shape and capabilities
39
40 ### Applications
41
42 Applications consume data from both layers to power operational workflo
43
44 ### Data Flow Summary
45
46 ```
47 Source Systems → Connectors → Datasets → Transforms → Clean Datasets
48                                     ↓
49                                     Ontology (Objects, Links)
50                                     ↓
51                                     Applications (Workshop, O
52                                     ↓
53                                     User Decisions → Actions
54 ```

```

API Reference ↗

Multimodal Data Plane (MMDP)

57

58 The Multimodal Data Plane (MMDP) is Palantir's open

59

Send feedback


```

60 - **Open data architecture:** Apache Iceberg as the primary table format
61 - **Multimodal data support:** Beyond tabular data, MMDP extends to media
62 - **Open compute architecture:** Autoscaling runtimes including Spark and
63 - **Compute Modules:** "Bring your own compute" capability for containerized
64 - **Model access:** Secure connectivity to commercial LLMs (OpenAI, Anthropic)
65
66 ## Core Terminology
67
68 ### Data Layer Terms
69
70 **Dataset:** A wrapper around a collection of files stored in Foundry.
71
72 **Transform:** Code that processes input datasets to produce output datasets.
73
74 **Pipeline Builder:** A point-and-click application for building data pipelines.
75
76 **Sync:** The process of bringing data from external source systems into Foundry.
77
78 **Connector:** A pre-built integration for connecting to external data sources.
79
80
81 **Listener:** An endpoint that enables external systems to push data into Foundry.
82
83 **Incremental pipeline / transform:** A pipeline or transform that processes data in chunks.
84
85 **Branch:** A version control concept allowing parallel development of pipelines.
86
87 ### Ontology Terms
88
89 **Object:** A single instance of an object type, representing a real-world entity.
90
91 **Object Type:** The schema definition of a real-world entity or event.
92
93 **Object Set:** A collection of objects, typically the result of a filter.
94
95 **Property:** The schema definition of a characteristic of a real-world entity.
96
97 **Primary Key:** The unique identifier for objects of a type. Maps to a database primary key.
98
99 **Link Type:** The schema definition for relationships between object types.
100
101 **Action Type:** A definition of changes or edits to objects, property values, or link types.
102
103 **Transaction:** A user-initiated transaction that modifies objects, property values, or link types.
104
105 **Interface:** An abstract type describing shared properties and methods.
106
107 **Materialization:** A dataset that combines data from input data sources.

```

API Reference ↗

Send feedback

```
108
109 ### Function Terms
110
111 **Function:** Server-side code (TypeScript or Python) that can read Ont
112
113 **Function-backed Action:** An action type whose logic is implemented b
114
115 **Function-backed Column:** A derived column in a Workshop Object Table
116
117 **Ontology Edits:** Modifications to objects, properties, and links per
118
119 ### Application Terms
120
121 **Workshop:** A low-code application builder for creating operational a
122
123 **Widget:** A UI component in Workshop (table, chart, map, form, button
124
125 **Event:** A configurable behavior in Workshop that is triggered by use
126
127 **Variable:** A typed value used to configure how data moves through a
128
129 **Slate:** An application framework that enables application developers
130
131 **OSDK (Ontology SDK):** Auto-generated SDKs (TypeScript, Python, Java,
132
133 **Custom Widget:** There are two approaches to extending Workshop with
134 1. **OSDK Custom Widget:** A React component built with OSDK that exten
135 2. **Custom Widget via iframe:** An external application embedded in Wo
136
137 ### AI Platform (AIP) Terms
138
139 **AIP:** Palantir's Artificial Intelligence Platform for building AI-po
140
141 **AIP Chatbot:** An interactive assistant built in AIP Chatbot Studio (
142
143 **AIP Logic:** A no-code development environment for building, testing,
144
145 **AIP Assist:** An in-platform LLM assistant for navigating and underst
146
147 **AIP Observability:** A set of capabilities in Workflow Lineage that p
148
149 **Retrieval Context:** Documents, object data, or function outputs prov
150
151
152
153 **Bring Your Own Model (BYOM):** Organizations can c
154
155 ## Data Integration
```

API Reference ➤

ider compatible APIs:** Foundry provides proxy endpoints for

Send feedback

```
156
157 Data integration in Foundry provides an extensible framework for connec
158
159 ### Pipeline Builder
160
161 **Pipeline Builder** is Foundry's primary application for data integrat
162 - Point-and-click interface for building pipelines
163 - Dataset health checks
164 - Type-safe transformations with schema safety
165 - Built-in LLM assistance for generating complex transformations
166 - Support for media processing and geospatial data
167
168 Workflow: Inputs → Transform → Preview → Deliver → Outputs
169
170 Pipeline Builder can output to datasets, media sets, files and file set
171
172 ### Code Repositories
173
174 For complex transformation logic, **Code Repositories** provides a web-
175 - Git-based version control with branching
176 - Pull requests and code review
177 - IntelliSense and error checking
178 - Integration with CI/CD workflows
179
180 ### Transform Languages
181
182 **Python Transforms** (most full-featured):
183 - Use `@transform.using` decorator
184 - Work with PySpark DataFrames or Pandas/Polars/DuckDB
185 - Support incremental computation
186 - Can call external APIs via `transforms-external-systems`
187
188 **SQL Transforms:**
189 - Declarative SQL syntax
190
191 **Java Transforms:**
192 - Access to full Spark Java API
193
194 ### Processing Modes
195
196 **Batch:** Fully recomputes all datasets in the pipeline on each run.
197
198 **Incremental:** Processes only new/changed data. More efficient for la
200
201
202 ### Data Quality
203
```

API Reference ↗

Send feedback

204 ****Data Expectations:**** Assertions about data quality (for example, "col
205
206 ****Health Checks:**** Monitoring rules that alert on pipeline issues, data
207
208 ****Data Health:**** A Foundry application for monitoring the health of pla
209 - ****Monitoring views:**** Monitor resources at scale using scope-based mo
210 - ****Health checks:**** Configure detailed checks on individual resources,
211
212 Alerts can be delivered through Foundry notifications, email digests, o
213
214 **## Ontology**
215
216 The Ontology transforms raw data into real-world concepts, enabling app
217
218 **### Object Types**
219
220 An object type defines:
221 - ****Properties:**** Attributes with types (string, integer, double, boole
222 - ****Primary Key:**** Unique identifier property
223 - ****Title:**** The property that acts as a display name for objects of th
224 - ****Backing Datasource(s):**** The source of the data used as property va
225
226 Objects are automatically created and updated through the indexing proc
227
228 **### Link Types**
229
230 Link types define relationships with:
231 - ****Source and Target Object Types:**** Which types are connected
232 - ****Cardinality:**** One-to-one, one-to-many, many-to-one, or many-to-man
233 - ****Key:**** The properties or columns used to create links (foreign key
234 - ****Object-backed Links:**** Use a backing object type to add additional
235
236 Links enable traversing relationships: from an Order, navigate to its C
237
238 **### Interfaces**
239
240 Interfaces provide polymorphism:
241 - Define shared properties that multiple object types implement
242 - Enable workflows that operate on any implementing type
243 - Example: `Facility` interface implemented by `Airport`, `Manufacturin
244
245 **### Action Types**
246

API Reference ↗

247 - ****Rules:**** Logic that transforms parameters into o
248 - ****Parameters:**** Inputs the user provides (object selections, text fie
249 - ****Rules:**** Logic that transforms parameters into o
250 - ****Side Effects:**** Notifications and webhooks to integrate with other
251 - ****Schedule Rules:**** Trigger builds of schedules when actions are appl

Send feedback

```

252 - **Submission Criteria:** Conditions that determine whether an Action
253
254 Actions can be **function-backed** for complex logic that cannot be exp
255
256 ## Functions
257
258 Functions enable server-side business logic with first-class Ontology s
259 - Query and aggregate object data
260 - Traverse links between objects
261 - Create, update, and delete objects (Ontology edits)
262 - Call external APIs
263
264 ### Languages
265
266 **TypeScript v2:** Runs in a Node.js runtime with OSDK support, configu
267
268 **TypeScript v1:** Supports webhooks, functions on models, and bring-yo
269
270 **Python:** Ontology object and edits support with OSDK. The only langu
271
272
273 **Ontology SQL:** Define reusable, parameterized queries over ontology
274
275 ### TypeScript v1 Example
276
277 ```typescript
278 import { Function } from "@foundry/functions-api";
279 import { Objects } from "@foundry/ontology-api";
280
281 export class FlightFunctions {
282     @Function()
283     public currentFlightDestinations(airportCode: string): Set<string>
284         const flightsFromAirport = Objects.search()
285             .flights()
286             .filter(flight => flight.departureAirportCode.exactMatch(ai
287             .all());
288
289         const destinations = flightsFromAirport.map(flight => flight.ar
290
291         return new Set(destinations);
292     }
293 }
294 ```

```

API Reference ↗

```

295 ### Python Example
296
297 ```python
298 from functions.api import function, String

```

Send feedback

```

300
301 @function
302 def my_function() -> String:
303     return "Hello World!"
304 ```
305
306 ### Function-backed Columns
307
308 Derived properties computed on-the-fly in Workshop Object Tables:
309
310 ```typescript
311 @Function()
312 public flightAlertCalculateUrgency(flightAlerts: ObjectSet<FlightAlert>
313 FunctionsMap<FlightAlert, string>{
314     const map = new FunctionsMap<FlightAlert, string>();
315     flightAlerts.all().forEach(flightAlert => {
316         var hoursDelayed = flightAlert.timeOfDelayHours
317         if (hoursDelayed! > 4) {
318             map.set(flightAlert, "High")
319         } else if (hoursDelayed! > 2) {
320             map.set(flightAlert, "Medium")
321         } else {
322             map.set(flightAlert, "Low")
323         }
324     });
325     return map;
326 }
327 ```
328
329 ### Function-backed Actions
330
331 Actions implemented with Ontology edit functions:
332
333 ```typescript
334 @OntologyEditFunction()
335 public addPriorityToTitle(ticket: DemoTicket): void {
336     let newTitle: string = "[" + ticket.ticketPriority + "]" + ticket.t
337     ticket.ticketTitle = newTitle;
338 }
339 ```
340
341 ## Applications
342

```

API Reference ↗ op

Workshop is a flexible, object-oriented application

Send feedback

Widgets: UI components that display content and are the core buildi

```

348 - Object Table: Display and interact with object sets
349 - Object List: Cards for browsing objects
350 - Chart XY: Visualizations backed by Ontology aggregations
351 - Inline Action: Enables users to create, modify, or delete objects or
352 - Map: Geospatial object visualization
353 - Button Group: Trigger Actions, Workshop events, URLs, and exports via
354 - Many more (60+ widgets across display, visualization, filtering, navi
355
356 **Events:** Trigger specific behavior based on user actions
357 - Row selection → update variable
358 - Button selection → execute action
359 - Object selection → navigate to detail view
360
361 **Variables:** Configure how data moves through a Workshop module
362 - Store object sets, object set filters, primitives (strings, numbers,
363 - Bind to widget inputs and outputs
364 - Enable interactivity between widgets
365
366 **Layouts:** Configure how the user interface of a module is organized
367 - Pages, overlays (drawers and modals), collapsible sections
368
369 **Common Patterns:**
370 - Inbox/Task Management: List of items to triage and process
371 - Common Operational Picture (COP): Big-screen dashboards with maps and
372 - Detail Views: Drill down from list to individual object
373 - Forms: Capture user input and execute actions
374
375 ### Slate
376
377 Slate enables application developers to construct customizable applicat
378 - Drag-and-drop widget positioning
379 - Custom styling and branding
380 - Direct JavaScript for complex interactions
381 - Access to Ontology and Functions via API calls
382 - Support for public-facing applications
383
384 Use Slate when you need a code-first approach with full HTML, CSS, and
385
386 ### OSDK (Ontology SDK)
387
388 For fully custom applications, OSDK generates type-safe SDKs:
389
390 **TypeScript SDK:**
391
392 import { createClient } from "@osdk/client";
393 import { Employee } from "@your-generated-sdk";
394
395 const client = createClient(foundryUrl, ontologyRid, auth);

```

API Reference ↗

Send feedback

```

396 const result = await client(Employee).fetchPage();
397 const employees = result.data;
398 ```
399
400 **Slate Integration:**
401 ```typescript
402 import { client } from "@slate/osdk";
403
404 const driverResponse = await client.ontology.objects.F1Driver.fetchPage
405     pageSize: 10,
406 });
407 const driverNames = driverResponse.data.map(
408     (driver) => `${driver.forename} ${driver.surname}`
409 );
410 ```
411
412 OSDK supports:
413 - Object queries with filtering, sorting, pagination
414 - Link traversal
415 - Action execution
416 - Real-time subscriptions
417 - Custom Workshop widgets
418
419
420 ### Pilot
421
422 Pilot is an AI-powered application builder that creates applications fr
423
424 Pilot manages the full application lifecycle with specialized AI agents
425 - **Ontology generation:** Creates object types, action types, link typ
426 - **Design specification:** Produces color palette, typography, layout,
427 - **Frontend generation:** Implements a React application using OSDK ho
428 - **Seed data generation:** Generates sample data in an isolated containe
429 - **Guided deployment:** Step-by-step deployment through ontology promo
430
431 Pilot uses Global Branching to promote ontology changes to production.
432
433 ### Analytics Applications
434
435 **Quiver:** Point-and-click analysis on Ontology objects and time serie
436 - Best for: Ontology-mapped data, time series, embeddable dashboards
437 - Features: Link traversal, time series formula language
438
439 **Point-and-click analysis on datasets (tables)
440 - Best for: Large datasets (100k+ rows), non-Ontology data
441 - Features: Visual transforms, joins, aggregations,
442
443

```

API Reference ➤

Send feedback


```

444 **Insight:** Point-and-click analysis on Ontology objects
445 - Best for: Analysts and investigators working with modeled Ontology da
446 - Features: Step-by-step analysis paths, link traversal, aggregations,
447 - Compared to Object Explorer: Insight is best for informed analysis on
448
449 **Code Workbook** [Legacy]: Code-based analysis notebooks
450 - Languages: Python, R, SQL
451 - Features: Visualization, collaboration, template reuse
452 - Note: Legacy status, consider other tools (Code Workspaces for explor
453
454 **Notepad:** Object-aware collaborative rich-text editor
455 - Embed charts and tables from other tools
456 - Template-based report generation
457 - Point-in-time data snapshots
458
459 **Fusion:** Spreadsheet application
460 - Writeback from spreadsheets to datasets
461 - Familiar spreadsheet experience
462
463 **Object Explorer:** Search and analysis tool for answering questions a
464 - Keyword and property-based search
465 - Bulk actions on object sets
466 - Export capabilities
467
468 ## AIP Applications
469
470 ### AIP Chatbot Studio
471
472 Build interactive assistants (AIP Chatbots) with:
473 - **Retrieval Context:** Ground responses in Ontology objects, document
474 - **Tools:** Enable chatbots to perform specific actions or retrieve in
475 - **Application Variables:** Configure chatbot state and map to Worksho
476 - **Deployment:** Use in AIP Threads, Workshop, OSDK applications, or v
477
478 Agent Tiers:
479 1. **Ad-hoc:** Use AIP Threads for quick document analysis
480 2. **Task-specific:** Build reusable chatbots with specific context
481 3. **Agentic Application:** Integrate chatbots into Workshop or OSDK ap
482 4. **Automated:** Publish chatbot as function for autonomous workflows
483
484 ### AIP Logic
485
486 No-code environment for LLM-powered functions:
487 - **Block-based interface**
488 - **Iterative prompt engineering with natural language**
489 - Query Ontology objects for context
490 - Make Ontology edits based on LLM output
491 - Integrate with Automate for triggered or scheduled execution of Ontol

```

API Reference ↗

Send feedback

```
492
493 Use cases:
494 - Extract structured data from unstructured text
495 - Classify and route incoming requests
496 - Generate summaries and recommendations
497
498 ### AIP Assist
499
500 In-platform LLM assistant for:
501 - Navigating Foundry documentation
502 - Understanding platform capabilities
503 - Developer assistance with code and APIs
504
505 ### AIP Evals
506
507 Testing environment to evaluate AIP Logic functions, Chatbot functions,
508 - Create evaluation suites with test cases
509 - Measure quality metrics
510 - Run experiments with parameter combinations
511 - Compare model performance
512
513 ## Automation
514
515 ### Automate
516
517 Automate triggers actions based on conditions:
518
519 **Conditions:**
520 - Time-based: "Every Monday at 9am"
521 - Data-based: "When a high-priority alert is created"
522 - Combined: "Every Monday at 9am, check for new high-priority alerts"
523
524 **Effects:**
525 - Action effects: Execute actions on objects (create, modify, delete)
526 - Function effects: Execute functions for custom compute logic (beta)
527 - Logic effects: Execute AIP Logic functions
528 - Notification effects: Send notifications (email, platform) with optio
529 - Fallback effects: Handle errors gracefully when primary effects fail
530
531 Use cases:
532 - Scheduled report sending and digests
533 - Data alerting
534 - Workflow automation
535
536
537 ## Developer Tools
538
539 ### Code Repositories
```

API Reference ↗ searches

Send feedback

```
540
541 Web-based IDE for:
542 - Python, Java, SQL transforms
543 - TypeScript and Python functions
544 - Git version control
545 - Pull requests and code review
546 - CI/CD integration
547
548 ### Developer Console
549
550 Portal for:
551 - OSDK generation and management
552 - OAuth client configuration
553 - Application hosting on enrollment subdomains or custom domains
554 - Application sharing and long-lived tokens
555 - Ontology MCP configuration for AI agent access
556
557 ### REST APIs
558
559 Programmatic access to platform resources through Palantir's APIs:
560 - **Datasets:** Read, write, and manage datasets, including branches, t
561 - **Filesystem:** Manage spaces, projects, folders, and resource roles
562 - **Administration:** Manage users, groups, organizations, hosts, and m
563 - **Orchestration:** Trigger builds, inspect jobs, and configure schedu
564 - **Connectivity:** Manage connections, virtual tables, and file or tab
565 - **SQL Queries:** Execute SQL against datasets
566 - **Media Sets:** Upload, retrieve, and manage media sets and their ite
567 - **Ontology:** Query and edit ontology data
568 - **AIP Chatbots:** Programmatic chatbot interactions
569 - **Platform administration:** Audit logs, data health checks, streams,
570
571 ### VS Code Integration
572
573 - VS Code Workspaces in browser
574 - Local VS Code with Palantir extension
575 - Continue extension for AI assistance with Foundry context
576
577 ### Palantir MCP
578
579 Model Context Protocol server enabling:
580 - External AI IDEs to access Foundry context
581 - Documentation and API discovery
582 - Application building assistance
```

API Reference ➤ s for building and modifying ontology types (object types, li

```
584
585 Palantir MCP is designed for ontology *builders* and
586
587
```

Send feedback

```
588 ### Ontology MCP (OMCP)
589
590 Ontology MCP is a Developer Console feature that exposes application on
591 - External AI agents can read objects, execute actions, and query data
592 - Controlled writes to ontology data through predefined actions
593 - Access restricted through application restrictions and permissions
594 - Authenticates using OAuth 2.0 with support for authorization code gra
595 - Integrates with desktop agents (Claude.ai, Microsoft Copilot Studio,
596 - **MCP Hub** provides a central location to discover and manage all On
597
598 Ontology MCP is designed for ontology *consumers*: external AI agents t
599
600 ## Interoperability
601
602 Foundry and AIP are designed to interoperate with existing enterprise s
603
604 - **Data interoperability:** Built on open data standards like Apache I
605
606 - **Metadata interoperability:** Exposes metadata attributes across pro
607
608 - **Semantic interoperability:** The Ontology can be accessed through R
609
610 - **Code & logic interoperability:** Uses open languages (Python, Java,
611
612 - **Analytical interoperability:** Out-of-the-box connectors for Power
613
614 - **Security interoperability:** Integrates with existing authenticatio
615
616 ## Observability
617
618 Foundry provides built-in tools to monitor the health of your resources
619
620 ### Monitoring
621
622 **Data Health** is the primary application for monitoring platform reso
623 - **Monitoring views:** Scope-based monitoring rules across projects, f
624 - **Health checks:** Detailed validation on individual resources includ
625
626 Alerts can be delivered through Foundry notifications or external syste
627
628 ### Metrics
629
630 Foundry provides metrics across multiple resource types:
631 - **Operations, actions, and AIP Logic:** Near real-time success/failure
632 - **Streams and compute modules:** Metrics for monitoring long-running
633
634 ### Debugging
635
```

API Reference ↗

Send feedback

```
636 **Workflow Lineage** enables exploration of platform history and logs:
637 - View seven days of execution history
638 - Filter by status, user, duration, or version
639 - Search across logs from all executions
640
641 **Trace views** visualize the full request journey across functions, ac
642
643 ### Log Export
644
645 Foundry logs, metrics, and traces can be exported to a streaming datase
646
647 ## Security & Governance
648
649 Foundry security is built on:
650
651 ### Access Control
652
653 - **Projects:** Primary security boundary for organizing work and resou
654 - **Organizations:** Mandatory controls for user silos
655 - **Roles:** Discretionary permissions (Owner, Editor, Viewer, Discover
656 - **Markings:** Mandatory controls for sensitive data (PII, PHI, and ot
657
658 ### Data Protection
659
660 - Encryption at rest and in transit
661 - Single sign-on and multi-factor authentication
662 - Comprehensive audit logging
663 - Row and column-level security
664
665 ### Governance
666
667 - Data lineage tracking
668 - Sensitive data scanning
669 - Data retention policies
670 - Checkpoint justifications for sensitive actions
671
672 ## Documentation Links
673
674 ### Getting Started
675
676 - [Overview](https://www.palantir.com/docs/foundry/getting-started/over
677 - [Introductory Concepts](https://www.palantir.com/docs/foundry/getting
678 - [Application Reference](https://www.palantir.com/docs/foundry/getting
```

API Reference ↗

Send feedback

```
680 ### Data Integration
```

```
681
```

```
682 - [Data Integration Overview](https://www.palantir.com/docs/foundry/data-integration/overview)
```

```
683 - [Pipeline Builder](https://www.palantir.com/docs/foundry/pipeline-builder)
```

684 - [Code Repositories](https://www.palantir.com/docs/foundry/code-reposi
685 - [Python Transforms](https://www.palantir.com/docs/foundry/transforms-
686
687 ### Ontology
688
689 - [Ontology Overview](https://www.palantir.com/docs/foundry/ontology/ov
690 - [Ontology Best Practices and Anti-patterns](https://www.palantir.com/
691 - [Object Types](https://www.palantir.com/docs/foundry/object-link-type
692 - [Link Types](https://www.palantir.com/docs/foundry/object-link-types/
693 - [Action Types](https://www.palantir.com/docs/foundry/action-types/ove
694 - [Interfaces](https://www.palantir.com/docs/foundry/interfaces/interfa
695
696 ### Functions
697
698 - [Functions Overview](https://www.palantir.com/docs/foundry/functions/
699 - [TypeScript v1 Getting Started](https://www.palantir.com/docs/foundry
700 - [TypeScript v2 Getting Started](https://www.palantir.com/docs/foundry
701 - [Python Functions](https://www.palantir.com/docs/foundry/functions/py
702
703 ### Applications
704
705 - [Workshop](https://www.palantir.com/docs/foundry/workshop/overview)
706 - [Slate](https://www.palantir.com/docs/foundry/slate/overview)
707 - [OSDK](https://www.palantir.com/docs/foundry/ontology-sdk/overview)
708 - [OSDK React Applications](https://www.palantir.com/docs/foundry/ontol
709 - [Pilot](https://www.palantir.com/docs/foundry/pilot/overview)
710
711 ### AI Platform
712
713 - [AIP Overview](https://www.palantir.com/docs/foundry/aip/overview)
714 - [Chatbot Studio](https://www.palantir.com/docs/foundry/chatbot-studio
715 - [AIP Logic](https://www.palantir.com/docs/foundry/logic/overview)
716 - [AIP Evals](https://www.palantir.com/docs/foundry/aip-evals/overview)
717
718 ### Analytics
719
720 - [Quiver](https://www.palantir.com/docs/foundry/quiver/overview)
721 - [Contour](https://www.palantir.com/docs/foundry/contour/overview)
722 - [Notepad](https://www.palantir.com/docs/foundry/notepad/overview)
723
724 ### Automation
725
726 - [Automate](https://www.palantir.com/docs/foundry/automate/overview)
727 - [Rules](https://www.palantir.com/docs/foundry/foundry-rules/o

API Reference ↗

Send feedback

728
729 ### Observability

730
731 - [Observability overview](https://www.palantir.com/docs/foundry/observ

```
732 - [Data Health](https://www.palantir.com/docs/foundry/observability/dat
733 - [Workflow Lineage](https://www.palantir.com/docs/foundry/workflow-lin
734 - [AIP Observability](https://www.palantir.com/docs/foundry/aip-observa
735
736 ### Security
737
738 - [Security overview](https://www.palantir.com/docs/foundry/security/ov
```

PREVIOUS

← [Start with examples](#)

NEXT

[Getting help / Overview](#) →

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

— [Cookies Settings](#)

[API Reference ↗](#)

[Send feedback](#)