

# Table of Contents

1. [VS Code workspaces • Overview • Palantir](#)
2. [VS Code workspaces • Overview • Palantir](#)
3. [VS Code workspaces • Choose between local development and VS Code workspaces • Palantir](#)
4. [VS Code workspaces • Benefits of VS Code workspaces • Palantir](#)
5. [VS Code workspaces • Global Branching • Palantir](#)
6. [VS Code workspaces • AI development tools • Palantir](#)
7. [VS Code workspaces • Troubleshooting • Palantir](#)

# VS Code workspaces

**i** VS Code workspaces and the Palantir extension for Visual Studio Code are not affiliated with or endorsed by Microsoft.

**i** VS Code workspaces is available by default in all Organizations where Code Workspaces is enabled.

VS Code workspaces bring the power of Microsoft's [VS Code](#) IDE directly into the Palantir platform. VS Code workspaces are development environments deployed on Palantir infrastructure that leverage [Code Workspaces](#) to provide an integrated development environment (IDE) for writing production-ready code. Whether you are building Python transforms, developing OSDK React applications, or working on compute modules ([see a full list of supported workflows here](#)), VS Code workspaces provide a familiar, powerful environment with automatic environment setup and seamless integration with Foundry resources.

## Why use VS Code workspaces?

[Learn more about the benefits of VS Code workspaces.](#)



## Get started with VS Code workspaces

API Reference ↗

  a workspace

Send feedback


1. Open an existing or create a new [supported repository](#) in VS Code.
2. From Code Repositories, you can select **Open in VS Code** in the upper right corner (shown for supported repositories).
3. At the time of creating a new repository, selecting VS Code will automatically bring you into a VS Code workspace.
4. Your environment is ready, and you can start coding.

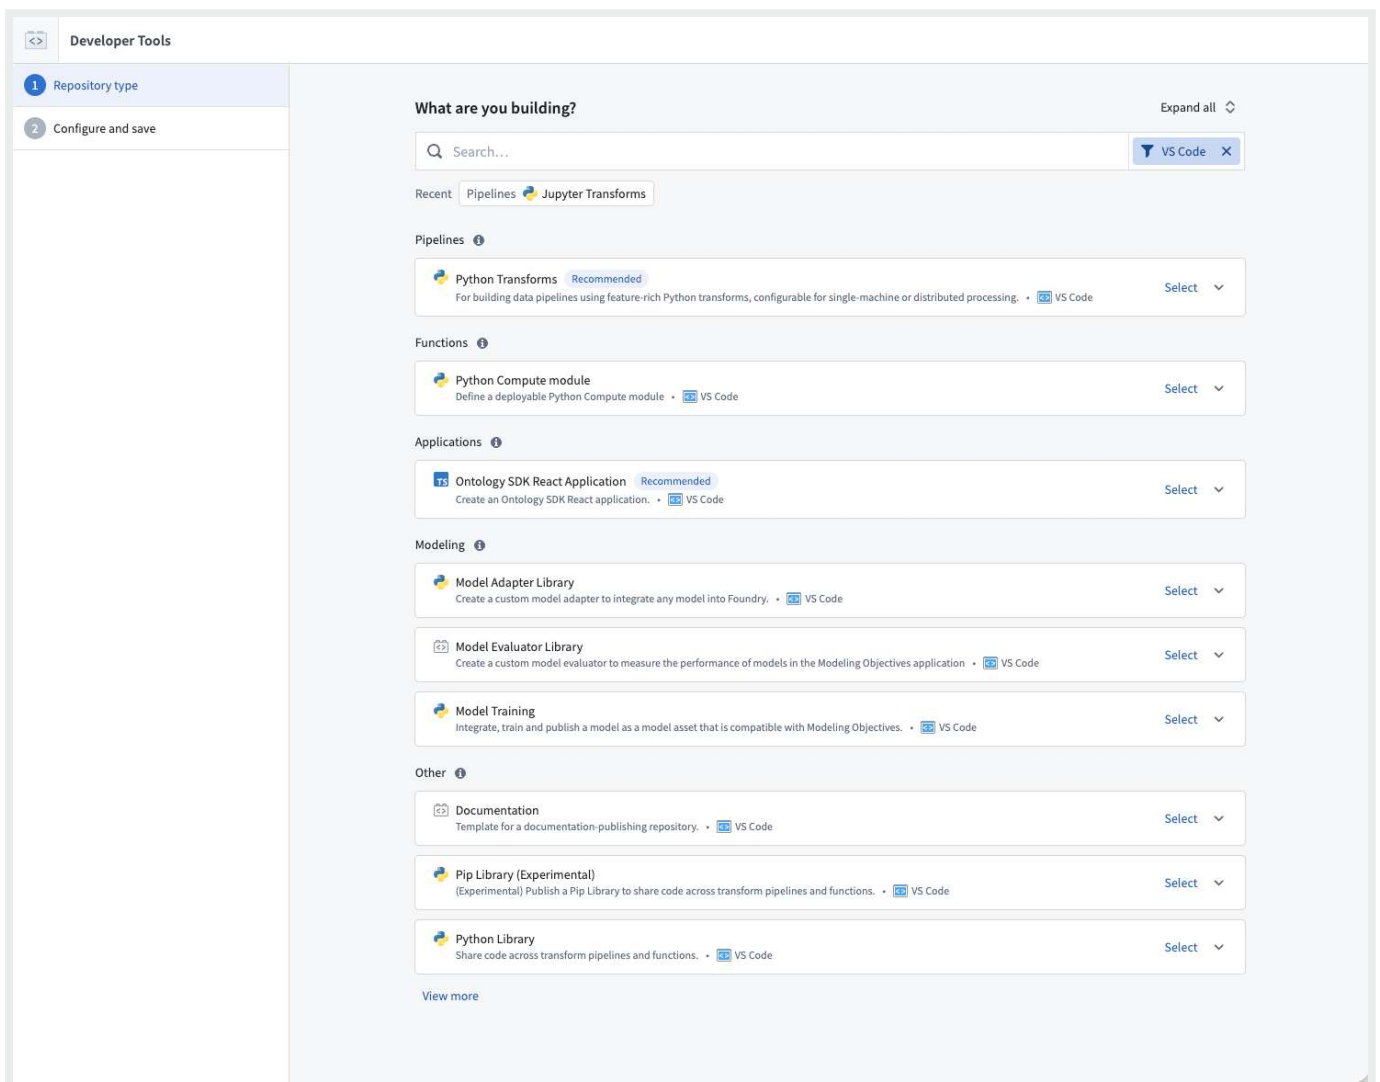

## Make VS Code your default editor

Y API Reference ↗ de your default code editor for all supported repository types by navigating to the **Settings** tab within any repository and selecting **Open repository in VS Code workspace by default**.

Send feedback

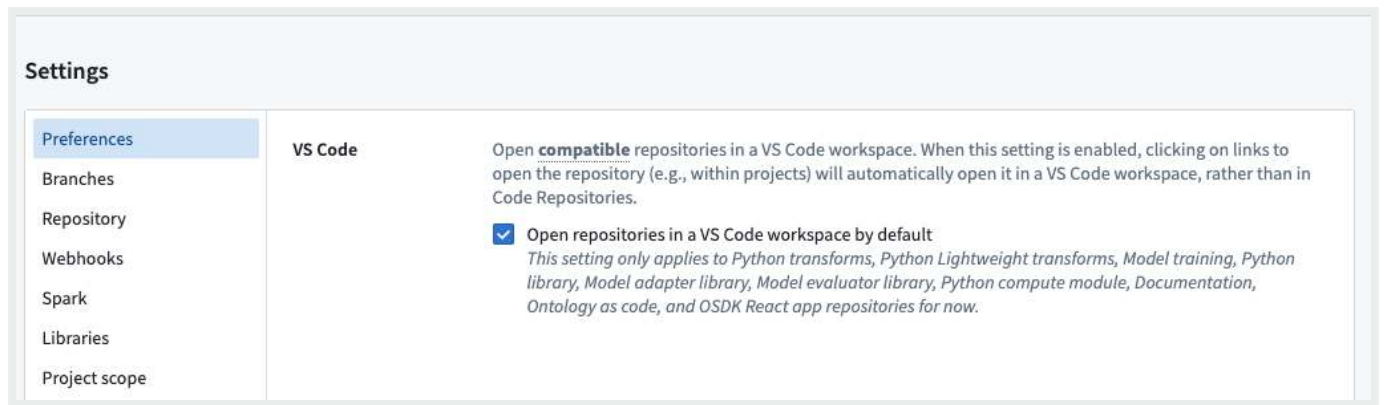

Note that some repositories will open in VS Code regardless of the default setting, since these repository types have been optimized for VS Code workspaces.

## Supported workflows

VS Code workspaces support the workflows described in the sections below.


### Python transforms

The Palantir extension automatically sets up your Python environment at startup and provides the following:

- [Preview integration](#) with sample-less and code-defined filtering options
- [Debugging support](#) with variable inspection
- [Build triggers](#) from inside your editor
- Resource paths displayed with resource identifiers for easy navigation
- Automatic code environment setup
- Code snippets for common patterns

[API Reference ↗](#)


[Send feedback](#)

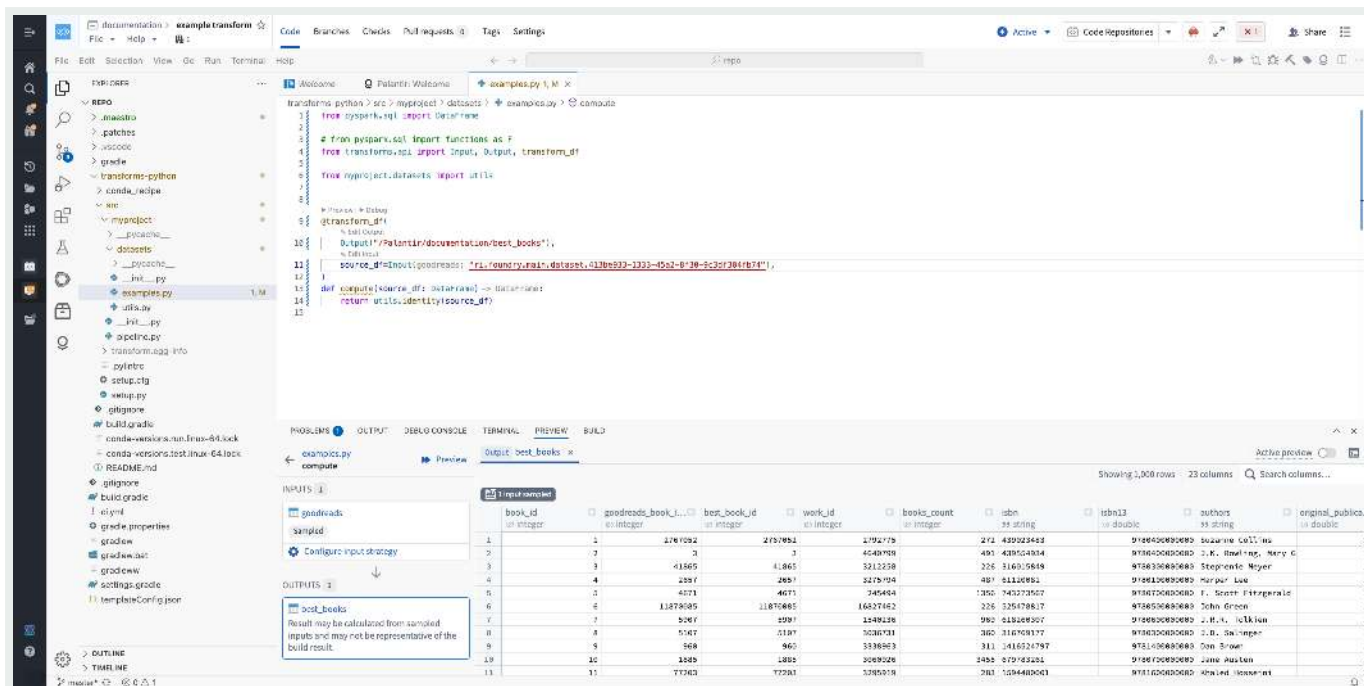

[Learn more about Python transforms.](#)

## OSDK React applications

VS Code is integrated with [Developer Console](#), allowing you to rapidly build React applications. You can create a VS Code workspace in the **Code repository** section of your Developer Console.

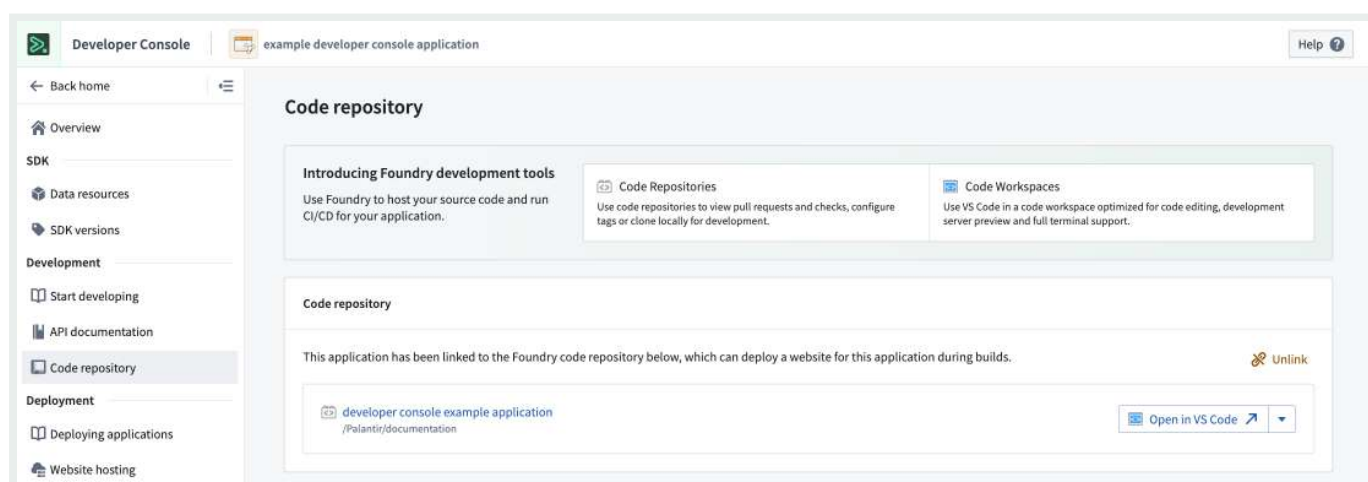

Key features include:


API Reference ↗

Integration with OSDK to interact with your unique Ontology resources

- Git repository configuration with OAuth pre-configured
- CI setup to deploy your website on every release

Send feedback

- Automatic node/npm environment setup
- Development server with live reload for instant feedback

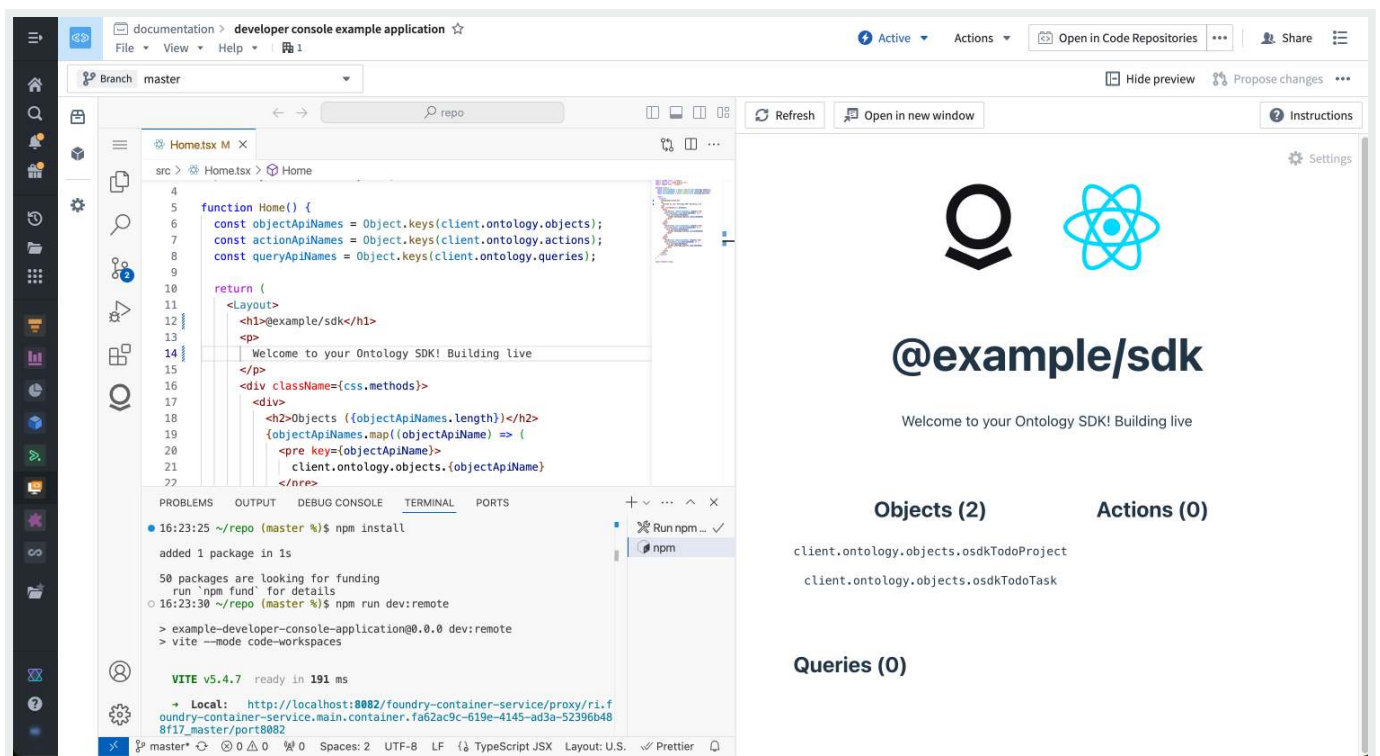

[Learn more about OSDK React applications.](#)

## Other supported workflows

- **Compute modules:** Build Python compute modules with run and debug capabilities.
- **Python libraries:** Develop and debug reusable Python libraries.

## Reference: VS Code workspaces vs. Code Repositories

VS Code and Code Repositories serve different primary purposes:

API Reference ↗

**VS Code:** A Palantir-built IDE focused on all code-management needs, including version control, change management, and continuous integration. This is the intended platform tool for pull request reviews and repository management.

Send feedback

- **VS Code:** A VS Code environment deployed on Palantir infrastructure and accessible from the Palantir platform. Provides the familiar VS Code editing experience with automatic environment setup and integration with Foundry resources through the [Palantir extension for Visual Studio Code](#).
- **Palantir extension for Visual Studio Code (local):** An extension you install in your local VS Code application to integrate directly with Foundry. Provides preview, debug, and build capabilities for Python transforms while working on your local machine.

## Feature comparison

| Feature                                                                                                    | Code Repositories                                                    | VS Code workspaces | Palantir extension for Visual Studio Code |
|------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|--------------------|-------------------------------------------|
| Transforms                                                                                                 |                                                                      |                    |                                           |
| Python transform preview                                                                                   | Yes                                                                  | Yes                | Yes                                       |
| Full data preview                                                                                          | Preview data sample, with the ability to pre-filter the input sample | Yes                | Yes                                       |
| Debugger support                                                                                           | Yes                                                                  | Yes                | Yes                                       |
| Java transforms                                                                                            | Yes                                                                  | No                 | No                                        |
| Unit tests                                                                                                 | Yes                                                                  | Yes                | Yes                                       |
| OSDK React applications                                                                                    |                                                                      |                    |                                           |
| Typescript Language Server                                                                                 | No                                                                   | Yes                | Yes                                       |
| Live reload code changes                                                                                   | No                                                                   | Yes                | Yes                                       |
| API Reference ↗                                                                                            |                                                                      |                    |                                           |
|  <b>compute modules</b> |                                                                      |                    | <div>Send feedback</div>                  |

| Feature                     | Code Repositories | VS Code workspaces      | Palantir extension for Visual Studio Code |
|-----------------------------|-------------------|-------------------------|-------------------------------------------|
| Run and debug Python files  | No                | Yes                     | Yes                                       |
| Python libraries            |                   |                         |                                           |
| Run and debug Python files  | No                | Yes                     | Yes                                       |
| Workflows                   |                   |                         |                                           |
| SQL integration             | Yes               | No                      | No                                        |
| Typescript function preview | Yes               | No                      | No                                        |
| IDE                         |                   |                         |                                           |
| Shell terminal              | No                | Yes (Remote host)       | Yes                                       |
| Keybinding customization    | No                | Yes                     | Yes                                       |
| Public extension support    | N/A               | No                      | Yes, if allowed by your organization      |
| AI Assistance               | AIP Autocomplete  | Yes, Continue extension | No                                        |

# Choose your development environment

You have two options for using VS Code with Foundry. For a detailed comparison to help you decide which is right for you, review our documentation on [choosing between local development and VS Code workspaces](#).

The [Palantir extension for Visual Studio Code](#) provides native integrations with the Palantir p API Reference ↗ many features you see in [Code Repositories](#).

[Learn more about the features of the Palantir extension.](#)

Send feedback



# Pricing

For VS Code workspace pricing information see [Code Workspaces compute usage](#).

PREVIOUS

← [Code Workspaces / Compute usage](#)

NEXT

[Choose between local development and VS Code workspaces](#) →

---

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

— [Cookies Settings](#)

[API Reference ↗](#)

[Send feedback](#)

# VS Code workspaces

**i** VS Code workspaces and the Palantir extension for Visual Studio Code are not affiliated with or endorsed by Microsoft.

**i** VS Code workspaces is available by default in all Organizations where Code Workspaces is enabled.

VS Code workspaces bring the power of Microsoft's [VS Code](#) IDE directly into the Palantir platform. VS Code workspaces are development environments deployed on Palantir infrastructure that leverage [Code Workspaces](#) to provide an integrated development environment (IDE) for writing production-ready code. Whether you are building Python transforms, developing OSDK React applications, or working on compute modules ([see a full list of supported workflows here](#)), VS Code workspaces provide a familiar, powerful environment with automatic environment setup and seamless integration with Foundry resources.

## Why use VS Code workspaces?

[Learn more about the benefits of VS Code workspaces.](#)



## Get started with VS Code workspaces

API Reference ↗

  a workspace

Send feedback


1. Open an existing or create a new [supported repository](#) in VS Code.
2. From Code Repositories, you can select **Open in VS Code** in the upper right corner (shown for supported repositories).
3. At the time of creating a new repository, selecting VS Code will automatically bring you into a VS Code workspace.
4. Your environment is ready, and you can start coding.

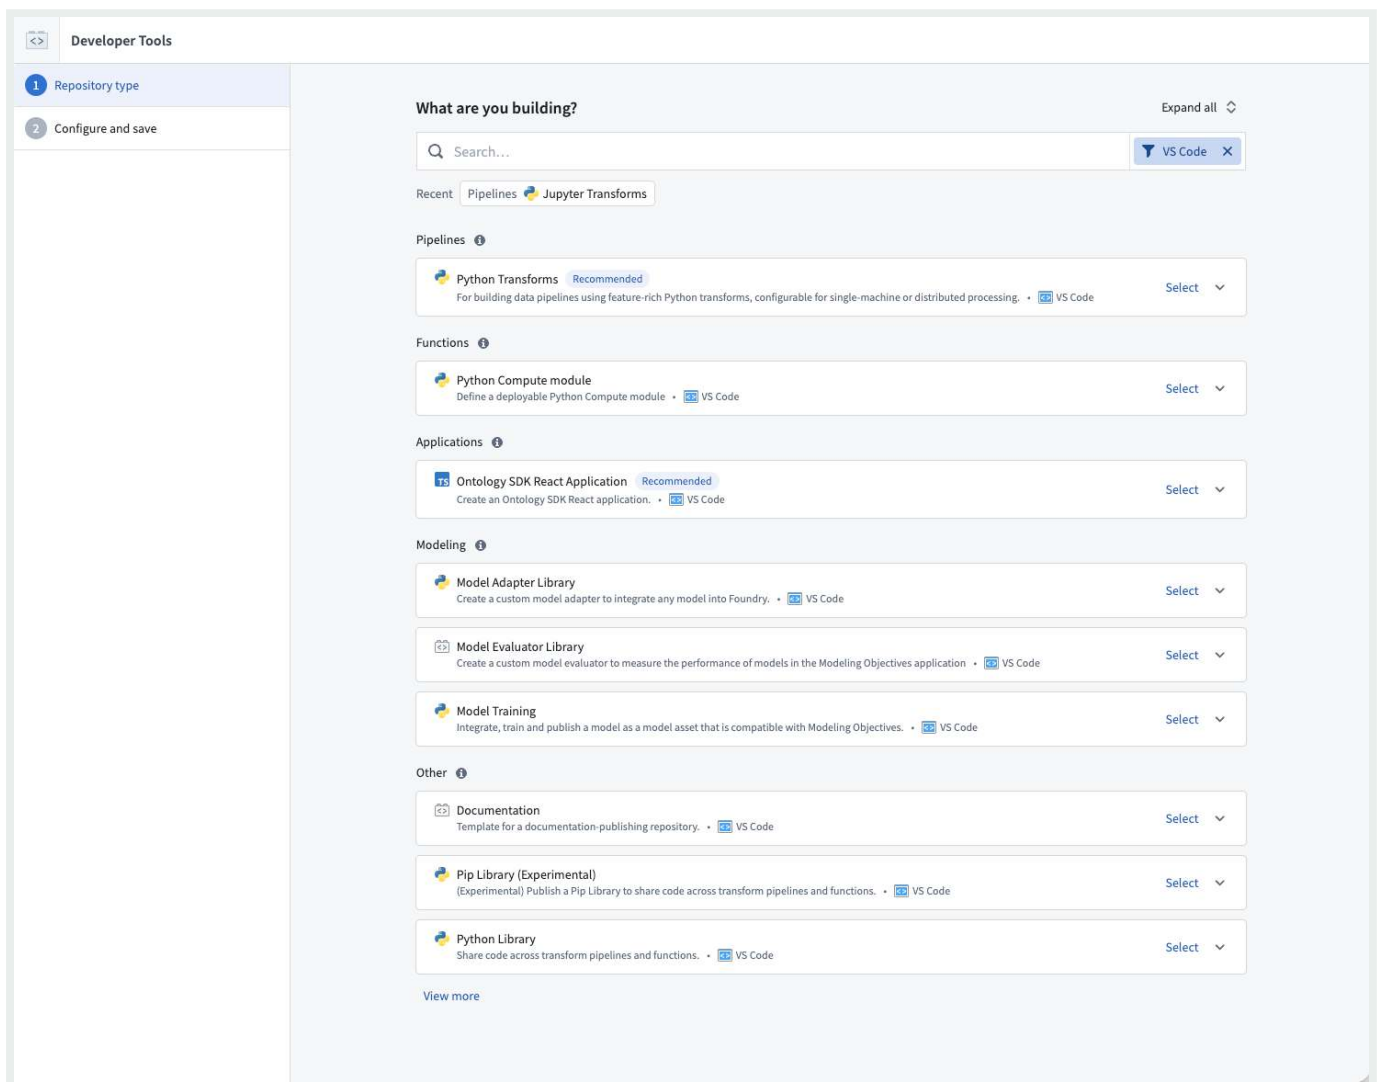

## Make VS Code your default editor

Y API Reference ↗ de your default code editor for all supported repository types by navigating to the **Settings** tab within any repository and selecting **Open repository in VS Code workspace by default**.

Send feedback

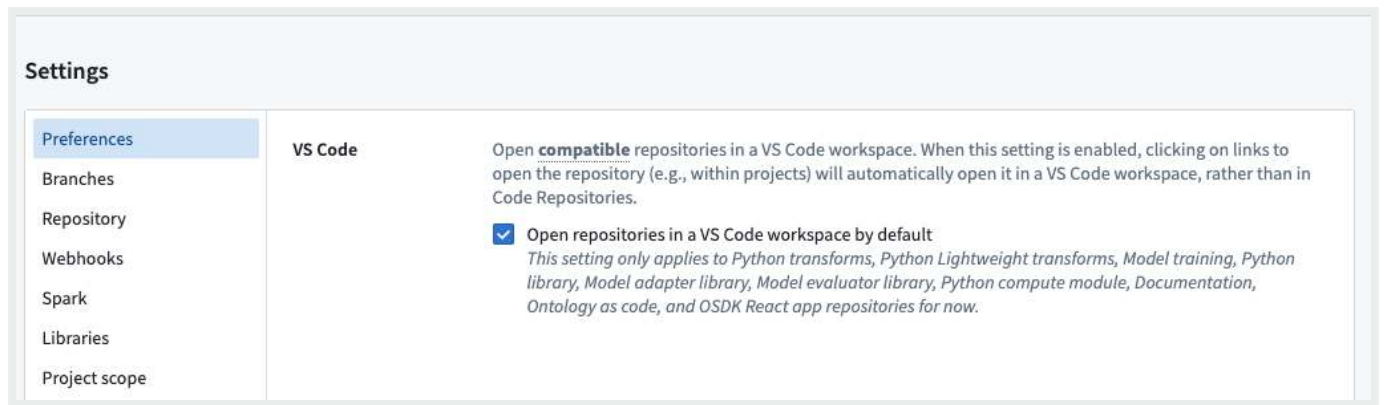

Note that some repositories will open in VS Code regardless of the default setting, since these repository types have been optimized for VS Code workspaces.

## Supported workflows

VS Code workspaces support the workflows described in the sections below.


## Python transforms

The Palantir extension automatically sets up your Python environment at startup and provides the following:

- [Preview integration](#) with sample-less and code-defined filtering options
- [Debugging support](#) with variable inspection
- [Build triggers](#) from inside your editor
- Resource paths displayed with resource identifiers for easy navigation
- Automatic code environment setup
- Code snippets for common patterns

API Reference ↗


Send feedback

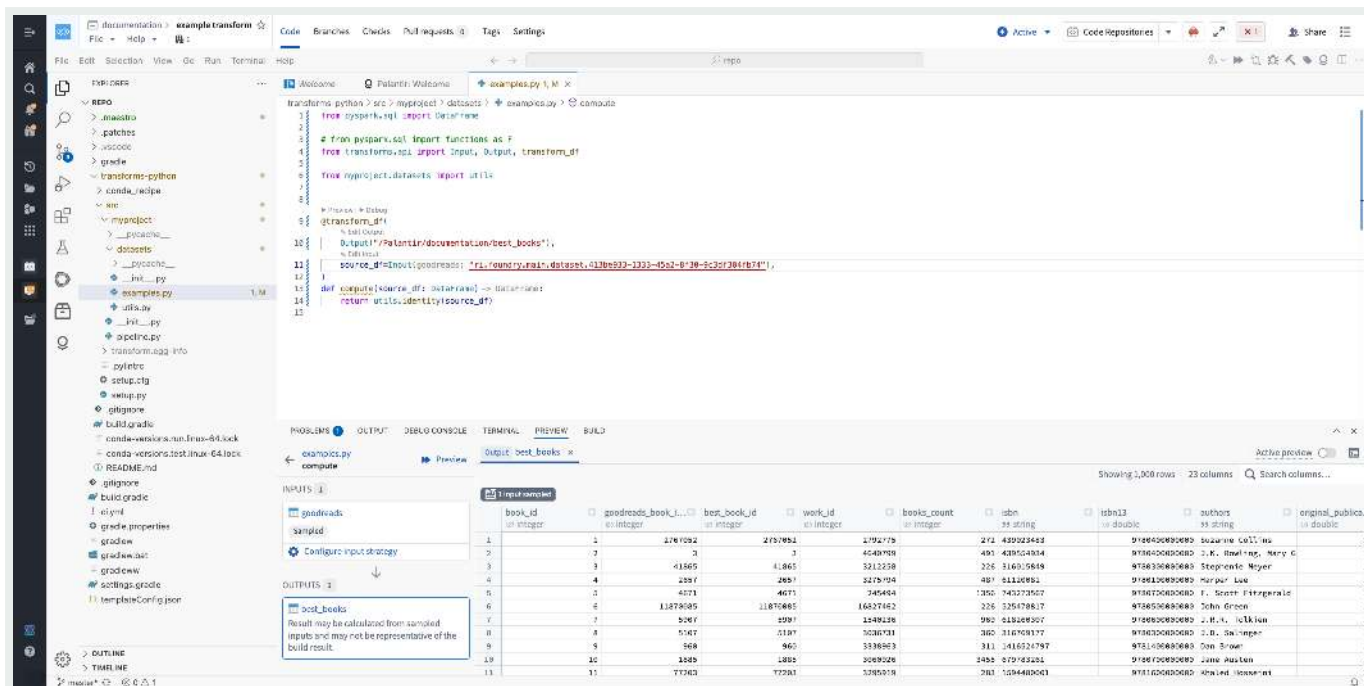

[Learn more about Python transforms.](#)

## OSDK React applications

VS Code is integrated with [Developer Console](#), allowing you to rapidly build React applications. You can create a VS Code workspace in the **Code repository** section of your Developer Console.

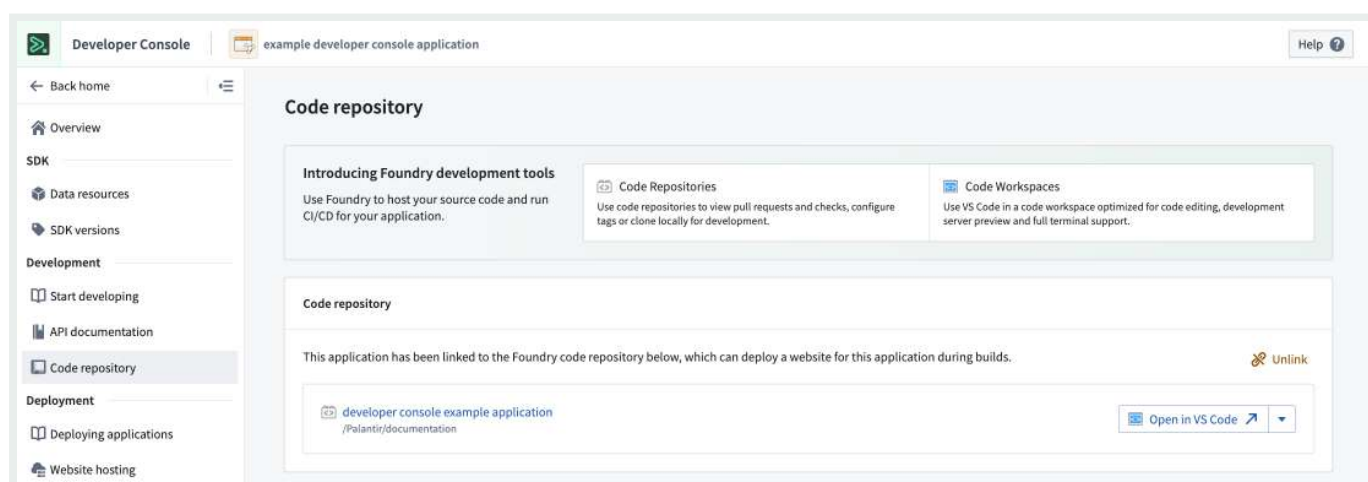

Key features include:


API Reference ↗

Integration with OSDK to interact with your unique Ontology resources

- Git repository configuration with OAuth pre-configured
- CI setup to deploy your website on every release

Send feedback

- Automatic node/npm environment setup
- Development server with live reload for instant feedback

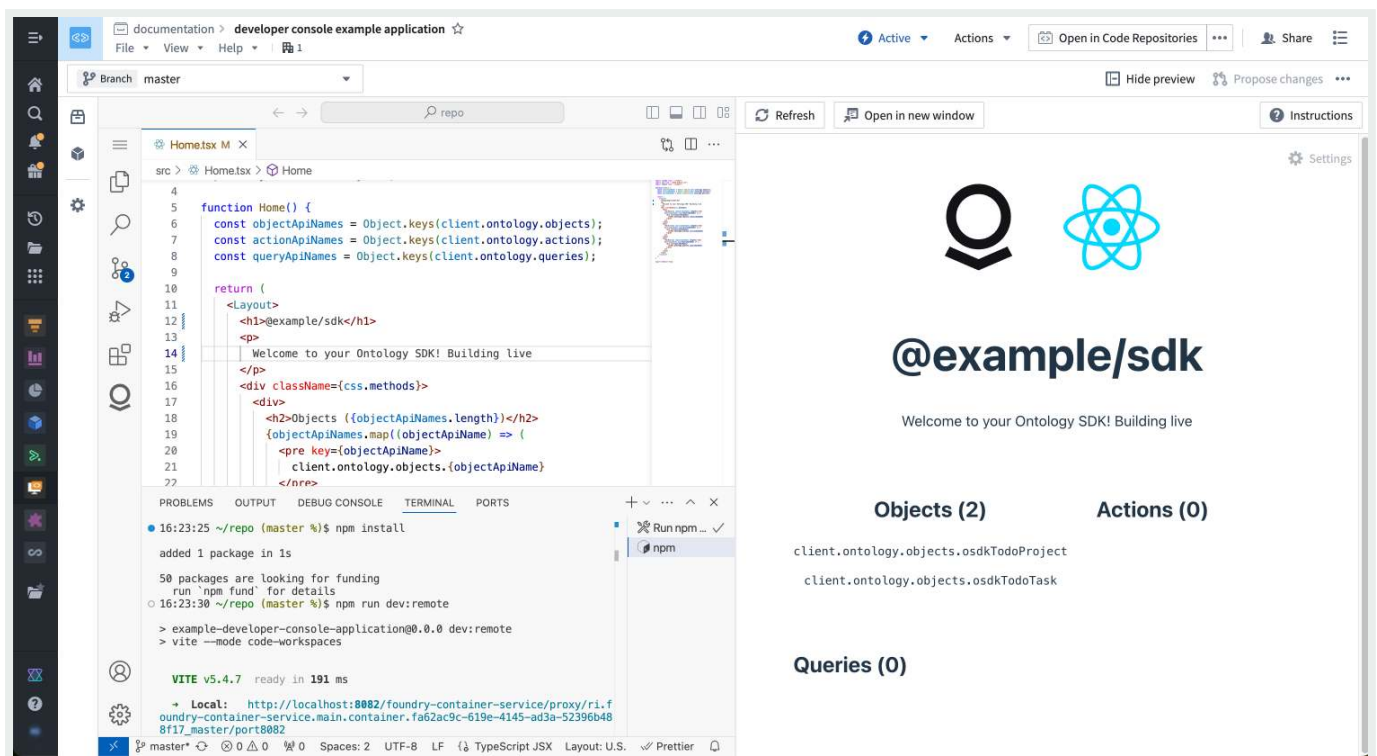

[Learn more about OSDK React applications.](#)

## Other supported workflows

- **Compute modules:** Build Python compute modules with run and debug capabilities.
- **Python libraries:** Develop and debug reusable Python libraries.

## Reference: VS Code workspaces vs. Code Repositories

VS Code and Code Repositories serve different primary purposes:

API Reference ↗

**VS Code:** A Palantir-built IDE focused on all code-management needs, including version control, change management, and continuous integration. This is the intended platform tool for pull request reviews and repository management.

Send feedback

- **VS Code:** A VS Code environment deployed on Palantir infrastructure and accessible from the Palantir platform. Provides the familiar VS Code editing experience with automatic environment setup and integration with Foundry resources through the [Palantir extension for Visual Studio Code](#).
- **Palantir extension for Visual Studio Code (local):** An extension you install in your local VS Code application to integrate directly with Foundry. Provides preview, debug, and build capabilities for Python transforms while working on your local machine.

## Feature comparison

| Feature                                                                                             | Code Repositories                                                    | VS Code workspaces | Palantir extension for Visual Studio Code |
|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|--------------------|-------------------------------------------|
| Transforms                                                                                          |                                                                      |                    |                                           |
| Python transform preview                                                                            | Yes                                                                  | Yes                | Yes                                       |
| Full data preview                                                                                   | Preview data sample, with the ability to pre-filter the input sample | Yes                | Yes                                       |
| Debugger support                                                                                    | Yes                                                                  | Yes                | Yes                                       |
| Java transforms                                                                                     | Yes                                                                  | No                 | No                                        |
| Unit tests                                                                                          | Yes                                                                  | Yes                | Yes                                       |
| OSDK React applications                                                                             |                                                                      |                    |                                           |
| Typescript Language Server                                                                          | No                                                                   | Yes                | Yes                                       |
| Live reload code changes                                                                            | No                                                                   | Yes                | Yes                                       |
| API Reference ↗                                                                                     |                                                                      |                    |                                           |
|  compute modules |                                                                      |                    | <div>Send feedback</div>                  |

| Feature                     | Code Repositories | VS Code workspaces      | Palantir extension for Visual Studio Code |
|-----------------------------|-------------------|-------------------------|-------------------------------------------|
| Run and debug Python files  | No                | Yes                     | Yes                                       |
| <b>Python libraries</b>     |                   |                         |                                           |
| Run and debug Python files  | No                | Yes                     | Yes                                       |
| <b>Workflows</b>            |                   |                         |                                           |
| SQL integration             | Yes               | No                      | No                                        |
| Typescript function preview | Yes               | No                      | No                                        |
| <b>IDE</b>                  |                   |                         |                                           |
| Shell terminal              | No                | Yes (Remote host)       | Yes                                       |
| Keybinding customization    | No                | Yes                     | Yes                                       |
| Public extension support    | N/A               | No                      | Yes, if allowed by your organization      |
| AI Assistance               | AIP Autocomplete  | Yes, Continue extension | No                                        |

## Choose your development environment

You have two options for using VS Code with Foundry. For a detailed comparison to help you decide which is right for you, review our documentation on [choosing between local development and VS Code workspaces](#).

The [Palantir extension for Visual Studio Code](#) provides native integrations with the Palantir p

API Reference ↗

many features you see in [Code Repositories](#).

[Learn more about the features of the Palantir extension.](#)

Send feedback



# Pricing

For VS Code workspace pricing information see [Code Workspaces compute usage](#).

PREVIOUS

← [Code Workspaces / Compute usage](#)

NEXT

[Choose between local development and VS Code workspaces](#) →

---

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

— [Cookies Settings](#)

[API Reference ↗](#)

[Send feedback](#)

Developer toolchain / VS Code workspaces / Choose between local development and VS Code workspaces

# Choose between local development and VS Code workspaces

When working with VS Code in Foundry, you can choose between two developer environment options: use VS Code workspaces deployed on Palantir infrastructure, or install the Palantir extension in your local VS Code application. This guide helps you understand the differences and choose the right option for your needs.

## Quick comparison

|                        | VS Code workspaces                                            | Palantir extension for local development         |
|------------------------|---------------------------------------------------------------|--------------------------------------------------|
| Setup                  | No installation required; select <b>Open in VS Code</b>       | Download and install the extension locally       |
| Environment            | Deployed on Palantir infrastructure                           | Runs on your local machine                       |
| Data handling          | Data stays on platform (except for displayed preview results) | Streams data to local memory during preview      |
| Access requirements    | Code Workspaces enabled                                       | Administrator approval plus download permissions |
| Third-party extensions | Not supported                                                 | Supported (if allowed by your organization)      |

API Reference ↗

: VS Code workspaces

Send feedback

### Best for the following:

- **Getting started quickly:** No installation or configuration needed; open your repository and start coding.
- **Sensitive data workflows:** Data remains on Palantir infrastructure during development, with strict security controls.
- **Teams requiring consistent environments:** Everyone works in the same standardized environment.
- **Users without download permissions:** Preview transforms without needing download operations on datasets.

## Option: Palantir extension for local development

### Best for the following:

- **Developers who prefer local workflows:** Work with your existing local setup and familiar tools.
- **Using third-party tools and extensions:** Access the full VS Code extension marketplace (if allowed by your organization).
- **Custom development environments:** Full control over your IDE configuration and installed tools.

### Requirements:

- Platform administrator must enable local preview in [Control Panel](#).
- You must have download permissions ( `s3-proxy:datasets-read` and `api:datasets-read` ) on all input datasets.
  - These are privileged operations that allow downloading entire datasets locally.

## Data security

### Visualizations

API Reference ↗

**Data handling:** Data remains on Palantir infrastructure during development. Query results (up to 1000 rows) are displayed in the results table. No input datasets are streamed

Send feedback

to your machine.

**Security controls:** Strict access controls and audit logging are maintained. No risk of accidental data leakage to local machines.

## Palantir extension for local development

Review our documentation on [security considerations for local development](#).

If you are unsure which option is best for you, we recommend starting with VS Code workspaces. This option requires no setup and maintains the strictest security controls. You can always switch to local development later if you need additional flexibility.

## Getting started

### VS Code workspaces

1. Open a [supported repository](#) in VS Code.
2. From code repositories, you can select **Open in VS Code** in the upper right corner (shown for supported repositories).
3. At the time of creating a new repository, selecting VS Code will automatically bring you into a VS Code workspace.
4. Your environment is ready, and you can start coding.

## Palantir extension for local development

1. Verify with your administrator that local preview is enabled.
2. Ensure you have the necessary download permissions on your datasets.
3. [Download and install the Palantir extension](#).
4. Clone your repository and start developing.

For API Reference ↗, review setup instructions (including Java transforms), review our documentation on [previewing transforms in local development](#).

Send feedback

For more information, review additional documentation:

- [VS Code workspaces overview](#)
- [Palantir extension for Visual Studio Code](#)
- [Security considerations for local development](#)

PREVIOUS  
← Overview

NEXT  
Benefits of VS Code workspaces →

---

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

—[Cookies Settings](#)

[API Reference ↗](#)

[Send feedback](#)

# Benefits of VS Code workspaces

This page provides an overview of the benefits of using VS Code in Foundry to write and manage code. In particular, the benefits below should be considered when deciding whether to switch from Code Repositories to VS Code in Foundry.

## AI-powered coding assistance with Continue

VS Code in Foundry comes with [Continue](#), an AI coding assistant preconfigured to work with Palantir-provided language models and equipped with knowledge about relevant Palantir SDKs and your Python transforms or OSDK repository. With this contextual understanding of your data structures, ontology, and organization, Continue can generate more accurate and relevant code suggestions and access Foundry-specific tools to accelerate your workflows.

## Enhanced preview features

VS Code in Foundry provides powerful preview capabilities that go beyond basic sampling:

- **Full dataset preview in Python transforms repositories:** Use [full dataset preview](#) to preview the full output of transforms without random sampling, giving you accurate results that match production behavior.
- **Accurate incremental preview:** The Palantir extension runs the same [incremental resolution and evaluation logic](#) as production builds for both Spark and lightweight transforms with full support for v1 and v2 incremental semantics. This way, you can see incremental transforms will behave.

API Reference ↗

**filtering:** Specify your own [code-defined filters](#) to control preview, enabling targeted testing of specific scenarios.

Send feedback

# Optimized VS Code language server

The highly optimized language server in VS Code enables an efficient, responsive developer experience, with major speed boosts for features like linting and auto-complete.

## Integrated terminal

VS Code's integrated terminal gives you full control over your development environment. Automate workflows with scripts, run commands to perform bulk operations, and efficiently manage version control with the command line interface.

## Flexibility to work in Foundry or locally

**VS Code workspaces** provide you with an environment deployed on Palantir infrastructure and accessible from the Palantir platform. Alternatively, the [Palantir extension for Visual Studio Code](#) can be installed in your local VS Code IDE to integrate directly with your code in Foundry.

For a detailed comparison to help you decide which is right for you, review our documentation on [choosing between local development and VS Code workspaces](#).

## Customizable user experience

VS Code workspaces enables you to customize your workflow and save your coding preferences, such as custom key bindings, configurable color themes and layouts, and other UI settings.

Learn more about the motivation for [VS Code integration with Foundry](#) and additional [features of the VS Code extension](#).

---

N [API Reference](#) ↗ availability is subject to change and may differ between customers.

[Send feedback](#)

VS Code workspaces and the Palantir extension for Visual Studio Code are not affiliated with or endorsed by Microsoft.

The Continue extension is a product of Continue Dev, Inc. No affiliation or endorsement is implied.

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

—[Cookies Settings](#)



# Global Branching in VS Code workspaces

**i** Global Branching in VS Code workspaces is supported for **Python Transforms** repositories and **TypeScript v1** function repositories. For the full list of resource types that support Global Branching, review the [integrations documentation](#).

When working in VS Code, you can create and access global branches and use other supported workflows for Python transforms and TypeScript v1 function repositories. These workflows are available both in [VS Code workspaces](#) deployed on Palantir infrastructure and in local VS Code through the [Palantir extension for Visual Studio Code](#).

## Global branches and Code Repositories branches

A repository in VS Code has two kinds of branches:


- A **Code Repositories branch** is the underlying git branch of your repository.
- A **global branch** can contain changes across multiple Palantir applications, allowing you to develop and test an end-to-end workflow on a single branch. Global branches must be based on the `main` branch of the repository.

In the Palantir extension, the tabbed branch selector lets you create and check out both [Code Repositories](#) branches and global branches from one place.

API Reference ↗



Send feedback

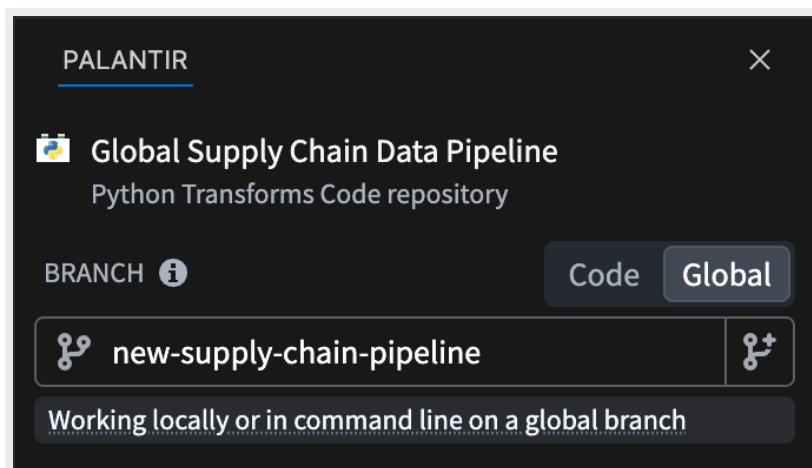

Learn more about [branch options in Code Repositories](#).

## Branch taskbar

When you open a supported repository in a VS Code workspace, the [branch taskbar](#) appears as a blue bar at the bottom of the editor on the **Code** page. The taskbar displays your active branch and keeps it in sync with VS Code. The branch reflected in the terminal, the Command Palette, and the editor always matches the branch shown in the taskbar.

The taskbar is available in VS Code workspaces only. In local VS Code, use the Palantir extension to view and switch your branch.

## Create a global branch

You can create a global branch from any of the following entry points:

- **Branch taskbar** (VS Code workspaces only): Open the branch selector in the taskbar and create a new branch.
- **Palantir extension** (VS Code workspaces and local VS Code): Open the tabbed branch selector in the Palantir panel of the sidebar, select the **Global branch** tab, and create a

API Reference ↗

e (VS Code workspaces and local VS Code): Press `Cmd+Shift+P` (macOS) or `Ctrl+Shift+P` (Windows/Linux), then run **Palantir: C**

Send feedback

- **Branches page** in Code Workspace: Create a global branch from the repository's **Branches** page.

From any of these entry points, the create branch dialog opens.

## Check out a global branch

You can check out an existing global branch from any of the following entry points:


- **Branch taskbar** (VS Code workspaces only): Open the branch selector in the taskbar and choose a branch.
- **Palantir extension** (VS Code workspaces and local VS Code): Open the tabbed branch selector in the Palantir panel of the sidebar and choose a branch from the **Global branch** tab.
- **Command Palette** (VS Code workspaces and local VS Code): Press `Cmd+Shift+P` (macOS) or `Ctrl+Shift+P` (Windows/Linux), then run **Palantir: Checkout Global Branch**.

Aside from the branch taskbar, each entry point opens the same branch picker, which groups branches into sections to help you find the relevant branch quickly:

- `main` branch
- Your branches containing this repository
- Your branches
- All other branches

[API Reference ↗](#)

[Send feedback](#)

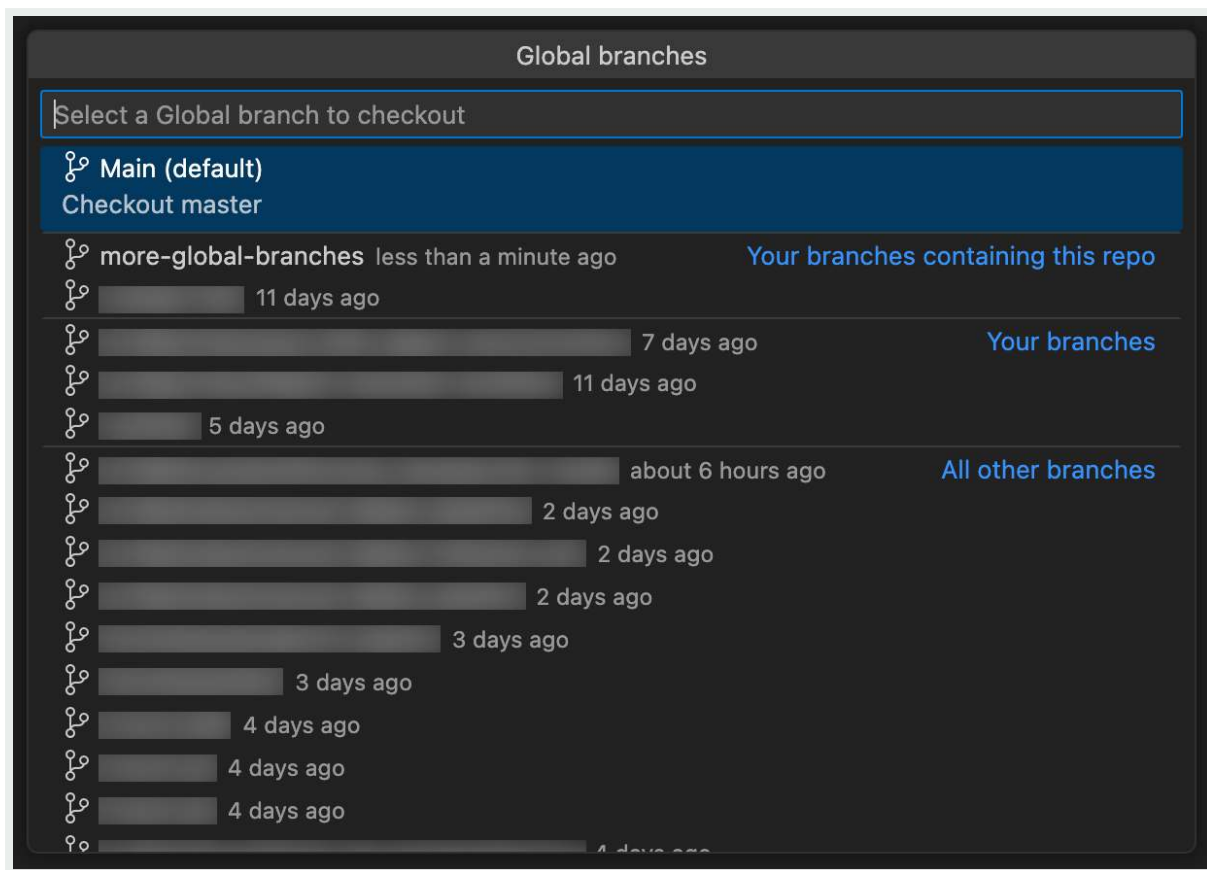

The following behaviors apply when checking out a branch:

- **Adding a repository to a branch:** If the repository is not yet on the branch you select, you are prompted to add it before the checkout completes.
- **Uncommitted changes:** If you have uncommitted changes, a dialog prompts you to resolve them before the checkout or add-to-branch operation proceeds. This prevents your editor from getting out of sync with your active branch.

## Develop transforms on a branch

You can develop Python transforms on a global branch. The [preview](#) and [build](#) panels run against the branch you currently have checked out.

[Learn more about developing Python transforms.](#)

API Reference ↗

## Develop functions on a branch

Send feedback

For TypeScript v1 function repositories, these panels also operate in the context of your active global branch:

- **[Live preview](#)**: Preview your functions against the resources on the branch.
- **Published preview**: Preview the function versions you have published on the branch.
- **[Resource imports](#)**: Import and modify the Ontology resources available to your functions.

You can publish function versions on a global branch by tagging them. Tag a version from the **Tags** page in your VS Code workspace or with the **Tag Version** action in the Palantir extension. While you are on a global branch, the tag is created against that branch.

[Learn more about developing, publishing, consuming, rebasing, and merging functions on a branch.](#)

PREVIOUS  
← Benefits of VS Code workspaces

NEXT  
AI development tools →

---

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

—[Cookies Settings](#)

[API Reference ↗](#)

[Send feedback](#)

Developer toolchain / VS Code workspaces / AI development tools

# AI development tools

AI development tools can be used in VS Code workspaces to assist with code generation, testing, debugging, and optimization.

## Continue

[Continue](#) is an open source extension for VS Code. Continue provides features for AI code generation, including [chat](#), [inline edits](#), [codebase indexing](#), [custom context selection](#), and more.

In the Palantir platform, Continue is preconfigured to work with Palantir-provided language models, and has added knowledge about relevant Palantir SDKs and your Python transforms or OSDK repository. This contextual understanding of your data structures, Ontology, and organization allows Continue to generate more accurate and relevant code.

## Get started


Below are some commands and actions you can use to get started with Continue:

- Open the Continue extension from the VS Code sidebar, and use the model picker to select a Palantir-provided model.
- Select a code snippet in the editor and use the command `cmd/ctrl + L` to add context to a new chat.
- Select a code snippet in the editor and use the command `cmd/ctrl + I` to edit the

API Reference ↗

filename, @folder or @codebase to reference parts of your codebase.   
problems to include linting errors in open files.

Send feedback

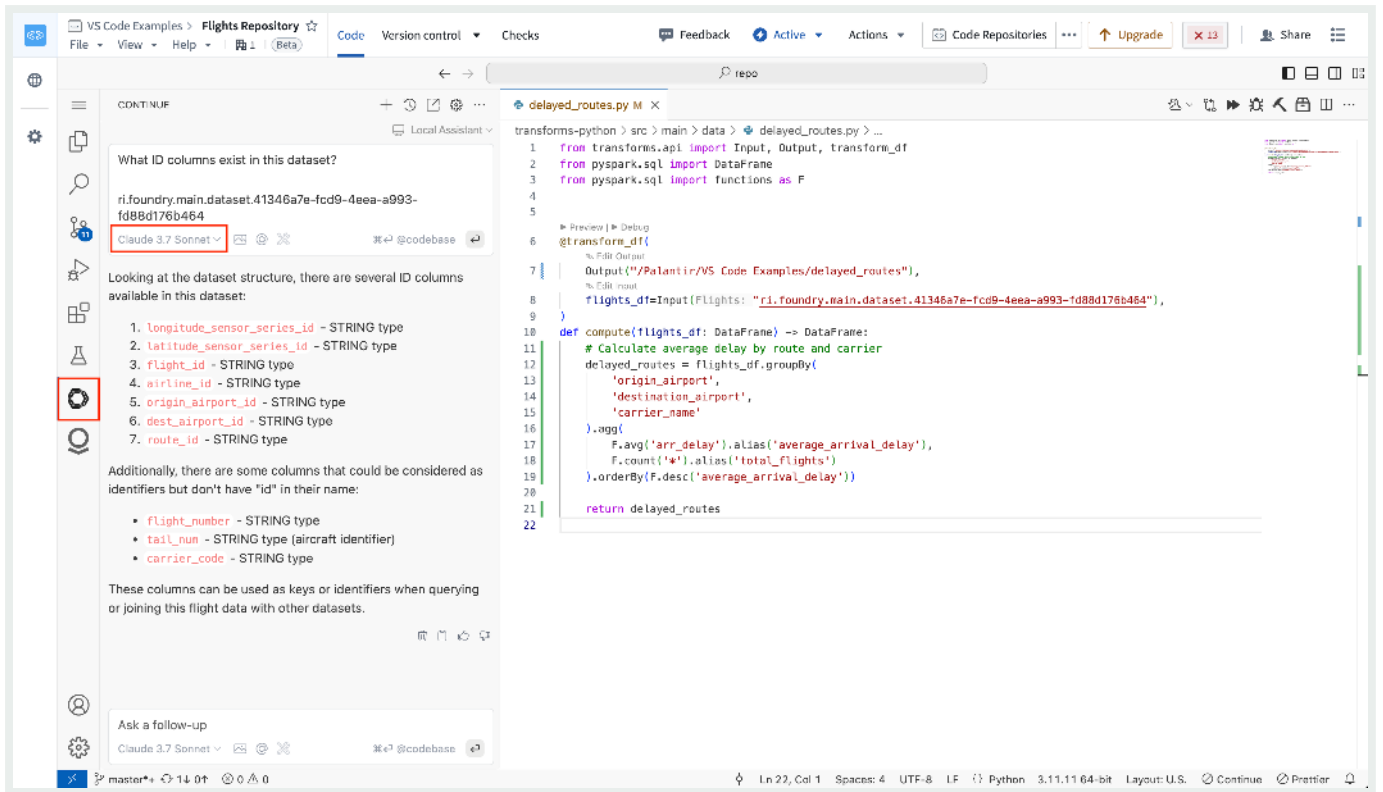

## Python transforms


In [Python transforms](#) repositories, Continue is preconfigured to understand how to write Python transforms. This includes knowledge of the following topics:

- The Python transforms SDK and related Palantir APIs.
- Dataset schemas: Include a dataset RID in your message, or in added context to automatically include dataset schemas and metadata.
- Foundry-specific conventions and best practices.

Ask `How do I write a transform?` to get started.

[API Reference](#) ↗

[Send feedback](#)

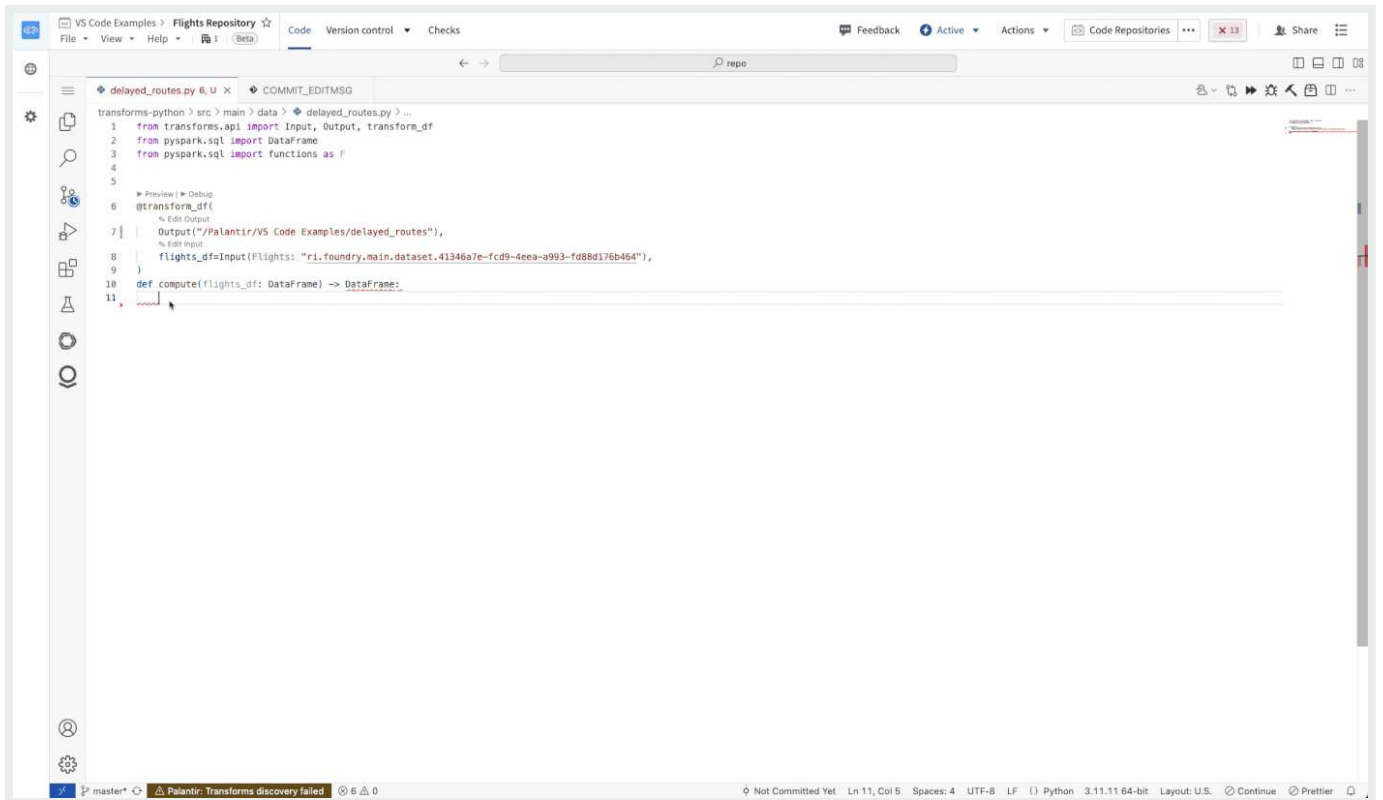

## OSDK

In [TypeScript OSDK](#) repositories, Continue is preconfigured to understand the OSDK included in your repository. This includes the following:


- The TypeScript OSDK and its associated libraries.
- Ontology objects and their metadata, links, Actions and imported functions.

Ask `Tell me about my OSDK` in your repository to get started.

API Reference ↗

Send feedback



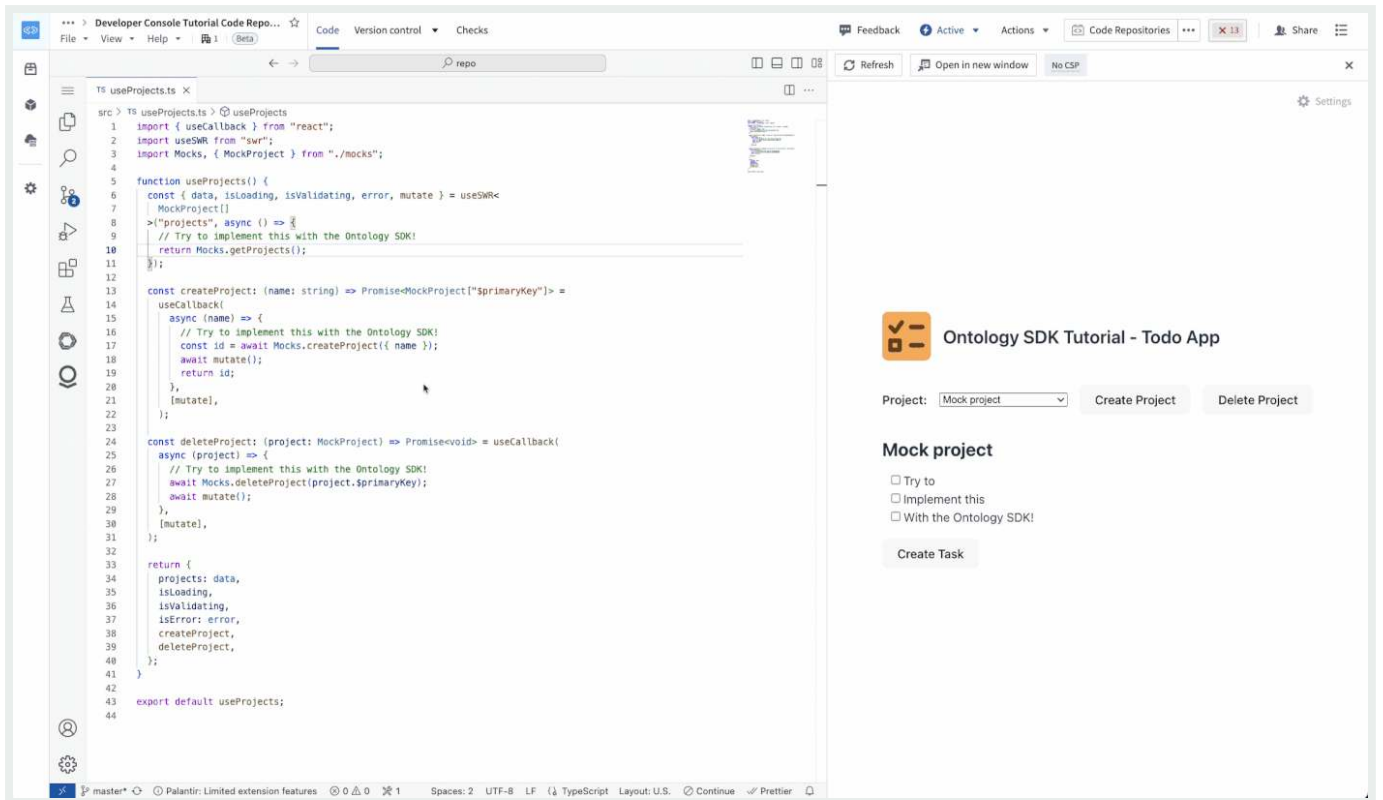

## Palantir MCP integration


Palantir MCP is integrated into VS Code workspaces by default. The MCP provides context from your code, library, and Foundry context to the LLM agent. It also offers agent tools to take actions within your repository and Foundry.

The following tools are provided by Palantir MCP in a VS Code workspace:

- Context tools for OSDK, Python, and TypeScript function repositories.
- Preview tools for Python transforms, allowing the agent to run a transform and fix errors if they occur.
- Ontology management tools for you to explore and modify the ontology.
- Developer Console tools for the agent to update and regenerate the OSDK without leaving your IDE.
- Foundry navigation tools to investigate Foundry project contents, view individual dataset schemas, and run SQL queries.

[API Reference ↗](#)

[Send feedback](#)

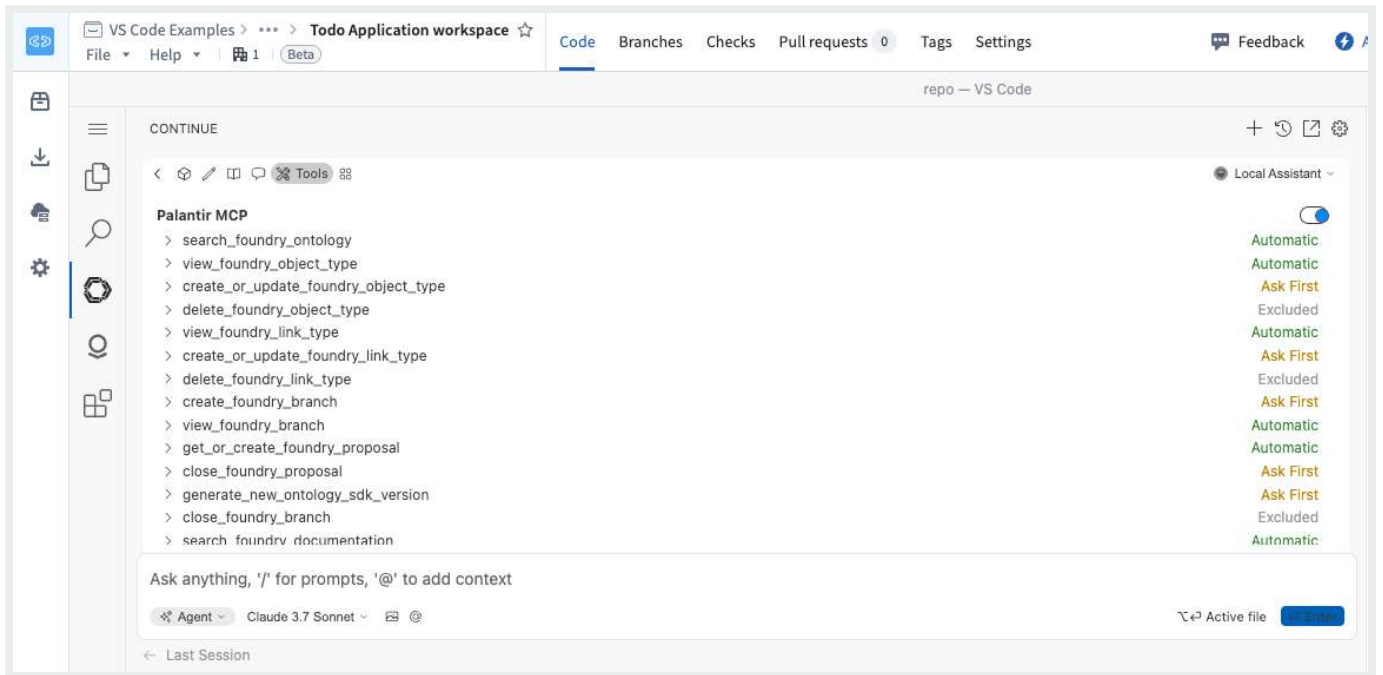

For more information, review our [Palantir MCP documentation](#).

## Pricing

Continue is included with VS Code workspaces at no additional charge. Usage of Palantir-provided models will incur compute costs according to [Palantir's AIP compute pricing model](#).

## Security

Continue in VS Code workspaces is preconfigured to use the Palantir-provided models available on your enrollment. To maintain the same level of security offered across the platform, we do not recommend adding additional models directly in the Continue extension. To add additional models use [Control Panel](#).

## Availability

Continue is automatically available in VS Code workspaces if [AIP is enabled](#) on your enrollment. Additional installation or configuration is required. Contact your Palantir administrator to enable AIP for your enrollment.

[Send feedback](#)

Note: AIP feature availability is subject to change and may differ between customers.

VS Code workspaces and the Palantir extension for Visual Studio Code are not affiliated with or endorsed by Microsoft.

The Continue extension is a product of Continue Dev, Inc. No affiliation or endorsement is implied.

PREVIOUS  
← Global Branching

NEXT  
Troubleshooting →

---

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

—Cookies Settings

[API Reference ↗](#)

[Send feedback](#)

# Troubleshooting

This page contains tips for troubleshooting issues that you may encounter while using the Palantir extension for Visual Studio Code.

## Code Workspaces errors

VS Code in the Palantir platform uses the Code Workspaces infrastructure; refer to the [Code Workspaces troubleshooting page](#) for more information.

## VS Code Workspace fails to load or displays a blank screen

If VS Code fails to load or only displays a blank screen, there might be an issue with the browser cache. In this case, perform a hard reload of your browser page to resolve your issue.

- Hold **Cmd** (macOS) or **Ctrl** (Windows), then select **Reload**.
- Use **Cmd+R** (macOS) or **Ctrl+R** (Windows) to reload.
- In Chrome, open the **Developer Tools** panel by navigating to **View > Developer > Developer Tools** or using the **F12** key. Then, right-click the **Reload** button to the left of the search bar and choose **Empty Cache and Hard Reload**.

API Reference ↗

NEXT

Palantir extension for Visual Studio Code →

Send feedback



---

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

— [Cookies Settings](#)

[API Reference ↗](#)

[Send feedback](#)