

Table of Contents


1. [Workflow Lineage • Overview • Palantir](#)
2. [Workflow Lineage • Overview • Palantir](#)
3. [Workflow Lineage • Getting started • Palantir](#)
4. [Workflow Lineage • Perform refactors and understand your workflows • Palantir](#)
5. [Workflow Lineage • AIP usage metrics and observability • Palantir](#)
6. [Workflow Lineage • Manage security • Palantir](#)
7. [Workflow Lineage • Branching support • Palantir](#)
8. [Workflow Lineage • Keyboard shortcuts • Palantir](#)

Use case development / Workflow Lineage / Overview

Workflow Lineage

i The application previously known as Workflow Builder is now called Workflow Lineage.

Workflow Lineage provides an interactive workspace for understanding and managing applications and their underlying processes.

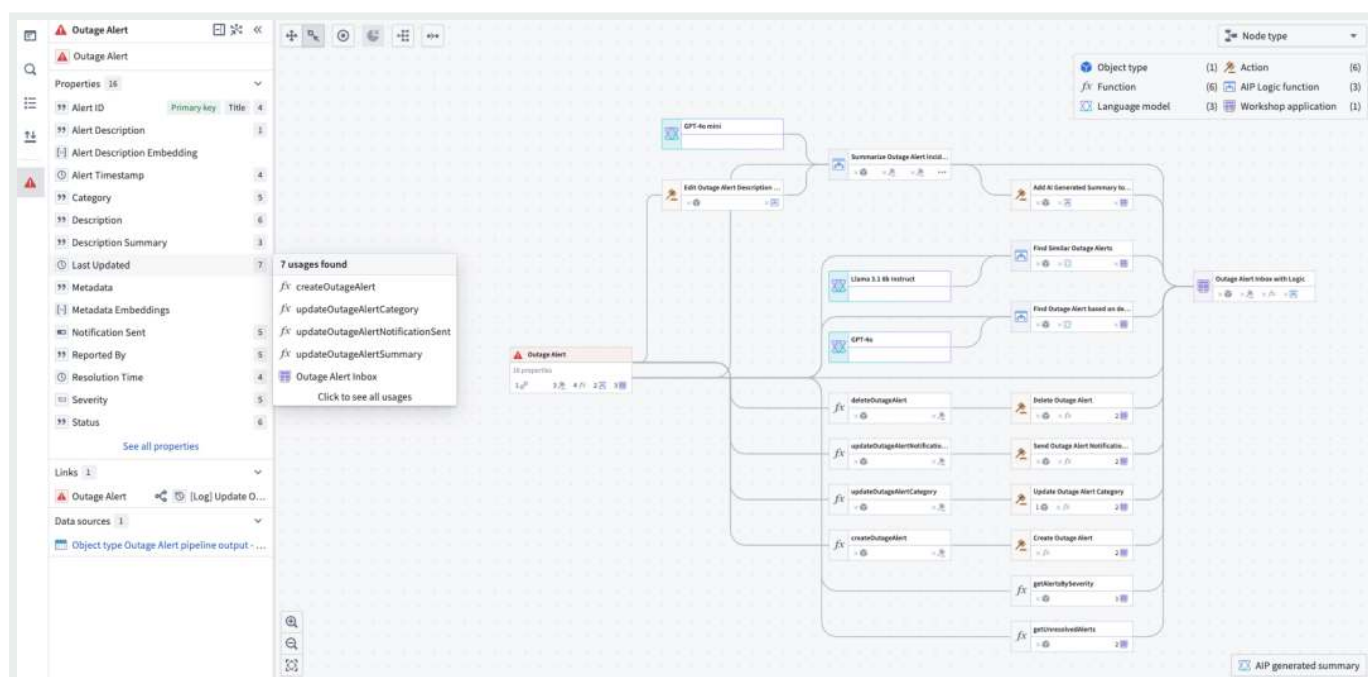

With Workflow Lineage, you can perform the following:

- Explore workflows to see details on objects, actions, functions, large language models, and applications, including:

[API Reference](#)

[Send feedback](#)

- Submission criteria
- Code snippets
- For a specific column in an object, view all usages downstream including dependent actions and Workshop applications.
- Use the color legend to easily see outdated functions, resource or Ontology permissions across all actions, application views and more.
- Bulk select actions to update the actions to a specific version simultaneously.

Workflow Lineage is particularly suitable for the following users:

- Application builders that are creating, debugging or maintaining workflows. The graph of provenance, deeper property and workshop widget/variable provenance, and upgrade tooling are all helpful when making changes to or extending a workflow.
- New builders that want to learn from existing workflows to answer the question “What parts of the Ontology are used in this workflow, and how?”
- Users that are presenting existing workflows: The graph provides a high-level overview of the Ontological resources used which can be a helpful presentation and teaching tool when sharing workflows with others.

i To enable Workflow Lineage, contact your platform administrator to [modify application access](#) in Control Panel.

When to use Workflow Lineage

The intent of Workflow Lineage is to help understand, manage, and debug workflows. Workflows typically span a spread of ontology resources and often flow into an application. As such, Workflow Lineage is complementary to [Pipeline Builder](#) and [Data Lineage](#):

- Pipeline Builder: Integrating data from raw sources into the Ontology.
- Workflow Lineage: Management of workflows built on top of the Ontology.
- Data Lineage: An end-to-end view of data flowing from source, to Ontology, through to workflow

API Reference ↗


As an example, if you require information about the scheduling of data type in your workflow in Workflow Lineage, you can right-click and open Data Lineage to explore schedules.

Send feedback


[Learn how to get started with Workflow Lineage.](#)

Access control

You can control which users in your organization have access to Workflow Lineage in Control Panel.

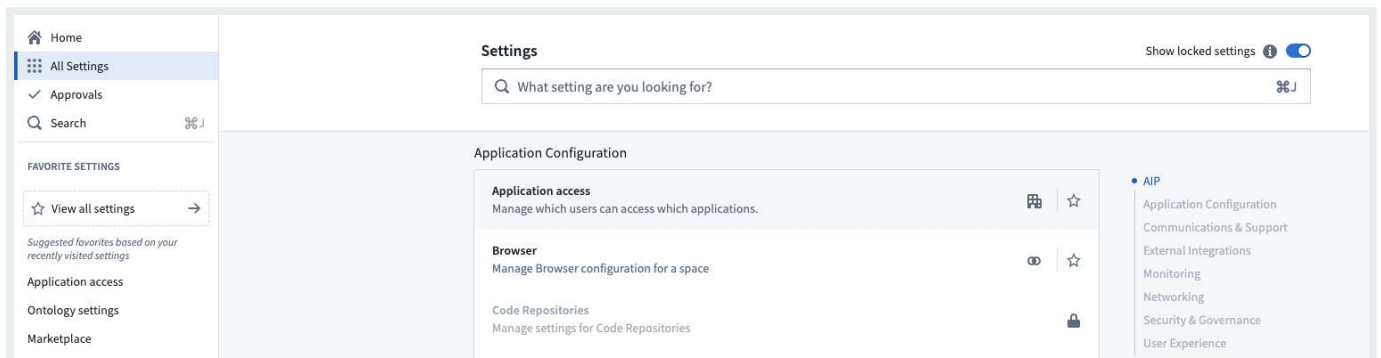

On the **Application settings** tab of **Application access**, navigate to the **Ontology** section. Select **Manage** to the right of the Workflow Lineage entry.

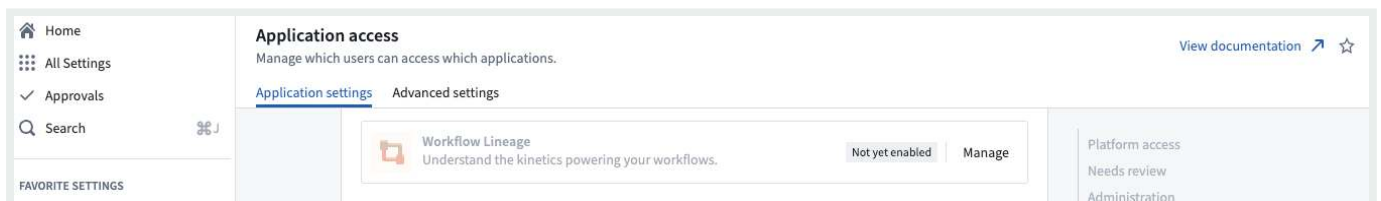

Select **Manage** to open up a window where you can configure your enrollment's preferences.

[API Reference ↗](#)

[Send feedback](#)

Request application access changes for  Workflow Lineage

Select which users of the organization should be able to access this application:

☒ Everyone

☐ Only members of groups

☐ Everyone except members of groups

☐ Nobody



Enabled for everyone

Everyone in your organization will be able to see and access the selected application.

Change request title (required)

Enable Workflow Lineage

Change request description (optional)

Provide a description for this change request...

Cancel


Request change

Use case development / Workflow Lineage / Overview

Workflow Lineage

i The application previously known as Workflow Builder is now called Workflow Lineage.

Workflow Lineage provides an interactive workspace for understanding and managing applications and their underlying processes.

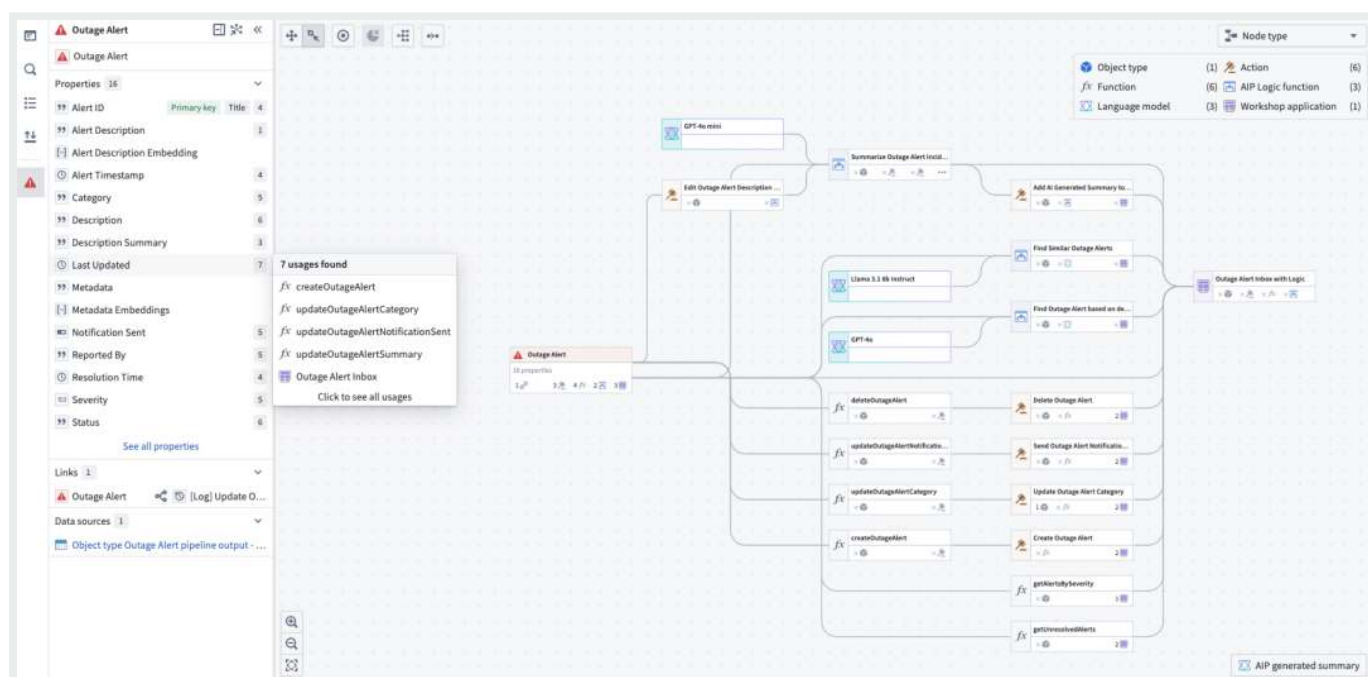

With Workflow Lineage, you can perform the following:

- Explore workflows to see details on objects, actions, functions, large language models, and applications, including:

[API Reference ↗](#)

Send feedback

- Submission criteria
- Code snippets
- For a specific column in an object, view all usages downstream including dependent actions and Workshop applications.
- Use the color legend to easily see outdated functions, resource or Ontology permissions across all actions, application views and more.
- Bulk select actions to update the actions to a specific version simultaneously.

Workflow Lineage is particularly suitable for the following users:

- Application builders that are creating, debugging or maintaining workflows. The graph of provenance, deeper property and workshop widget/variable provenance, and upgrade tooling are all helpful when making changes to or extending a workflow.
- New builders that want to learn from existing workflows to answer the question “What parts of the Ontology are used in this workflow, and how?”
- Users that are presenting existing workflows: The graph provides a high-level overview of the Ontological resources used which can be a helpful presentation and teaching tool when sharing workflows with others.

i To enable Workflow Lineage, contact your platform administrator to [modify application access](#) in Control Panel.

When to use Workflow Lineage

The intent of Workflow Lineage is to help understand, manage, and debug workflows. Workflows typically span a spread of ontology resources and often flow into an application. As such, Workflow Lineage is complementary to [Pipeline Builder](#) and [Data Lineage](#):

- Pipeline Builder: Integrating data from raw sources into the Ontology.
- Workflow Lineage: Management of workflows built on top of the Ontology.
- Data Lineage: An end-to-end view of data flowing from source, to Ontology, through to [workflow](#)

[API Reference ↗](#)


As an example, if you require information about the scheduling of data type in your workflow in Workflow Lineage, you can right-click and open Data Lineage to explore schedules.

[Send feedback](#)


[Learn how to get started with Workflow Lineage.](#)

Access control

You can control which users in your organization have access to Workflow Lineage in Control Panel.

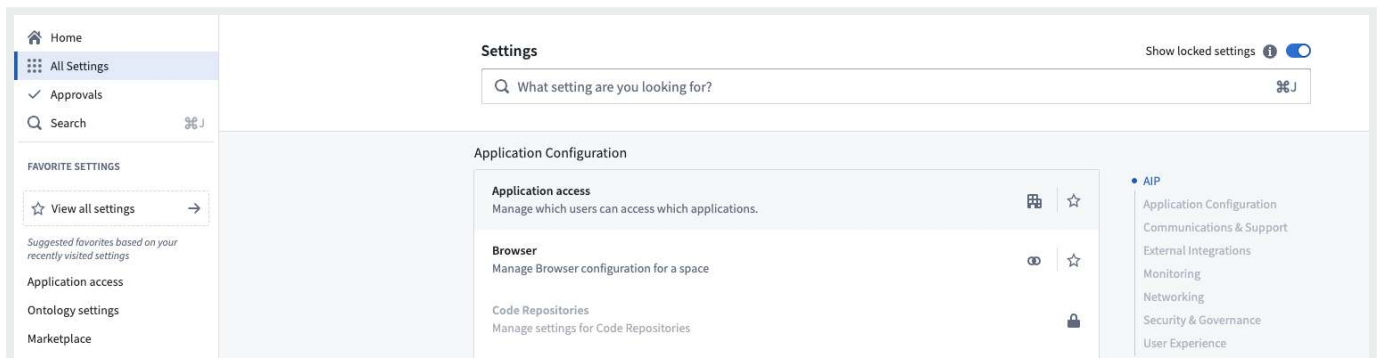

On the **Application settings** tab of **Application access**, navigate to the **Ontology** section. Select **Manage** to the right of the Workflow Lineage entry.

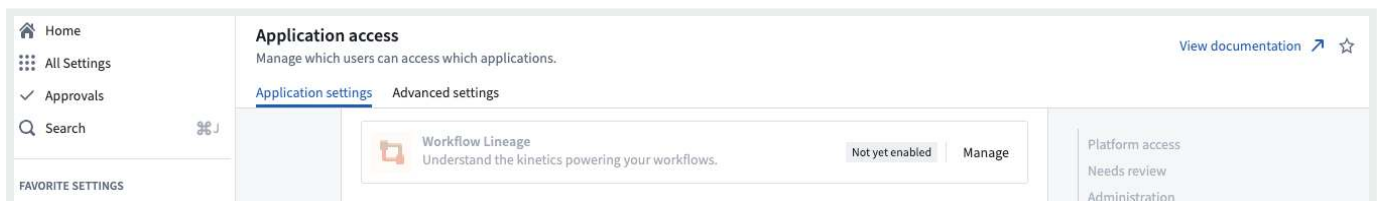

Select **Manage** to open up a window where you can configure your enrollment's preferences.

[API Reference ↗](#)

[Send feedback](#)

Request application access changes for  Workflow Lineage

Select which users of the organization should be able to access this application:

☒ Everyone

☐ Only members of groups

☐ Everyone except members of groups

☐ Nobody



Enabled for everyone

Everyone in your organization will be able to see and access the selected application.

Change request title (required)

Enable Workflow Lineage

Change request description (optional)

Provide a description for this change request...


Cancel

Request change

Use case development / Workflow Lineage / Getting started

Getting started

To get started with Workflow Lineage, use the keyboard shortcut `Cmd + i` (macOS) or `Ctrl + i` (Windows) to view the Workflow Lineage graph depicting the objects, actions, and functions that back your resource. You can also navigate to Workflow Lineage from the following applications with the **Open in Workflow Lineage** navigation option commonly found under **File** or **Actions**.

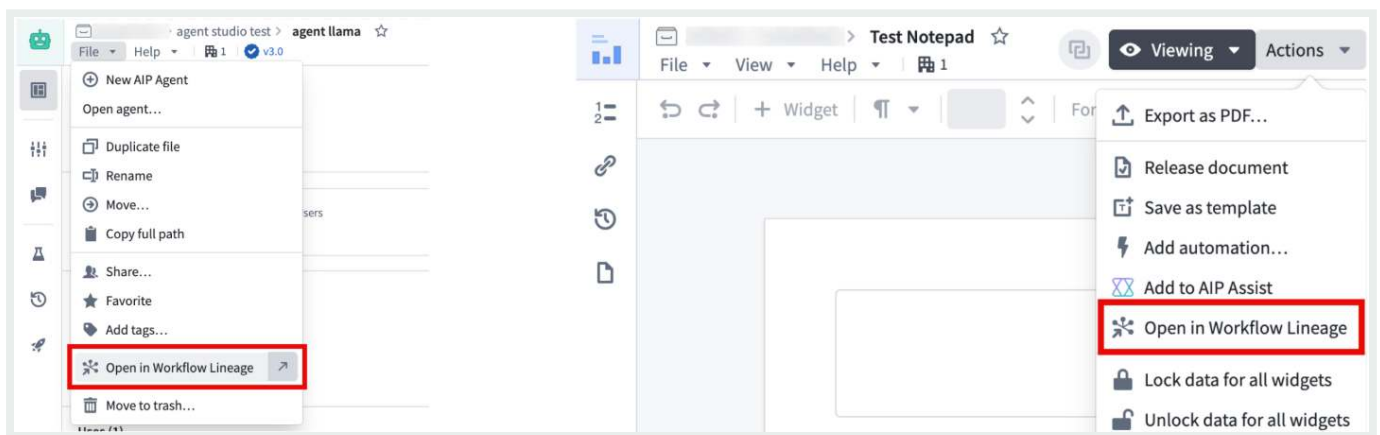

The following applications support these features:

- Workshop
- Objects in Ontology Manager
- Function repositories
- Quiver dashboards
- Machinery
- Slate
- Chatbot Studio

API Reference ↗

Applications



er Console (Keyboard shortcut only)

Send feedback


- Marketplace (Keyboard shortcut only, in a draft resource's overview tab.)

- Notepad (Navigation option only)
- Object types in Pipeline Builder (Navigation option only)

Interface

Workflow Lineage's interface consists of the two main components, as seen in the following notional screenshot:

1. **Graph panel:** An interactive graphical view of the entities backing your workflow and the relationships between them.
2. **Workshop panel:** An interactive view of the selected Workshop applications.

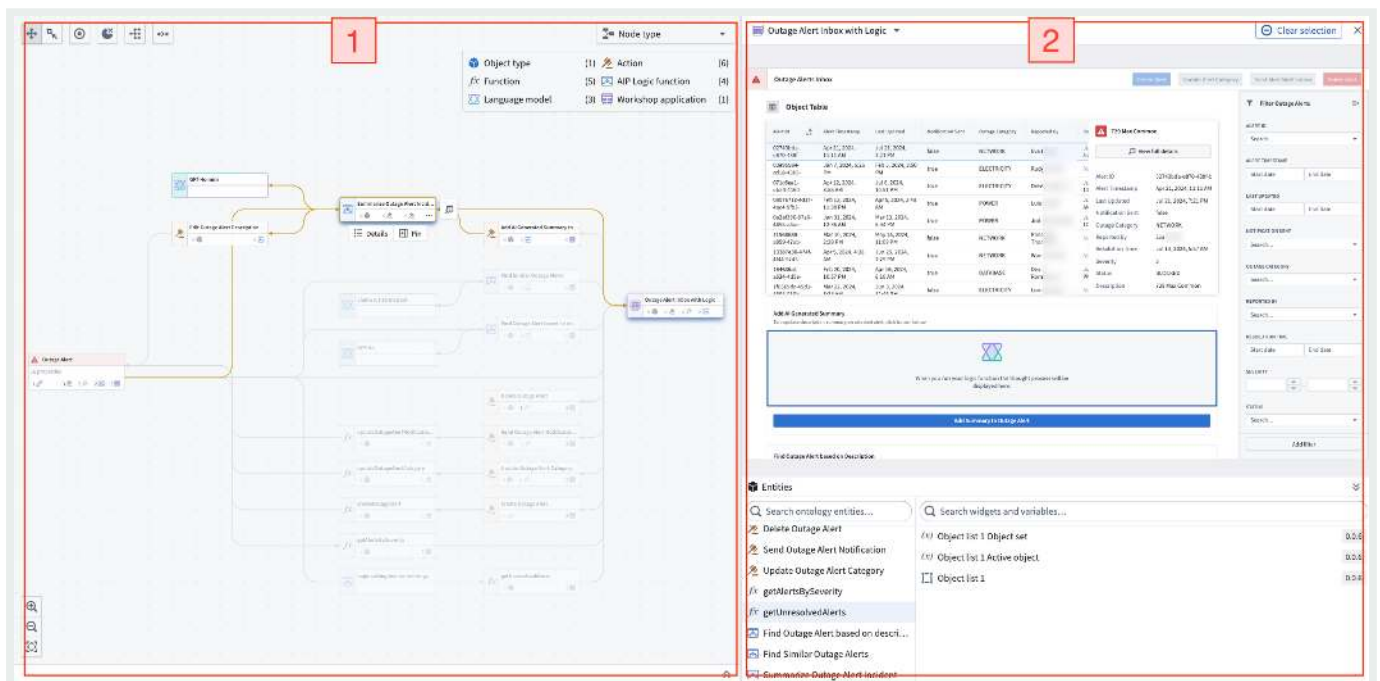


Graph panel


When you select nodes on the graph panel, you can see the corresponding Workshop components highlighted on the Workshop panel. This makes it easy to see the exact places that are using specific nodes and can help show you where specific objects are being used.

[API Reference ↗](#)

[Send feedback](#)

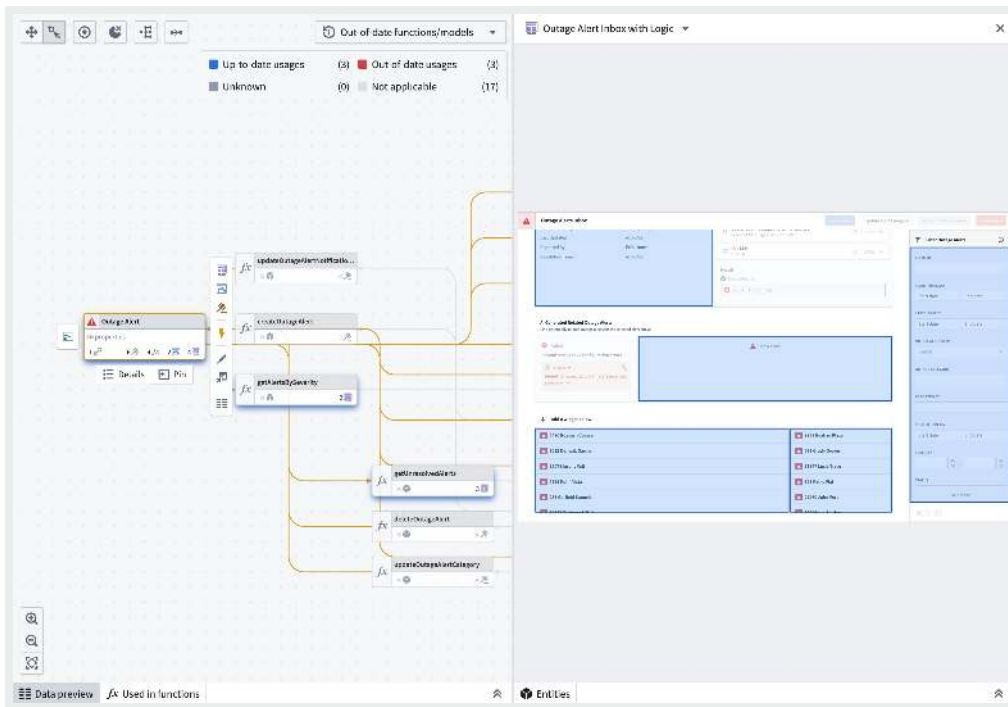

When you select a specific node on the graph, you can use the **Pin** option to pin it to the left sidebar or view more details about the node.

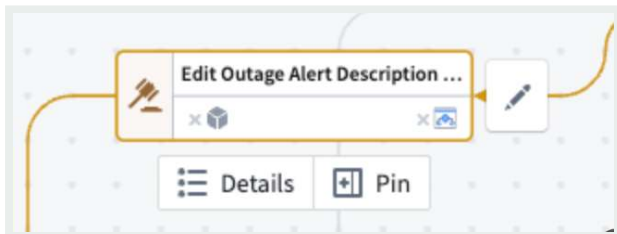


To see all linked dependencies for a particular node, select the icon corresponding to the input type you want to see on the graph.

You can view the icons of each node type in the legend at the top right of the graph panel. Object type nodes are represented using the icon specified in the Ontology.

In the example below, we want to see the nine actions dependent on the **Outage Alert** object. Select the same icon location inline on the object to show and hide those

API Reference  view.

Send feedback

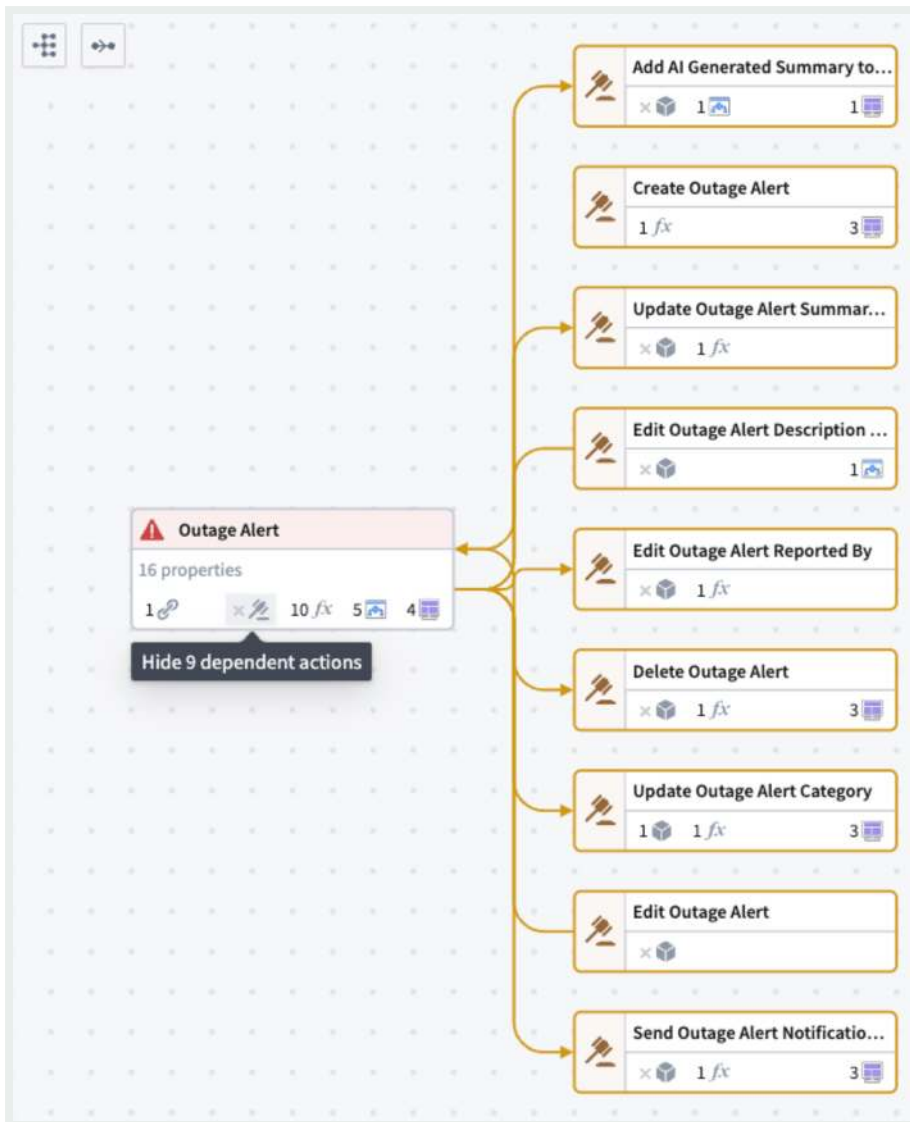


Review details of a specific node by selecting the node and then opening the selection details panel on the left side of the screen. Details displayed vary depending on the type of node selected. The following is a list of sample details that can be found for each resource:

- **Objects:** A list of properties and where those properties are used throughout the workflow (see property provenance linked below), linkages, backing data source, and so on.
- **Object links:** Resource usage by objects, functions, actions, Workshop applications, and more.
- **Functions:** Inputs, outputs, dependencies, repository, and other relevant metadata.
- **API Reference** [↗](#) input data, Ontology edits, and submission criteria.
- **API Logic Functions:** Dependencies, automations, and metadata about creation details.
- **Language models:** Model descriptions and metadata on model c

Send feedback

- **Workshop applications:** Metadata about creation and action, function, and object dependencies.

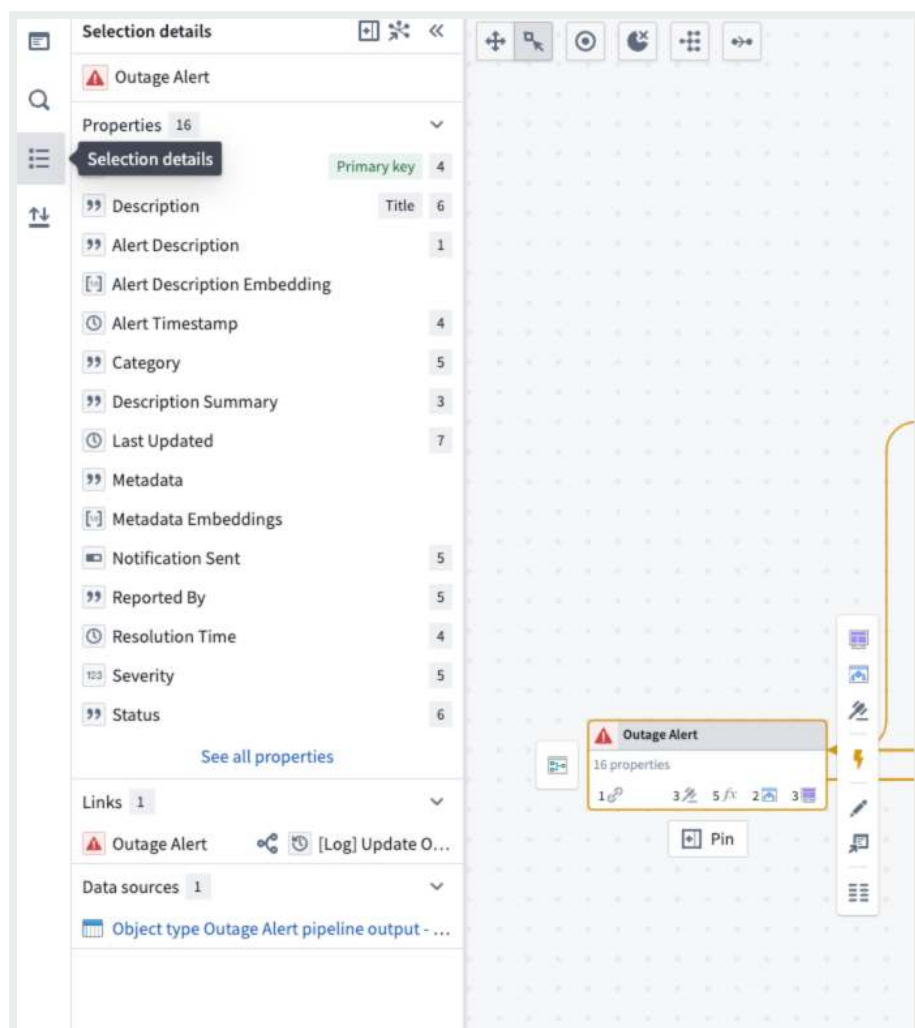

Support for multiple ontologies


The Workflow Lineage graph displays resources from all relevant ontologies, allowing you to visualize cross-ontology relationships.

If an object, interface or action node belongs to a different ontology, that node will be gray and a warning icon will appear in the upper right corner of the node.


API Reference ↗

Classes and object nodes will have limited functionality when you select an ontology different from their own. For example, you can only update on function-backed actions within the currently selected ontology.

Send feedback

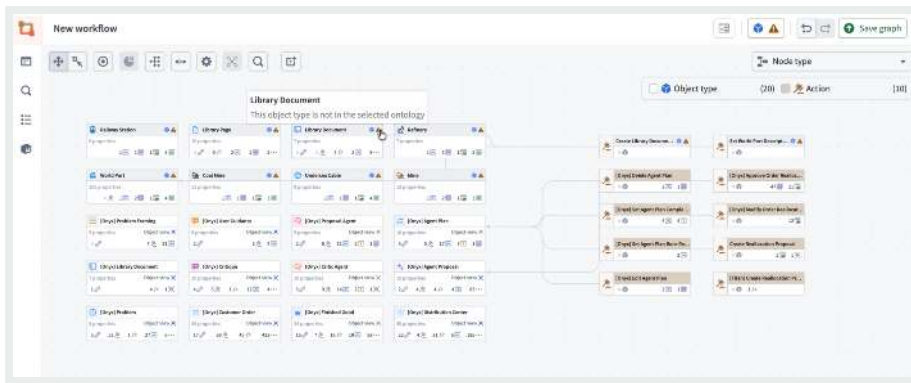

If multiple ontologies are present, a warning icon will also appear next to the blue cube in the upper right corner of the graph. Though you can only select one ontology at a time, you can view the ontologies present in your graph and switch between them by selecting the cube icon.

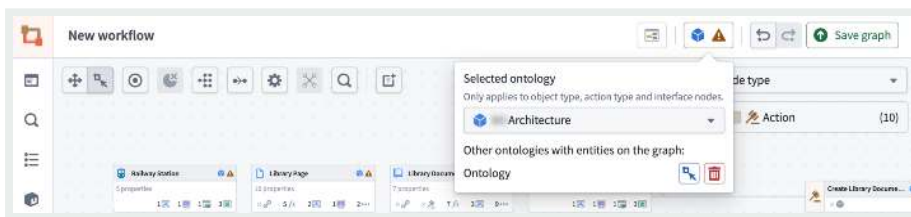

Additional details

For **Functions**, you can view the code when you select the node. This includes the objects from which your function reads and a description of the logic. You can also [bulk upgrade functions used in Workshop applications and automations](#).

API Reference ↗

Send feedback

The screenshot displays a workflow diagram at the top with various action nodes like 'createOutageAlert', 'updateOutageAlertCategory', and 'sendOutageAlertNotification'. Below the diagram, the 'Function code' tab is active, showing the code for the 'updateOutageAlertNotificationSent' function. The code is as follows:

```

42 @Edits(OutageAlert)
43 @OntologyEditFunction()
44 async updateOutageAlertNotificationSent(sent: boolean = true, outageAlert: OutageAlert): Promise<void> {
45
46     // Modify Outage Alert
47     outageAlert.notificationSent = sent;
48     outageAlert.lastUpdated = Timestamp.fromJsDate(new Date());
49 }

```

On the right side, the 'Objects' panel shows that the function reads data from and updates properties of 'Outage Alert' objects.

For **Actions**, you can view the action function code, the action log, and the option to [upgrade the action](#). You can also [bulk update the submission criteria on actions](#) and [bulk delete actions and objects](#).

This screenshot shows the 'Update Outage Alert Category' action selected in the workflow diagram. Below the diagram, the 'Action log' tab is active, displaying a log of actions. The log shows that the action was called on Nov 4, 2024, at 8:22 PM. The 'Object edits' section shows that the action created a new 'Outage Alert' object with ID '095'.

Update Outage Alert Category logs	Action called by
Nov 4, 2024, 8:23 PM	on Nov 4, 2024, 8:22 PM
Nov 4, 2024, 8:22 PM	
Nov 4, 2024, 8:22 PM	
Nov 4, 2024, 8:22 PM	

The 'Object edits' section shows:

- Created objects:** ri.actions.main.action.dbb90f65... (Log) Update Outage Alert Category
- Modified objects:** 095 Outage Alert

For **objects**, you can view a preview of the object data. You can also [bulk delete actions and objects](#).

⚠ By default, the lines denoting object links and objects that are inputs to actions are not shown on the graph. To see these relationships, select the object nodes. You

API Reference ↗

A on macOS and **Ctrl + A** on Windows as a shortcut to select all

Send feedback

TITLE	SEVERITY	NOTIFICATION SENT	METADATA	LAST UPDATED	ALF	
256	Experimental	2	true	DATABASE-	Jan 29, 2024, 5:36 AM	On
283	Experimental	2	true	ELECTRICIT	Feb 13, 2024, 2:05 AM	On
112	Experimental	0	false	ELECTRICIT	Apr 1, 2024, 9:40 AM	On
513	Experimental	1	true	POWER-51	Mar 21, 2024, 6:18 AM	On

You can also view object links under the **Links** section of the **Selection details** panel. Hover over each object link to show a preview of all usages.

Selection details

[Onyx] Customer Order
Orders on various finished goods by customers

Properties 29

- Order Id (Primary key)
- Title
- Actual Completion Date
- Actual Start Date
- ai-prediction
- Automation Agent Comment
- Automation Status
- Creation Time
- Criterion
- Current Status

Links 13

- [Onyx] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order
- [Gamma] Customer Order

39 usages found

- fx calculateRawMaterialNeeded 9.9.1
- fx orderRawMaterial 9.9.1
- fx rawMaterialCalculationAccountingForWastage 9.9.1
- fx rawMaterialCalculationNotAccountingForWastage 9.9.1
- AIP_Operations

Click to see all usages

API Reference ↗

Select the link to view full details. If the link is being edited, a pen icon will appear. [Send feedback](#)

Selection details

Back to object type

Film ↔ Actor

RID

ri.ontology.main.rel:

Status

Experimental

Join table

films_and_actors

LinkTheStars Data Pipeline

Link sides

Film → Actor

Each Film has many Actors

Actor Id

Matches on column

actor_id

film.actor.all()

Actor → Film

Each Actor has many Films

pk

Matches on column

primary_key

actor.film.all()

Link type usages

Search usages

Create Film ↔ Actor

Guess the Movie

Edits link

Object type

Function

Language model

Workshop applicatio

Film

4 properties

1 1 1

Pin

Actor

2 properties

2 1 3

These links will also show up as dependencies in downstream resources.

Selection details

About

Dependencies

Search dependencies

[Onyx] Customer

1

[Onyx] Customer Order

10

[Onyx] Delivery

2

[Onyx] Delivery Log

4

[Onyx] Distribution Center

6

[Onyx] Manufacturing Plant

2

[Onyx] Edit Customer Order Title

[Titan] Escalate Order to High Priority

[Titan] Reallocate Orders

Confirm Customer Approval

Update Note from Customer

[Gamma] Cu... ↔ [Gamma] Custome...

[Gamma] Distrib... ↔ [Gamma] Cust...

[Gamma] Finis... ↔ [Gamma] Custo...

[Titan] Delivery ↔ [Titan] Delivery Logs

[Gamma] Custome... ↔ [Gamma] De...

[Titan Industry] ... ↔ [Titan Industry]...

AIP_Operations

4

Pin

[Onyx] Support Ticket Attachm...

5 properties

1 1 4

[Onyx] Customer Order

29 properties

7 21 12 15 59...

[ClaimQA] AI Next Best Action

7 properties

1 2

[ClaimQA] Invoice Line Item

11 properties

1 1 2


[Onyx] Distribution Center

[Titan Industry] Manufacturing Plant ↔ [Titan Industry] Distribution Centers


API Reference ↗

Send feedback

For **Automations**, you can view property usages and dependencies in the **Selection details** sidebar. Under **Condition ontology dependencies**, you can see a breakdown of the specific object properties on which the automate's condition depends. Hover over the number to view the exact property.

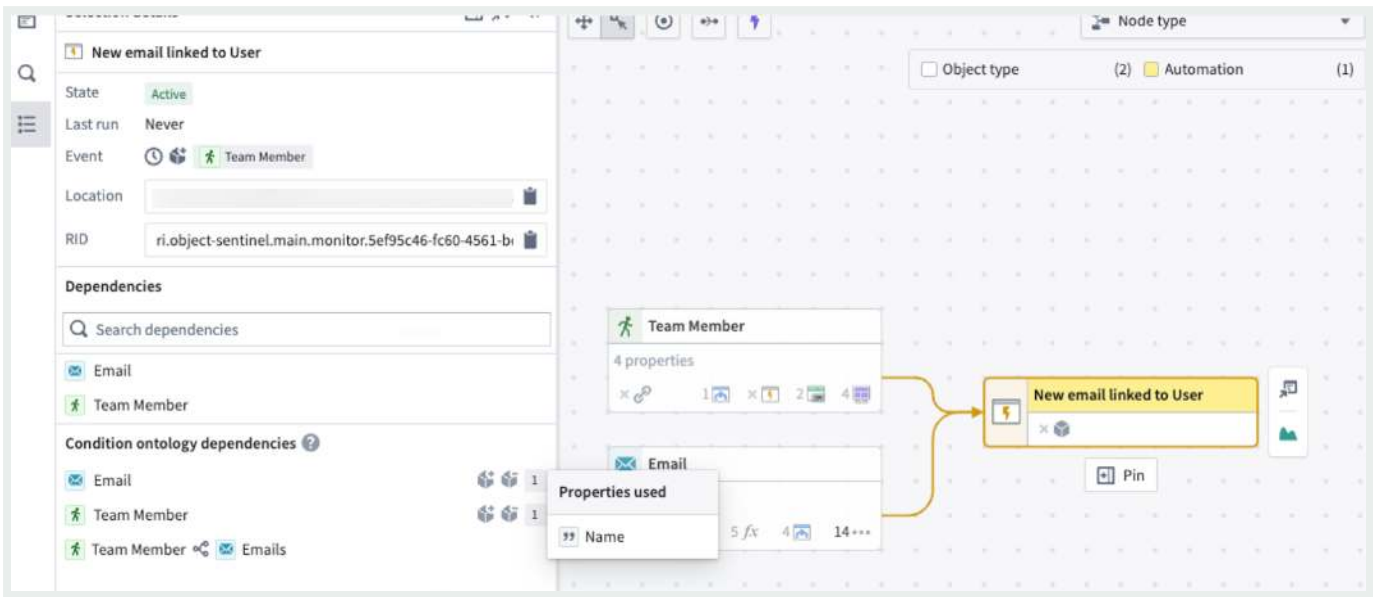


You can also toggle the purple lightning bolt button at the top left of the graph to view the actions and functions that trigger the automation.

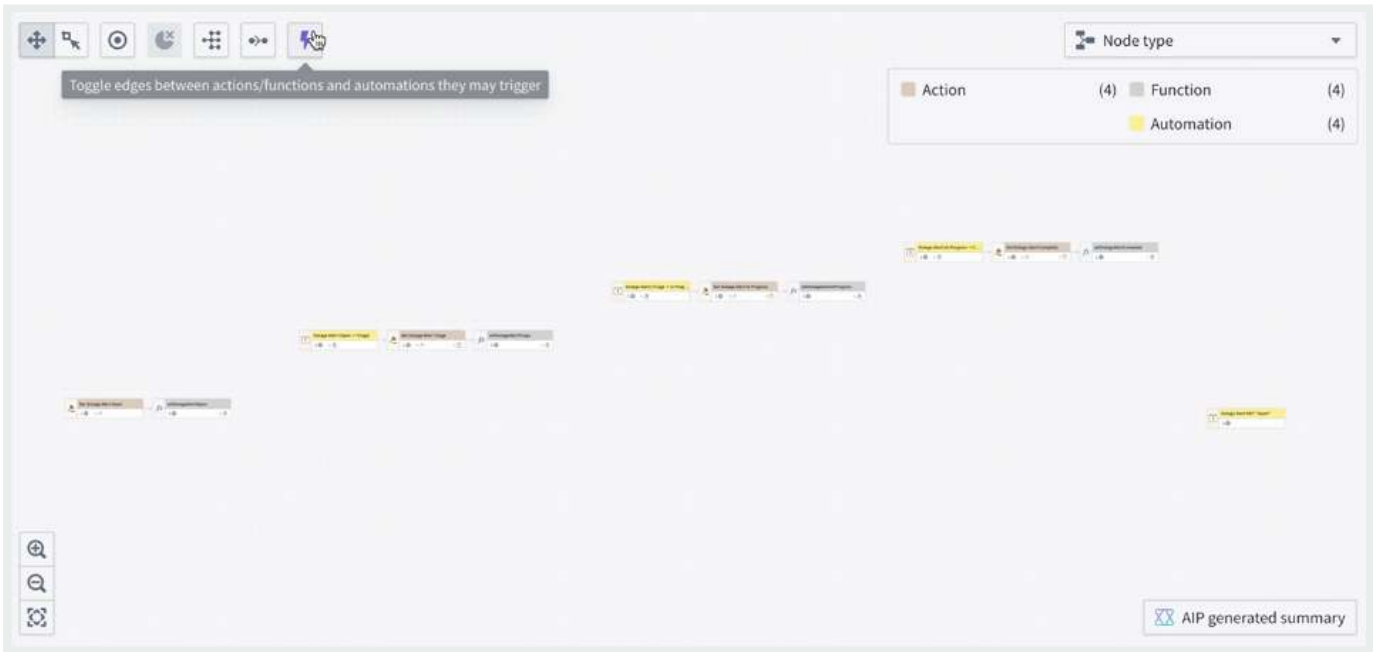


API Reference ↗

Send feedback

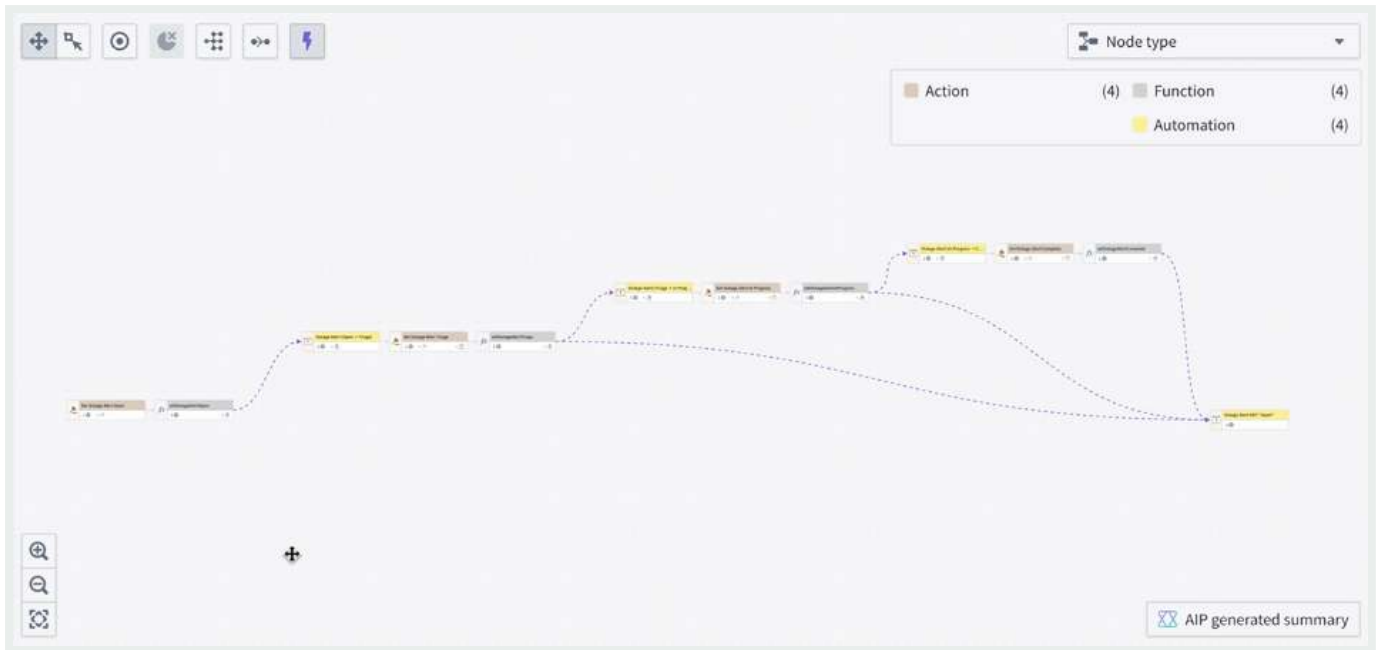

If you have an automation that triggers when a property is a specific value, Workflow Lineage will find the actions or functions that edit that property to that value and link them to the automation.

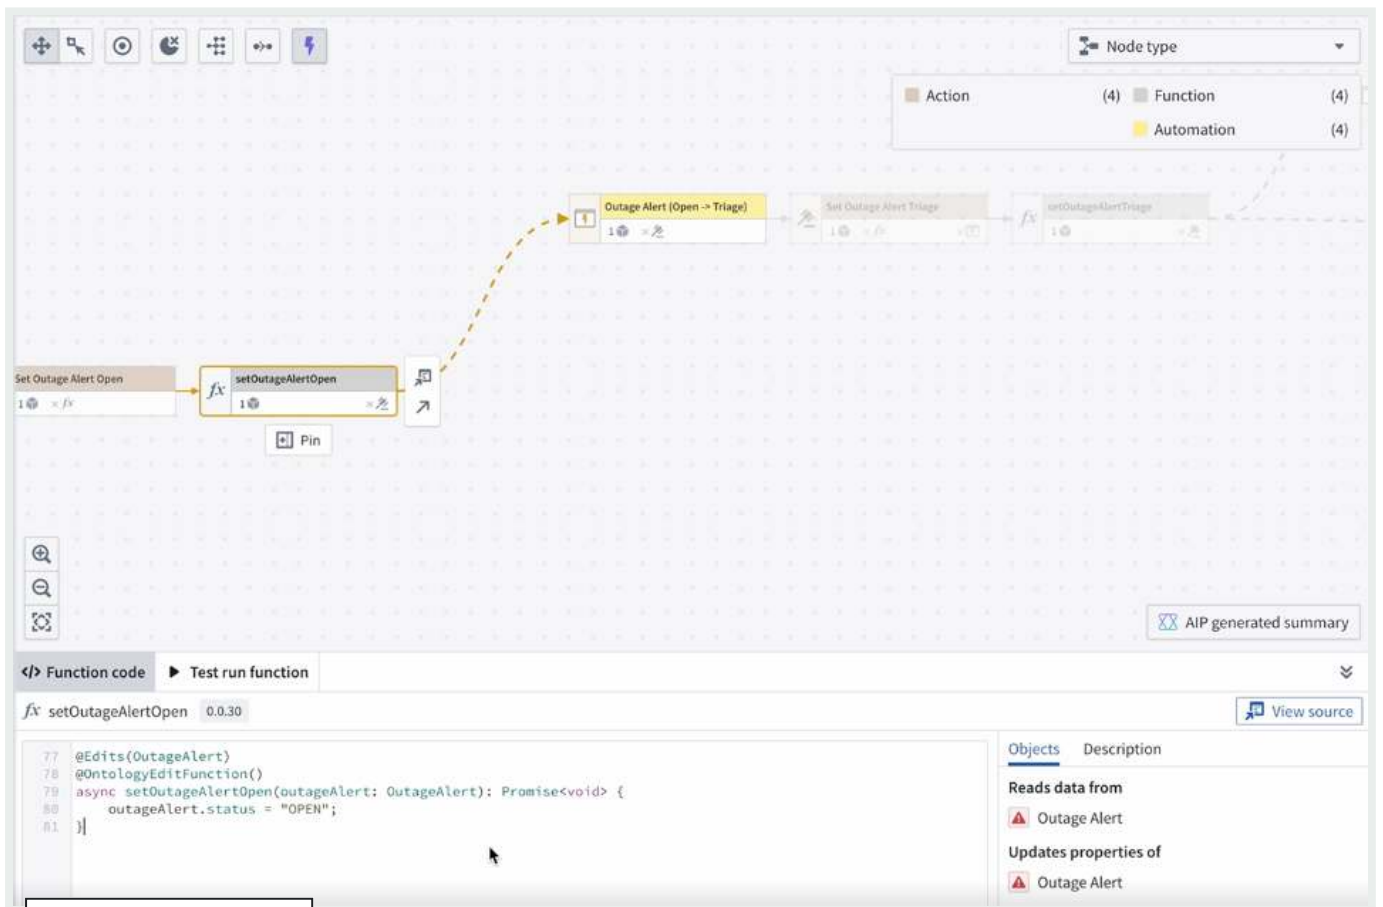

[API Reference ↗](#)

Workshop panel

[Send feedback](#)

On the Workshop panel, you can select different components and view the corresponding nodes highlighted on the Workflow Lineage graph.

At the bottom of the Workshop panel, the **Entities** section shows all backing objects and actions used in the application. When you select a specific entity, you can view exactly where the entity is used throughout the Workshop application.

If you have multiple Workshop applications on your graph, you can use the dropdown menu at the top to toggle between Workshop application views.

Node type

Object type

Function

Language model

(1) Action

(5) AIP Logic function

(3) Workshop application

(6)

(4)

(3)

Workflow Lineage Graph

Outage Alert Inbox with Logic

Outage Alert Inbox

Outage Alert Inbox

Outage Alert Inbox with Logic

Alert ID	Alert Timestamp	Last Updated	Notification Sent	Outage Category	Reported By
02743bda-e870-439f-...	Apr 21, 2024, 11:11 AM	Jul 21, 2024, 7:21 PM	false	NETWORK	Eva...
03e95594-cd18-4305-...	Jan 7, 2024, 6:26 PM	Feb 5, 2024, 3:50 PM	true	ELECTRICITY	Rud...
071c6ea1-eb54-4160-...	Apr 12, 2024, 3:55 AM	Jul 6, 2024, 10:51 PM	true	ELECTRICITY	Dre...
0897671c-e037-4ac4-9fb3-...	Feb 13, 2024, 11:30 PM	Apr 5, 2024, 2:48 AM	true	POWER	Luis...
0a2af390-67a0-4855-a4ac-...	Jan 31, 2024, 12:36 AM	Mar 13, 2024, 8:04 PM	true	POWER	Jodi...
11968689-a959-47ab-...	Mar 10, 2024, 2:29 PM	May 15, 2024, 11:09 PM	false	NETWORK	Ran...
13387e30-474f-4f44-9245-...	Apr 5, 2024, 4:28 AM	Jun 25, 2024, 7:29 PM	true	NETWORK	Wan...
164636a1-a524-4d5e-...	Feb 20, 2024, 10:57 PM	Apr 16, 2024, 6:10 AM	true	DATABASE	Dev...
1f0669dc-45d1-4864-0106-...	Mar 22, 2024, 5:34 AM	Jun 3, 2024, 12:47 PM	false	ELECTRICITY	Lon...

Add AI Generated Summary

To populate description summary on selected alert, click button below

When you run your logic function the thought process displayed here.

Add Summary to Outage Alert

Find Outage Alert based on Description


To reopen the Workshop panel, select any Workshop application on the graph and press **I**, or double-click on the node.

Color legend options

API Reference ↗

Workflow Lineage provides a color legend system to help manage security and view metadata about specific applications. Examples of color legends are

Send feedback

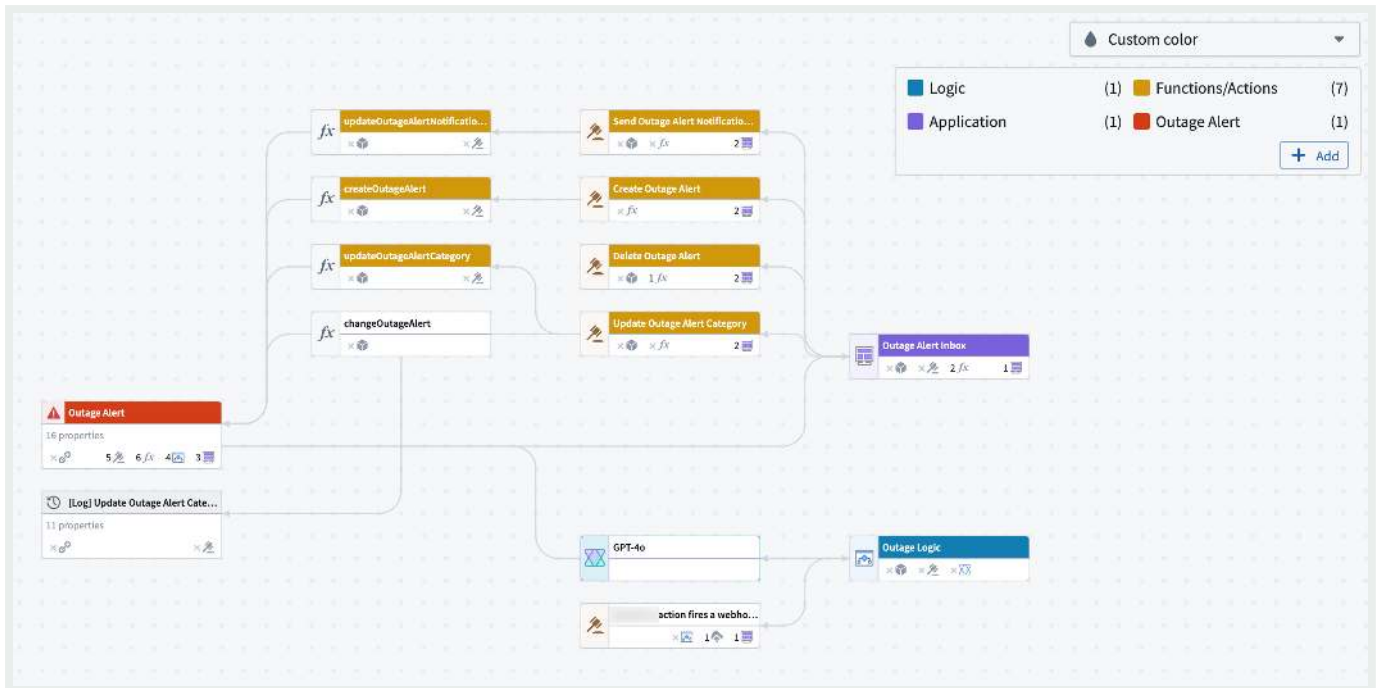

General

- **Node type:** Shows the type of resource that each node represents on your graph.
- **Custom color:** Adds colors into the legend by right-clicking nodes to create a new color group, selecting an existing one, or dragging colors from the legend onto nodes.

Permissions



- **Ontology permissions:** Review the [managing security](#) documentation.

API Reference ↗

Permissions: Review the [managing security](#) documentation.


Usage

Send feedback



- **Usages:** Applies color to Workshop applications based on how many views that application had over the past four weeks, in both view and edit mode.
- **Out of date functions:** Review the [action-backed function upgrades](#) section.
- **Application views:** Applies color to Workshop applications based on how many views that application had over the past four weeks, in both view and edit mode.
- **Model usage:** Review the [AIP usage metrics](#) section.
- **Ontology status:** Applies color to nodes based on `Active`, `Experimental`, `Deprecated`, `Example`, and `Promoted` statuses.
- **Action rule:** Applies color to nodes based on whether it runs a function, creates, modifies, or deletes objects, or does a combination of any of the above.
- **Automation expiration:** Applies color to automation nodes based on their expiration date.
- **Last modified:** Applies color to nodes based on their last modified date.

Organization

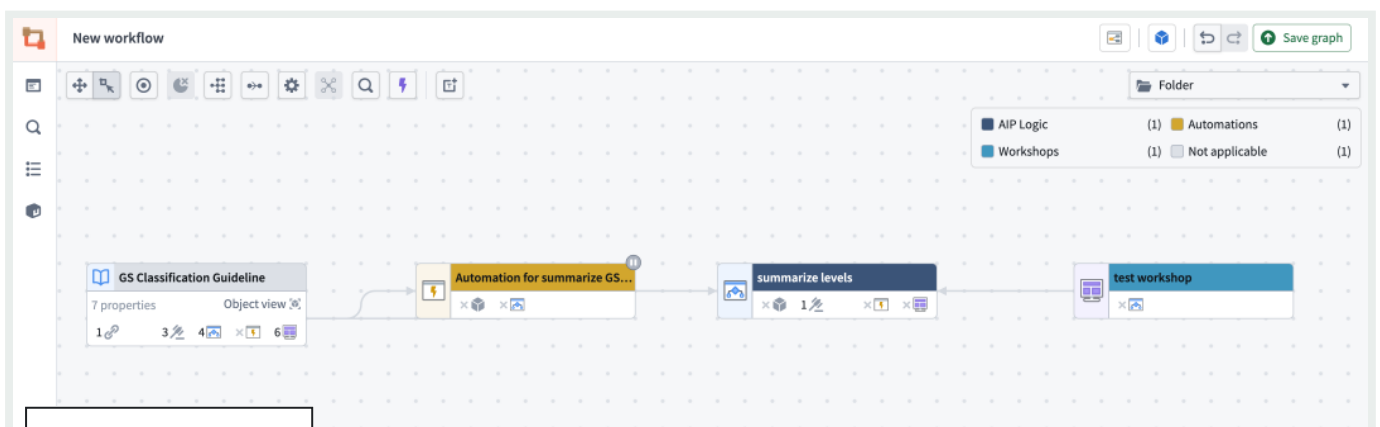

API Reference ↗


- **Folder:** Applies color to nodes based on the folder each node lives in.
- **Project:** Applies color to nodes based on the project each node lives in.

Send feedback

- **Portfolio:** Applies color to nodes based on the portfolio each node lives in.
- **Functions repository:** Applies color to function nodes based on the functions repository each node lives in.

Text nodes

You can add text nodes in Workflow Lineage to help document and call attention to details in your graph. Text nodes use [Markdown syntax ↗](#), and they can be colored like regular nodes. They will not be affected by layout options and are not attached to any specific node on your graph.

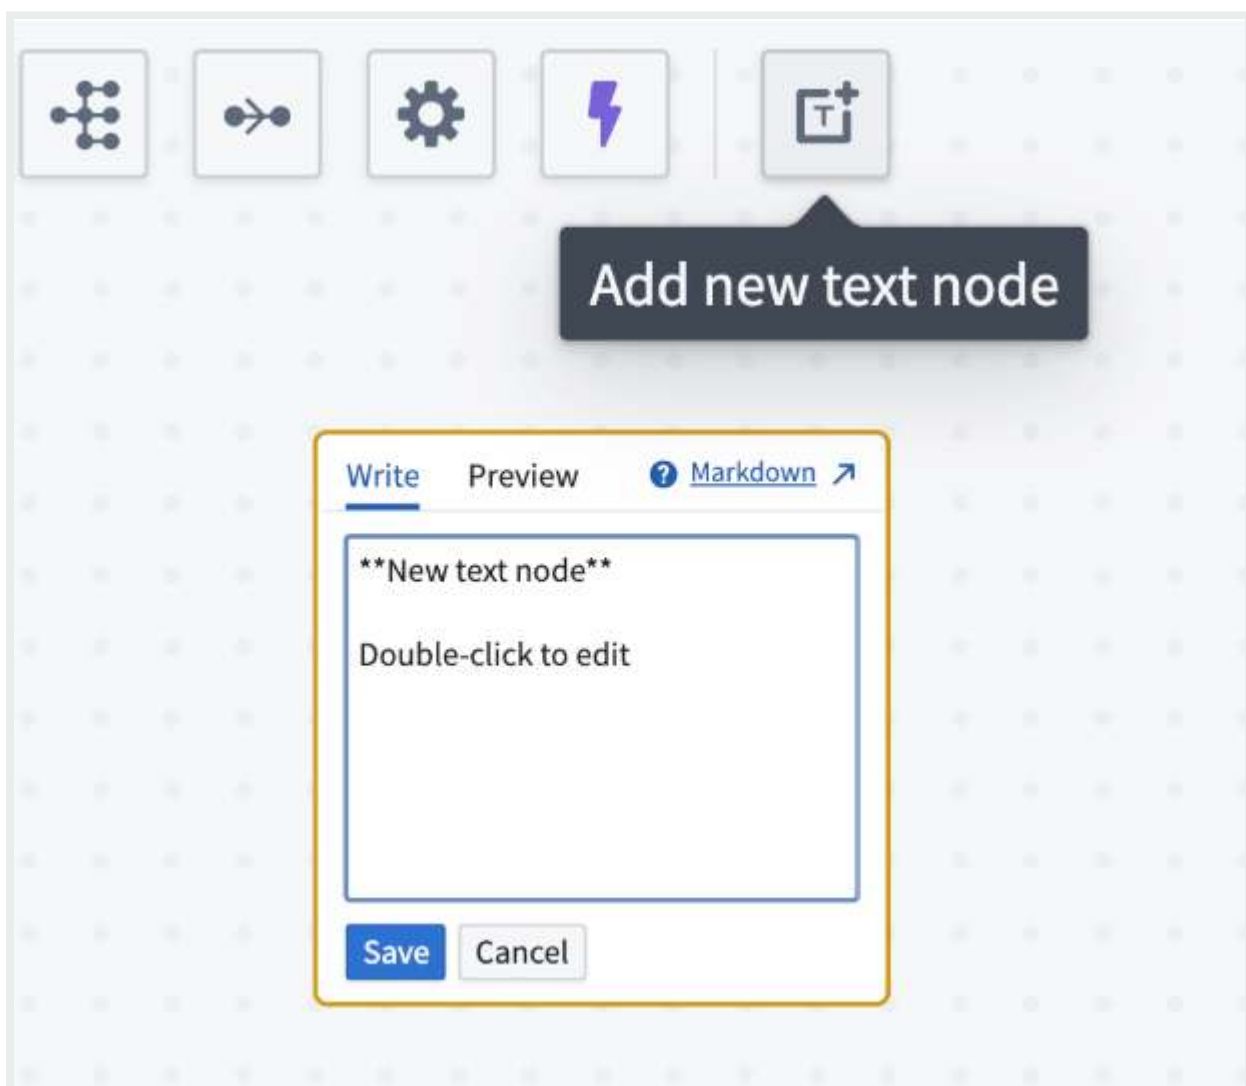


1. To add a text node to your graph, select **Text** in the top-left of the graph.

2. [API Reference ↗](#) text node to edit and add Markdown text.

3. Select **save** when you are done.

[Send feedback](#)


To color a text node, right click and select **Color nodes**. Choose a color or add a new color.

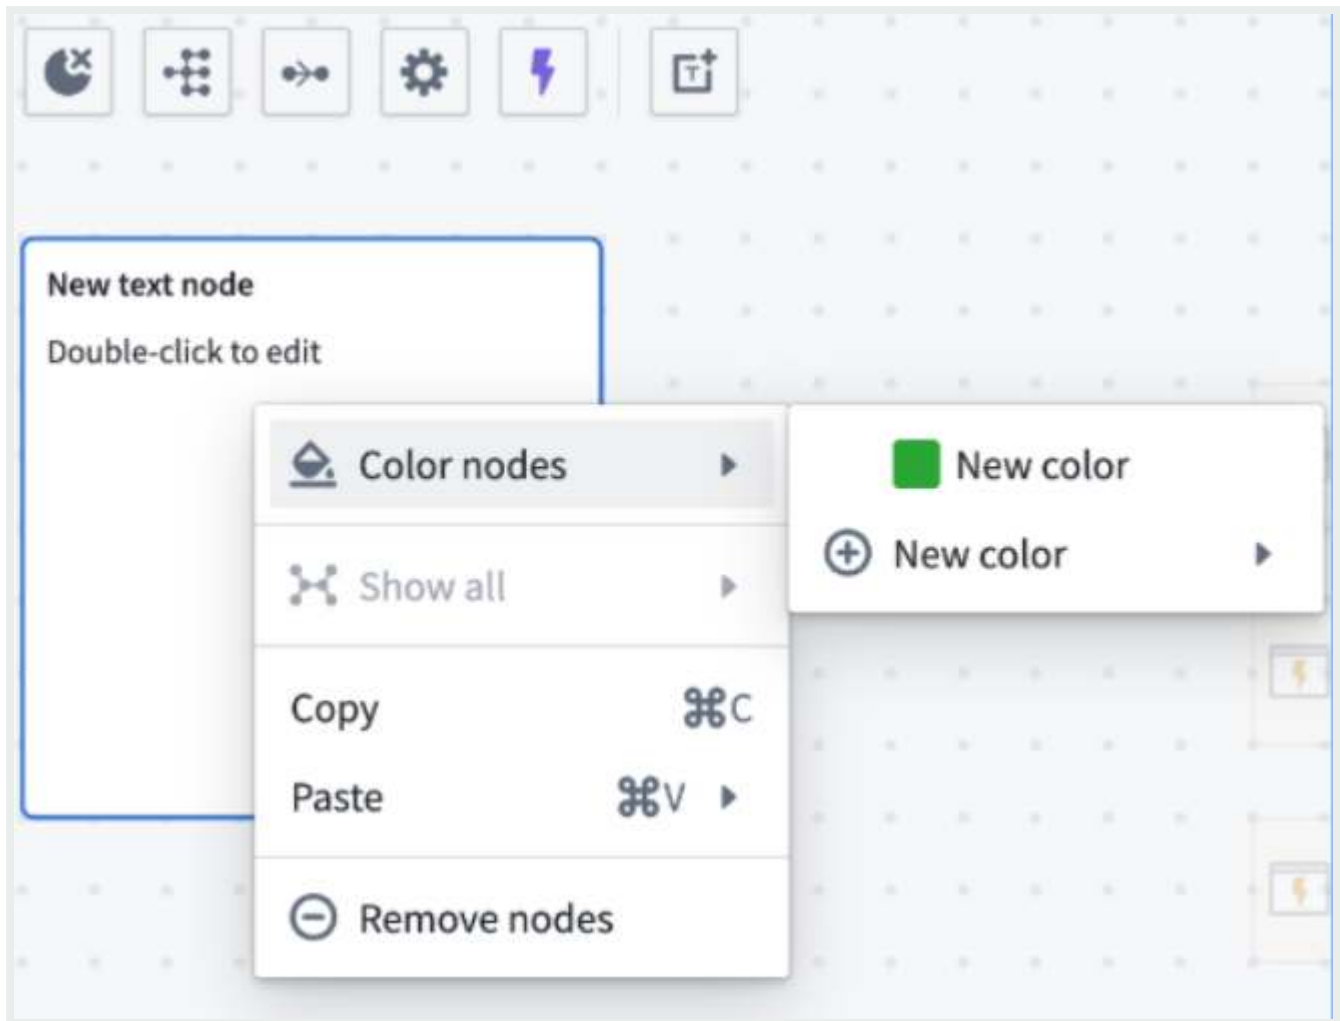

You can also resize text nodes using the three lines in the bottom right corner. If the length of your text is greater than the length of the text node, the node will automatically become scrollable.

[API Reference ↗](#)

[Send feedback](#)

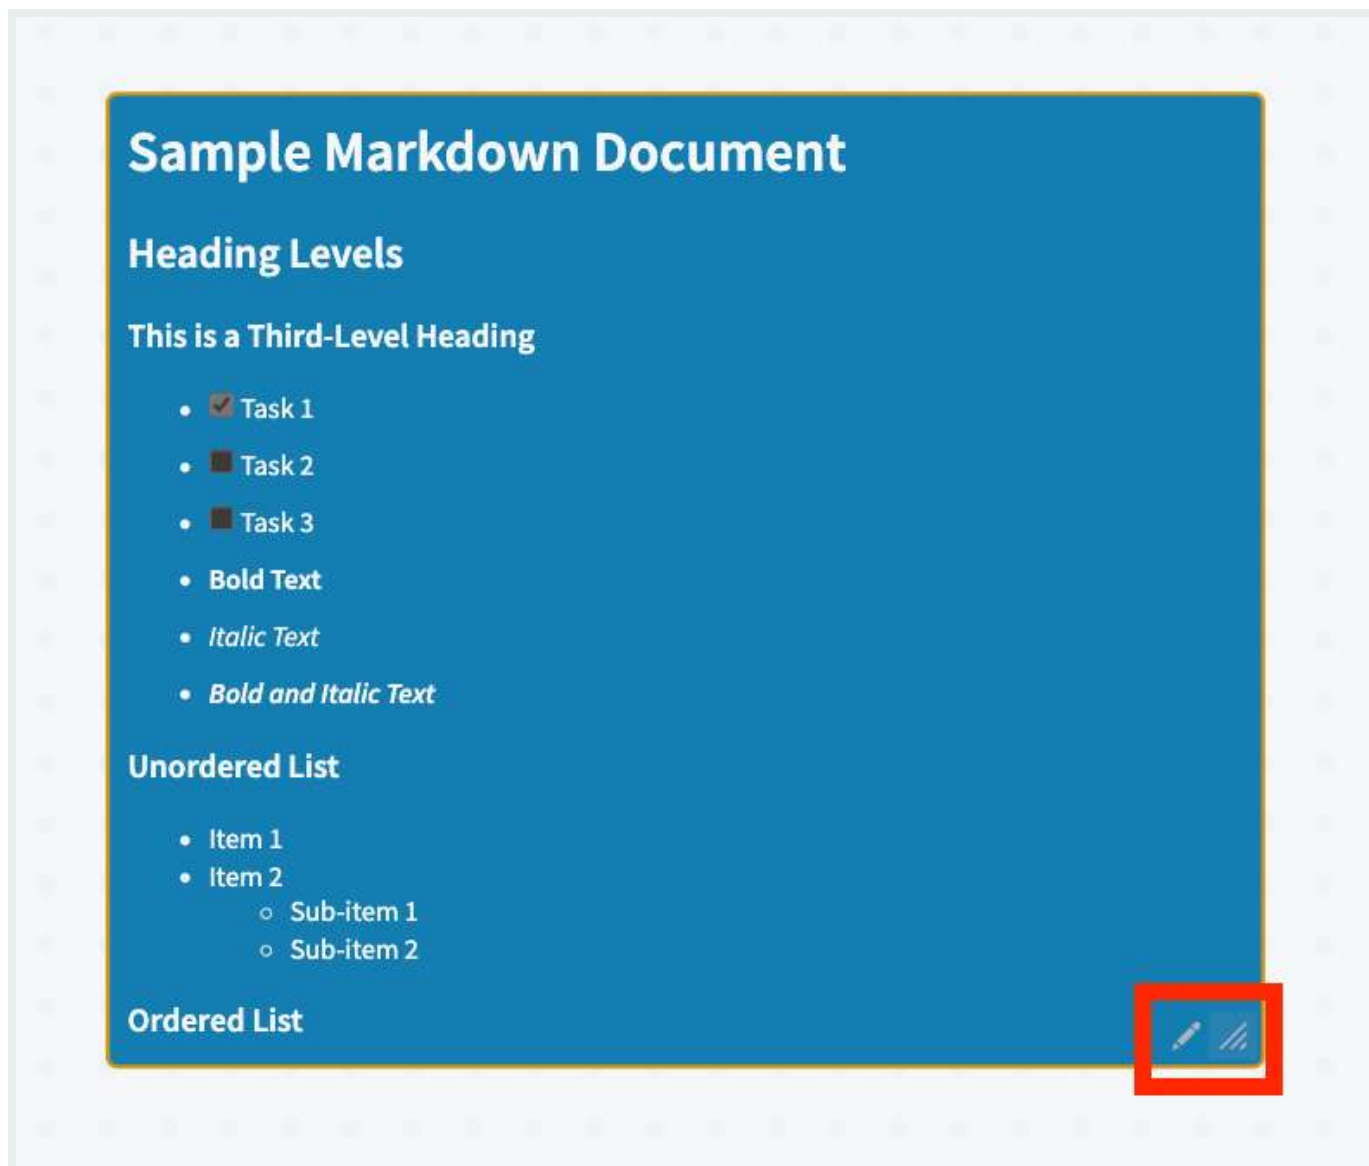


[Learn more about understanding workflows in Workflow Lineage.](#)

Presentation mode

Presentation mode in Workflow Lineage lets you create and organize visual snapshots, or “frames”, of your graph for a seamless way to present you workflow.

[API Reference ↗](#)

[Send feedback](#)

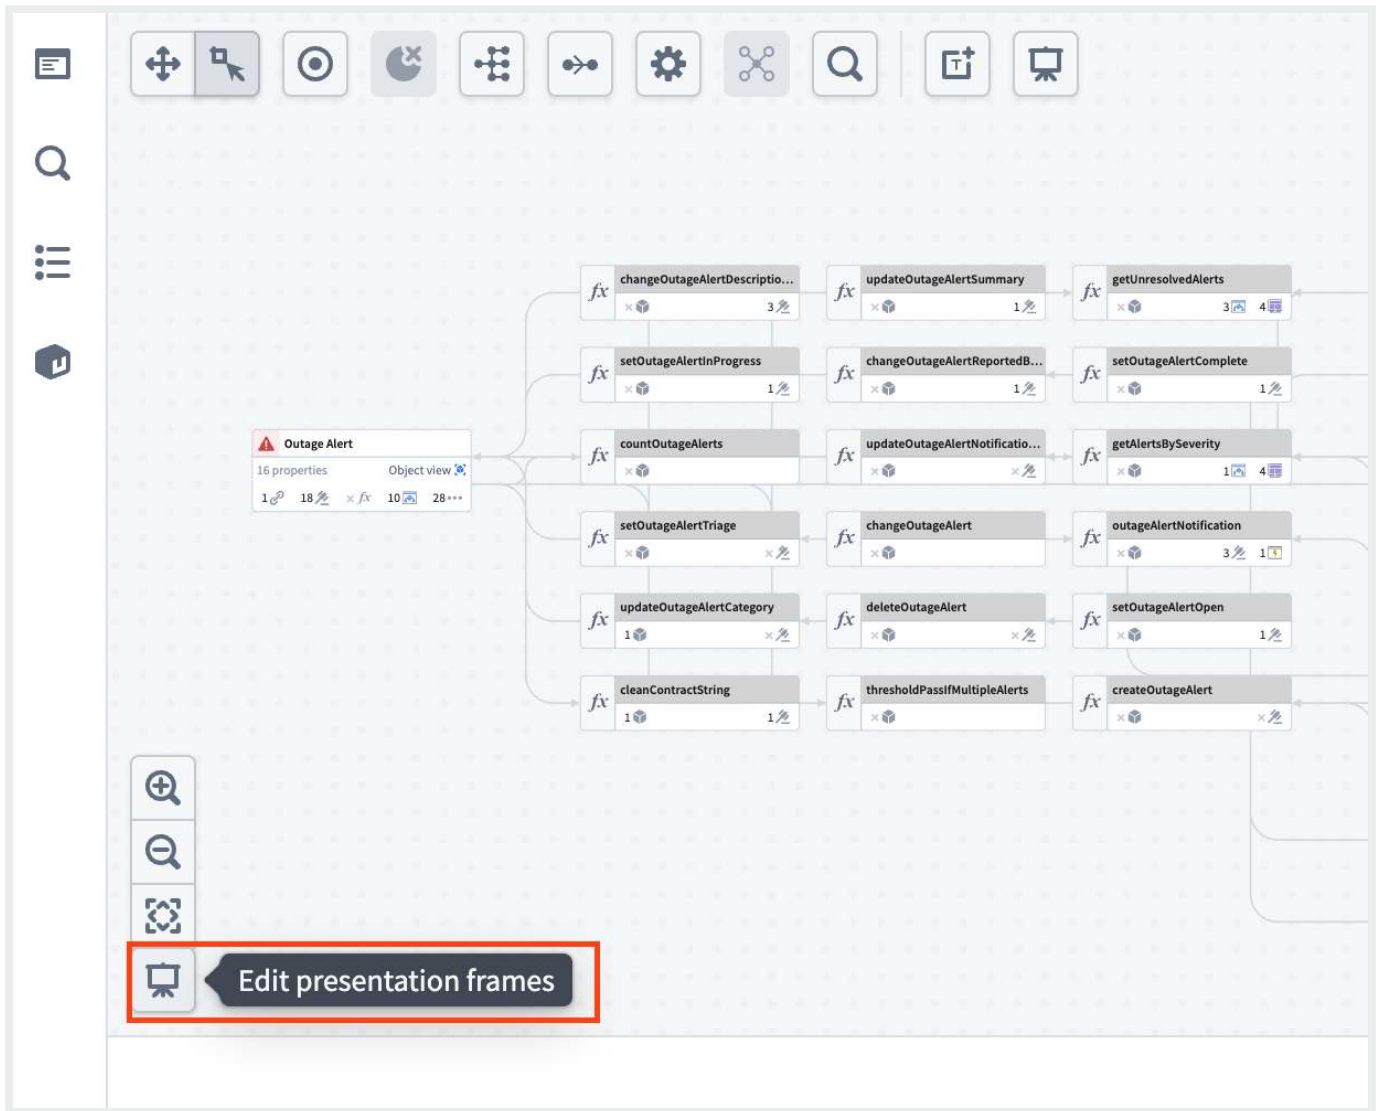


i You must save your graph before you can use the presentation tool.


To create a frame, adjust your graph to capture the desired configuration. This can include the arrangement of nodes, node colors, color mode, and zoom level. Once you are satisfied with the current view, select **Save state as new frame**.

[API Reference ↗](#)

[Send feedback](#)

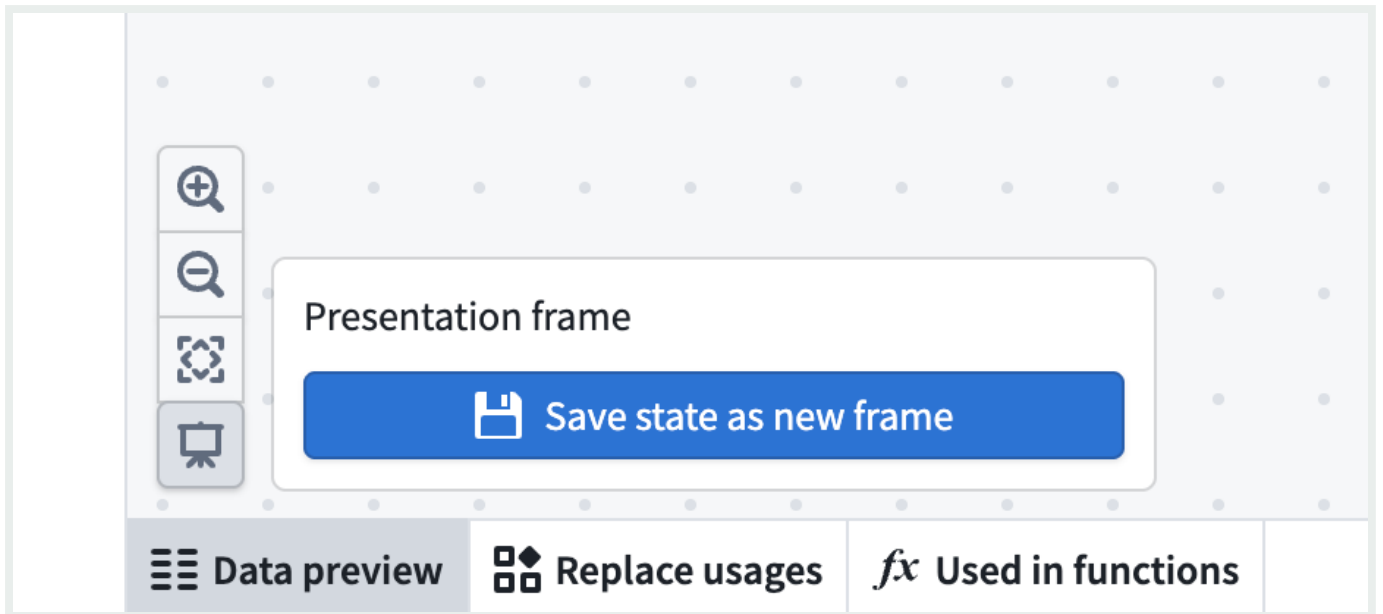

Each created frame will be given a default name such as “Frame (1),” “Frame (2),” and so on, based on the number of frames in your presentation. If you wish to rename a frame, select the pencil icon next to the frame’s name and enter your preferred title.

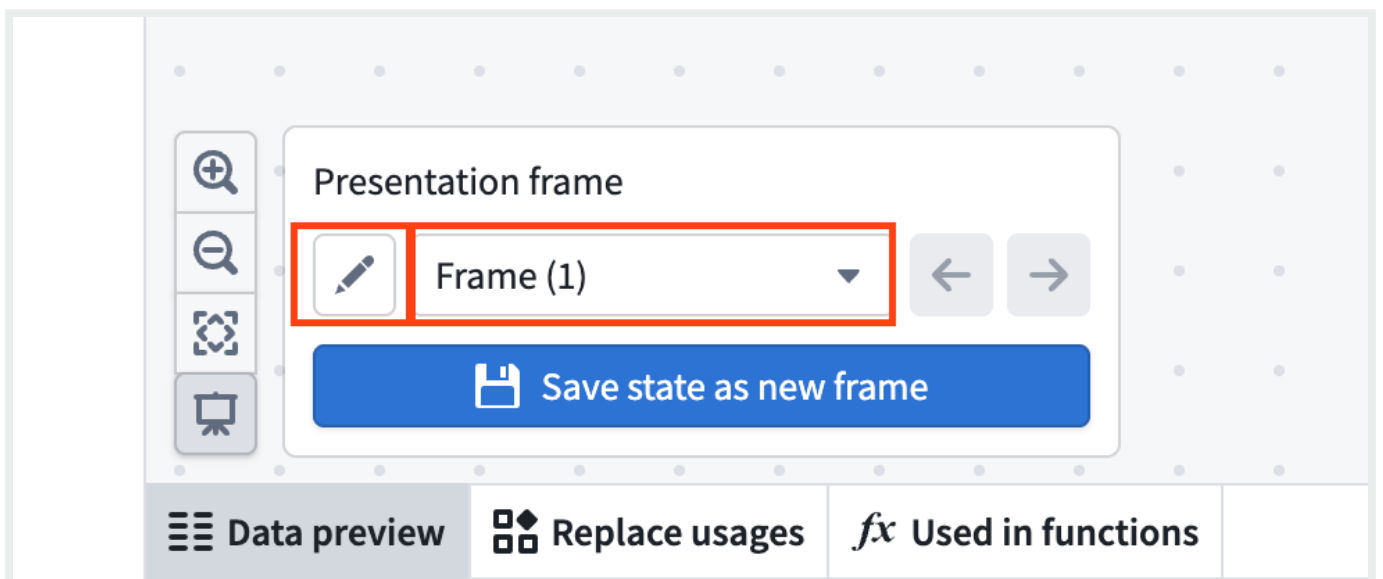

It is not currently possible to edit an existing frame directly. If you need to update a frame, adjust your graph as needed, save the new state as a new frame, and delete the old frame. To delete a frame, select the dropdown of all frames, and hover over the frame you want to delete. Then, select the red trashcan icon.

[API Reference ↗](#)

[Send feedback](#)

through each step of your workflow with custom notes or explanations.

← PREVIOUS
Overview

NEXT
Perform refactors and understand your workflows →

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

—Cookies Settings

[API Reference ↗](#)

Send feedback

Use case development / Workflow Lineage / Perform refactors and understand your workflows

Perform refactors and understand your workflows

i The application previously known as Workflow Builder is now called Workflow Lineage.


To start using Workflow Lineage, open a Workshop application or functions repository and use the keyboard shortcut `Command + I` (macOS) or `Ctrl + I` (Windows) to view the relevant Workflow Lineage graph depicting the objects, actions, and functions that back the application.

You can also navigate directly to the Workflow Lineage application and manually add resources to the graph.

[API Reference ↗](#)



[Send feedback](#)

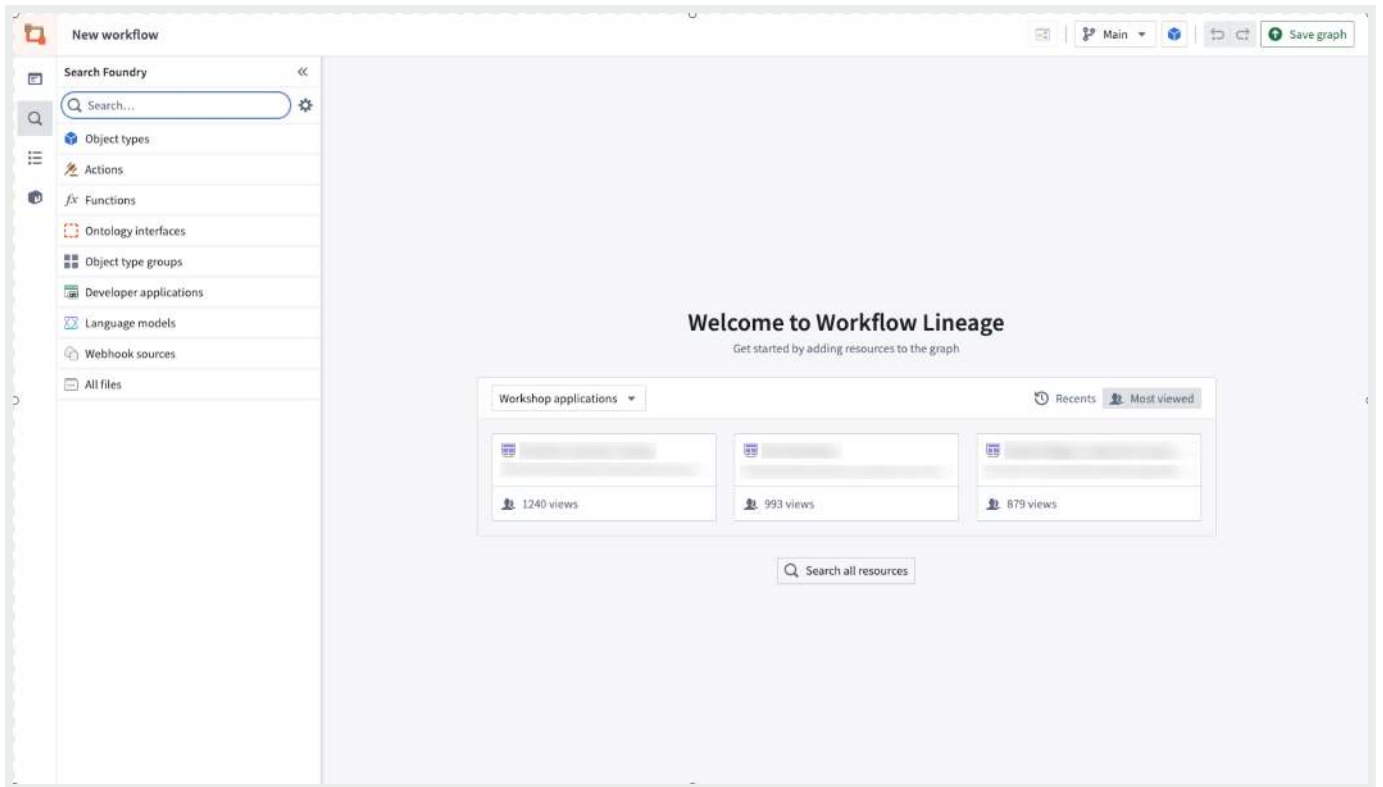

To help you understand and easily perform refactors in your workflow, Workflow Lineage provides a simple way for you to understand attached properties, update outdated variables and action-backed functions, or bulk edit submission criteria on actions.


Property provenance

You can track the usage of each property within any object throughout your entire workflow. Select the object on the graph, and view the **Selection details** panel on the left to see where each property is being used.

The number shown next to each property refers to the amount of functions, actions, linkages, Workshop applications, and more depending on the context.

[API Reference ↗](#)

[Send feedback](#)

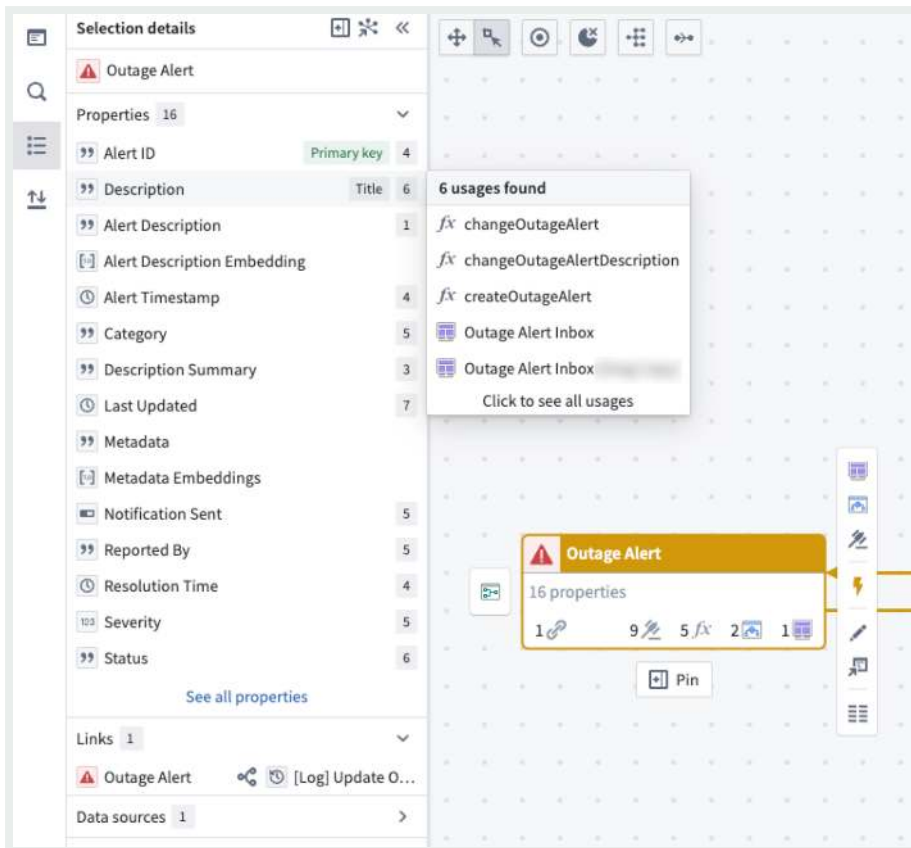


Bulk function-backed resource upgrades

To upgrade code functions or AIP Logic functions used in actions, automations, or Workshop applications, add these function-backed resources to the graph and find the relevant upgrade tab in the bottom panel.


To identify outdated function-backed resources, navigate to the color legend. From there, select the **Out-of-date functions** option. This action will highlight all the outdated functions in red, giving you a clear visual indication. Next, choose the specific resources for which you want to upgrade the backing function. Upon selection, any outdated resources related to the function will appear in the panel located at the bottom of the screen for further action.

[API Reference ↗](#)

[Send feedback](#)

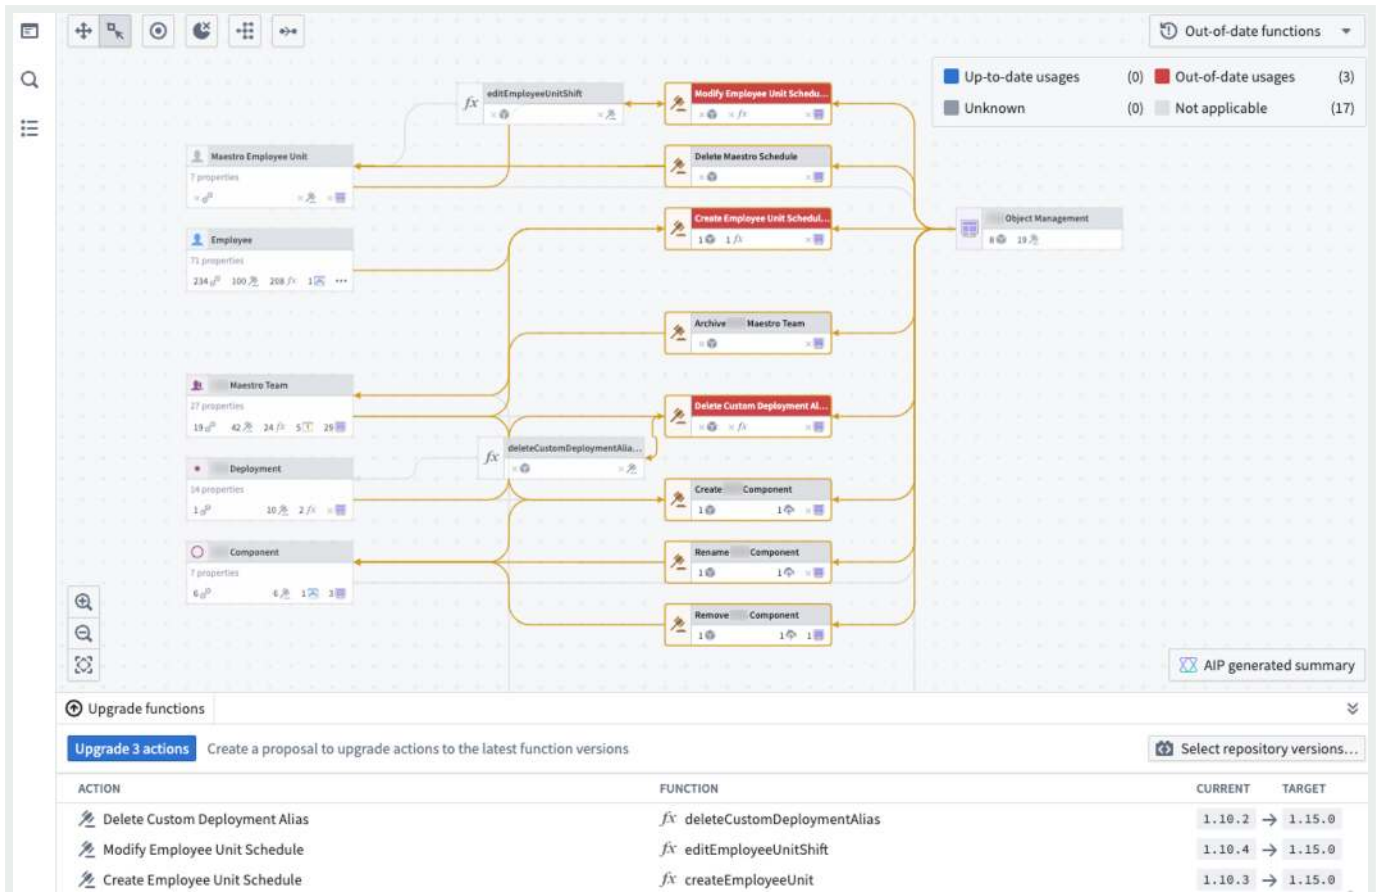

To select the desired version of the functions to be upgraded, choose **Select versions...** in the selected bottom panel tab. This will open a pop-up window where you can select the desired version for each function repository as well as the version for all functions created by AIP Logic or compute modules. If no version is specified, the repository's latest version will automatically be selected.

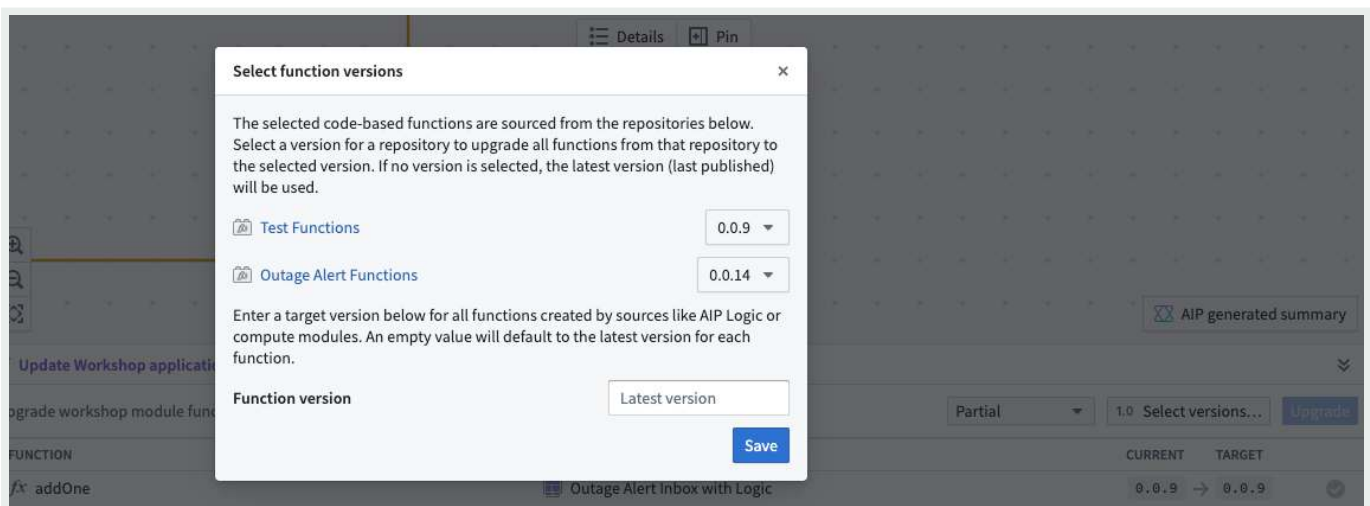

API Reference ent status types you may see when upgrading functions:

- **Green:** Function can be successfully updated.
- **Gray:** Function is already up-to-date.

Send feedback

- **Yellow:** Function upgrade would cause a breaking change.
- **Red:** Function upgrade has errors, such as permission issues or functions not found.

FUNCTION	WORKSHOP MODULE	CURRENT	TARGET	STATUS
✓ f/x addOne	Outage Alert Inbox with Logic	0.0.9	→ 0.0.10	✓
✓ f/x castToString	Outage Alert Inbox with Logic	0.0.9	→ 0.0.10	✓
✓ Find Outage Alert based on description	Outage Alert Inbox with Logic	1.3.0	→ 1.3.0	✓
✓ Find Similar Outage Alerts	Outage Alert Inbox with Logic	2.0.0	→ 3.1.0	⚠ Function schema changed
✓ f/x getAlertsBySeverity	Outage Alert Inbox with Logic +1	1.0.0	→ 1.0.1	✓
✓ f/x getUnresolvedAlerts	Outage Alert Inbox with Logic +1	1.0.0	→ 1.0.1	✓
✓ Summarize Outage Alert Incident	Outage Alert Inbox with Logic	1.3.0	→ 1.3.0	✓

For function-backed automations and Workshop applications, there are two upgrade options:

- **All or nothing:** Upgrade the functions in the resource only if all can upgrade without breaking changes. If there are any breaking changes, nothing will be upgraded.
- **Partial:** Upgrade only the functions without breaking changes. Functions that would cause breaking changes will not be upgraded.

[API Reference ↗](#)


Function-backed action upgrades

[Send feedback](#)

To upgrade functions used in actions, open **Update actions** on the bottom panel.

⚠ If an action is configured with an action log and the new function version edits a new object type, that action cannot be updated in Workflow Lineage and must be upgraded in Ontology Manager.

After you upgrade your actions, a proposal will be created in Ontology Manager. Here, you can ask for a review of the changes (for example, the function upgrades) and once approved, you will be able to merge the proposal.

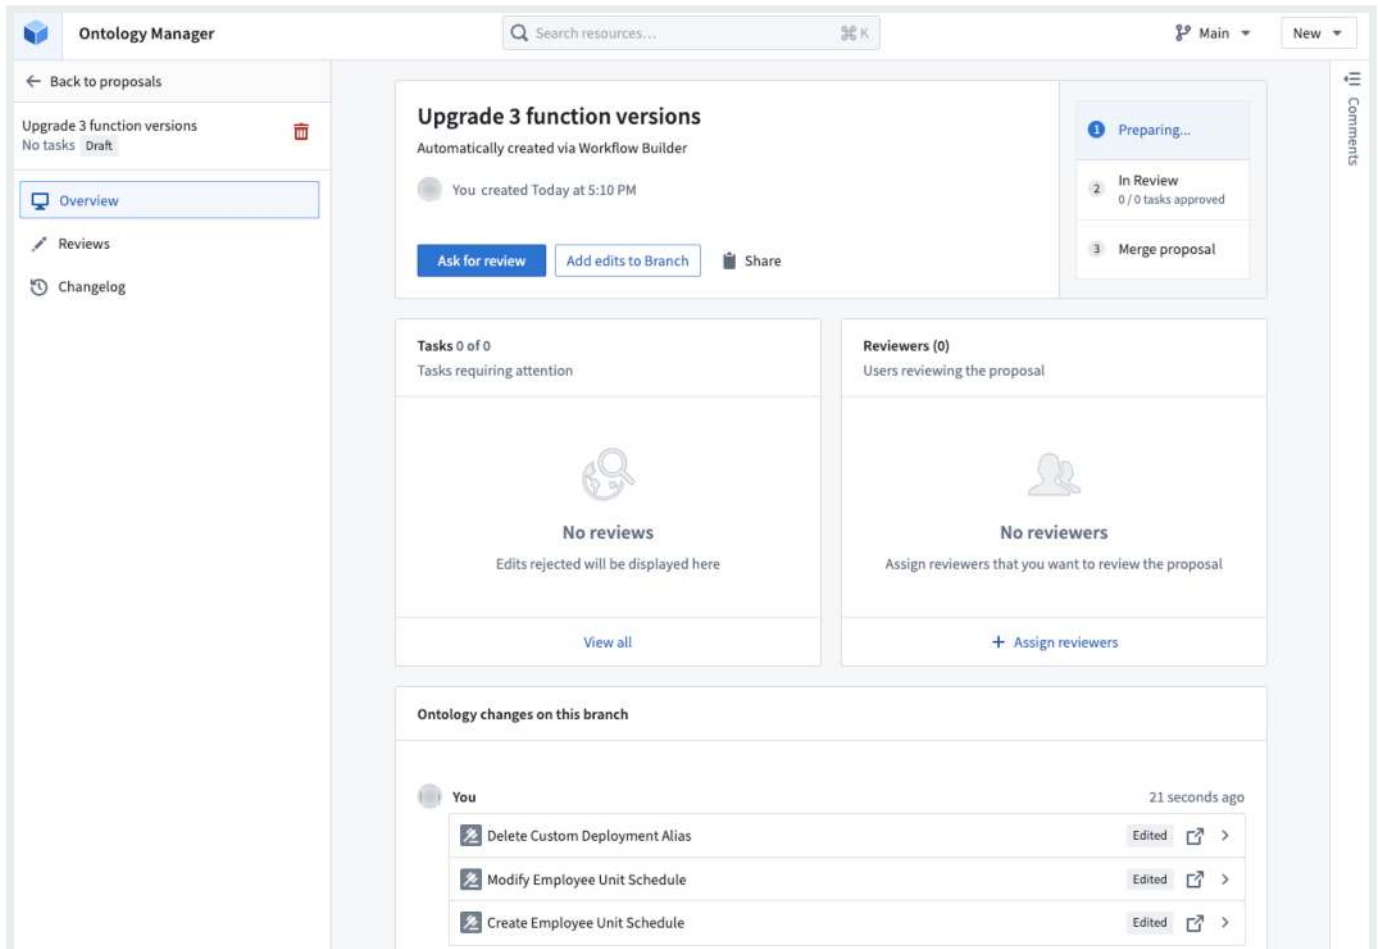


Function-backed automation upgrades

To upgrade functions used in automations, open **Update Automations** on the bottom panel.

[API Reference ↗](#)

[Send feedback](#)

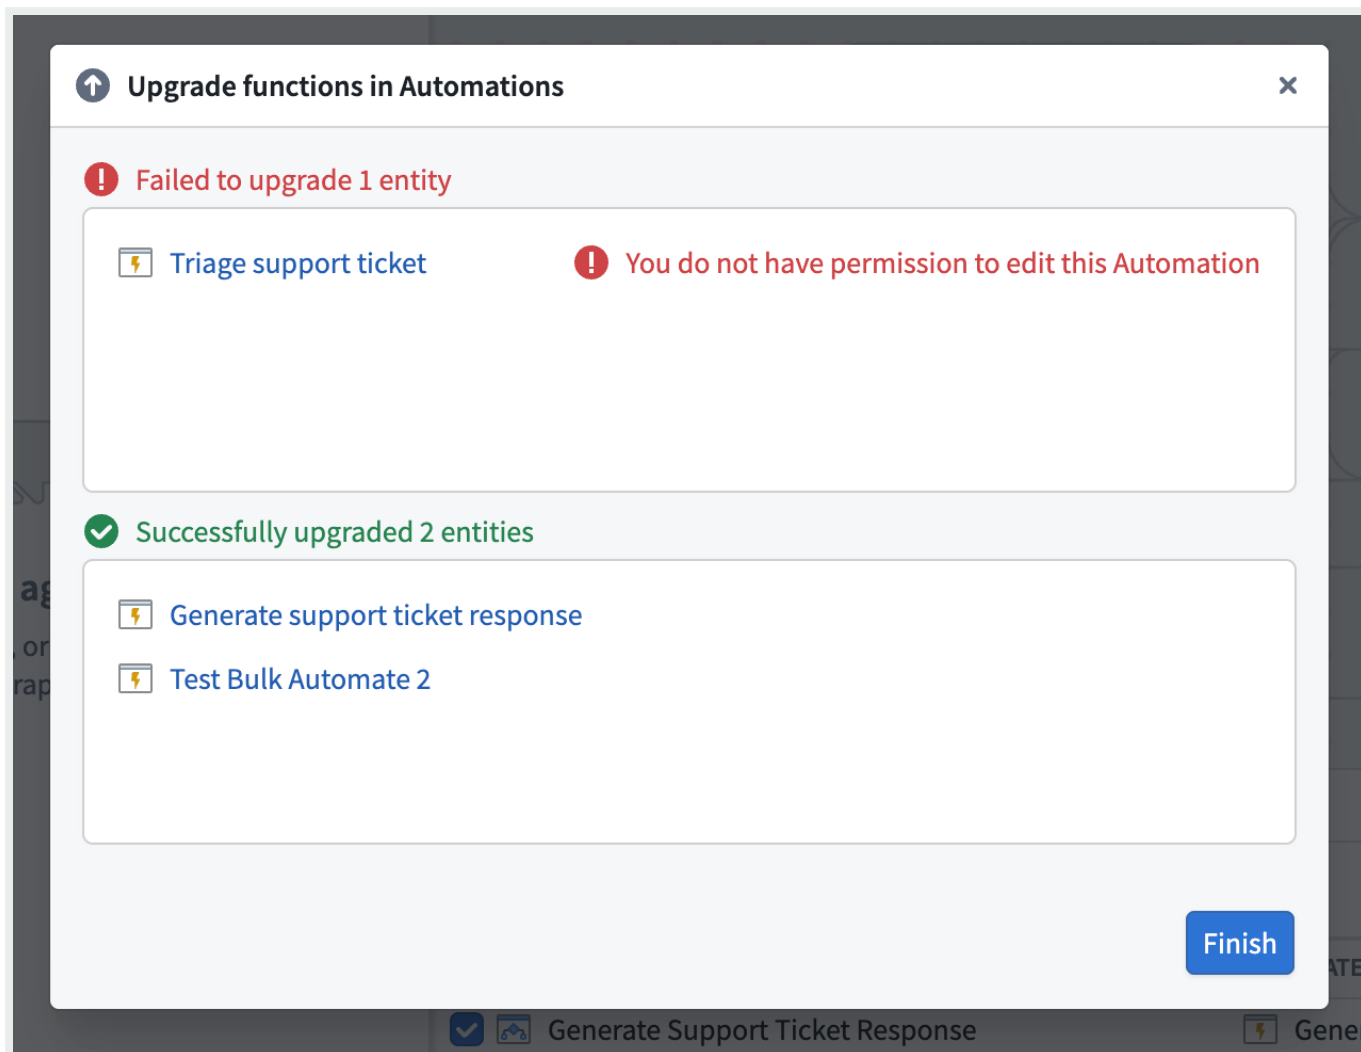

Function-backed Workshop application upgrades

To upgrade functions used in Workshop applications, open **Update Workshop applications** on the bottom panel.

[API Reference ↗](#)

[Send feedback](#)

Out-of-date dependencies

- Up-to-date usages (0)
- Out-of-date usages (6)
- Unknown (0)
- Not applicable (18)

Nodes with out-of-date usages are referencing old versions of entities such as functions, webhooks, and models.

Update Workshop applications

Upgrade workshop module functions to target versions

FUNCTION	WORKSHOP MODULE	CURRENT	TARGET	
fx addOne	Outage Alert Inbox with Logic	0.0.9	→ 0.0.9	✓
fx addTwo	Outage Alert Inbox with Logic	0.0.4	→ 0.0.9	⚠
fx castToString	Outage Alert Inbox with Logic	0.0.9	→ 0.0.9	✓
Find Outage Alert based on description	Outage Alert Inbox with Logic	1.3.0	→ 1.3.0	✓
Find Similar Outage Alerts	Outage Alert Inbox with Logic	2 versions	→ 3.1.0	⚠
fx getAlertsBySeverity	Outage Alert Inbox with Logic	0.0.17	→ 0.0.17	✓
fx getUnresolvedAlerts	Outage Alert Inbox with Logic	0.0.17	→ 0.0.17	✓
Summarize Outage Alert Incident	Outage Alert Inbox with Logic	1.3.0	→ 1.3.0	✓

When you select the blue **Upgrade** option to upgrade your Workshop module functions to the target versions, a pop-up will appear listing which Workshop modules will be upgraded.

Upgrade functions in Workshop modules


Upgrading functions will create a new version for each Workshop module. If a Workshop module is configured with a different published version than the latest version, the published version will remain the same, and the latest version will include the upgrades.

- Outage Alert Inbox with Logic 0.185.0 Published

Cancel Upgrade

Select **Upgrade** for the changes to go into effect. The successfully upgraded Workshop a **API Reference** ↗ on the pop-up.


Send feedback

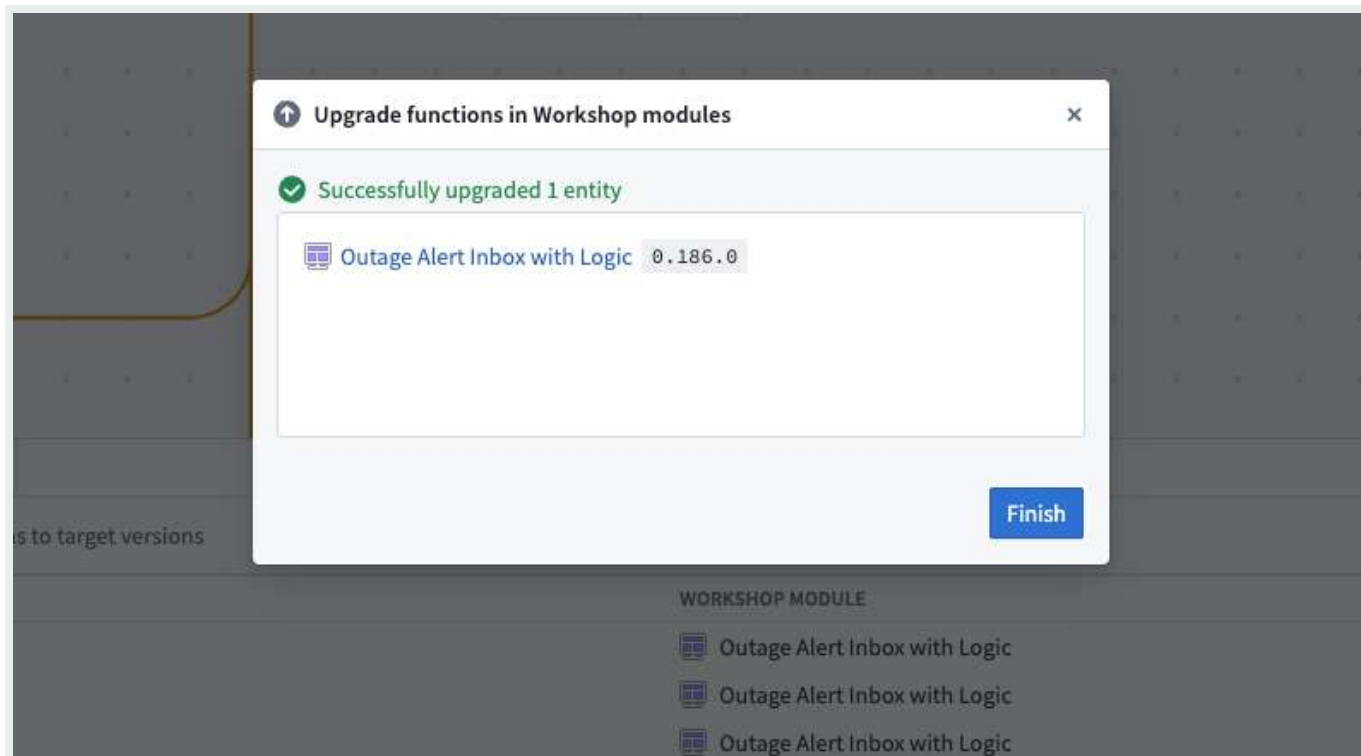

You also have the choice of bulk publishing the Workshop after the functions are updated. Learn how in the documentation on [bulk-publishing Workshop applications](#).

Bulk publish Workshop applications

Workshop applications can be configured to always publish the latest version; Workshop applications that do not automatically publish the latest version can be "bulk published", which will update all selected applications at once. To bulk publish Workshop applications, select the Workshop nodes, then right-click and select **Publish [number of] Workshop modules**.

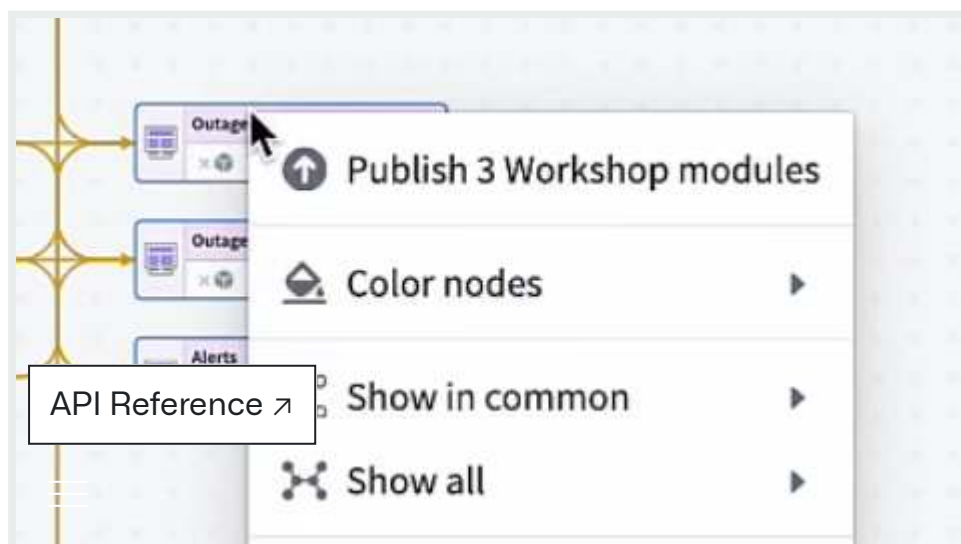


Publishing multiple Workshop modules at once will open a window displaying which of your Workshop applications are already on the latest version. If a Workshop application has a blue checkmark with either **Latest published** or **Published** next to it, the workshop is already on the latest version.


Specifically:

- **Latest published** means that Workshop always automatically publishes the latest version. This is a setting that can be toggled in the Workshop application.
- **Published** means that Workshop does not automatically publish the latest version, but the application currently has the latest version published.

For Workshop applications that are not **Published** or **Latest published**, you can select which applications you want to publish to the latest version and then select **Publish [number of] entities**.

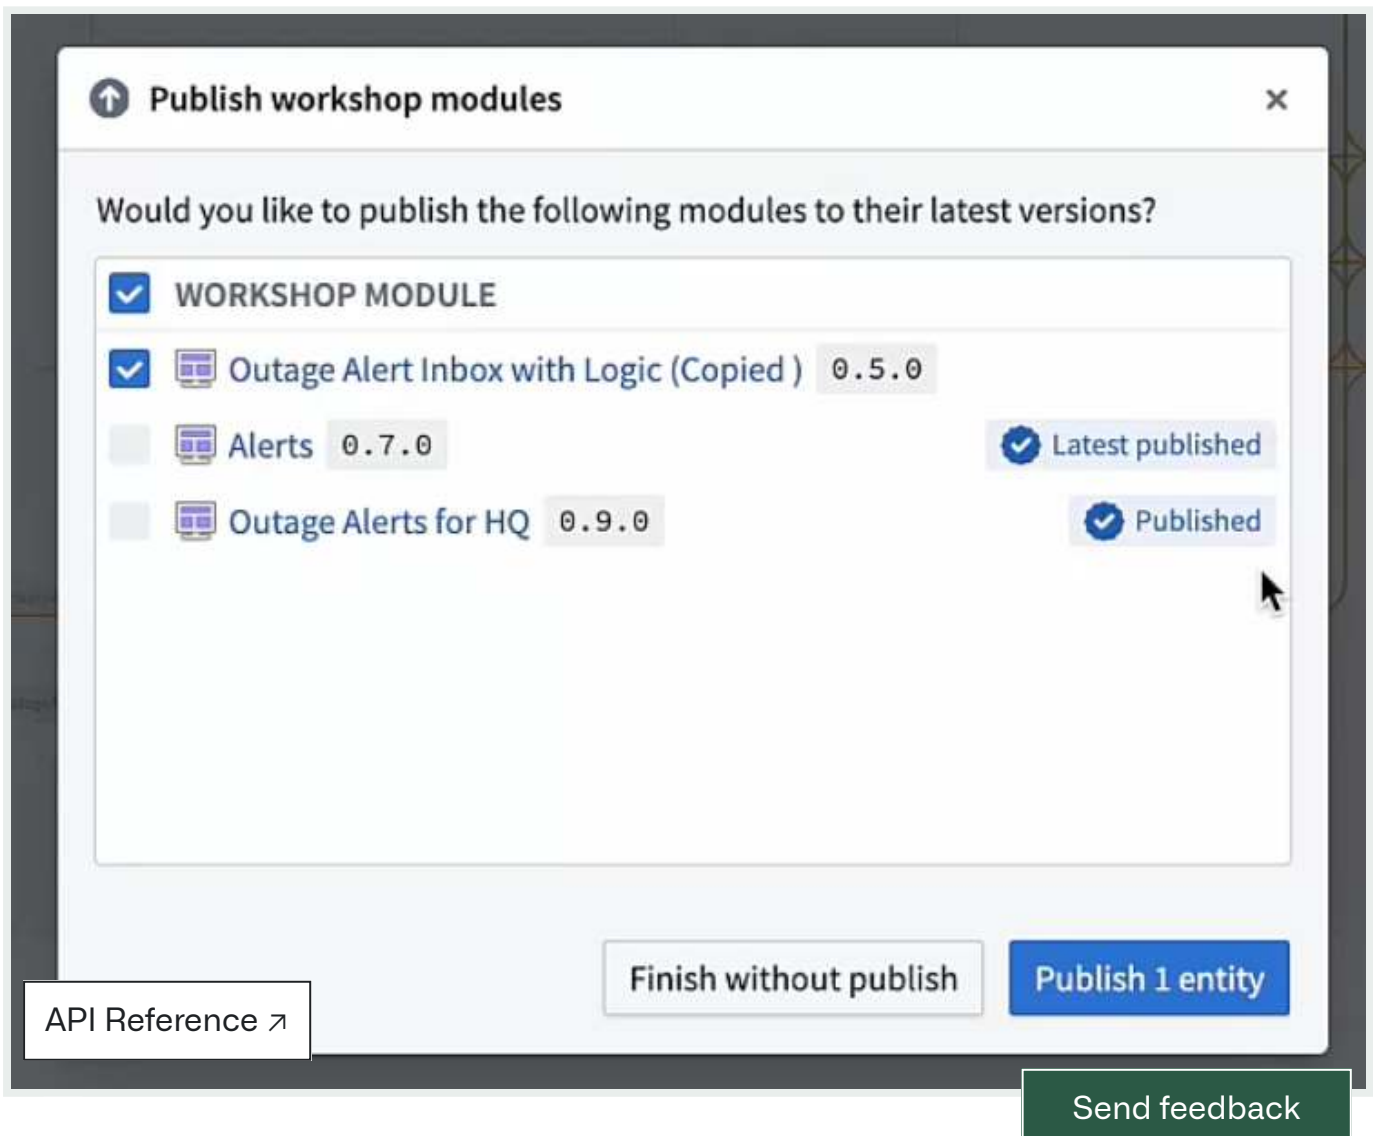


You can also bulk publish Workshop modules after updating functions in Workflow Lineage. To do so, after updating the functions, select **Continue to publish**.

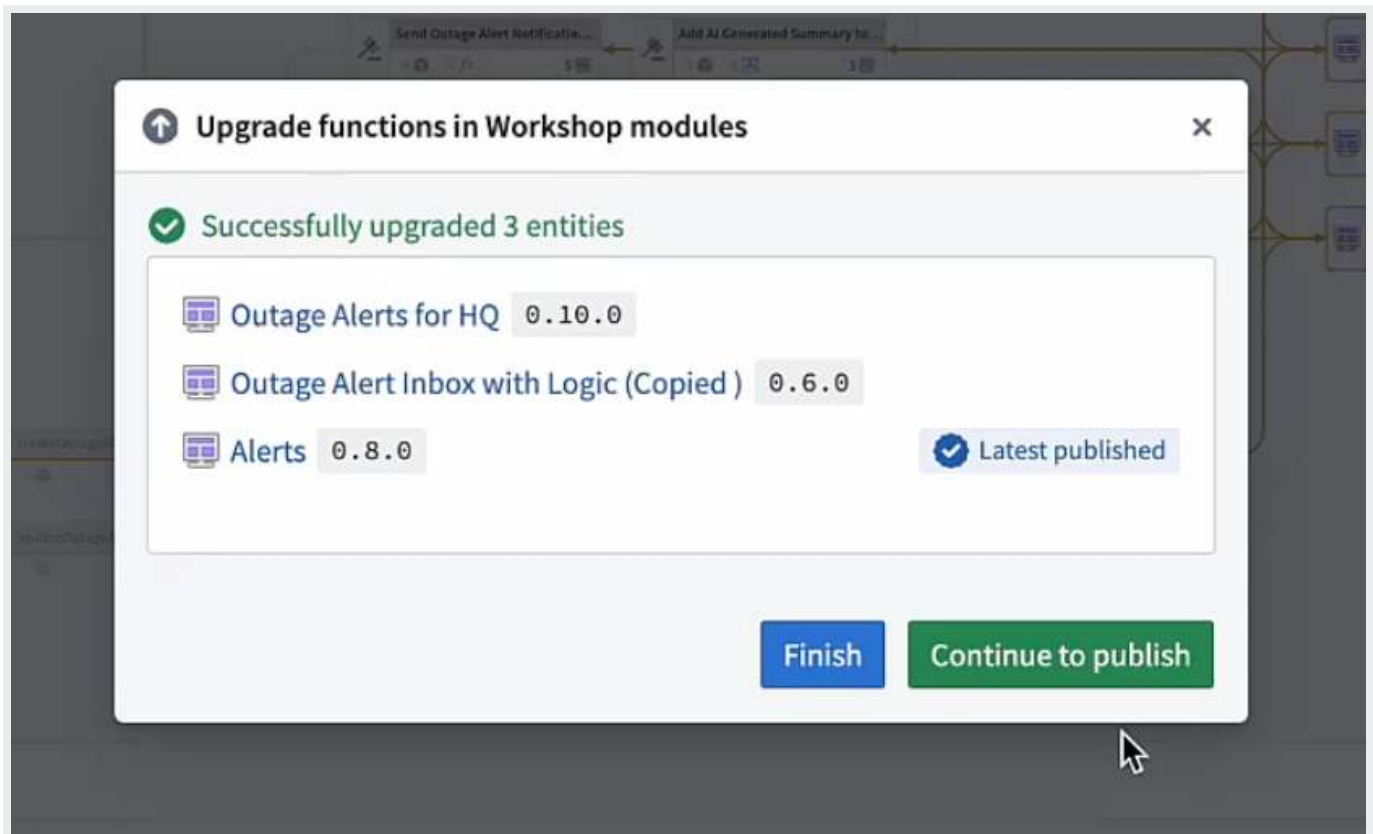

This will bring you to a page with all the Workshop modules that are not yet published to their latest version. Confirm that you want to publish the latest version for these modules and select **Publish [number of] entities**.

[API Reference ↗](#)


[Send feedback](#)

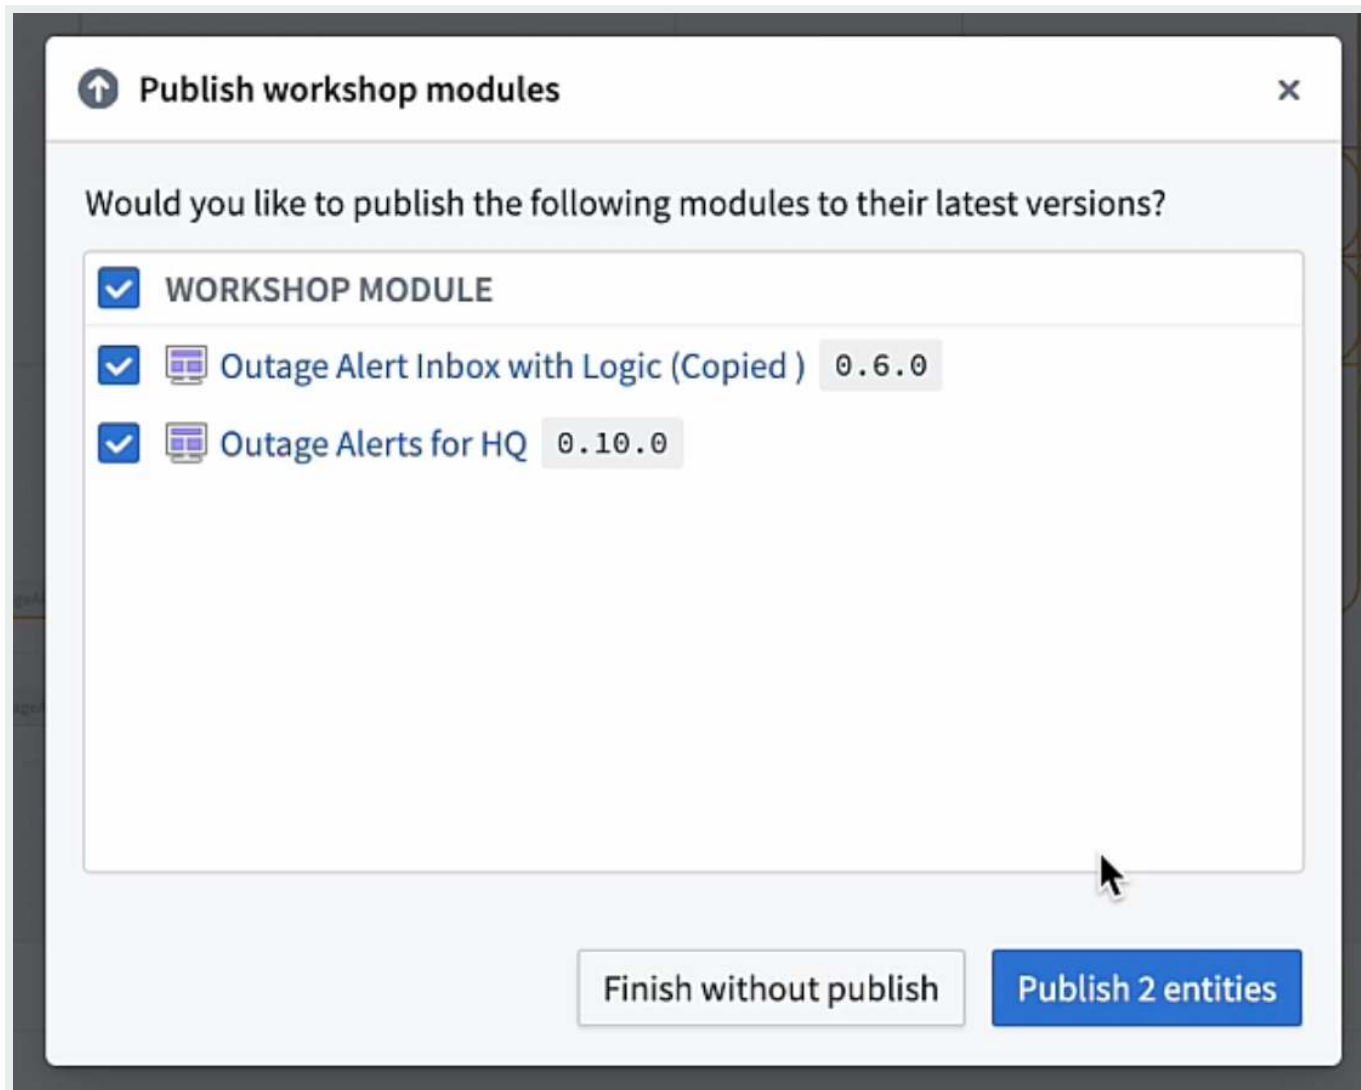

Once this has been done successfully, select **Finish**.

[API Reference ↗](#)

[Send feedback](#)

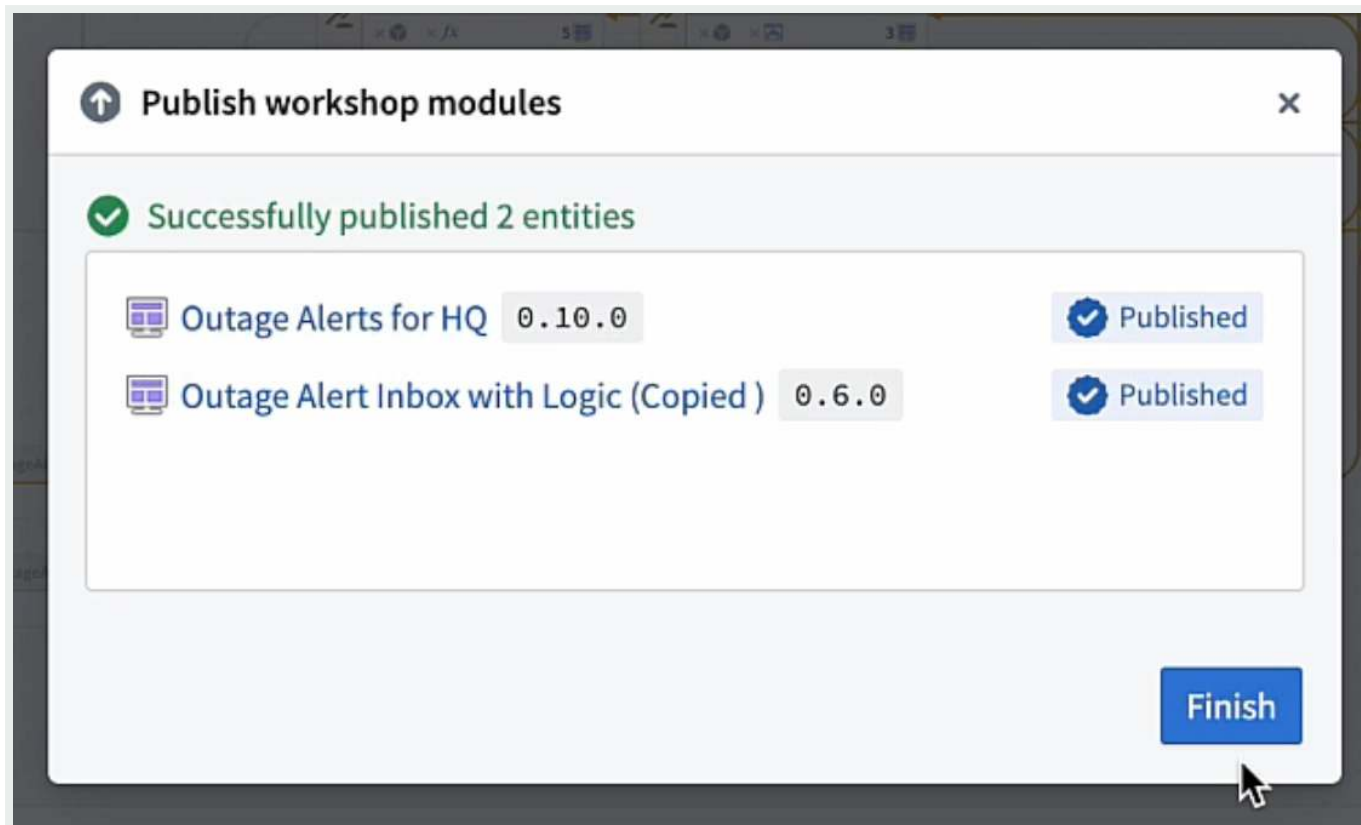

Bulk replace models

You can replace a model used by multiple AIP Logic functions in a single action from Workflow Lineage instead of opening each function and updating the model individually. This is useful when migrating off a [deprecated model](#) or evaluating a new model across a workflow.


i Bulk model replacement in Workflow Lineage currently supports AIP Logic nodes only. Support for additional resource types is in development.

To replace a model across multiple AIP Logic functions:


1. Open your workflow in Workflow Lineage.
2. Select the language model node you want to replace on the graph.
3. Add the AIP Logic nodes you want to update to the graph if they are not already present.

API Reference  logic icon on the model node to filter nodes that consume the selected model directly on the graph. AIP Logic nodes that are not on the graph will not appear in the **Replace model** tab.

Send feedback

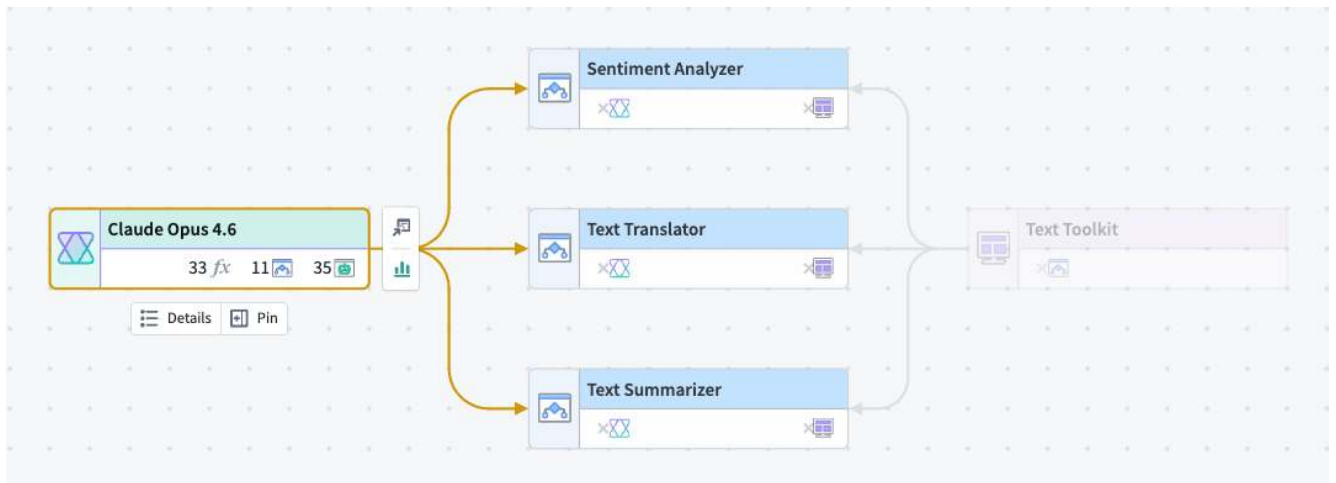

4. Open the **Replace model** tab in the bottom panel. The source model appears on the left, and the AIP Logic functions that use it appear under **Used in** on the right.
5. Select the replacement model under **Replace with**.
6. Use the checkboxes in the **Used in** list to deselect any AIP Logic functions you want to exclude from the model replacement.

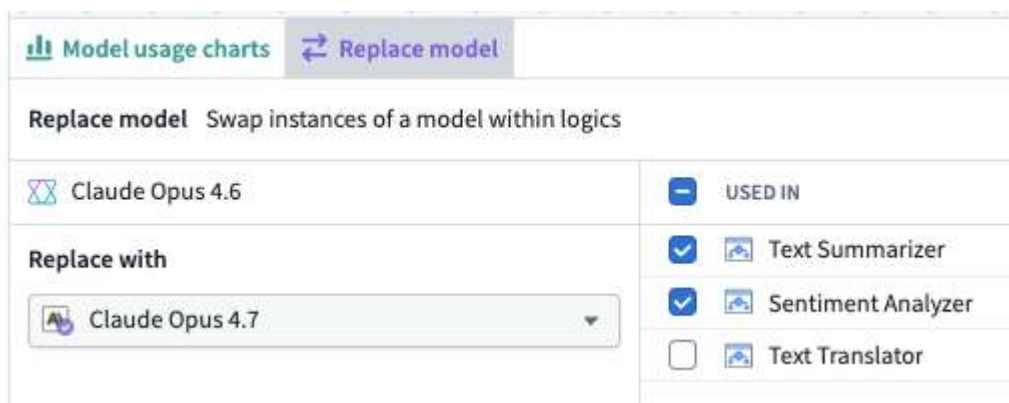

7. Select **Replace model**.

Considerations when replacing models in bulk

- Workflow Lineage skips AIP Logic functions you are not able to edit.
- Workflow Lineage applies the changes directly to the affected AIP Logic functions. There is no proposal or review step.
- Graph connections may take a moment to refresh after a successful replacement.


API Reference ↗

Models must be [Palantir-provided](#).


Bulk delete objects and actions

Send feedback

To bulk delete objects and actions, select the nodes on the graph, right click, and select **Delete resources**.

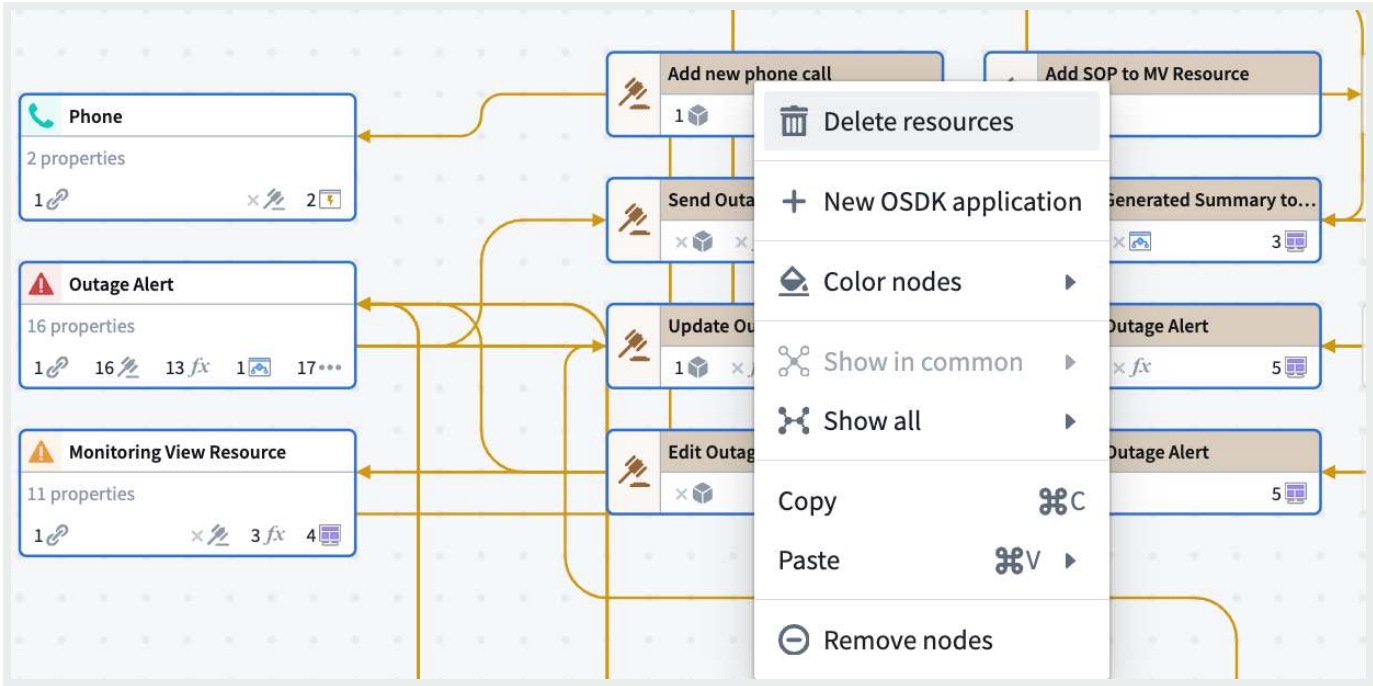


This will prompt you to create a proposal. You will also see the number of link types associated with the objects being deleted. These links will also be included in the deletion proposal.

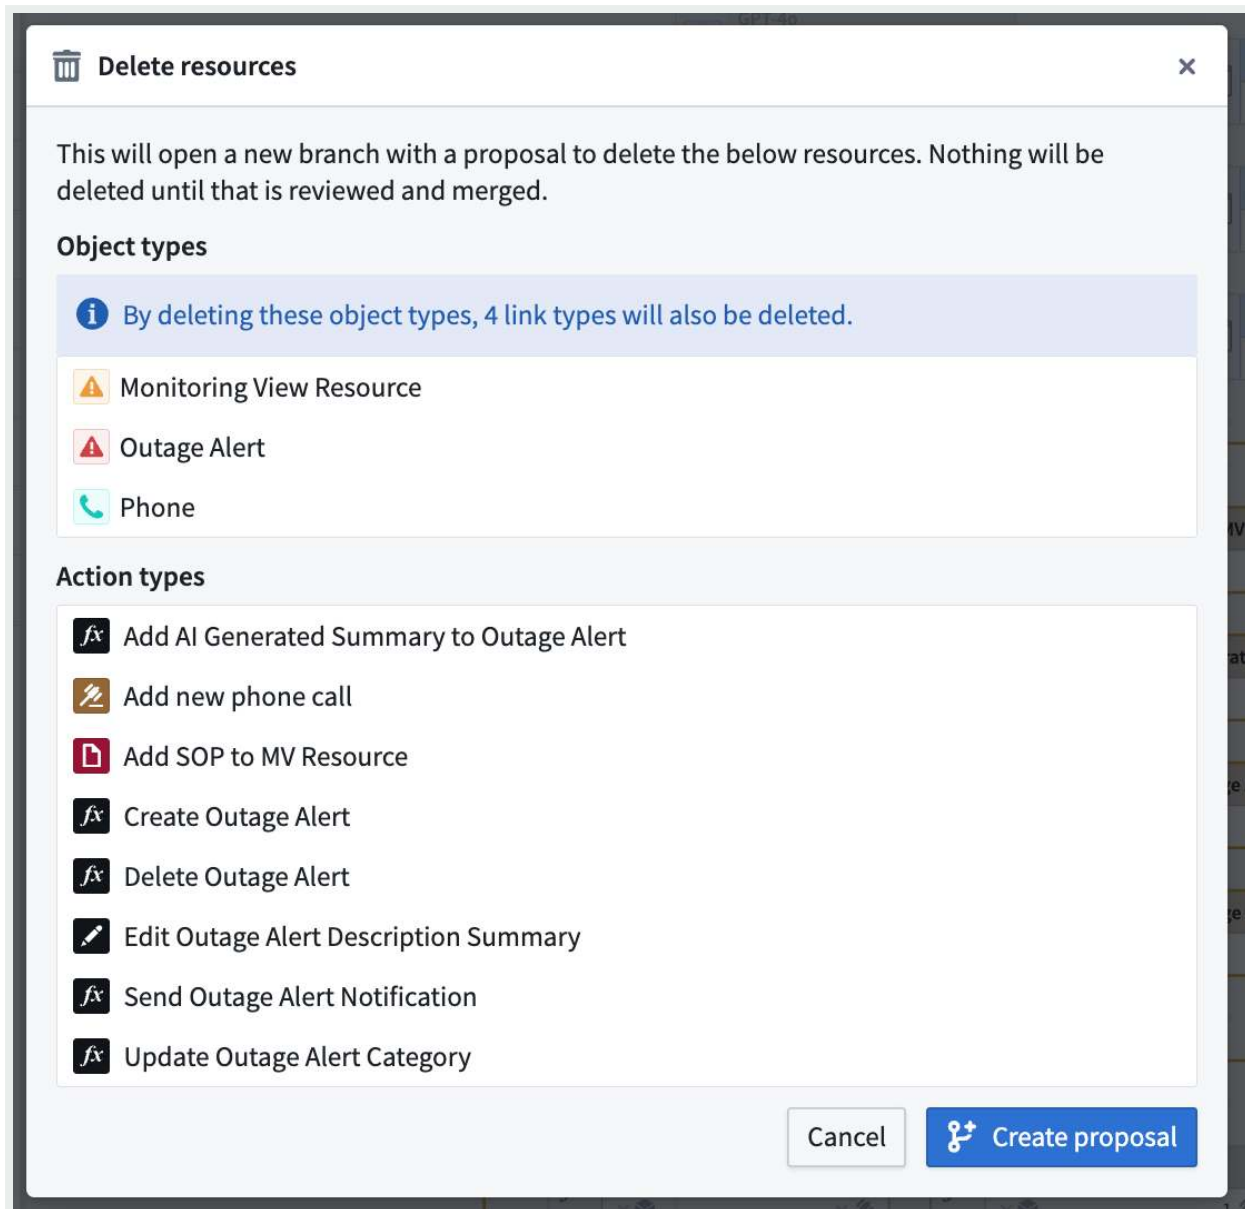

Follow the prompt in Ontology Manager to merge the proposal.

[API Reference ↗](#)

[Send feedback](#)

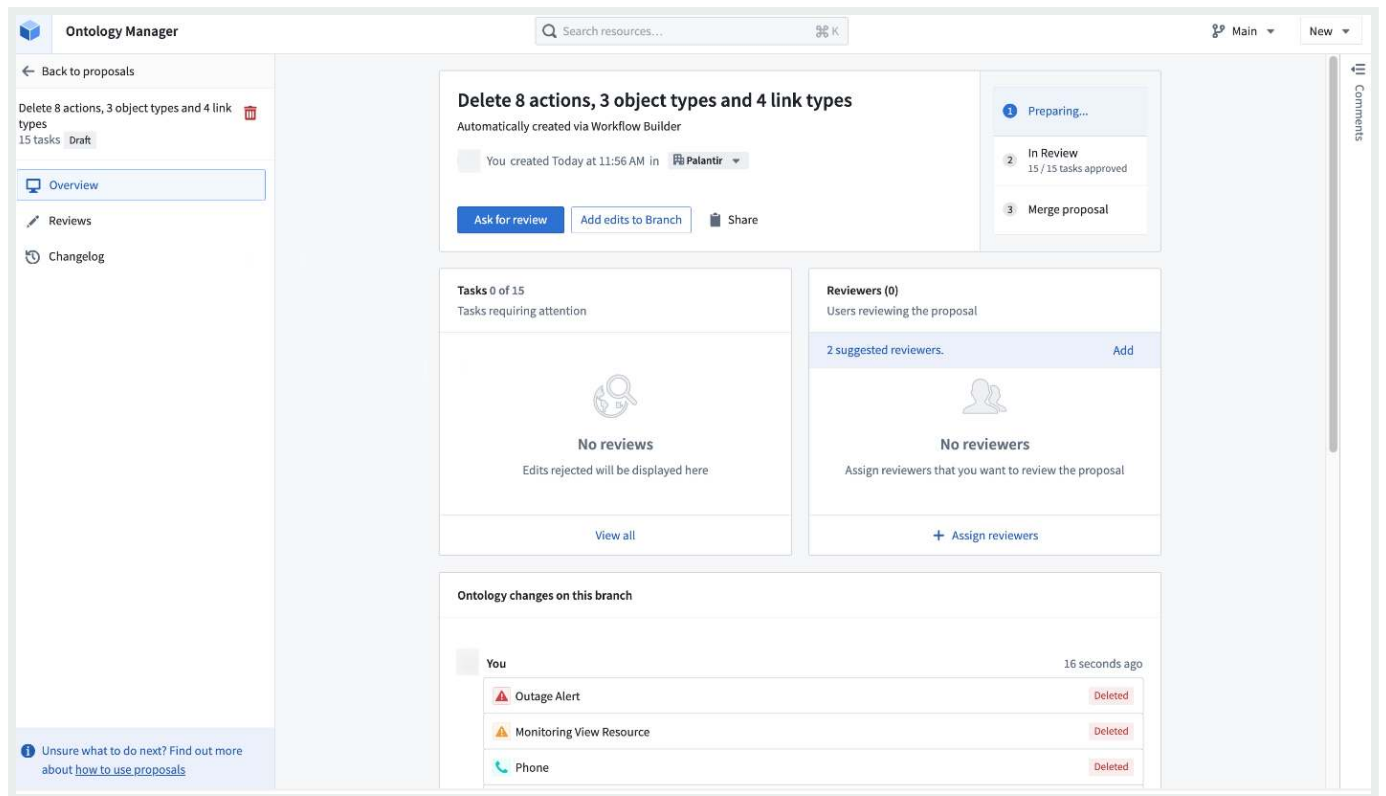


Marketplace products

The **Marketplace products** sidebar helps you inspect and confirm that Marketplace products have the right inputs, no resources are missing, and all resources are in the expected packages. This feature is especially helpful for packages you created that are publishing elsewhere.

API Reference ↗

Send feedback

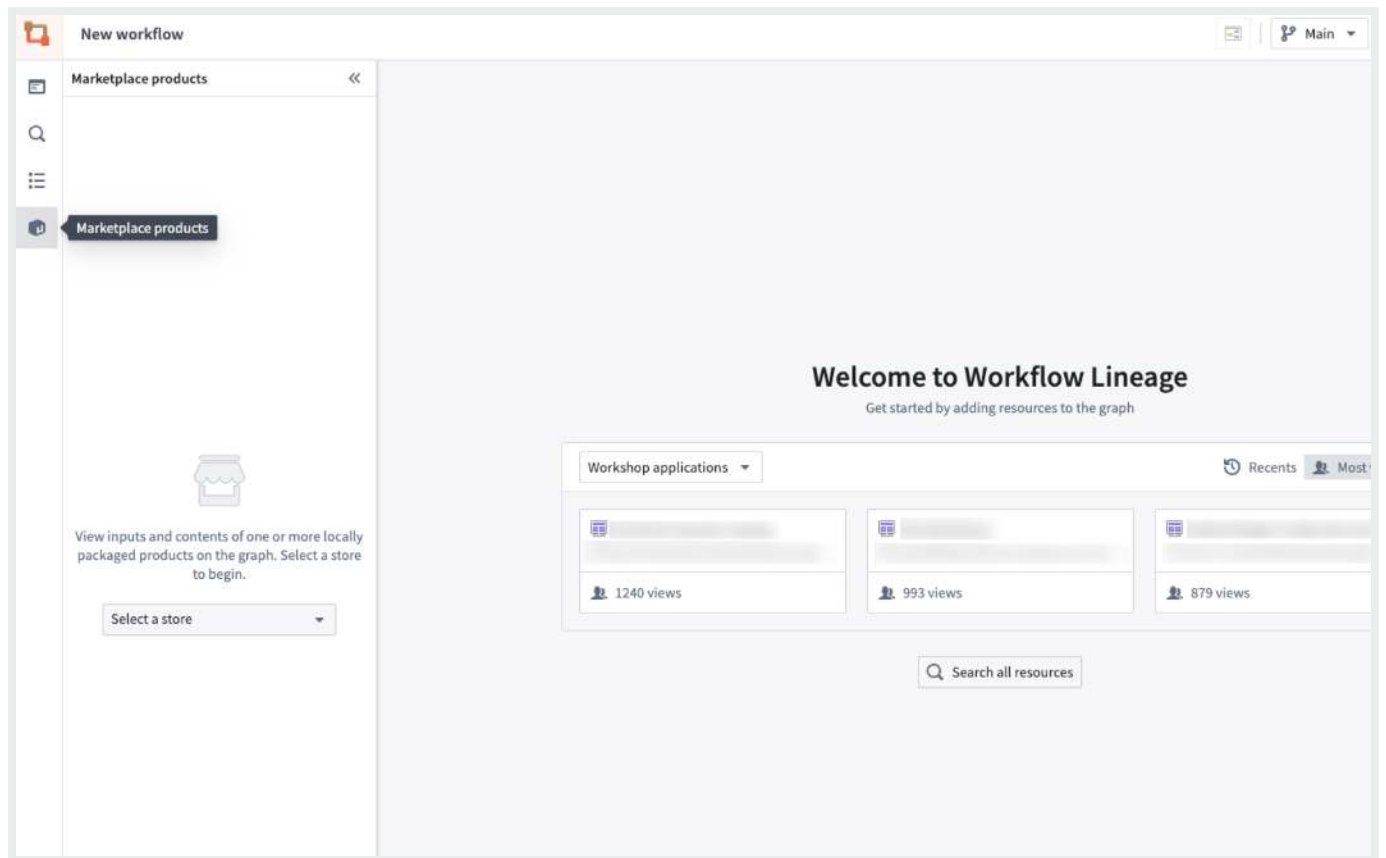


Navigate to the **Marketplace products** sidebar and choose your store in the dropdown menu. Note that the sidebar will only search local stores and not remote stores.

Select **Add a product** to add the products you wish to inspect, and add all corresponding nodes on the graph by selecting **Add all nodes to graph**.

[API Reference ↗](#)

[Send feedback](#)

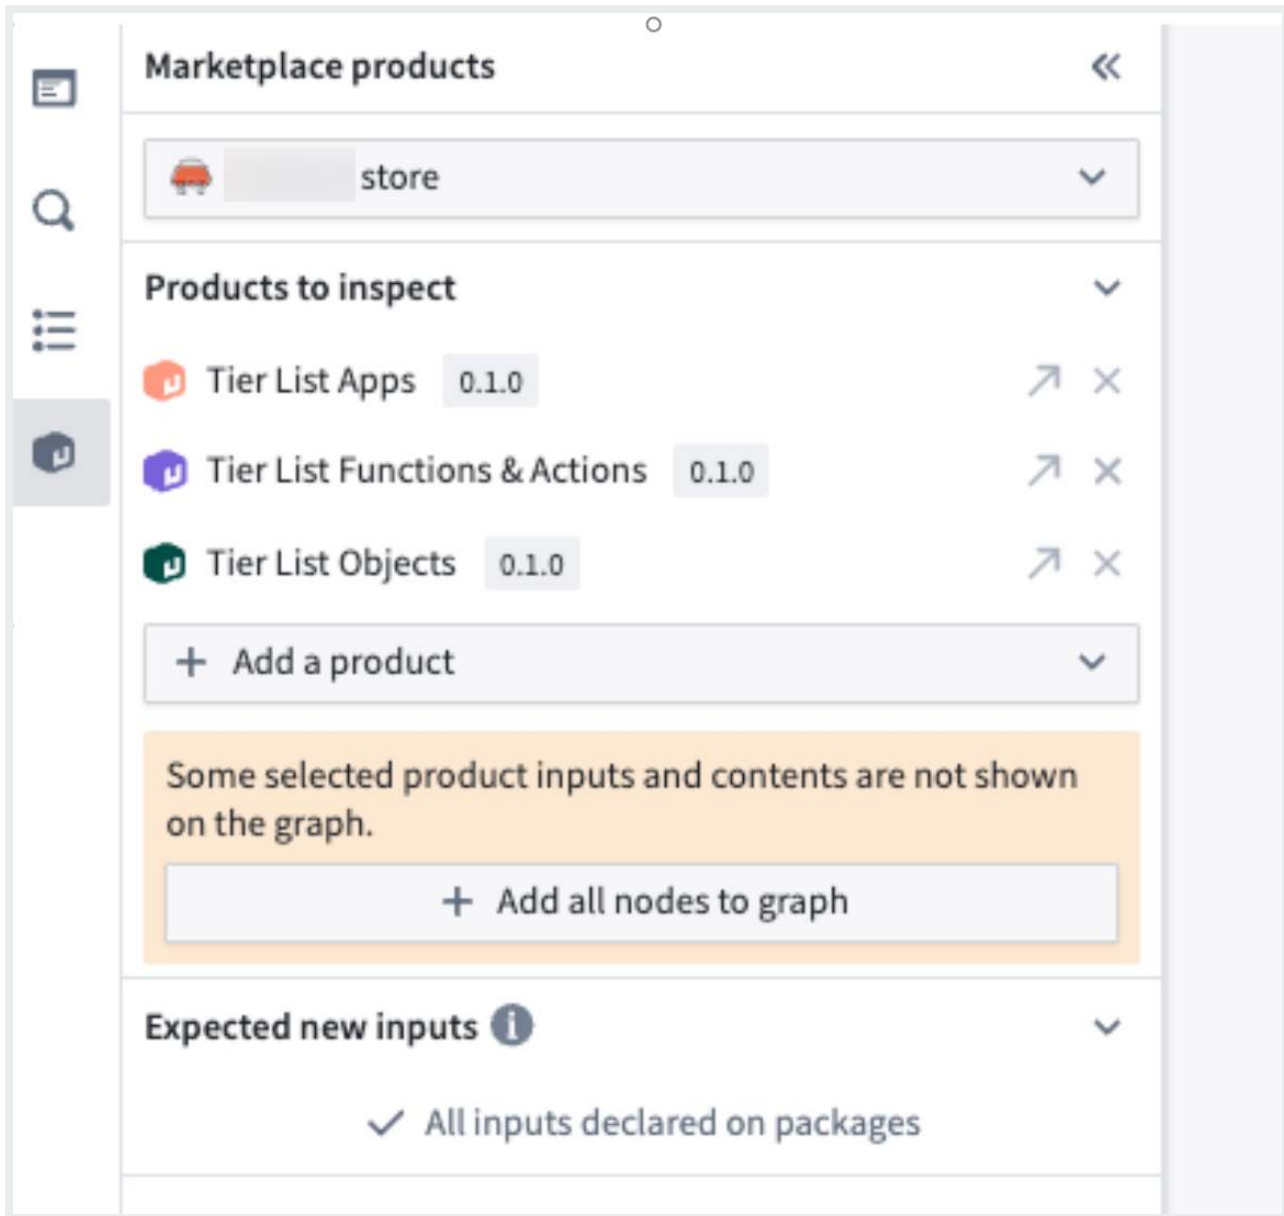


A Workflow Lineage graph will populate, colored by which package the resources are in and whether the resources are inputs to a specific package.


In the example below, the function `upsertTierListRank` is listed as an input; however, the function should be packaged because it is used in an action that is packaged. Additionally, the **[Log] Upsert Rank** object ended up in **Tier List Functions & Actions** instead of the **Tier List Objects**. A flag also shows that the model GPT-4o is required to use the logic function.

[API Reference ↗](#)

[Send feedback](#)

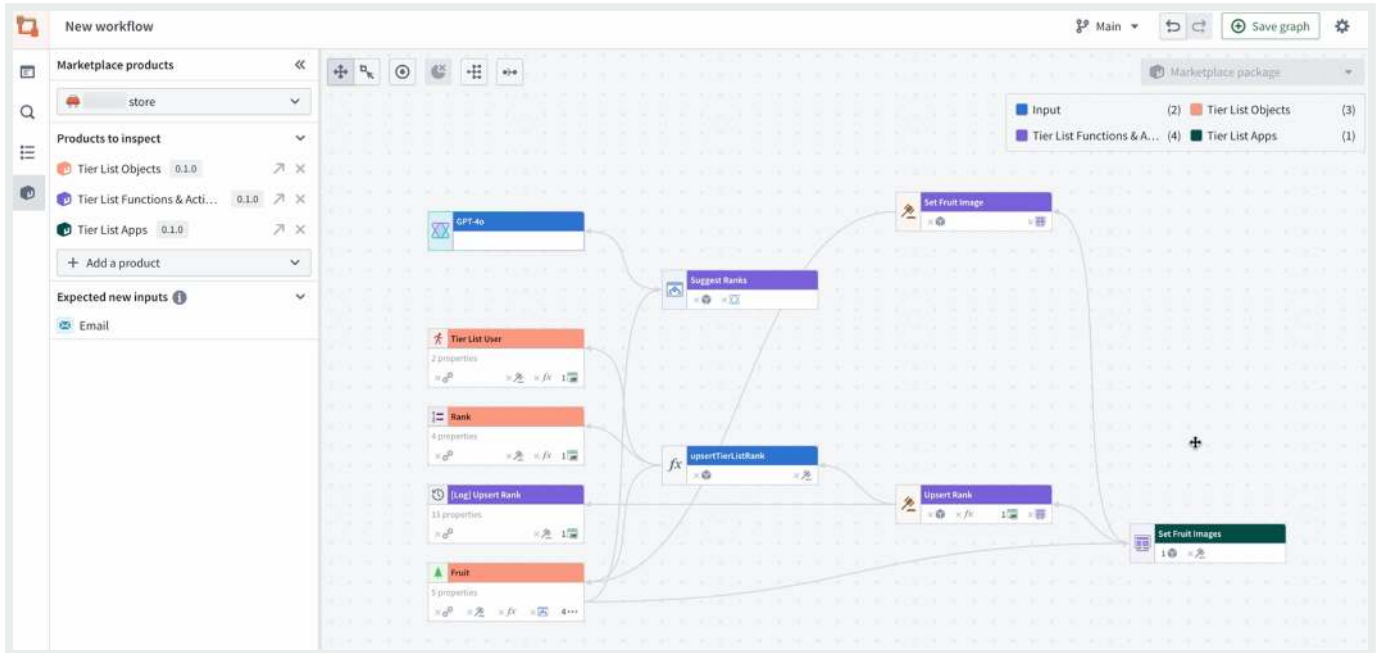


On the left panel, a list of expected new inputs to your package is displayed. In the example below, the **Email** object feeds into the **Set Fruit Images** Workshop module, so it should be included in future packages.

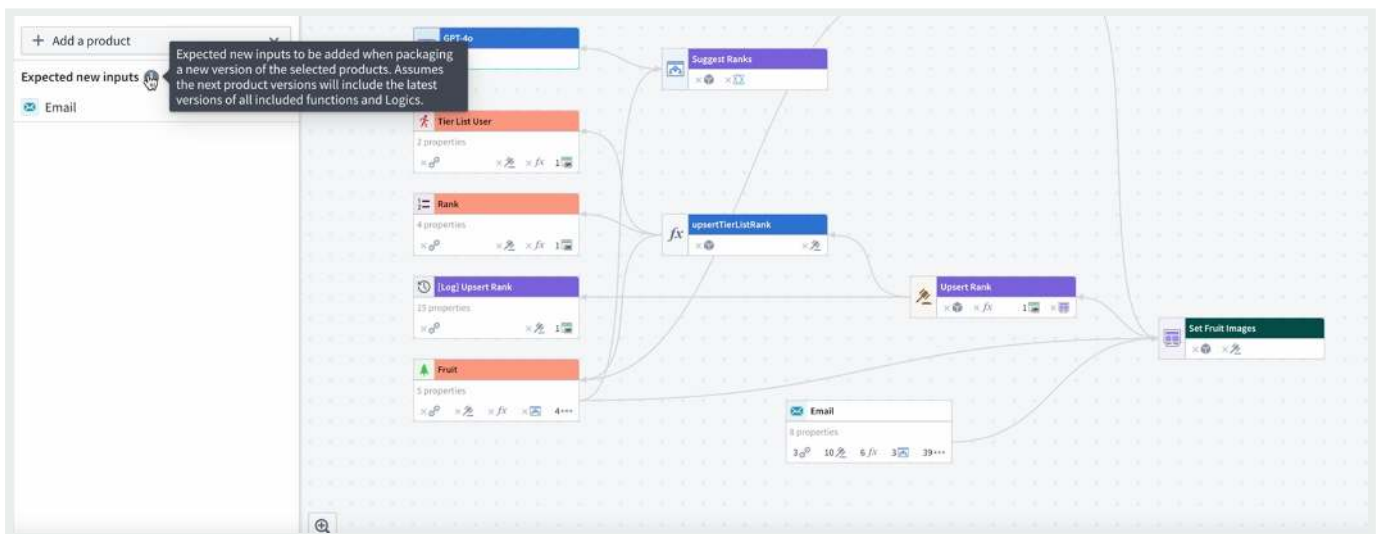

The color legend will also show package overlaps with the **Multiple packages** key.

[API Reference ↗](#)

[Send feedback](#)

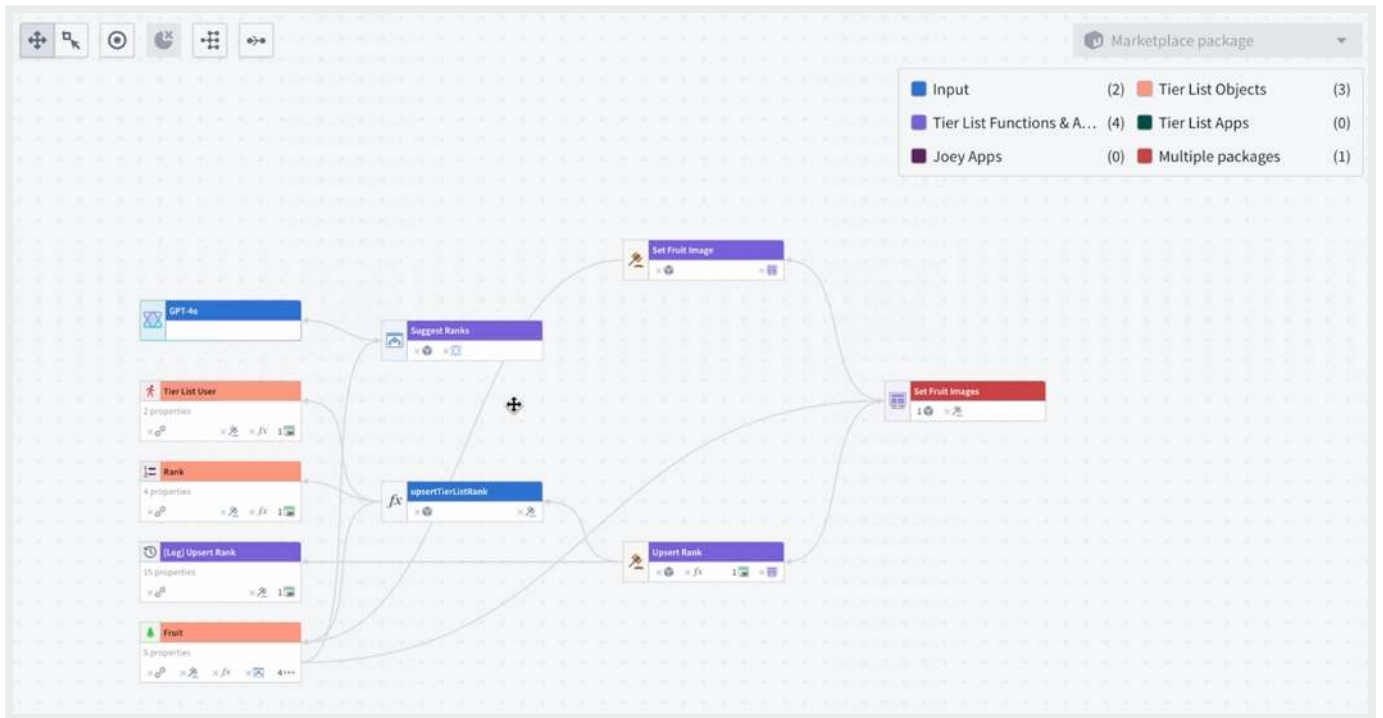

Additional workflow updates

Aside from the various refactoring explained above, you can also perform security updates for your workflows directly from Workflow Lineage. Review our Workflow Lineage security documentation to learn how to [bulk update ontology roles on workflow resources](#) and [action submission criteria](#).

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

API Reference ↗

Send feedback

Use case development / Workflow Lineage / AIP usage metrics and observability

AIP usage metrics and observability


i The application previously known as Workflow Builder is now called Workflow Lineage.

To start using Workflow Lineage, open a Workshop application or functions repository and use the keyboard shortcut **Command + I** (macOS) or **Ctrl + I** (Windows) to view the relevant Workflow Lineage graph depicting the objects, actions, and functions that back the application.

AIP usage metrics

The following sections will help you understand the various AIP usage metrics viewable in Workflow Lineage.

Model usage coloring

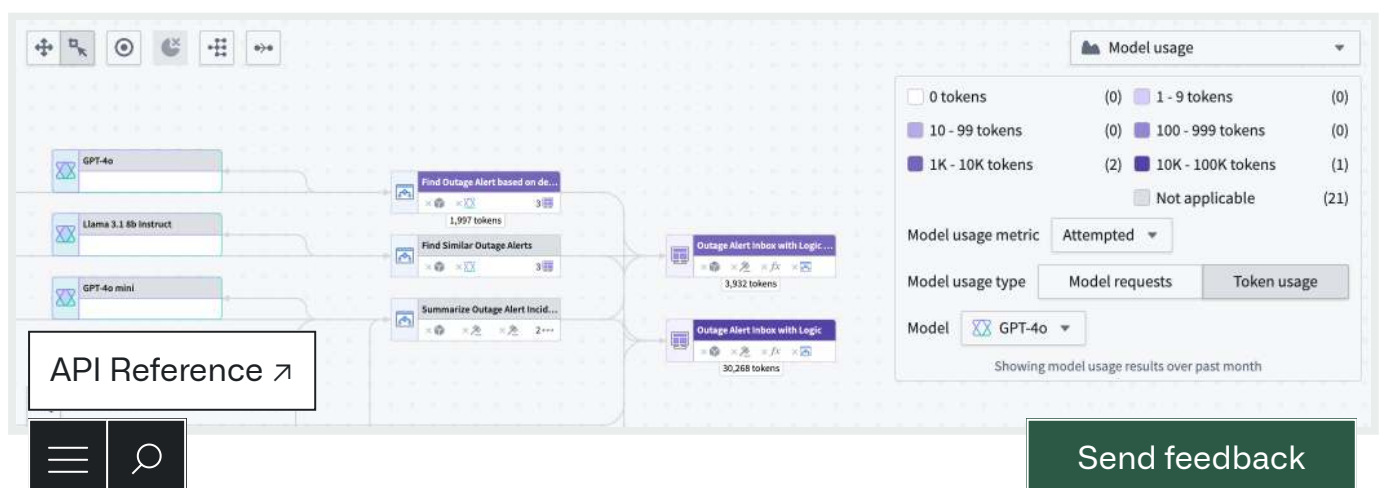


Workflow Lineage allows you to view model metrics for model requests and token usage. There are three types of model usage metrics:


- **Successful:** Total successful model requests or tokens used in attempts made by the specified model.
- **Attempted:** Total attempts made by the model, including successful and rate-limited attempts.
- **Rate-limited:** Total rate-limited attempts made.

Under **Model usage**, specify whether you want to view **Model requests** or **Token usage** metrics.

Model requests shows the total number of specified requests on model nodes in your Workflow Lineage.

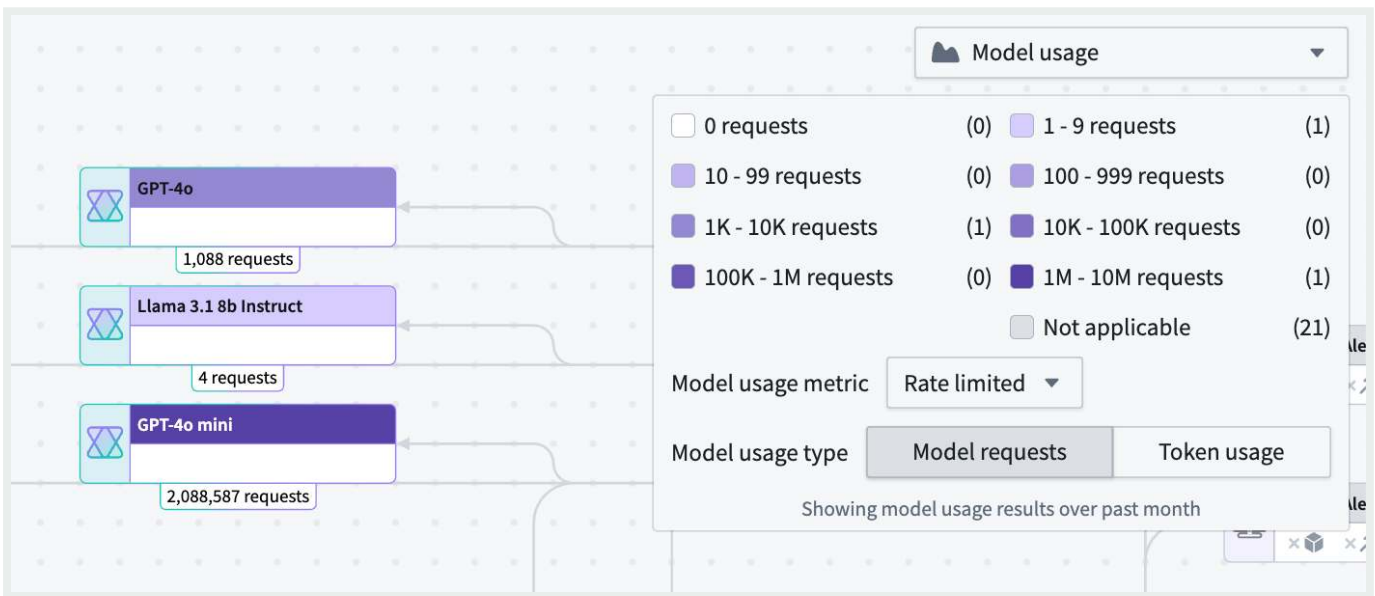

Token usage shows the number of tokens used for Workshop applications, Automations, or third-party OSDK applications. Token counts on Logic nodes are the token counts used in the Logic application debugger.

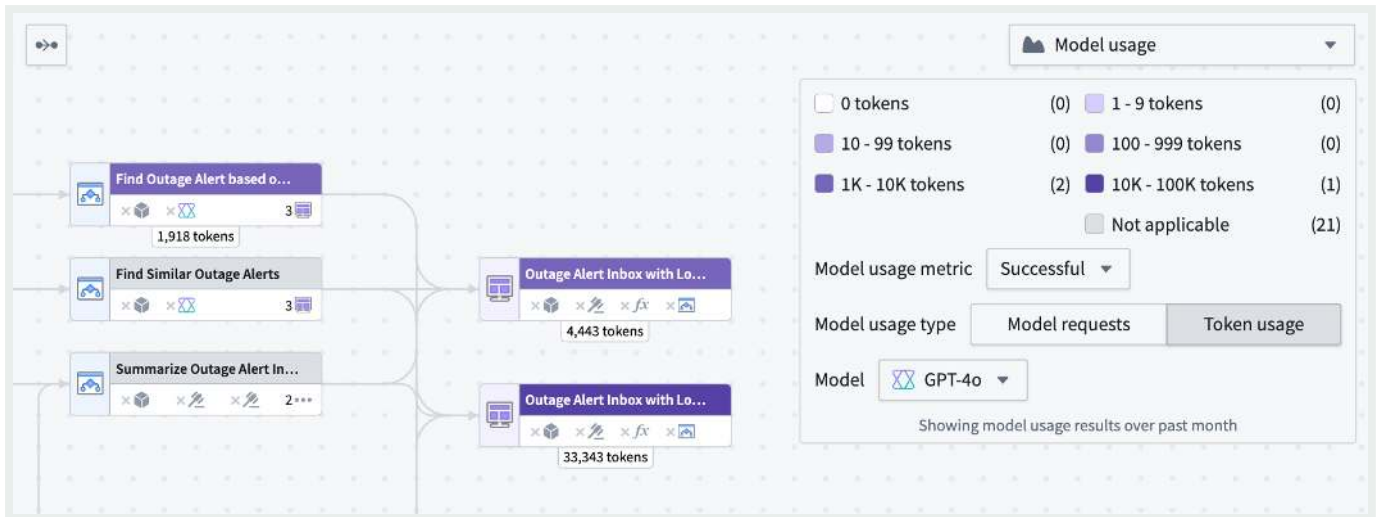

Model usage charts

You can view the token usage or model requests over time for Workshop applications, Automations, and third-party applications (Ontology SDK applications) over time in a line chart by selecting the nodes and opening the **Model usage charts** panel at the bottom.



To [API Reference](#) value for a particular resource, hover over the graph itself. The same filters that are used in the color legend explained above also appear in the

Send feedback

Bulk replace models

Once you identify model usage you want to migrate or replace, open the **Replace model** tab in the bottom panel to replace a language model across multiple AIP Logic functions in a single action. For step-by-step instructions, see the [bulk replace models](#) documentation.

AIP observability

Workflow Lineage provides observability features to help you monitor and debug your AIP workflows. You can track execution history, visualize distributed traces, access detailed logs, and analyze performance metrics for your functions, actions, language models, and automations.

For detailed information about AIP observability features, view the [AIP observability documentation](#).

PREVIOUS

← [Perform refactors and understand your workflows](#)

NEXT

[Manage security](#) →

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement](#) ↗

[Privacy Statement](#) ↗

[Terms of Use](#) ↗

— [Cookies Settings](#)

[API Reference](#) ↗

[Send feedback](#)


Use case development / Workflow Lineage / Manage security

Manage security

Workflow Lineage includes tools to help you understand and manage the security policies and submission criteria in your workflow.

View permissions with color coding

The color legend in Workflow Lineage shows both **Ontology permissions** and **Resource permissions**.

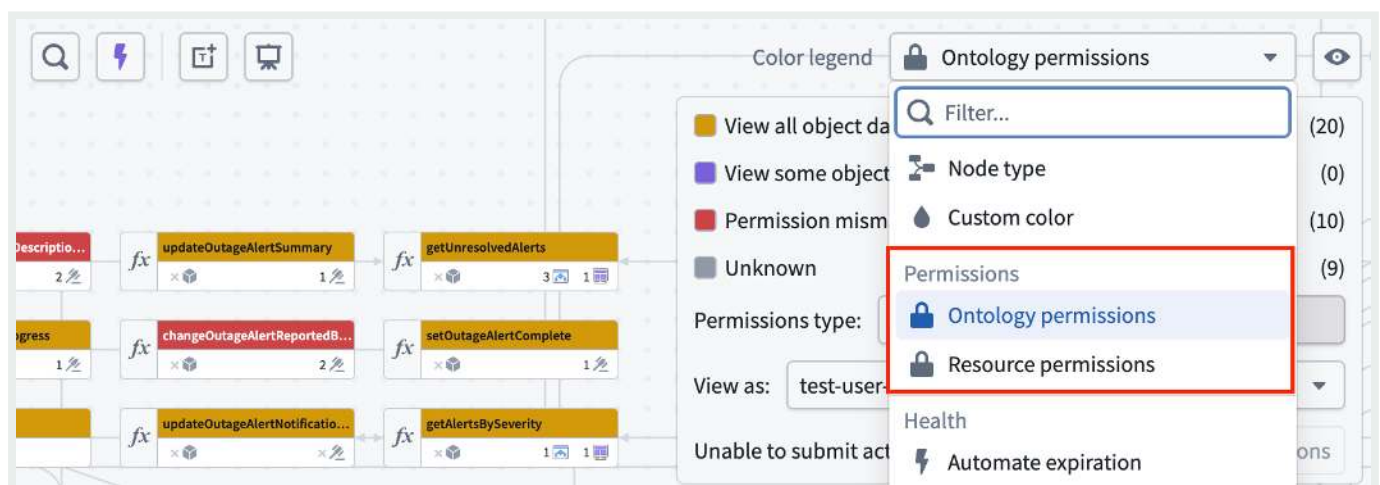

There are two types of **Ontology permissions**:

- **Definition:** Whether the specified user can view or edit entity definitions.
- **Data and execution:** Whether the specified user can view object data or execute actions.

Resource permissions show a breakdown for that particular user: whether they are an API Reference ↗ discoverer, or have no access to the resource itself.




Send feedback

To check the access permissions of a specific user, enter their username into the **View as** dropdown menu for a preview.

Debug why a user cannot submit an action

If you want to understand why someone cannot submit an action, use **Debug permissions** within the Ontology permissions color mode.

1. Select **Debug permissions** to open the left side panel. Alternatively, select your action first, then open the **Selection details** side panel to reach the same view.
2. Under **Check action submission**, select the user in question.
3. Review the breakdown of what is required to submit the selected action.

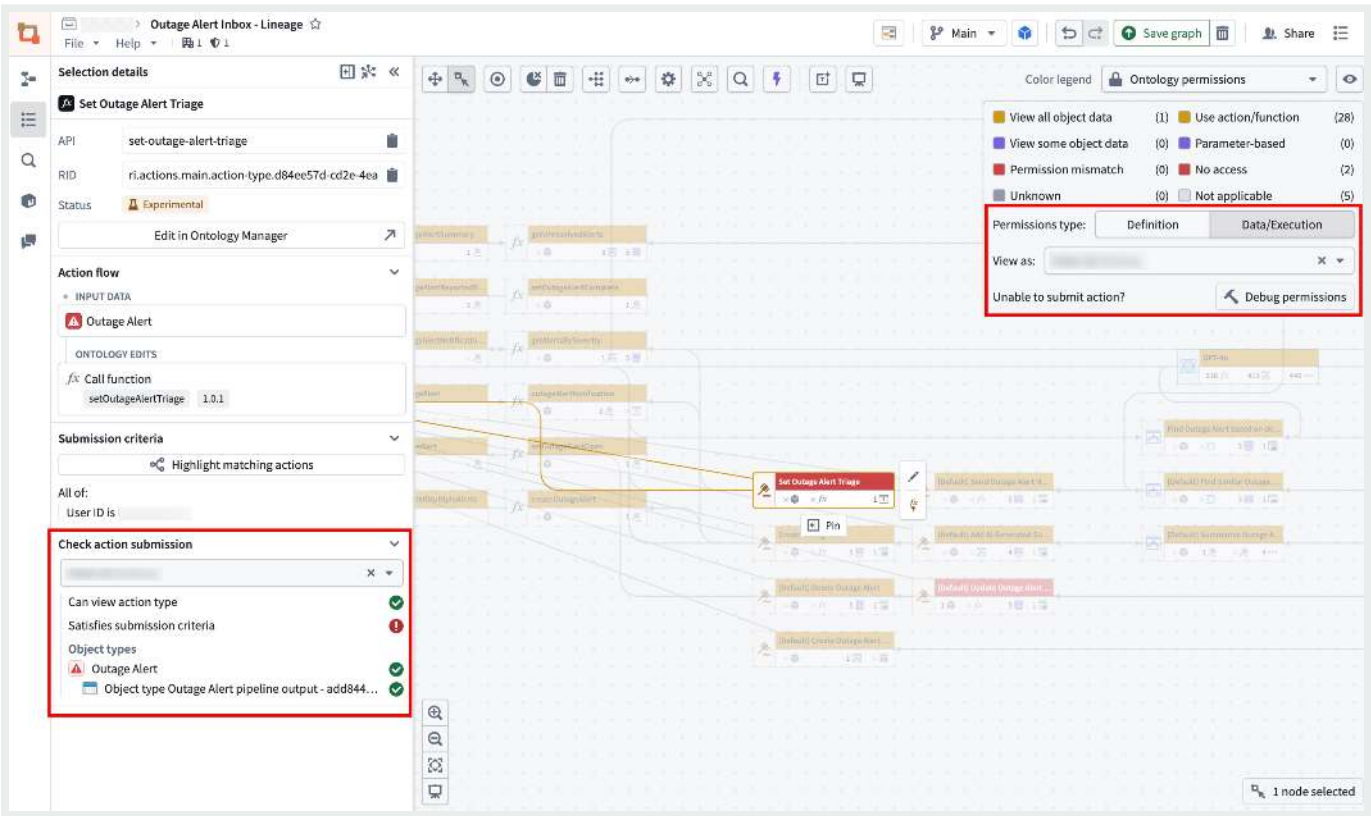

In the example above, the user can view the action type but does not satisfy the submission criteria.


API Reference ↗atching submission criteria

Send feedback

You can view the submission criteria for a selected action, and highlight all other actions on the graph that match those criteria.

To do this:

1. Select an action on your graph.
2. Open the **Selection details** side panel.
3. Select **Highlight matching actions** underneath **Submission criteria**.
4. View which actions match. When you are finished, select **Exit highlight mode**.

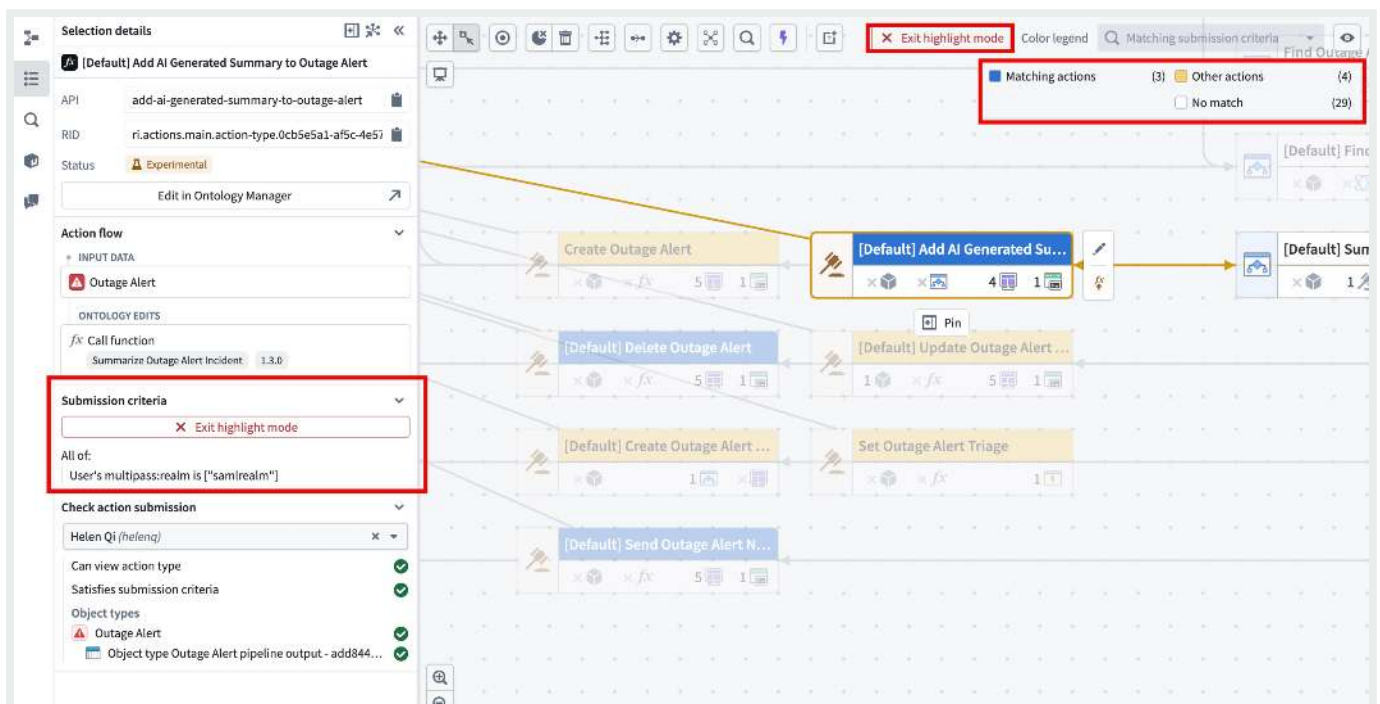


Bulk update action submission criteria

After seeing the highlighted matching submission criteria, you can also bulk update action submission criteria to match the submission criteria of a source action. From the Workflow Lineage graph, select the actions you wish to update. Then, navigate to **Update submission criteria** from the bottom panel.

[API Reference ↗](#)

[Send feedback](#)

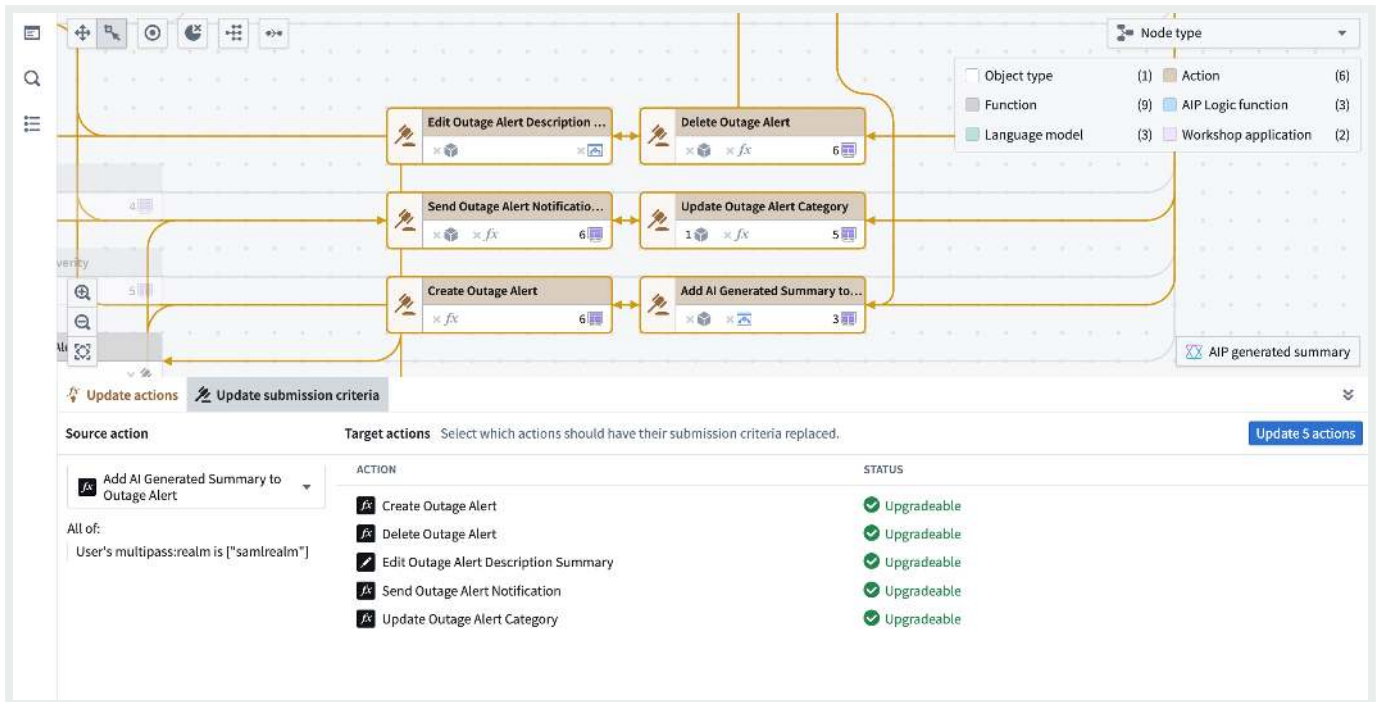

On the left side of the panel, select the source action with submission criteria that you want applied to the other actions. The submission criteria of the source action can be viewed under the selected source action.

When completed, select the blue **Update x actions** button where **x** is the number of actions that will be updated. This will create a proposal you can approve and submit for the changes to take effect.


Bulk update ontology roles on resources

You can also bulk edit [ontology role permissions](#) on objects and actions by following the steps below:


1. Navigate to a resource and right-click on it, then select **Edit permissions** from the context menu.

API Reference ↗

Send feedback

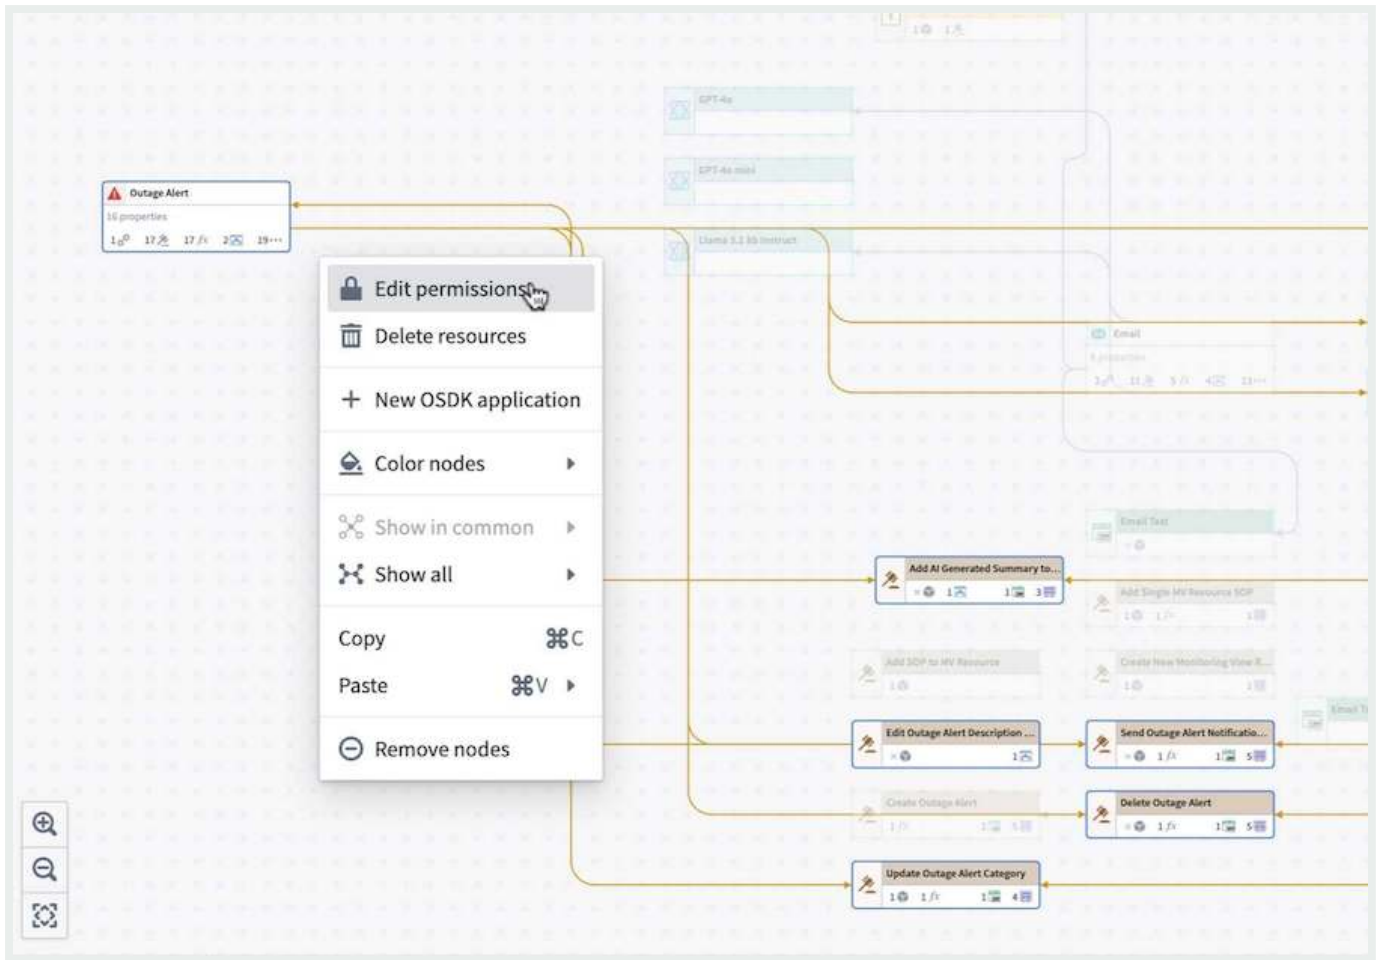


This will bring you to the **Edit ontology resource permissions** window, displaying the selected resources.

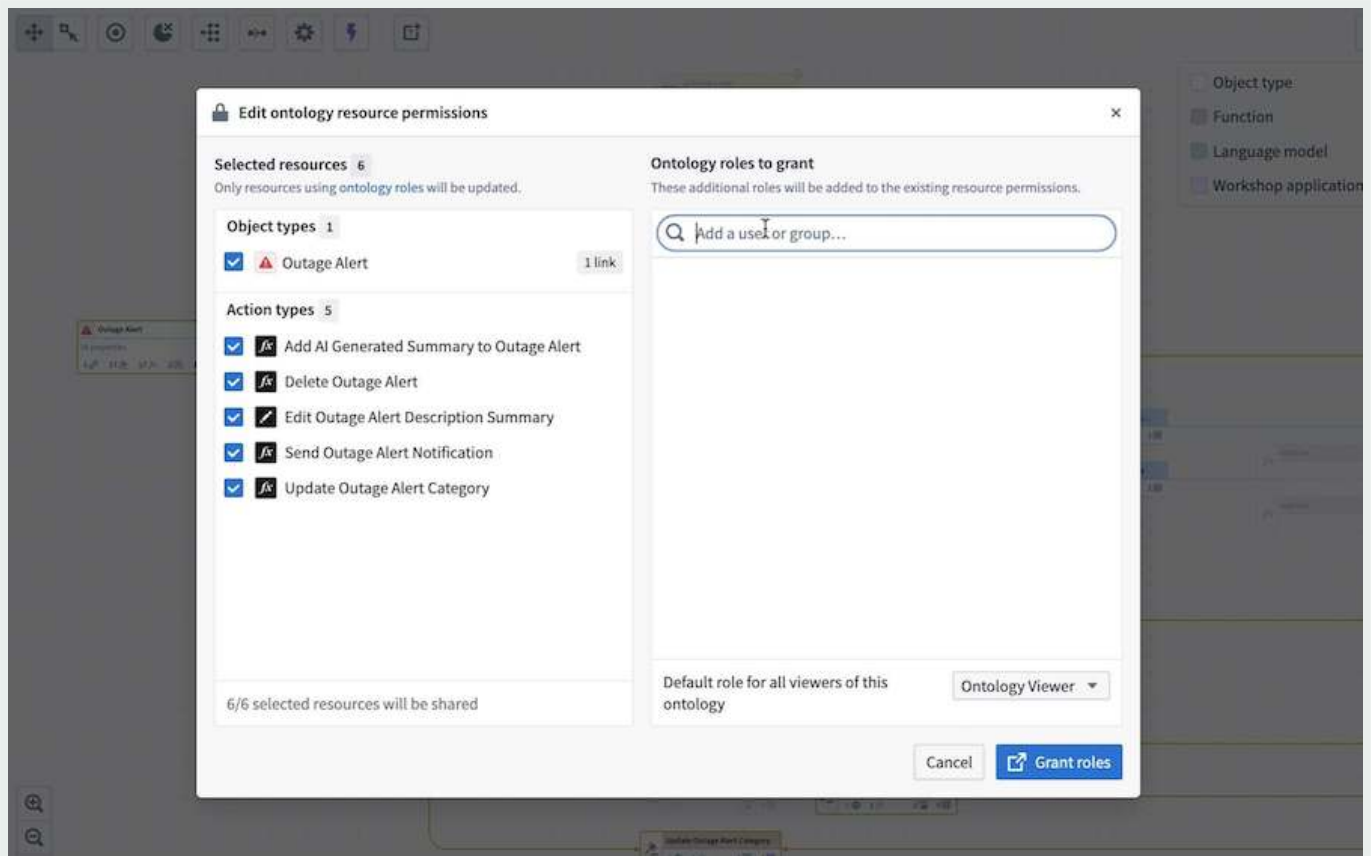


2. In the **Ontology roles to grant** section, search for the group that you want to add. After selecting the role, you should see it displayed next to the selected group.

[API Reference ↗](#)

[Send feedback](#)

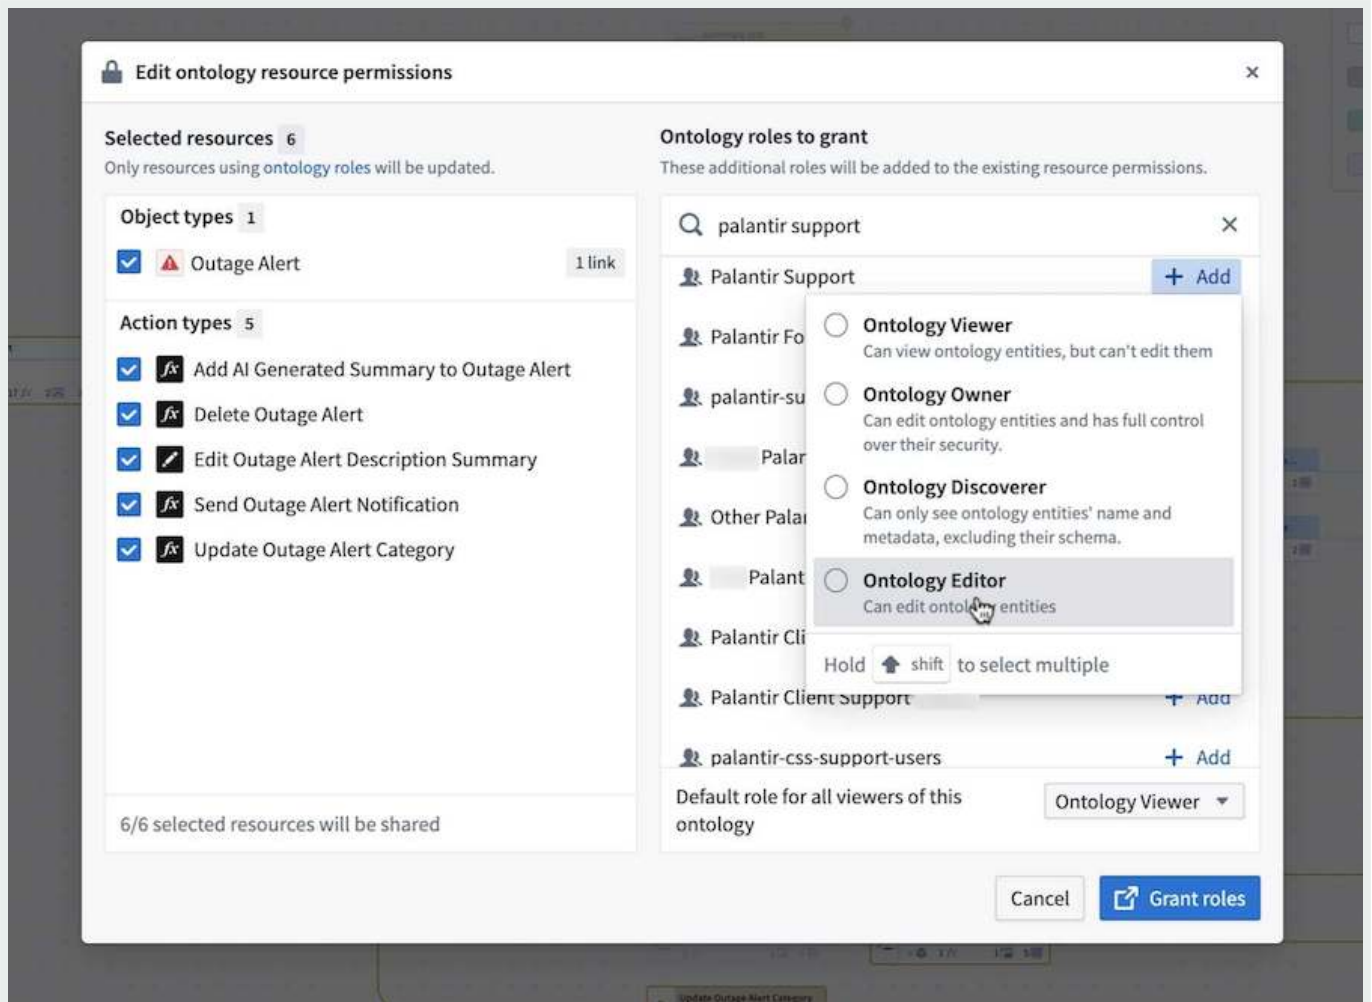

3. Confirm the action by selecting **Grant roles** in the bottom right. A dialog will appear with the prompt, `Are you sure you want to share these resources?`.
4. Select **Yes, share** to proceed. Note that this action is immediate and cannot be undone.

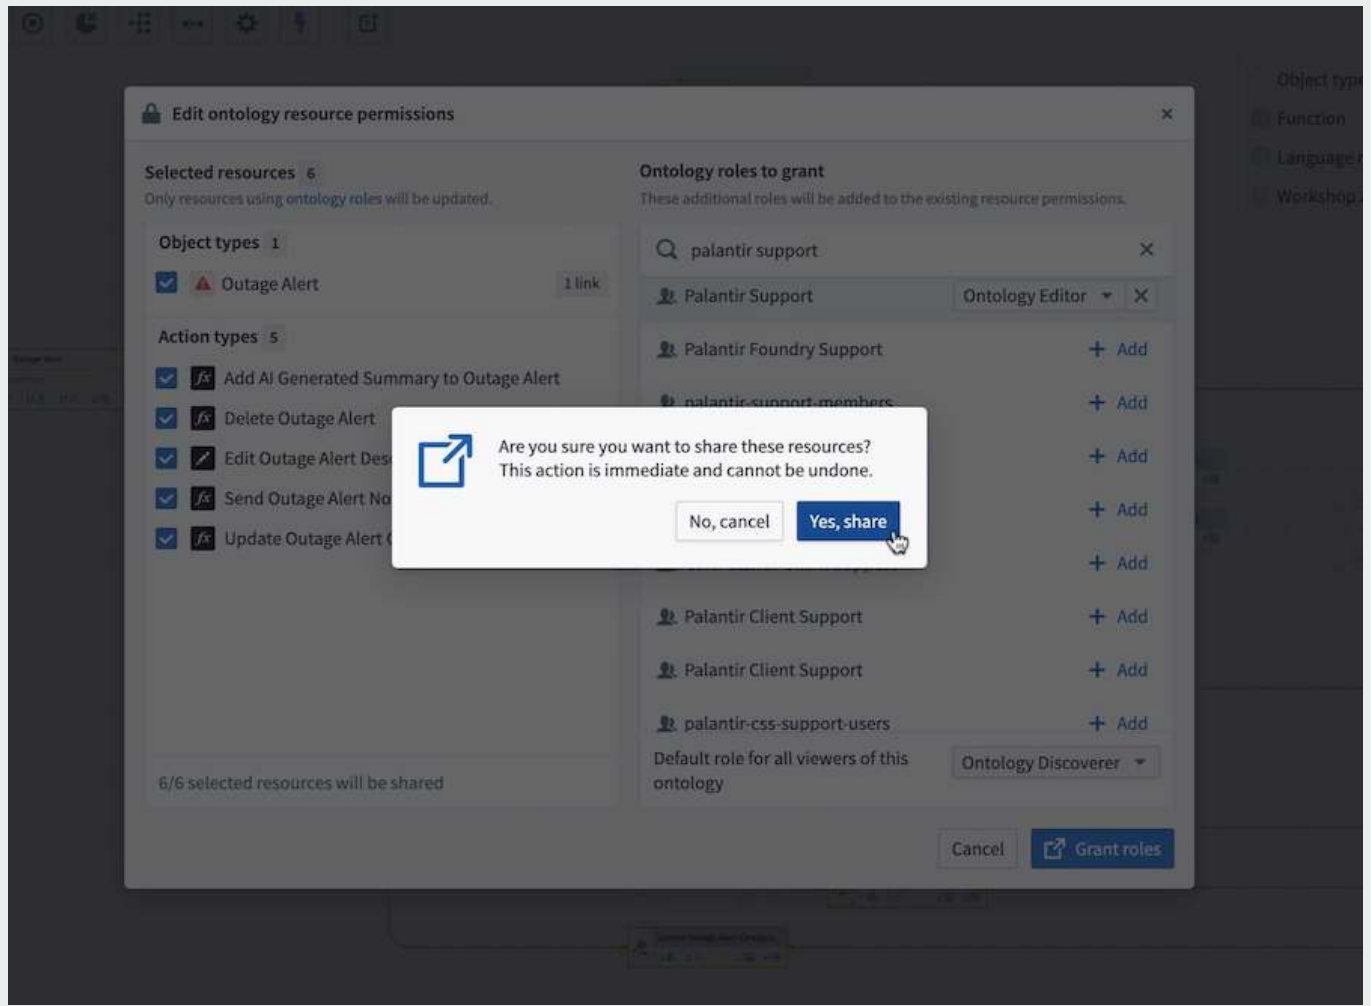


View matching object security policies

You can view an object's security policies, as well as see all other objects that match or partially match those policies.

1. Select an object on your graph.
2. Open the **Selection details** side panel and go to the **Security policy** section.
3. To view the granular policy, hover over **Granular policy**.

[API Reference ↗](#)

[Send feedback](#)

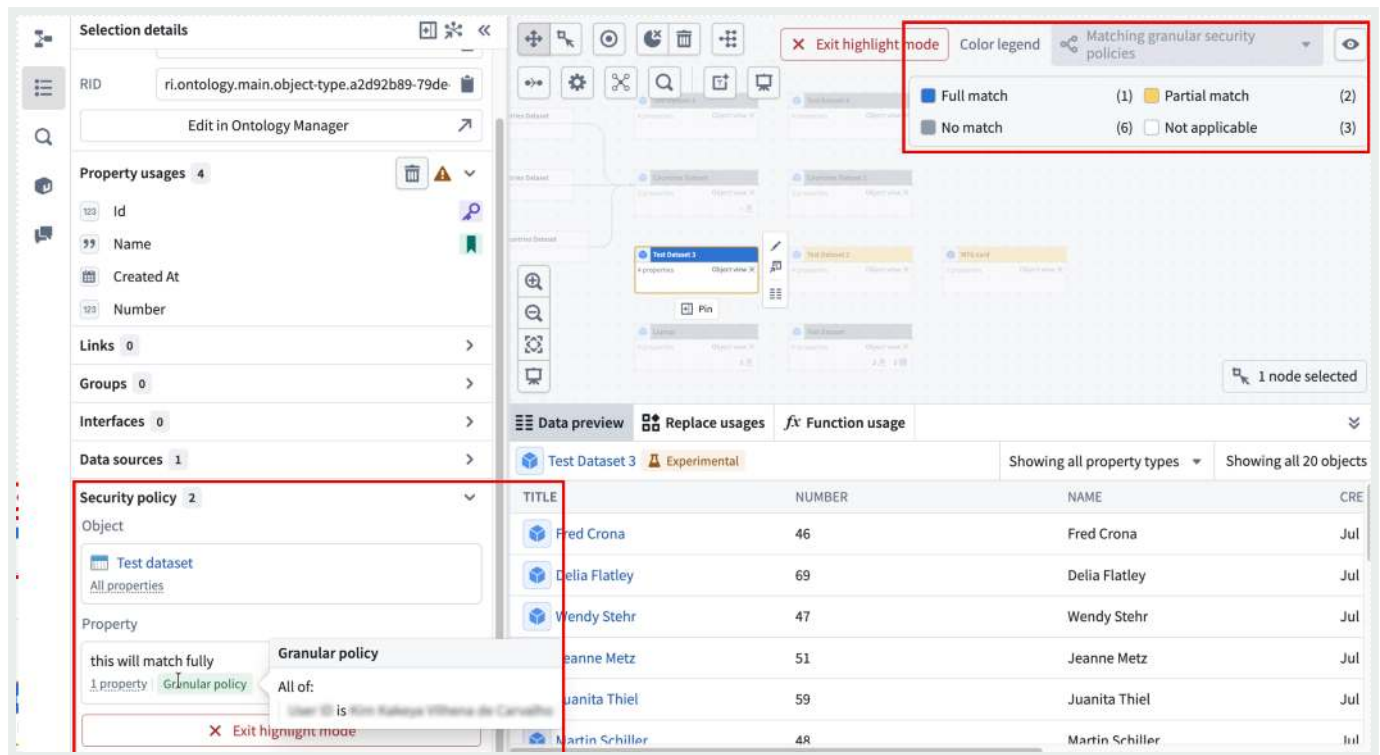

To see which objects on your graph fully or partially match your selected object's security policy go to the **Security policy** section in the **Selection details** side panel.

1. Select **Highlight matching actions** underneath **Security policy**.
2. View which actions match. When you are finished, select **Exit highlight mode**.

PREVIOUS
← AIP usage metrics and observability

NEXT
Branching support →

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

[API Reference ↗](#)


[Send feedback](#)

Use case development / Workflow Lineage / Branching support

Branching in Workflow Lineage

Workflow Lineage supports Global Branching, allowing you to inspect, edit, and validate workflow resources on a branch before merging changes into `main`. This makes it easier to develop and test end-to-end workflow changes in an isolated branch context before promoting them to production.

For general information on Global Branching concepts and workflows, refer to the [Global Branching documentation](#).

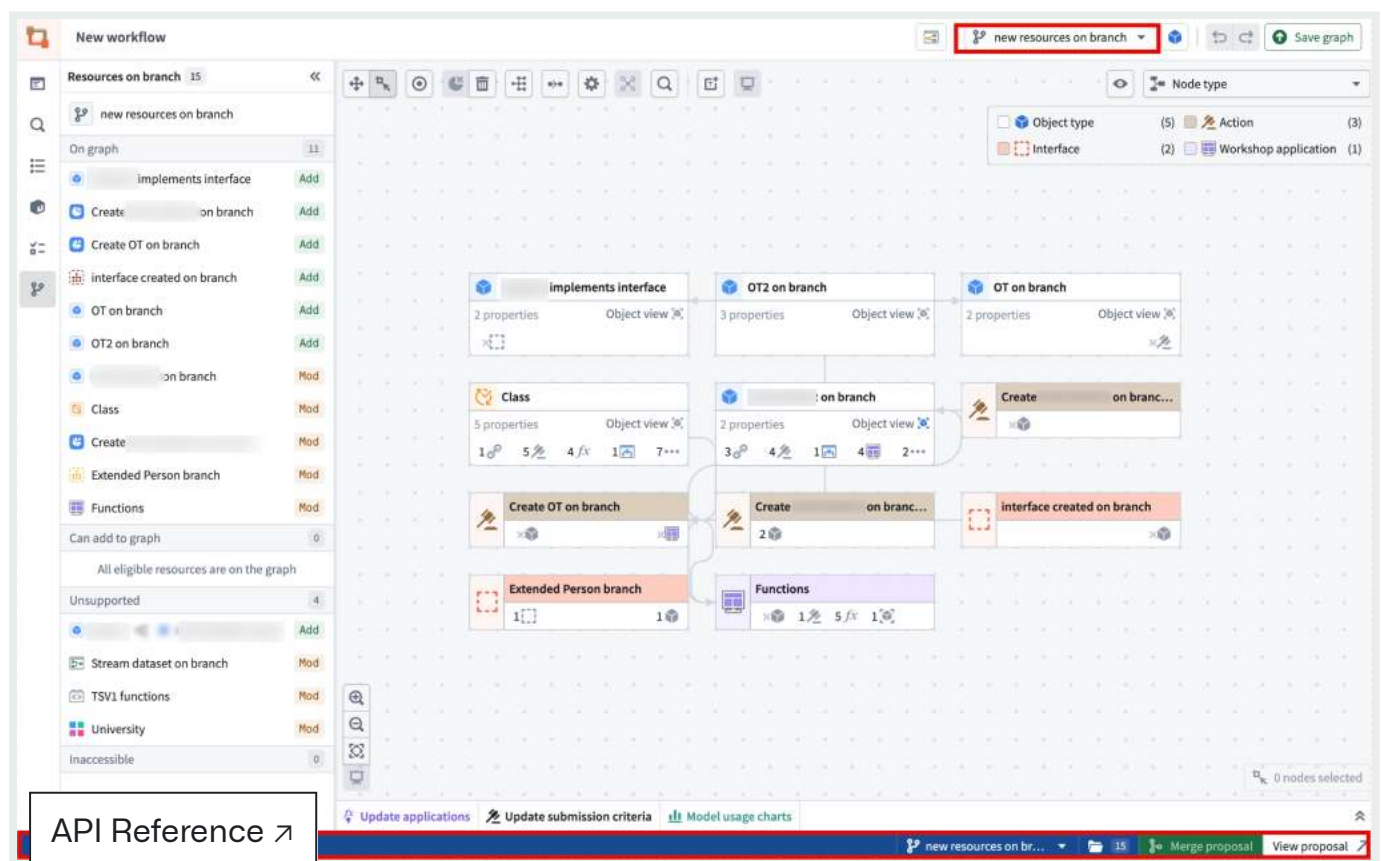


[API Reference ↗](#)

[Send feedback](#)

Adding, removing, and modifying resources

When working on a global branch, you can open Workflow Lineage from a variety of supported branch-aware entry points, including:


- The AI FDE panel, by right-clicking a global branch tag or when selecting a global branch context to add.

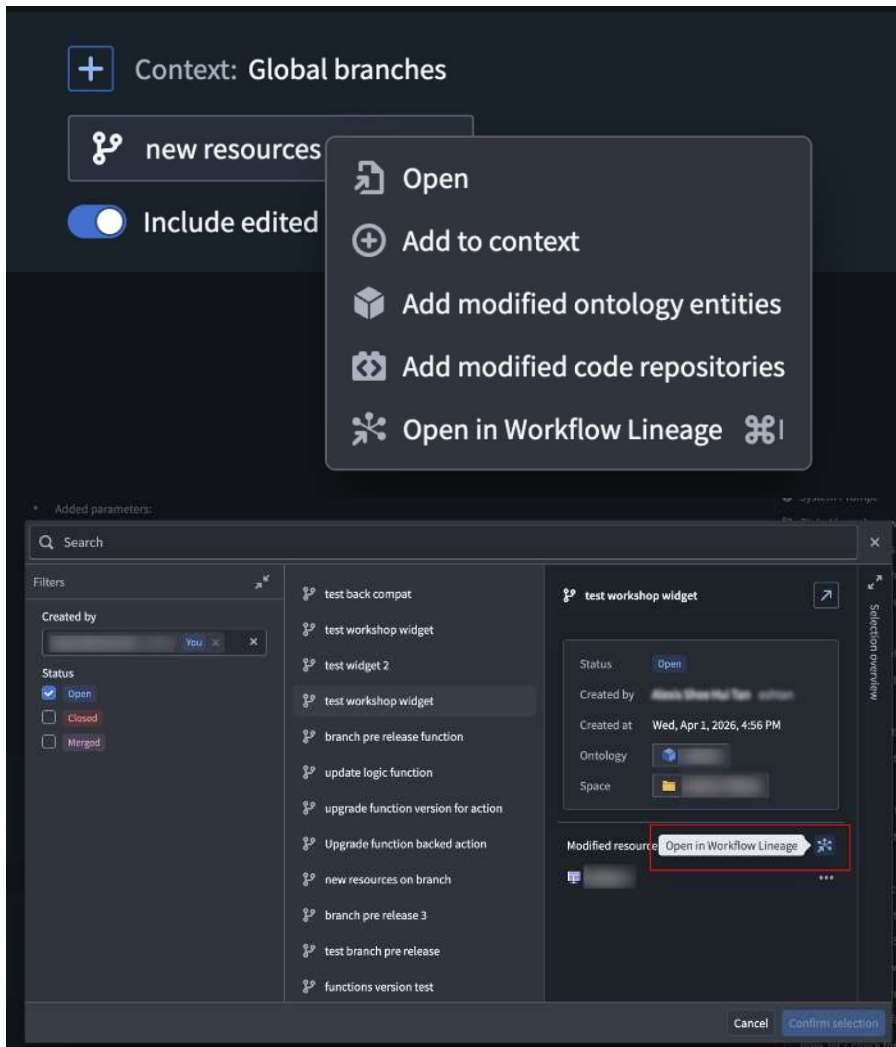


- The global branch bottom bar.

[API Reference ↗](#)

[Send feedback](#)

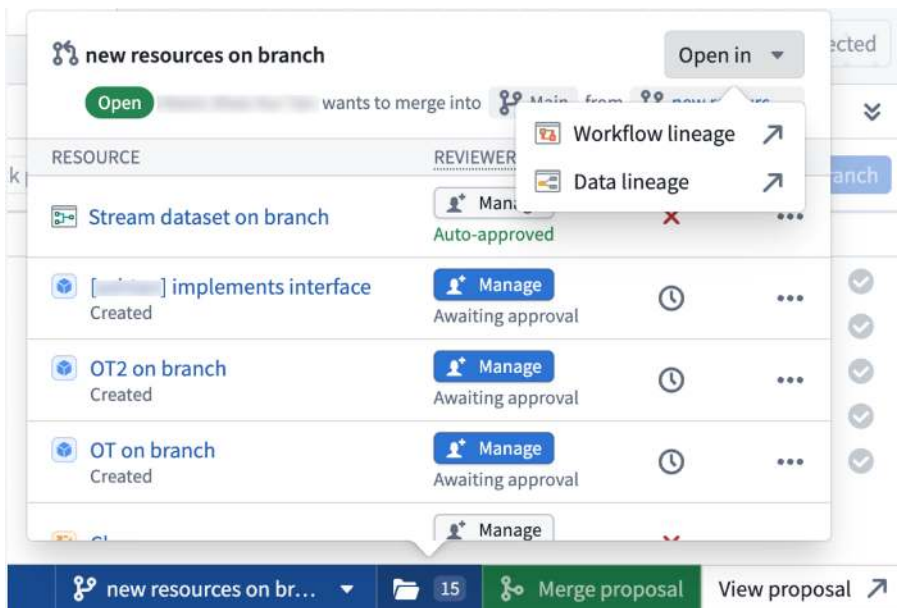


- The global branch main branch page.

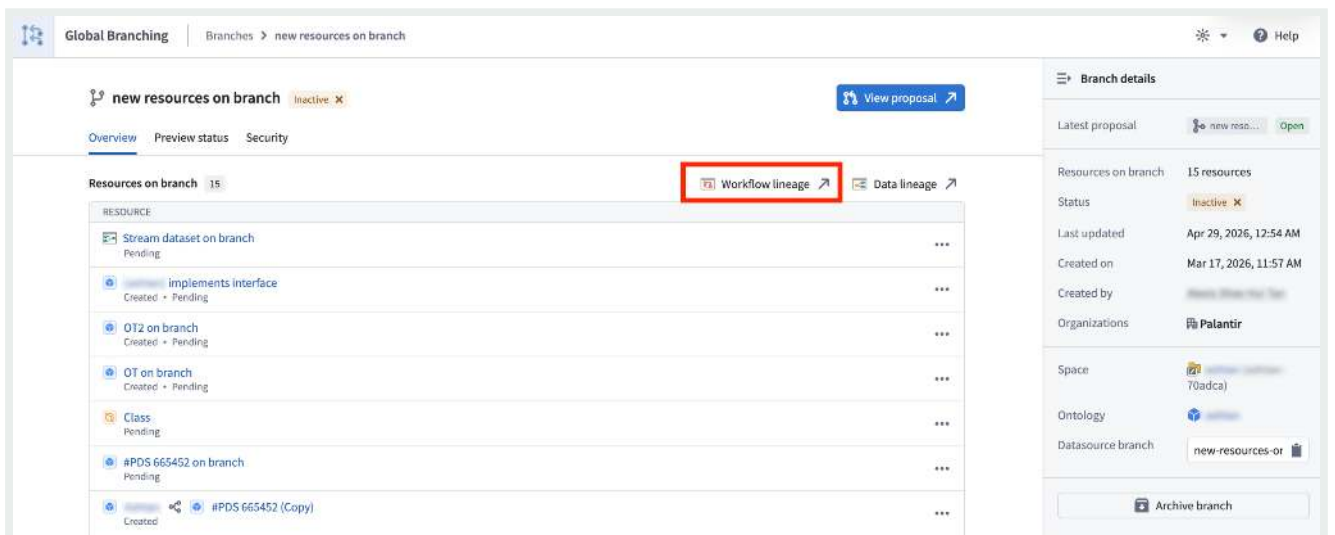

- The global branch proposal page.

API Reference ↗

Send feedback

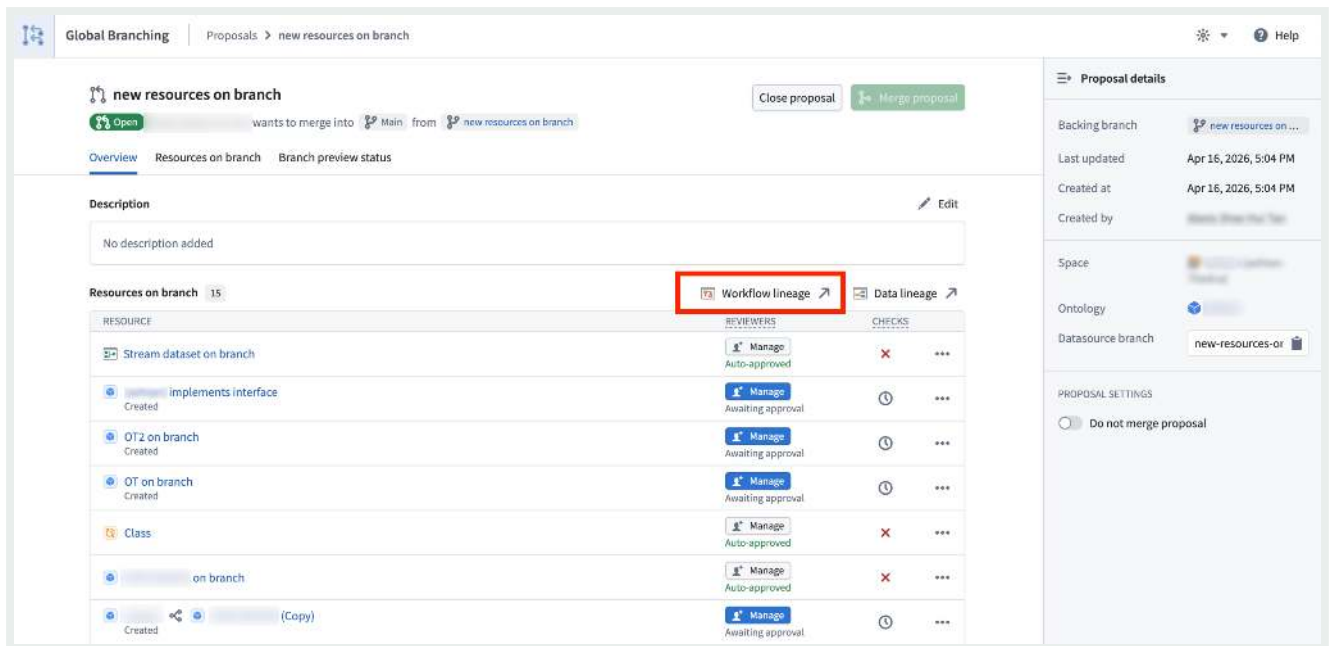


Eligible resources are added to the graph automatically, and the branch side panel helps you review any added or modified resources. You can also use `Cmd+I` (macOS) or `Ctrl+I` (Windows) from supported resources on a branch to open Workflow Lineage in the same branch context. This is supported from Workshop, Ontology Manager, AIP Logic, and Pipeline Builder object type outputs.

Cross-application compatibility

With Global Branching in Workflow Lineage, you can use branch-aware color modes for function repositories, action rules, Ontology status, usages, and out-of-date dependencies.

[API Reference ↗](#)

[Send feedback](#)

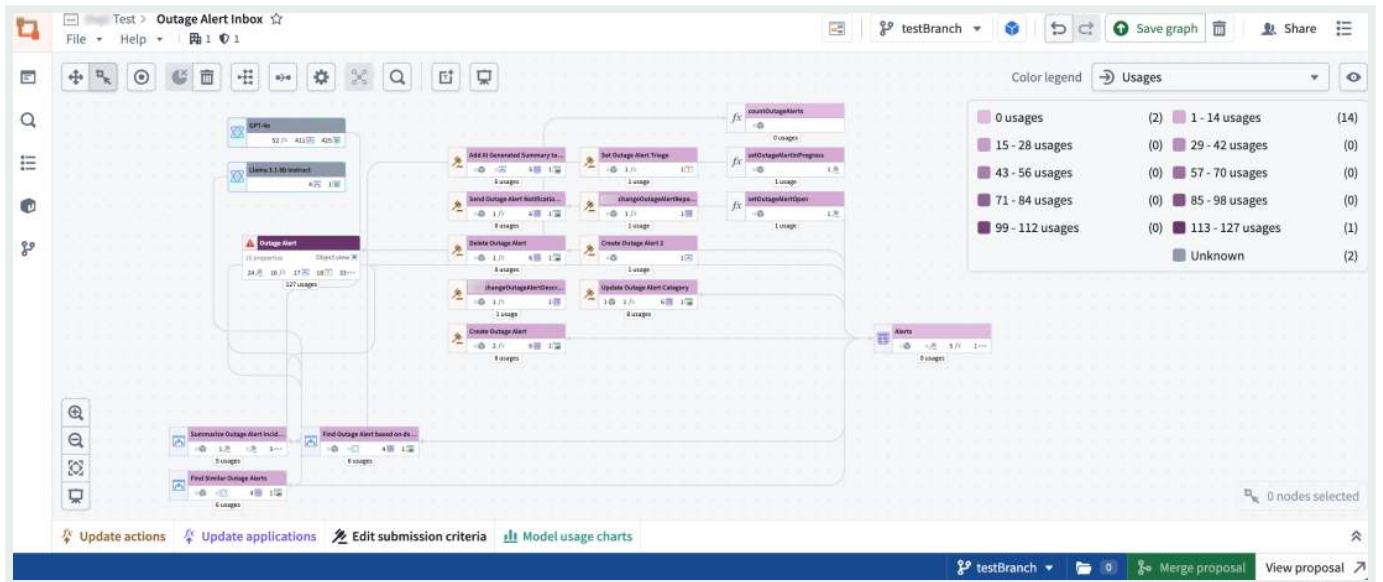

You can also perform supported bulk edits, including upgrading function versions for action types or Workshops, deleting Ontology resources, and updating action type submission criteria.

Upgrade the functions of workshop modules and the workshops backing object views to target versions				
☒ FUNCTION		WORKSHOP MODULE		
☒ <code>fx</code> addition_function		Functions	1.1.0 → 1.1.0	☒
☒ <code>fx</code> ObjectTypeCountFilter		Functions	1.0.1 → 1.2.0	☒
☒ <code>fx</code> castToString		Functions	0.0.10 → 0.0.10	☒
☒ <code>fx</code> shoCompareIntegers		Functions	1.11.1-dev → 1.11.1-dev	☒

In addition, you can search for and add resources created on a branch, including object types, action types, functions, and interfaces. The side panel helps you review modified resources and add modified resources that are not already displayed on the graph.

Known limitations

API Reference ↗

- Object type groups in search only reflect those apart of the `main`
- Bulk upgrading logic on a branch is not currently supported.

Send feedback

© 2026 Palantir Technologies Inc. All rights reserved.

[Cookies Statement ↗](#)

[Privacy Statement ↗](#)

[Terms of Use ↗](#)

— [Cookies Settings](#)

[API Reference ↗](#)

[Send feedback](#)

Keyboard shortcuts

i The application previously known as Workflow Builder is now called Workflow Lineage.

To view the list of keyboard shortcuts available to you in Workflow Lineage, select **Help > View hotkeys**.

The available hotkeys are as follows:

Global	macOS	Windows
Undo last change	Cmd + Z	Ctrl + Z
Redo last change	Cmd + Y	Ctrl + Y
Redo last change	Cmd + Shift + Z	Ctrl + Shift + Z
Save graph	Cmd + S	Ctrl + S

Graph	macOS	Windows
Zoom to fit nodes	↑	↑
Zoom to fit nodes	Home	Home
Show/hide Workshop application split view	I	I
Deselect all nodes	Esc	Esc
Copy nodes to clipboard	Cmd + C	Ctrl + C
Remove selected nodes	Delete	Del
Remove selected nodes	Backspace	

API Reference ↗

Send feedback

Graph	macOS	Windows
Lay out all nodes	Cmd + Shift + A	Ctrl + Shift + a
Hierarchy layout	Shift + L	Shift + L
Lay out nodes	L	L
Clustered hierarchy layout	Alt + L	Alt + L
Grid layout	G	G
Vertical layout	V	V
Horizontal layout	H	H
Select all nodes	Cmd + A	Ctrl + A
Invert selection (select unselected nodes)	Cmd + I	Ctrl + I
Select downstream nodes	→	→
Select upstream nodes	←	←
Select all downstream	Shift + →	Shift + →
Select all upstream	Shift + ←	Shift + ←