

# KeyTalk - API

Author	MR vd Sman
Creation date	14-March-2017
Last updated	13-June-2018
Document version	2.3.0.1
Document status	Qualified
Product	KeyTalk certificate and key management & enrolment virtual appliance
Data classification	Public

# TABLE OF CONTENTS

<b>1. INTRODUCTION</b>	<b>2</b>
1.1 Purpose	2
1.2 Scope	2
<b>2. CERTIFICATE RETRIEVAL API (RCDP V2)</b>	<b>3</b>
2.1 RCDPv2 versions	3
2.2 KeyTalk config file	3
2.3 RCDPv2 overview	4
2.4 RCDPv2 communication phases	5
2.5 Messages sent in all phases	6
2.5.1 End Of communication	6
2.5.2 Error	6
2.6 Phase 1 (handshake)	8
2.6.1 Hello	8
2.6.2 Handshake	8
2.7 Phase 2 (authentication)	10
2.7.1 Request authentication requirements	10
2.7.2 Authentication	11
2.7.3 Change password	17
2.8 Phase 3 (service provision)	18
2.8.1 Check for the last messages	18
2.8.2 Generate certificate on the server	19
2.8.3 <a href="#">[as of v2.2.0]</a> Query CSR requirements	21
2.8.4 <a href="#">[as of v2.2.0]</a> Generate certificate from the client CSR	22
<b>3. PUBLIC API</b>	<b>24</b>
3.1 PUBLIC INFO API versions	24
3.2 API overview	24
3.2.1 Retrieve self-service availability	24
3.2.2 Retrieve address book URLs	25
<b>4. CERTIFICATE AUTHORITY RETRIEVAL API (CA API)</b>	<b>26</b>
4.1 CA API versions	26
4.2 CA API overview	26
4.2.1 Retrieve internal signing CA	26

# **1. INTRODUCTION**

## **1.1 Purpose**

The purpose of this document is to describe the API used by the KeyTalk system.

## **1.2 Scope**

This document is intended for KeyTalk and its hired 3<sup>rd</sup> parties for continuous development of the KeyTalk product and related services.

More importantly this document is intended for release to the public so they may use it for their own KeyTalk related development purposes.

## 2. CERTIFICATE RETRIEVAL API (RCDP V2)

This section describes certificate retrieval API called RCDP version 2. The motivation to develop a new API over the existing legacy RCDPv1 was as follows:

- Offload handcrafted security to the standard SSL/TLS stack implemented by HTTPS protocol
- Use RESTful way of communication based on simple HTTP GET requests and JSON responses
- Simplify the API to make it easier to develop KeyTalk clients and related services

### 2.1 RCDPv2 versions

RCDP version	Supported KeyTalk server	Changes wrt the previous RCDP version
2.0.0	4.6.0 and up	
2.1.0	5.3.0 and up	Allow caller to request a certificate download URL in the phase 3 <code>cert</code> request instead of a certificate body.
2.2.0	5.3.1 and up	<ul style="list-style-type: none"> <li>- Allow submitting CSR for signing</li> <li>- Include TPM Virtual Smart Card requirement flag as a part of auth-requirements response</li> </ul>

### 2.2 KeyTalk config file

In order to make use of the KeyTalk API, several details are required from the KeyTalk Real Client Communication Data file (RCCD).

This configuration file is used to feed a KeyTalk app with minimal required information to setup a proper secure connection to any KeyTalk instance.

The RCCD file is effectively a zip container and can thus easily be extracted.

As such a developer incorporating the KeyTalk API in their app, can choose to statically make use of individual files in an RCCD file, or choose to import the entire RCCD into their app or simply make use of some of the components within this RCCD file.

The content folder within the RCCD contains several files, the most important ones being:

- **RCA.der Root CA** typically only included when KeyTak's internal private CA is generated under an already existing CA.
- **PCA.der Primary CA** with a KeyTalk self-signed private CA its usually the top of the KeyTalk internal private CA, but when RCA is included its generated under the RCA.
- **UCA.der User CA** signed under the PCA. It is the trust under which the end-point client and/or server certificates are signed and issued only in case of using the internal KeyTalk CA for issuance.  
When issuing end-point client and/or server certificates under for example a connected Microsoft CA or Trusted Certificate Service Provider, ensure that their intermediate certificates are included in your app or present on the target OS as well as these are by default not part of the current KeyTalk RCCD
- **SCA.der Server CA** signed under the PCA, it is the trust under which the KeyTalk virtual appliance certificates are generated and used.
- **user.ini** Generic configuration settings which includes the KeyTalk server URL/IP as well as the KeyTalk tenant name/SERVICE used to communicate with.
- **user.yaml** Generic configuration settings which includes the KeyTalk server URL/IP as well as the KeyTalk tenant name/SERVICE used to communicate with. Similar to user.ini just another format

## 2.3 RCDPv2 overview

Communication in RCDPv2 is encapsulated in RESTful calls over HTTPS using standard port 443. Optional out-of-band certificate downloads are made possible over HTTP using port 8000.

Below is a set of client HTTP headers that the client needs to send to the server.

HTTP Header	Required	Description
GET	YES	/rcdp/2.X.Y/<action>?<request-params>
Host	YES	Should contain the FQDN or IP (v4 or v6) of the KeyTalk virtual appliance.
Cookie	YES except for hello	Session identifier received from KeyTalk server.

**action** is a request action

**request-params** is URL-encoded string of request parameters. Complex request parameters (arrays, dictionaries) should be JSON-encoded. All JSON objects should escape forward slashes '/' as '\\/'.

A typical set of client HTTP headers:

```
GET
/rcdp/2.2.0/authentication?service=DEMO_SERVICE&PASSWD=change%21&HWSIG=12345
6&USERID=DemoUser &ips=%5B%2281.175.103.107%22%5D&caller-hw-
description=Windows+7%2C+BIOS+s%2Fn+1234567890 HTTP/1.1
Host: keytalkdemo.keytalk.com
Cookie: keytalkcookie=a622bb821bec1f5315668c8f9a8e780f
```

A typical set of HTTP response headers:

```
HTTP/1.1 200 OK
Content-type: application/json
Cache-Control: no-cache
Set-Cookie: keytalkcookie=a622bb821bec1f5315668c8f9a8e780f

{'status': 'auth-result', 'auth-status': 'OK'}
```


## 2.4 RCDPv2 communication phases

The complete RCDPv2 communication circle consists of 3 phases:

**Phase1:** handshake

**Phase 2:** authentication

**Phase 3:** service provision

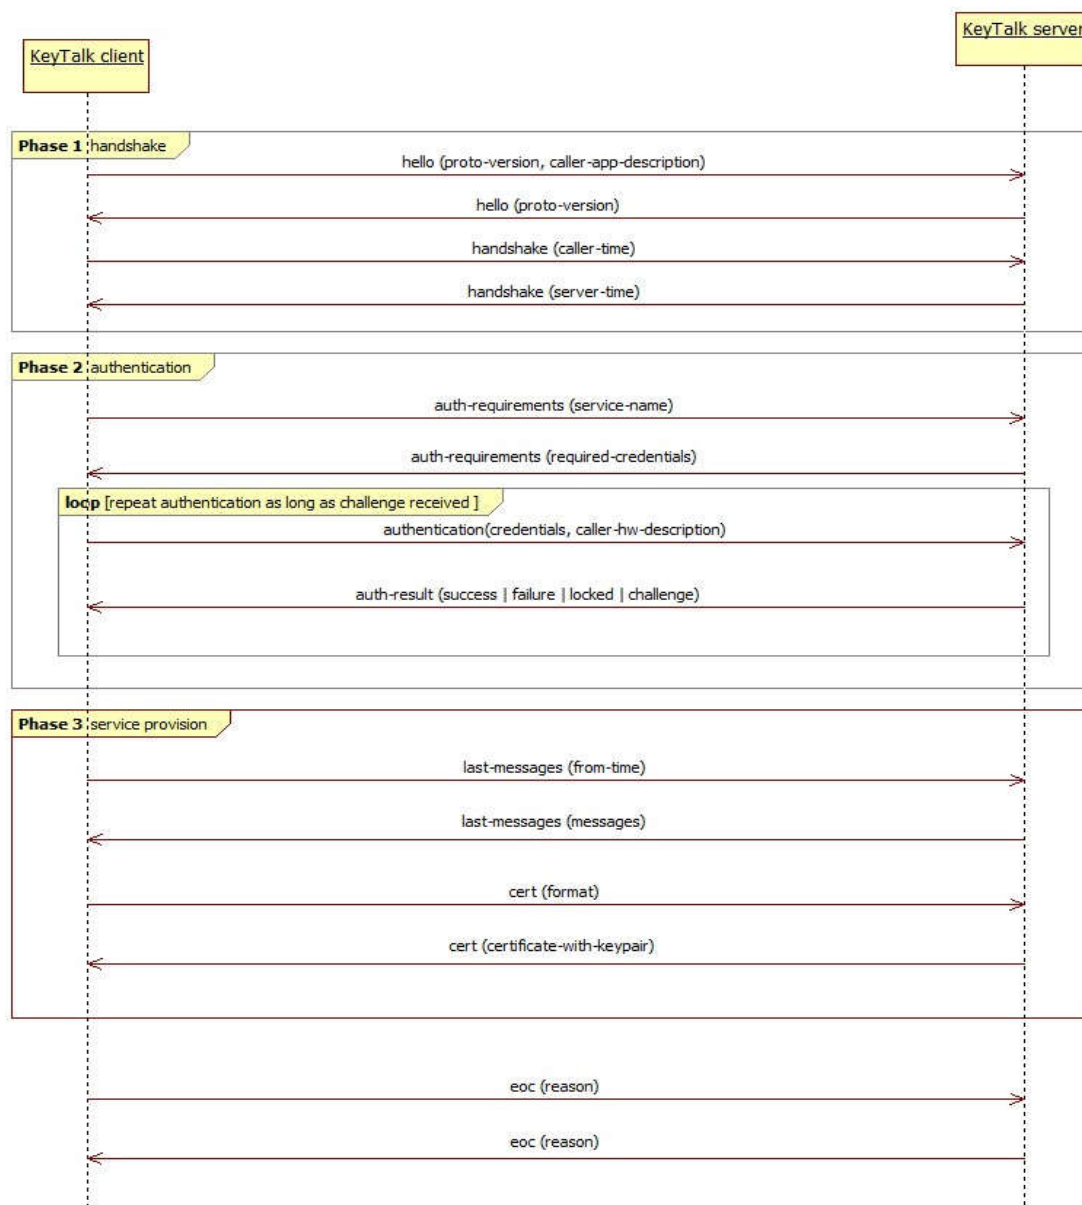

Further we describe message semantics on each phase in detail.

## 2.5 Messages sent in all phases

### 2.5.1 End Of communication

#### Request

GET /rcdp/<version>/eoc

#### Example:

/rcdp/2.2.0/eoc  
/rcdp/2.2.0/eoc?reason=bye%2C+server

#### Query parameters

parameter	type	required	description
reason	string	no	optional reason for ending communication

#### Response

HTTP 200 - application/json

```
{
  'status': 'eoc',
  [optional] 'reason': optional reason for ending communication
}
```

End of communication can be sent at any time, initiated by any communication side.

### 2.5.2 Error

Errors are typically sent by the server to notify the caller on error processing its request. The client can also send errors to the server when it can't handle the server's response.

#### Request

GET /rcdp/<version>/error

#### Example:

/rcdp/2.2.0/error?code=1066&description=invalid+response

#### Query parameters

parameter	type	required	description
code	number	yes	numeric error code
reason	string	no	optional error description. Might be required for certain error codes. See the error code table below.

#### Response

HTTP 200 - application/json

```
{
  'status': 'error',
  'code': numeric error code,
  [optional] 'description': error description. Might be required for certain error codes. See
  the error code table below.
}
```

## Error codes

code	description	direction	remarks
1001 (ErrResolvedIpInvalid)	optional	server -> client	Sent by the server when none of IPs resolved by the client and by the server match.
1002 (ErrDigestInvalid)	optional	server -> client	Sent by the server when the client's calculated executable digest does not match the digest stored on the server.
1003 (ErrTimeOutOfSync)	difference in seconds between caller UTC and the server UTC	server -> client	Sent by the server when the client time is out of sync with the server's time.
1004 (ErrMaxLicensedUsersReached)	optional	server -> client	Sent by the server when no certificate can be supplied because the max number of licensed users has been reached
1005 (ErrPasswordExpired)	optional	server -> client	Sent by the server when the password of the user trying to authenticate is expired and the caller is not supposed to change it.



## 2.6 Phase 1 (handshake)

### 2.6.1 Hello

Agree on RCDP API version and establish session ID.

#### Request

GET /rcdp/<version>/hello

#### Example:

```
/rcdp/2.2.0/hello
/rcdp/2.1.0/hello?caller-app-description=Demo+KeyTalk+client
```

#### Query parameters

parameter	type	required	description
caller-app-description	string	no	optional description of the caller application

RCDP API version proposed by a caller is sent as a part HTTP GET path.

#### Response

HTTP 200 - application/json

```
{
  "status": "hello",
  "version": proposed API version
}
```

Session ID is returned in HTTP cookie keytalkcookie in Set-Cookie header.

### 2.6.2 Handshake

Confirm version handshake and exchange time information.

#### Request

GET /rcdp/<version>/handshake

#### Example:

```
/rcdp/2.2.0/handshake?caller-utc=2016-04-22T10%3A44%3A35.746255Z
```

#### Query parameters

parameter	type	required	description
caller-utc	UTC string in ISO 8601 format including date and time	yes	caller UTC

If the caller supports API version proposed by the server on the previous step, it proceeds with this version in HTTP GET path. Otherwise the caller ends communication.

## Response

HTTP 200 - application/json

```
{  
  "status": "handshake",  
  "server-utc": server UTC in ISO 8601 format including date and time  
}
```

## 2.7 Phase 2 (authentication)

### 2.7.1 Request authentication requirements

Request authentication requirements from the server.

#### Request

GET /rcdp/<version>/auth-requirements

#### Example:

/rcdp/2.2.0/auth-requirements?service=DEMO\_SERVICE

#### Query parameters

parameter	type	required	description
service	string	yes	KeyTalk service name

#### Response

HTTP 200 - application/json

```
{
  "status": "auth-requirements",
  "credential-types": credential types,
  [optional] "hwsig_formula": HWSIG formula,
  [optional] "password-prompt": password-prompt,
  [optional] "service-uris": service URIs,
  [optional] "resolve-service-uris": if service URIs need to be resolved,
  [optional] "calc-service-uris-digest": if service URIs digest needs to be calculated,
  [as of v2.2.0] [optional] "use-tpm-vsc-authentication": if TPM Virtual Smart
  Card authentication should be used,
}
```

#### credential-types

JSON array of credential types required to authenticate against the given service. Supported credential types are: "USERID", "HWSIG", "PASSWD", "PIN" and "RESPONSE".

Example: ["USERID", "HWSIG", "PASSWD"]

#### hwsig\_formula

formula to calculate caller's hardware signature.

Example: "1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16". Sent when credential-types parameter contains HWSIG.

#### password-prompt

prompt to display to a user when a password is requested interactively e.g. "password" or "tokencode". Sent when credential-types parameter contains PASSWD.

#### *service-uris*

JSON array of RFC 3986-compliant URIs of the given service

Example:

```
[ "https://demo1.keytalk.com", "https://demo2.keytalk.com" ]
```

or

```
[ "file://%ProgramFiles%\vpn\vpn.exe" ]
```

#### *resolve-service-uris*

Boolean flag ("true" or "false") requesting a caller to resolve IP addresses of each supplied *service-uris* identifying web resources. Defaults to "false".

#### *calc-service-uris-digest*

Boolean flag ("true" or "false") requesting a caller to calculate sha-256 hexadecimal digests of each supplied *service-uris* identifying file resources. Defaults to "false".

#### *use-tpm-vcs-authentication*

Boolean flag ("true" or "false") requesting a caller to make use of PM Virtual Smart Card to generate a certificate signing request (CSR). The CSR will be then sent KeyTalk server to create a certificate. Defaults to "false".

#### **Example:**

```
{
  "status": "auth-requirements",
  "credential-types": [ "HWSIG", "PASSWD", "USERID" ],
  "hwsig_formula": "1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16",
  "password-prompt": "Password",
  "service-uri": [ "https://demo.keytalk.com" ],
  "resolve-service-uri" : "true"
}
```

## **2.7.2 Authentication**

Authenticate the caller against the selected service using the supplied set of credentials. Multiple authentication rounds might be needed e.g. for RADIUS SecurID or RADIUS EAP AKA/SIM authentication.

### **Request**

```
GET /rcdp/<version>/authentication
```

### **Example:**

```
/rcdp/2.2.0/authentication?service=DEMO_SERVICE&caller-hw-
description=Windows+7%2C+BIOS+s%2Fn+1234567890&USERID=DemoUser&HWSIG=123456&P
ASSWD=change%21&resolved=%5B%7B%22ips%22%3A+%5B%2281.175.103.107%22%5D%2C+%22
uri%22%3A+%22https%3A%2F%2Fdemo.keytalk.com%2F%22%7D%5D
```

## Query parameters

parameter	type	required	description
service	string	yes	KeyTalk service name
caller-hw-description	string	yes	<p>Caller HW description which should be unique for the given device. For uniqueness e.g. BIOS serial number or iOS device UDID can be used. Examples:</p> <ul style="list-style-type: none"> <li>- Windows 10, BIOS s/n 1234567890</li> <li>- iPad: Jan's iPad 234567890abcdef1234567890abcdef</li> </ul>
USERID	string	if requested	ID of the user. Required if USERID was previously set by the server in auth-requirements response.
HWSIG	string	if requested	Hardware Signature of the caller's device calculated with the formula specified in the previous auth-requirements server response. Required if HWSIG was previously set by the server in auth-requirements response..
PASSWD	string	if requested	User password. Required if PASSWD was previously set by the server in auth-requirements response.
PIN	string	if requested	User pincode. Required if PIN was previously set by the server in auth-requirements response.
resolved	JSON array	if requested	<p>JSON array of objects containing service URIs accompanied with RFC 3986-compliant IPv4 or IPv6 address resolved from the URI hostname. Required if resolve-service-uris was previously set in auth-requirements response.</p> <p>Example:</p> <pre>[   {     "uri": "https://demo1.keytalk.com",     "ips": ["81.175.10.107", "81.175.103.109"]   },   {     "uri": "https://demo2.keytalk.com",     "ips": ["81.175.10.108", "[2001:db8:a0b:12f0::1]"]   } ]</pre>
digests	JSON array	if requested	<p>JSON array of objects containing service URIs accompanied with SHA-256 hexadecimal digest of the underlying file. Required if calc-service-uris-digest was previously set in auth-requirements response.</p> <p>Example:</p> <pre>[   {     "uri": "file://%Program Files%\vpn\vpn.exe",     "digest": "01c7198fb614bf8746b46062aa551dff4506dd553ad96817622c76dafa8dc354"   },   {     "uri": "file://%Program Files%\vpn\vpn2.exe",     "digest": "01c7198fb614bf8746b46062aa551dff4506dd553ad96817622c76dafa8dc355"   } ]</pre>

## Response

HTTP 200 - application/json

```
{
  "status": "auth-result",
  "auth-status": authentication-status,
  [optional] "delay": authentication delay for failed authentication,
  [optional] "password-validity": password validity on success,
  [optional] "challenges": requested challenges,
  [optional] "response-names": response names for the given challenges
}
```

### *auth-status*

authentication status. Can be one of:

"OK" - authentication successful

"DELAY" - authentication was not successful and `delay` parameter is set

"LOCKED" - cannot login because the user is locked on the server

"EXPIRED" - authentication not successful because the user password is expired

"CHALLENGE" - challenge is supplied by the server and `challenges` parameter is set

### *delay*

when `DELAY` is received in `auth-status`, indicates the time in seconds the caller is suspended from repeating its authentication attempt. Can be 0 which means a caller can try re-authenticating immediately.

### *password-validity*

when authentication succeeds ("OK" received), indicates the number of seconds until the password expires or -1 if the password never expires. Password validity is supplied only when provided by an authentication backend.

### *challenges*

when `CHALLENGE` is received, contains JSON array of challenges. Challenge names are meant to be displayed to a user during interactive challenge prompt. Challenge values is the value of the challenge to use for response calculation.

Example:

```
[
  {
    "name": "enter first pincode",
    "value": "981fa356"
  },
  {
    "name": "enter second pincode",
    "value": "981fa357"
  }
]
```

### *response-names*

when `CHALLENGE` is received, contains JSON array of response names. When multiple responses are required by the server, response name allow identifying each response sent by the caller, thus serving as response keys. Response names can be omitted when only one response is expected by the server.

Example: ["response 1", "response 2", "response 3"]

**Example:**

Successful authentication:

```
{
  "status": "auth-result",
  "auth-status": "OK"
}
```

Unsuccessful authentication, the caller is suspended for 10 seconds

```
{
  "status": "auth-result",
  "auth-status": "DELAY",
  "delay": 10,
}
```

Extra challenge is requested (RADIUS SecurID authentication)

```
{
  "status": "auth-result",
  "auth-status": "CHALLENGE",
  "challenges": [{ "name": "Password challenge", "value": "Enter your new PIN
of 4 to 8 digits, or <Ctrl-D> to cancel the New PIN procedure:" }],
}
```

Extra challenge is requested (RADIUS EAP-AKA UMTS challenge-response authentication)

```
{
  "status": "auth-result",
  "auth-status": "CHALLENGE",
  "challenges": [{ "name": "UMTS AUTN",
"value": "01010101010101010101010101010101"},
                  { "name": "UMTS RANDOM",
"value": "101112131415161718191a1b1c1d1e1f" }],
  "response-names": ["RES", "IK", "CK"]
}
```

When a caller receives `CHALLENGE` in `auth-status` from the server, it should proceed as follows:

- provided the set of required credentials does not include `RESPONSE`, the caller should re-submit all the credentials required by the server, filling `PASSWD` credential with the response to the received challenge. This is called multi-phase password authentication. Example: RADIUS SecurID authentication.
- provided the set of required credentials includes `RESPONSE`, the caller should respond with `RESPONSE` credential only as described below in 2.6.2.1. This is called Challenge-Response authentication. Example: RADIUS EAP AKA/SIM authentication.

### 2.7.2.1 Challenge-response authentication

#### Request

GET /rdp/<version>/authentication

#### Example:

/rdp/2.2.0/authentication?responses=%7B%22CK%22%3A+%22123%22%2C+%22RES%22%3A+%22456%22%2C+%22IK%22%3A+%22789%22%7D

#### Query parameters

parameter	type	required	description
responses	<i>JSON object</i>	yes	JSON array of responses. Response names should be the same as returned by the server on the previous authentication request. Example: [ {"name": "RES", "value": "123"}, {"name": "IK", "value": "456"}, {"name": "CK", "value": "789"} ]

#### Response

#### Response

HTTP 200 - application/json

```
{
  "status": "auth-result",
  "auth-status": authentication-status,
  [optional] "delay": authentication delay for failed authentication,
  [optional] "password-validity": password validity on success,
  [optional] "challenges": requested challenges,
  [optional] "response-names": response names for the given challenges
}
```

#### *auth-status*

authentication status. Can be one of:

- "OK" - authentication successful
- "DELAY" - authentication was not successful and *delay* parameter is set
- "LOCKED" - cannot login because the user is locked on the server
- "EXPIRED" - authentication not successful because the user password is expired
- "CHALLENGE" - challenge is supplied by the server and *challenges* parameter is set

#### *delay*

when DELAY is received in *auth-status*, indicates the time in seconds the caller is suspended from repeating its authentication attempt. Can be 0 which means a caller can try re-authenticating immediately.

#### *password-validity*

when authentication succeeds ("OK" received), indicates the number of seconds until the password expires or -1 if the password never expires. Password validity is supplied only when provided by an authentication backend.



#### *challenges*

when CHALLENGE is received, contains JSON array of challenges. Challenge names are meant to be displayed to a user during interactive challenge prompt. Challenge values is the value of the challenge to use for response calculation.

Example:

```
[
  {
    "name": "enter first pincode",
    "value": "981fa356"
  },
  {
    "name": "enter second pincode",
    "value": "981fa357"
  }
]
```

#### *response-names*

when CHALLENGE is received, contains JSON array of response names. When multiple responses are required by the server, response name allow identifying each response sent by the caller, thus serving as response keys. Response names can be omitted when only one response is expected by the server.

Example: ["response 1", "response 2", "response 3"]

### **Example:**

Successful authentication:

```
{
  "status": "auth-result",
  "auth-status": "OK"
}
```

Unsuccessful authentication, the caller is suspended for 10 seconds

```
{
  "status": "auth-result",
  "auth-status": "DELAY",
  "delay": 10,
}
```

Extra challenge is requested (RADIUS SecurID authentication)

```
{
  "status": "auth-result",
  "auth-status": "CHALLENGE",
  "challenges": [{"name": "Password challenge", "value": "Enter your new PIN of 4 to 8 digits, or <Ctrl-D> to cancel the New PIN procedure:"}],
}
```

### 2.7.3 Change password

Change user password. Password change facility has to be supported by the server backend such as Active Directory. A caller should normally change his password after `EXPIRED` authentication result is received from the server. A caller may also choose to change his password on successful authentication when `password-validity` parameter gives a hint that the password is about to expire.

#### Request

GET /rcdp/<version>/change-password

#### Example:

/rcdp/2.2.0/change-password?old-password=changeme&new-password=changed

#### Query parameters

parameter	type	required	description
old-password	<i>string</i>	yes	Current (old) user password.
new-password	<i>string</i>	yes	New user password.

#### Response

See 2.6.2 with authentication status limited to "OK", "DELAY" or "LOCKED"

"OK" means the password has been successfully changed and the user has to re-authenticate with his new password.

"DELAY" means the password change did not succeed (e.g. incorrect old password or too short new password) and the caller may try again after the given amount of seconds.

## 2.8 Phase 3 (service provision)

### 2.8.1 Check for the last messages

Check for the last server messages. Server messages are meant for KeyTalk users e.g. to indicate planned server maintenance.

#### Request

GET /rcdp/<version>/last-messages

#### Example:

```
/rcdp/2.2.0/last-messages
/rcdp/2.2.0/last-messages?from-utc=2018-04-26T06%3A49%3A55.614010Z
```

#### Query parameters

parameter	type	required	description
from-utc	<i>UTC string in ISO 8601 including date and time</i>	no	UTC to request the messages from. Defaults to requesting all server messages.

#### Response

HTTP 200 - application/json

```
{
  "status": "last-messages",
  "messages": [
    {
      "text": message text string,
      "utc": message UTC in ISO 8601 including date and time
    },
    ....
  ]
}
```

#### Example:

```
{
  "status": "last-messages",
  "messages": [
    { "text": "This is user message number 1",
      "utc": "2017-04-06T04:15:15+0000" },
    { "text": "This is user message number 2",
      "utc": "2018-03-04T02:10:10+0000" },
    { "text": "This is user message number 3",
      "utc": "2018-05-02T00:05:05+0000" }
  ]
}
```

## 2.8.2 Generate certificate on the server

Retrieve a server-generated certificate in the desired format along with a private key.

### Request

```
GET /rdcp/<version>/cert
```

### Example:

```
/rdcp/2.2.0/cert?format=P12
/rdcp/2.2.0/cert?format=PEM&include-chain=True
/rdcp/2.2.0/cert?format=P12&out-of-band=True
```

### Query parameters

parameter	type	required	default value	description
format	"P12" or "PEM"	yes	n/a	"PEM" to request PEM-encoded X.509 certificate and private key "P12" to request PKCS#12-encoded X.509 certificate and private key
include-chain	boolean	no	false	Request the entire certificate chain including subordinate and root CAs.
out-of-band	boolean	no	false	<a href="#">[as of v2.1.0]</a> When set, the server will send back URL to download the certificate instead of the certificate itself.

### Response

HTTP 200 - application/json

```
{
  "status": "cert",

  "cert": certificate in the desired format returned when out-of-band is not set.
    PEM-encoded certificate has its private key encrypted with the first 30 characters of the
    session ID sent by the server in keytalkcookie.
    When the certificate is delivered in PKCS#12 package, the package gets encrypted with
    with the first 30 characters of the session ID sent by the server in keytalkcookie and subsequently
    base64 encoded to be transported with JSON,

  "cert-url-templ": certificate download URL template returned when out-of-band is set.
    The template contains $(KEYTALK_SVR_HOST) placeholder that needs to be instantiated with
    a hostname or IP address of the KeyTalk server used by the caller to make up a valid URL. The
    download URL is valid for a limited amount of time (normally 5 minutes) and gets invalidated after
    the first use.
    PEM-encoded certificate has its private key encrypted with the first 30 characters of the
    session ID sent by the server in keytalkcookie.
    When the certificate is delivered in PKCS#12 package, the package gets encrypted with with
    the first 30 characters of the session ID sent by the server in keytalkcookie,

  "execute-sync": boolean flag indicating whether the caller should invoke the service URIs
  synchronously (true) or asynchronously (false). Defaults to false.
}
```



Example when certificate download URL is returned:

```
{
  "status": "cert",
  "cert-url-templ": "
http://$(KEYTALK_SVR_HOST):8000/cert/?cbf498dc683c4e0499fd7e2d27640917"
}
```

### 2.8.3 *[as of v2.2.0]* Query CSR requirements

Client might want to generate a key pair itself and submit the CSR to KeyTalk server for signing. Before generating a key pair the client should ask the server for the initial parameters for the CSR such as key size, signing algorithm and certificate subject.

#### Request

GET /rcdp/<version>/csr-requirements

#### Example:

/rcdp/2.2.2/csr-requirements

#### Response

HTTP 200 - application/json

```
{
  "status": "csr-requirements",
  "key-size": key size in bits,
  "signing-algo": algorithm to use for CSR signing,
  "subject": dictionary of subject fields to use in CSR
}
```

#### Example:

```
{
  "status": "csr-requirements",
  "key-size": "2048",
  "signing-algo": "sha256",
  "subject": {
    "cn": "TestUser",
    "c": "NL",
    "st": "Utrecht",
    "l": "Amersfoort",
    "o": "KeyTalk",
    "ou": "Development",
    "e": "test@keytalk.com",
  }
}
```

## 2.8.4 [as of v2.2.0] Generate certificate from the client CSR

Retrieve a PEM-encoded certificate from the CSR supplied by the client. The CSR should be created from the parameters retrieved from `csr-requirements` call described in 2.7.3.

### Request

```
POST /rcdp/<version>/cert
Content-type: application/x-www-form-urlencoded
```

### Example:

```
$ curl -H "Content-Type: application/x-www-form-urlencoded" -H "Cookie:
keytalkcookie=a77c33e55a1f411396031ce91ee48d9d" -H"Expect: " -d "csr=-----
BEGIN+CERTIFICATE+REQUEST-----
%0AMIIC1jCCAb4CAQAwZAxCAJBgNVBAYTAk5MMRIwEAYDVQQHDA1FaW5kaG92ZW4x%0ADDAKBgN
VBAsMA1NFUzEUMBIGA1UECgwLU21vdXggR3JvdXAxFjAUBgNVBAGMDU5v%0Ab3JkLUJhcmJhbnQxE
TAPBgNVBAMMCERlbW9Vc2VyMR4wHAYJKoZIhvcNAQkBFg90%0AZXN0dWlAc21vdXguZXUwgGEiMA0
GCSqGSIb3DQEBAQUAA4IBDwAwggEKAoIBAQDG%0AfyCCKM7cbVhpBCSx1Nf%2BFDqa9banKf9sPRW
5VwBFYP5siLdsywnKnqRFYcV0w6ss%0Ath21qK9bkjZoyiKpbzvzgQw08NlbBmJfj700O18HUn2xL
vp2z6J6q3Z4rAR4d8jx%0ApwcdRlPeJO5b3OtBaURKILaJTjtsUVyCXr%2B6u%2FgiuaD0DGBKsIQ
ccyAWGy%2B1zNer%0AsmUib%2FsnWHEaAPJtvG7T2amaWACKcqIOppR%2BHDJUUNSYyju9xZqCLjx
6Y2%2B2ZXHK%0AMpFcFsP%2F8GCYGGZ%2FAilWtsVzKSaRWmTVJfBsy50gW3YmwI0QYghl52NIDQu
BJeoT%0AmQFxsKXpqcWjpP3KTOS5AgMBAAGgADANBgkqhkiG9w0BAQsFAAOCAQEAbUVCaYm%2F%0A
wlotZaLgtCP2mIVVH%2FgHvTeVFs1436Lz%2FaKT5q1QRee81C2uslz9G7h3PG%2BM6w1N%0AUJau
wqQ2mR2c1VAidROdT52syNPR4jXeRl1%2F7a%2FmsZFqaw3%2FLlwVtBJHEfOA6apU%0AJSVWi6%2
F3kUjD0FhYHAufKm2nJ10qGnwC5xpzuvYQsUFFobLZoyGq5NNEgnSpK8X%0A9A9j5kKGBom9eQOr
Wxw%2F0UlwRqLpt6176Gt5%2B1Mp5BtTCPK2uboHvJiPu4aJUuHh%0Afx9ZjKox73V%2BleOEmNSY
fesuQPE5AwifkE988NFixGXOHw7uQdWc9SFsYFRFZG2p%0AYb%2Bm9iFyUY8AHw%3D%3D%0A-----
END+CERTIFICATE+REQUEST-----%0A" -X POST
https://test.keytalk.com/rcdp/2.2.0/cert
```

### Request POST parameters:

parameter	type	required	default value	description
csr	<i>string</i>	yes	n/a	Base64 encoded PKCS#10 certificate signing request
include-chain	<i>boolean</i>	no	false	Request the entire certificate chain including subordinate and root CAs.
out-of-band	<i>boolean</i>	no	false	When set, the server will send back URL to download the certificate instead of the certificate itself.

## Response

HTTP 200 - application/json

```
{
  "status": "cert",

  "cert": PEM-encoded certificate returned when out-of-band is not set,

  "cert-url-templ": certificate download URL template returned when out-of-band is set.
    The template contains $(KEYTALK_SVR_HOST) placeholder that needs to be instantiated with
    a hostname or IP address of the KeyTalk server used by the caller to make up a valid URL. The
    download URL is valid for a limited amount of time (normally 5 minutes) and gets invalidated after
    the first use,

  "execute-sync": boolean flag indicating whether the caller should invoke the service URIs
    synchronously (true) or asynchronously (false). Defaults to false.
}
```

Example regular usage (certificate is returned in the response):

```
{
  "status": "cert",
  "cert": "-----BEGIN CERTIFICATE-----
\nMIIFGTCCAwwGAgIBAgIIWurNEwAAABUwDQYJKoZIhvcNAQELBQAwwGAgHZAAdBgkq\n\nhkiG9w0B
CQEWEGluZm9Aa2V5dGFsay5jb20xCzAJBgNVBAYTAk5MMRwwGgYDVQQK\n\nnDBNLZlXlUYWxrIElUeIF
NlY3VyaXR5MRgwFgYDVQQLDA9GYWN0b3J5IERlZmF1bHJx\n\nnIDAEgNVBAMMF0tleVRhbGsgRGVt
byBTAwduaW5nIENBMB4XDTE4MDUwMzA3NDky\n\nnM1oXDTE4MDUwMzA5NDkyM1owgZAxCzAJBgNVBA
YTak5MMRIwEAYDVQQHDA1FaW5k\n\nnaG92ZW4xDDAKBgNVBASMA1NFUzEUMBIGA1UECgwLU21vdXgg
R3JvdXAxFjAUBGNV\n\nnBAGMDU5vb3JkLUJhcmJhbnQxETAPBgNVBAMMCERlbW9Vc2VYMR4wHAYJKo
ZIhvcN\n\nnAQAkBFg90ZXN0dWlAc21vdXguZXUwggEiMA0GCSqGSIb3DQEBAQUAA4IBDwAwggEK\n\nnAo
IBAQDGFyCCKM7cbVhpBCSx1Nf+FDqa9banKf9sPRW5VwBFYP5siLdsywnKqRf\n\nnYcV0w6ssth21
qK9bkjZoyiKpbzvzgQw08N1bBmJfj700018HUn2xLvp2z6J6q3Z4\n\nnrAR4d8jxpwcdr1PeJO5b3O
tBaURKILaJTjtsUVYCXr+6u\n\n/giuaD0DGBKsIQccyAW\n\nnGy+1zNersmUib\n\n/snWHEaAPJtvG7T2a
maWACKcQIOppR+HDJUUNSYYju9xZqCLjx6\n\nnY2+2ZXHKMpFcFsP\n\n/8GCGZ2\n\n/AilWtsVzKSaRWm
TVJfBsy50gW3YmwIOQYghl52NI\n\nnDQuBJeoTmQFxsKXpqcWjpp3KTOS5AgMBAAGjftB7MAkGA1Ud
EwQCMAAwHQYDVRO1\n\nnBBYwFAYIKwYBBQUHAWIGCCsGAQUFBwMBMAsgA1UdDwQEAwID+DAqBg1ghk
gBhvhC\n\nnaQIEHRYbQ1VTVF9QQVNTV0RfSU5URVJOQUxfVEVTVFVJMBYGA1UdEQQPMA2CC25z\n\nnLn
Npb3V4LmV1MA0GCSqGSIb3DQEBCwUAA4ICAQCCca0C1I9Dw+io7IIqMZ8UKzhq\n\nn8MWcbphtcgFH
PHdxqFYIftWYOzXCN8FVq96oHH2e09anBYopGyHW+a5oMbY8bKbP\n\nnvGD6\n\n/Cs1C8nFFqkQfRTH6
nanDSq18S\n\n/4uc3bMaIQvWzv5mEYpiTKtKCSUMfv7FLN\n\nns64I\n\n/UQNg1EhHMu1UyL0NM3xU8QY
mz+k6qnkw2C3M5Y9eprUT9izxXCm4XGJo7j\n\nnUPBIRBXUCsaPz+UdK0Syq2H1\n\n/IsREt5iPRJIU\n\n/B4FjdUJlD1R68ZAYNnyOeDQI7f\n\nnEJWUeBYC2QwdlXW3FqKdwi928wksRpy4x3Fyz9\n\n/f32chZ
QOihe378HP9PDiTZQ\n\nnFCIWSsrO+WUJToehK2ErgqWCrH0Ydw5ZuIV1vVivGzlgmDhMIQY6uPn
Yasa1kQw\n\nnspY2JyvlZA\n\n/9mhCvfupwB6L4QIA8yJwNoM3MASZgq4fVklkxm\n\n/k1pRMPB2bSGy4u
\nnFLyMoodTAYJfpzH\n\n/gCwWnrYowqW2T67HsPqBBiOonsuaA0h4k\n\n/m88i4ypcv5f48wJ\n\nnzcxaXq
RqWqxzw\n\n/efkYg5m4HdncAPU05NxmJmP17n77188MzvKc0wVbA+22vCBgCi\n\nnMaOYWhnkTuBN90A
oaYAJwelbkLlbTFMZJjsNPvvs5sAk119NihCrXS8ZWtZrFGYz\n\nngPkm+UPWboYdQbKCRg==\n\n---
--END CERTIFICATE-----\n"
```

Notice again that JSON-serialization of PEM certificates requires forward slashes '/' to be escaped as '\\'

Example when certificate download URL is returned:

```
{
  "status": "cert",
  "cert-url-templ": "
http://$(KEYTALK_SVR_HOST):8000/cert/?cbf498dc683c4e0499fd7e2d27640917"
}
```



### 3. PUBLIC API

There is a set of API to query various information from KeyTalk server without the need to authenticate.

#### 3.1 PUBLIC INFO API versions

REST API version	Supported KeyTalk server	Changes wrt the previous RCDP version
1.0.0	5.3.2 and up	n/a

#### 3.2 API overview

The communication goes over HTTPS and uses port 443.

##### 3.2.1 Retrieve self-service availability

Retrieves whether self-service is available for the given account.

##### Request

POST /public/1.0.0/self-service-availability  
Content-type: application/x-www-form-urlencoded

##### Request POST parameters:

parameter	type	required	default value	description
cert	string	yes	n/a	PEM-encoded X.509 user certificate previously received from KeyTalk identifying the caller

##### Response

HTTP 200 - application/json - successful invocation

```
{
  "status": "self-service-availability",
  "available": boolean
}
```

HTTP 400 - application/json - invalid request

```
{
  "status": "error",
  "error": error message (optional)
}
```

### 3.2.2 Retrieve address book URLs

Retrieves URLs of address books used by back-end LDAP/AD servers.

#### Request

GET /public/1.0.0/address-book-list

#### Example:

/public/1.0.0/address-book-list?service=DEMO\_SERVICE

#### Query parameters

parameter	type	required	description
service	string	yes	KeyTalk service name

#### Response

HTTP 200 - application/json - successful invocation

```
{
  "status": "address-book-list",
  "address-books": [
    {
      "ldap_svr_url": LDAP server URL,
      "search_base": LDAP server search base DN (e.g.
"ou=people,dc=example,dc=com",
      "verification_ca": PEM-encoded X.509 verification CA(s) of
the LDAPs server(optional for LDAPs URL),
    },
    ...
  ]
}
```

Example response when no address books configured for the service

```
{
  "status": "address-book-list",
  "address-books": []
}
```

HTTP 400 - application/json - invalid request

```
{
  "status": "error",
  "error": error message (optional)
}
```

## 4. CERTIFICATE AUTHORITY RETRIEVAL API (CA API)

Besides strongly authenticated TLS-secured RCDP API, KeyTalk server also supports unauthenticated plain-HTTP REST API to retrieve trusted and intermediate signing certificate authorities. CA API is meant to be called by KeyTalk clients in order to roll out the initial trust CAs on the system before RCDP API comes into play. The same effect can be achieved by deploying RCCD files, though parsing RCCD is far more complex task compared to downloading a single file over HTTP.

The calls go over plain HTTP iso HTTPS because at the stage of calling CA API a KeyTalk client is not yet supposed to possess a trusted KeyTalk communication CA to establish secure TLS connection to the server. Further more the requested certificates contain only public information hence no secrets are revealed over HTTP.

### 4.1 CA API versions

REST API version	Supported KeyTalk server	Changes wrt the previous RCDP version
1.0.0	5.3.1 and up	n/a

### 4.2 CA API overview

The communication goes over HTTP and uses port 8000.

#### 4.2.1 Retrieve internal signing CA

Retrieve KeyTalk Signing CA or KeyTalk Primary CA or KeyTalk root CA for a user certificate that will be eventually received via RCDP call. Each subsequent CA is a issuer of the previous one.

The received CAs are KeyTalk internal CAs (i.e. not from GlobalSign or Microsoft CA tree) corresponding to “Signing CA” “Primary CA” and “Root CA”, on the KeyTak admin web panel. A typical KeyTalk internal CA tree is 2 level deep with self-signed Primary CA and no Root CA.

#### Request

```
GET /ca/1.0.0/signing
GET /ca/1.0.0/primary
GET /ca/1.0.0/root
```

#### Response

```
HTTP 200 - application/octet-stream - PEM-encoded CA certificate is returned in
HTTP response body
HTTP 404 - CA does not exist (e.g. for Root CA)
```