

Estructura de datos: #1


2020-01-20

David Corzo

20190432

operations:

- 1) push
 - 2) pop
 - 3) clear
- } options

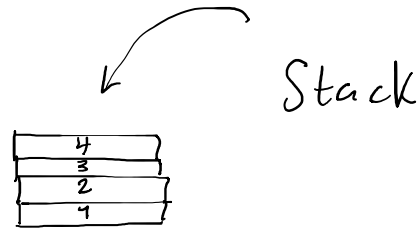

Steps:

- 1) initialize an array of strings
- 2) the parameter will be passed via an Javascript - alert-like - user input browser interface.
- 3) Store user input in the array
 - have a separate array to store the actions
 - link the indexes of both arrays
 - IF something happens in one array it must happen in the other thus counting the "last attribution"

