# Client-Side ANN on the Web: A Wikipedia Search Demonstration

David Denisov
University of Haifa
Haifa, Israel

**Live search demo:** https://wiki-ann-demo-20261022.pages.dev/client_wiki/
**Clustering lab:** https://wiki-ann-demo-20261022.pages.dev/client_wiki/benchmark.html
**Code and benchmarks:** https://github.com/DavidDenisov/ANN-on-the-Web

## Abstract

We demonstrate browser-based approximate nearest neighbour (ANN) search over 35.2 million English Wikipedia passages hosted on a static CDN. The browser embeds questions locally, uses inverted file (IVF) routing to select vector clusters for parallel download, ranks their vectors, and fetches text for the top results. This avoids a full index download or an application search server. Visitors submit questions and inspect passages, timings, and download costs; a companion lab measures the recovery–bandwidth trade-off. On a desktop with primed CDN caches, at 32k clusters, SQ6 centroids, and four probes, a repeated fixed question returning ten passages averages 130.3 ms to worker reply, including embedding and text loading but excluding startup, with 3.25 MB of compressed payload. Worker startup averages 2.46 s. At the same settings, isotropic perturbations of L2 norm 0.4 yield 98.1% source recovery@1; this is not real-question recall. Queries and embeddings stay local, while file requests can reveal access patterns.

## CCS Concepts

• **Information systems** → **Similarity search**.

## Keywords

approximate nearest neighbors, semantic search, client-side retrieval

**ACM Reference Format:**
David Denisov. 2027. Client-Side ANN on the Web: A Wikipedia Search Demonstration. In *Companion Proceedings of the ACM Web Conference 2027 (WWW '27).* ACM, New York, NY, USA, 4 pages.

## 1 Introduction

Semantic search on a static document collection usually requires a search service or a large local index. We demonstrate browser ANN over 35.2 million passages without either: local inverted file (IVF) routing [5] selects remote cluster files for parallel download. The probe count controls the number of clusters fetched and ranked.

We demonstrate a static-Web deployment of established ANN techniques: search exposes per-question costs, while the lab isolates routing and centroid compression. FP16 vectors occupy about 27 GB per index layout; each query fetches selected clusters and result text from Cloudflare Pages.

### 1.1 Related work

Our system builds on the author's earlier public image-search prototype, which is not demonstrated here because of its adult content. Related software includes the subsequently released ANNPack, which retrieves selected IVF lists through HTTP range requests.

SPANN [1] keeps centroids in RAM and posting lists on disk; we fetch static HTTP files. DiskANN [9] uses graphs. Tiptoe [4, Sections 3–5] combines local cluster selection, encrypted server-side similarities and private URL retrieval. We trade cryptographic privacy for static serving through plaintext downloads and local ranking. Keyword search (Pagefind) and SQL (sql.js-httpvfs) likewise process selectively downloaded static data in the browser.

MeMemo [10] and WebANNS [6] use browser-local HNSW in RAM and IndexedDB; WebANNS evaluates up to 480,000 passages. We use parallel cluster reads over a larger remote corpus.

## 2 Demonstration scenario

The two public pages use the same Wikipedia passage collection.

*Wikipedia search.* Visitors enter questions or text and receive ranked passages linked to Wikipedia. Defaults are 32k clusters, SQ6 centroids, four probes, and ten results. Controls offer three cluster counts, six centroid formats, and 1–100 probes. The page reports embedding, centroid-loading, retrieval and text-loading times, and vector downloads. The presenter compares one and four probes for the example question (Figure 1), examining changed passages and bytes. Visitors then try their questions; examples illustrate behaviour, not relevance scores. We keep the walkthrough to one or four probes to limit downloads; queries can be cancelled.

*Clustering lab.* The lab (Figure 2) offers noise presets and checks for cluster count, probes and centroid format. Visitors select 1–10,000 precomputed perturbed-passage queries per configuration (default 10) and can cancel runs. Short runs uniformly sample a shared subset and illustrate behaviour; paper measurements use all 10,000 queries, excluding embedding. Probe and compression checks use 16k clusters; the paper adds a 32k supplement. Full checks can take hours and transfer hundreds of GB. At the poster, visitors try short checks and interpret retained tables and plots.

*Public access.* The presenter will preload the model and centroids on a Chromium laptop with Internet access and WebAssembly. A poster QR code supports visitor access; mobile performance is unvalidated. For slow networks or incompatible browsers, saved screenshots and retained plots support a narrated walkthrough. The supplied source includes the client, builders, figures, compact measurements, and self-hosting instructions.

## 3 Method outline

Figure 3 traces local computation and the static files downloaded at startup and during search.

*WWW '27, Dublin, Ireland*
2027.

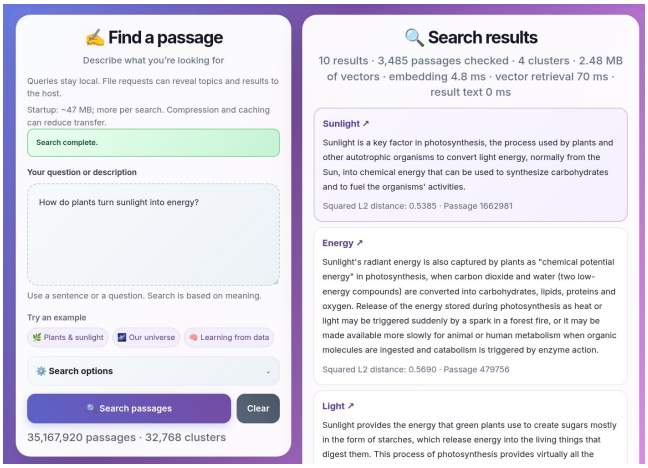



**Figure 1: Search with concise privacy/download notices and passages. Capture timings are separate from the warmed averages in Section 4.3.**

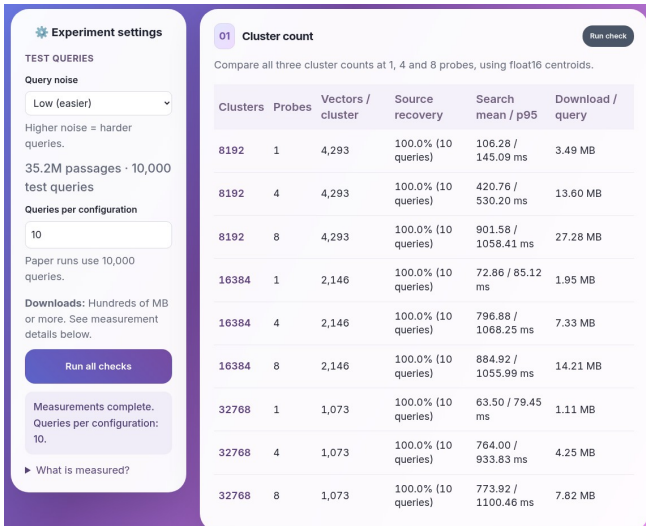



**Figure 2: Lab after a short cluster-count check, with settings on the left and measured results on the right.**

The Maloyan dataset [7] provides the passages and their 384-dimensional `all-MiniLM-L6-v2` embeddings [8].

For queries, Transformers.js [3] loads the Xenova ONNX conversion [13] in `q8` format, truncating inputs to 256 tokens.

*Index preparation.* We train $C$ centroids with Faiss $k$-means [2], using 20 iterations on about 2.1 million uniformly sampled passages. We assign each passage to its nearest centroid and store its ID and FP16 vector in that centroid's gzipped file. Centroids are published in FP16 and compressed formats; SQ6 uses six-bit scalar quantisation per component. Passage vectors remain FP16, occupying about 27 GB per index layout before compression.

*Result text.* Brotli files hold 500 contiguous passage IDs each, except the last. These text batches are shared across cluster counts. The browser fetches result batches and keeps decoded text in an 8 MiB cache.

*Static hosting.* The 70,336 text files use 71 branch deployments; vectors and centroids use 59 more in a second Pages project. Manifests map files to URLs. Our 1,000-file upload batches are a packaging choice, below the provider's 20,000-file Free-plan ceiling. Object storage can replace these hosts through manifest updates preserving CORS, content-encoding, and worker-isolation headers.

## 4 Supporting evaluation

All three indexes cover 35,167,920 passages. We test routing with synthetic perturbations and the ten-result worker workflow with a fixed question.

*Query setup.* Configurations share 10,000 uniformly sampled distinct source passages. We add $v \in \mathbb{R}^{384}$ with uniformly random direction and $\|v\|_2 = \alpha = 0.4$ to each unit source vector, then renormalise. The lab also offers 0.05 and 0.15.

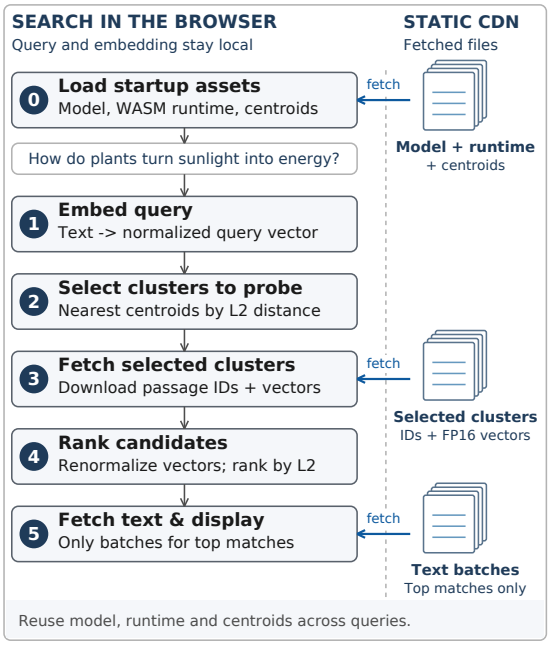



**Figure 3: Local query embedding and ranking, with model, runtime and centroid downloads at startup and selective vector and text downloads per query.**

*Perturbation scale and scope.* On 1,000 sources, mean query-source L2 displacement is 0.378, or 55.5% of the mean nearest-neighbour distance (0.681) from an exact full-corpus scan excluding self matches. This controlled test exercises IVF boundary routing; isotropic passage noise does not model the question–passage distribution gap.

*Metric.* **Source recovery@1** measures how often a perturbed query ranks its source first. Exact search can favour another passage, so recovery is not ANN recall. Exact neighbours for these noisy queries, real-question relevance/recall@10, and q8 question-encoder effects are unmeasured. For SQ6/four probes, the 95% Wilson interval [12] is [97.77, 98.31]% (9,806/10,000) under this synthetic protocol.

*Test environment.* Experiments use Ubuntu 22.04 on an Intel Core i5-12400F PC with 32 GB RAM and a GTX 1660 SUPER GPU. GPU Faiss prepared the indexes. Browser experiments use Chromium 155; inference uses Transformers.js 4.3.1 with CPU-only WebAssembly and four threads. Separate FAST.com checks reported about 300 Mbit/s download; CDN throughput was uncontrolled.

*Embedding compatibility.* Re-embedding 1,000 uniformly sampled passages with the q8 browser encoder yields mean and 5th-percentile cosine similarities of 0.9924 and 0.9892 to the stored vectors; this passage check does not validate question retrieval.

FP16 probe sweeps use 2–5 probes at 8k and 2, 3, 4, 6, 8, 10 at 16k/32k; the 8k four-probe point reuses the original measurement. At 32k and four probes, we compare FP16, SQ8/SQ6/SQ4, symmetric INT8 [2], and PQ4 with 4-bit codes per eight-component block [5]. Cluster assignments and FP16 passage vectors stay fixed. Shared configurations run once.

*Hosting and timing.* Vector and text files are prefetched to prime CDN caches; the fixed question has 100 warm-up searches. CDN residency and connections remain uncontrolled; browser-cache bypass does not establish a cold CDN. Timed searches fetch up to ten clusters in parallel and bypass browser HTTP and decoded-text caches. Untimed accuracy checks allow cached clusters. Each Table 1 row reports recovery, timing and payload from the same timed queries.

Retrieval time includes routing, vector download, decompression, decoding and ranking; Section 4.3 reports startup and complete-query costs. Centroids load once per configuration; separate download/decode benchmarks use 1,000 trials per file. Tables give mean and 95th-percentile (p95) times, and gzipped vector payload in decimal MB ($10^6$ bytes). Configuration order was randomised; the original seed and supplement order are recorded.

## 4.1 Cluster count and probe budget

With FP16 centroids, four probes recover over 98% of source passages at all three cluster counts (Table 1). More clusters reduce vector downloads and retrieval time but increase the initial centroid load.

**Table 1: FP16 four-probe retrieval at $\alpha = 0.4$: source recovery@1, mean / p95 time (ms), and vector payload per query.** 10,000 **queries per setting.**

| Clusters | Probes | Recovery (%) | Mean/p95 | MB/query |
|---|---|---|---|---|
| 8192 | 4 | 98.4 | 462 / 662 | 13.65 |
| 16384 | 4 | 98.2 | 215 / 326 | 7.11 |
| 32768 | 4 | 98.1 | 135 / 182 | 3.98 |

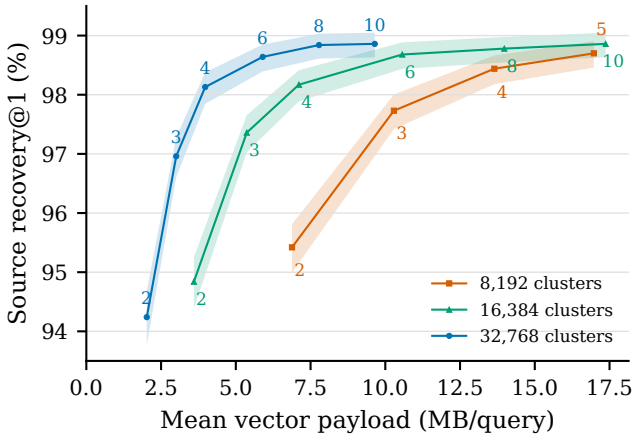



**Figure 4: Recovery versus vector payload (FP16, $\alpha = 0.4$; 10,000 queries/setting). Shading joins pointwise 95% Wilson intervals; labels mark probes.**

**Table 2: Centroid formats at 32k clusters and four probes: source recovery@1 on 10,000 queries ($\alpha = 0.4$), file size, and loading mean / p95 over 1,000 trials per file. Decode includes gzip decompression.**

| Format | Recovery (%) | Size (MB) | Fetch (ms) | Decode (ms) |
|---|---|---|---|---|
| FP16 | 98.1 | 23.24 | 675 / 692 | 254 / 260 |
| SQ8 | 98.2 | 11.23 | 300 / 339 | 113 / 115 |
| SQ6 | 98.1 | 8.98 | 224 / 261 | 100 / 102 |
| SQ4 | 97.4 | 4.86 | 83 / 102 | 88 / 91 |
| INT8 | 98.1 | 10.99 | 290 / 342 | 103 / 106 |
| PQ4 | 68.0 | 0.81 | 23 / 33 | 30 / 31 |

At 8k, two to five probes transfer 6.88–16.98 MB/query with 95.4–98.7% recovery. Figure 4 reports gzipped vector payload, excluding startup and text, because file bytes are unaffected by network conditions during multi-day runs. Observed retrieval time scaled approximately linearly with payload over this range.

## 4.2 Centroid loading costs

At 32k/four probes (Table 2), **SQ6 cuts centroid bytes by** 61.4%, from 23.24 to 8.98 MB. Mean loading in our runs falls from 929 ms (FP16) to 324 ms (SQ6); both round to 98.1% source recovery.

FP16, SQ8, SQ6, and INT8 differ by at most 0.09 percentage points; paired significance was not assessed. SQ4 and PQ4 reduce recovery at the tested code sizes. We use 32k/SQ6 and four probes as the demo default within this synthetic grid; larger cluster counts remain unevaluated.

## 4.3 Client setup and query costs

*Complete ten-result query.* For "How do plants turn sunlight into energy?" at 32k/SQ6, four probes and ten results, 1,000 repetitions take 130.3/150.3 ms (mean/p95) from submission to worker reply. Timing includes embedding, retrieval, text loading and message

handling; startup and DOM rendering are excluded. Model and decoded centroids stay loaded. This fixed-question p95 measures jitter, not question variation. Payload is 2.48 MB of gzipped vectors and 0.77 MB of Brotli text (3.25 MB), excluding HTTP headers.

*Separate components.* Synthetic $k = 1$ vector retrieval at 32k/SQ6 and four probes takes 122/187 ms (mean/p95), excluding embedding and text, with 98.1% source recovery and 3.98 MB of vectors. The fixed question uses 38% fewer vector bytes; these separate runs cannot be added to estimate varied-question end-to-end latency.

*Startup.* Startup spans worker creation to model and 32k SQ6 centroid readiness, excluding navigation. Across 100 fresh browser contexts in one Chromium process, it takes 2.46/2.53 s (mean/p95). Model (23.7 MB) and WebAssembly runtime (14.3 MB) response bodies plus compressed centroids (9.0 MB) total about 47 MB; HTTP compression can reduce transfer. Browser caching is bypassed; loading overlaps.

### 4.4 Trade-offs and limitations

A hypothetical 48-byte/vector PQ index occupies 1.69 GB in codes alone, equivalent to about 680 uncached fixed-question vector downloads of 2.48 MB. This compares vector bytes, not quality or latency, and excludes IDs, codebooks, caching and storage overhead. One million uncached fixed-question searches transfer 3.25 TB of vectors and text before startup or headers. A server returns text alone but receives the query and needs search compute; that baseline is unmeasured.

FP16 vectors dominate transfer. SQ8/PQ passage codes with optional rescoring could reduce bytes, but change ranking and require evaluation. At 32k, cluster sizes have median 1,023, p95 2,188, and maximum 8,263 passages. The four largest gzip files sum to 19.32 MB: a four-probe upper bound, not a query percentile; byte tails are unmeasured. Varied real-question end-to-end mean/p95/max, cold-connection/CDN trials and throttled/mobile profiles are needed before generalising desktop timings.

*Privacy threat model.* Assuming trusted client code and dependencies, query text and embeddings stay local. Model and runtime assets load from Hugging Face and jsDelivr. The host/CDN can link IP addresses and timing to four of 32,768 cluster IDs and text-batch IDs. For uncached requests, intersecting these batches with downloaded candidate IDs can identify returned passages and potentially reconstruct the displayed result set; inference effectiveness is unmeasured. Displayed results do not establish which passages were read. Shared ID-based text batches support all three cluster counts. Co-location would avoid result-specific text requests but require one text layout per count, while selected clusters remain visible. PIR, as in Tiptoe [4], requires a different serving protocol.

## 5 Conclusion

Local IVF routing enables browser search over 35.2 million statically hosted passages. The demo exposes source recovery, latency, and bandwidth trade-offs; real-question quality, cold-CDN latency and mobile performance remain unevaluated.

## 6 Ethical use of data

We downloaded Maloyan's precomputed embeddings of 35,167,920 English Wikipedia passages (wikipedia-22-12-en) [7]. They were generated by applying the MiniLM encoder [8] to these passages. The encoder and its Xenova ONNX conversion [13] for browser queries are Apache-2.0 licensed. Result links credit Wikipedia contributors through source articles [11]. The supplied client and text exporters include a CC BY-SA 3.0 notice and `DATA-NOTICE.txt`, recording attribution and extraction/packaging changes. The embedding dataset specifies no separate licence. Passages reflect an archived snapshot and may be outdated or biased; linked articles may have changed or been deleted. Experiments involve no human participants.

## References


[1] Qi Chen, Bing Zhao, Haidong Wang, Mingqin Li, Chuanjie Liu, Zengzhong Li, Mao Yang, and Jingdong Wang. 2021. SPANN: Highly-efficient Billion-scale Approximate Nearest Neighborhood Search. In *Advances in Neural Information Processing Systems*, M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan (Eds.), Vol. 34. Curran Associates, Inc., 5199–5212. https://proceedings.neurips.cc/paper_files/paper/2021/file/299dc35e747eb77177d9cea10a802da2-Paper.pdf

[2] Matthijs Douze, Alexandr Guzhva, Chengqi Deng, Jeff Johnson, Gergely Szilvasy, Pierre-Emmanuel Mazaré, Maria Lomeli, Lucas Hosseini, and Hervé Jégou. 2026. The Faiss Library. *IEEE Transactions on Big Data* 12, 2 (2026), 346–361. doi:10.1109/TBDATA.2025.3618474

[3] Hugging Face. 2024. Transformers.js: State-of-the-art Machine Learning for the Web. GitHub repository. https://github.com/huggingface/transformers.js Accessed October 24, 2026.

[4] Alexandra Henzinger, Emma Dauterman, Henry Corrigan-Gibbs, and Nickolai Zeldovich. 2023. Private Web Search with Tiptoe. In *Proceedings of the 29th Symposium on Operating Systems Principles (SOSP '23)*. ACM, 396–416. doi:10.1145/3600006.3613134

[5] Hervé Jégou, Matthijs Douze, and Cordelia Schmid. 2011. Product Quantization for Nearest Neighbor Search. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 33, 1 (2011), 117–128. doi:10.1109/TPAMI.2010.57

[6] Mugeng Liu, Siqi Zhong, Qi Yang, Yudong Han, Xuanzhe Liu, and Yun Ma. 2025. WebANNS: Fast and Efficient Approximate Nearest Neighbor Search in Web Browsers. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '25)*. Association for Computing Machinery, New York, NY, USA, 2483–2492. doi:10.1145/3726302.3730115

[7] Narek Maloyan. 2023. Wikipedia-22-12-en embeddings with all-MiniLM-L6-v2. Hugging Face dataset. https://huggingface.co/datasets/maloyan/wikipedia-22-12-en-embeddings-all-MiniLM-L6-v2 Accessed October 24, 2026.

[8] sentence-transformers. n.d. all-MiniLM-L6-v2. Hugging Face model card. https://huggingface.co/sentence-transformers/all-MiniLM-L6-v2 Accessed October 30, 2026.

[9] Suhas Jayaram Subramanya, Devvrit, Rohan Kadekodi, Ravishankar Krishnaswamy, and Harsha Vardhan Simhadri. 2019. DiskANN: fast accurate billion-point nearest neighbor search on a single node. In *Advances in Neural Information Processing Systems (NeurIPS)*.

[10] Zijie J. Wang and Duen Horng Chau. 2024. MeMemo: On-device Retrieval Augmentation for Private and Personalized Text Generation. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '24)*. Association for Computing Machinery, New York, NY, USA, 2765–2770. doi:10.1145/3626772.3657662

[11] Wikipedia contributors. n.d. Wikipedia:Copyrights. https://en.wikipedia.org/wiki/Wikipedia:Copyrights Accessed October 30, 2026.

[12] Edwin B. Wilson. 1927. Probable Inference, the Law of Succession, and Statistical Inference. *J. Amer. Statist. Assoc.* 22, 158 (June 1927), 209–212. doi:10.1080/01621459.1927.10502953

[13] Xenova. n.d. Xenova/all-MiniLM-L6-v2. Hugging Face model card. https://huggingface.co/Xenova/all-MiniLM-L6-v2 Accessed October 30, 2026.