Client-Side ANN on the Web: A Wikipedia Search Demonstration

David Denisov
University of Haifa
Haifa, Israel

Live search demo: https://wiki-ann-demo-20261022.pages.dev/client_wiki/
Clustering lab: https://wiki-ann-demo-20261022.pages.dev/client_wiki/benchmark.html
Code (AGPLv3) and benchmarks: https://github.com/DavidDenisov/ANN-on-the-Web

Abstract

We demonstrate browser-based approximate nearest neighbour (ANN) search over 35.2 million English Wikipedia passages hosted on a static CDN. The browser embeds queries, downloads selected vector clusters using inverted file (IVF) routing, ranks their vectors, and fetches text for the top results. Visitors can inspect passages, timings, and download costs for their own questions. A companion lab measures agreement and download size across settings. On a desktop with primed CDN caches, the default settings (32k clusters, SQ6 centroids, four probes) yield an estimated 174 ms for a 128-token query after startup, based on separate means for embedding, vector retrieval, and ten-passage text loading. Worker startup averages 2.46 s. At the same settings, the browser agrees with exact top-1 search on 98.89% of 10,000 queries generated by adding noise of magnitude 0.4 to passage embeddings.

CCS Concepts

• **Information systems** → **Similarity search**.

Keywords

approximate nearest neighbors, client-side retrieval

ACM Reference Format:
David Denisov. 2027. Client-Side ANN on the Web: A Wikipedia Search Demonstration. In *Companion Proceedings of the ACM Web Conference 2027 (WWW '27).* ACM, New York, NY, USA, 4 pages.

1 Introduction

Approximate nearest neighbour (ANN) search seeks vectors close to a query vector, using Euclidean distance in our demo. It aims to be faster than exact search but may miss some true nearest neighbours. In retrieval-augmented generation (RAG), ANN can search passage embeddings to provide context for a language model [6].

Conventional ANN systems keep index data on the machines that search it, in memory or on disk [1, 10]. On the Web, this typically means running search on a server or downloading the full index to the browser, which would yield prohibitively large data transfer for our corpus. The FP16 vectors for our 35.2 million Wikipedia passages alone occupy about 27 GB before compression.

We document and evaluate our client-side ANN implementation through a Wikipedia demo and lab. Faiss [2] builds the IVF index offline; a static CDN hosts the files, while the browser fetches selected clusters and performs all query-time computation.

WWW '27, Dublin, Ireland
2027.

1.1 Related work

The author's September 2025 adult-themed browser-based system used this cluster-fetching design. ANNPack 0.1.x, first released on PyPI in January 2026 after that implementation, also supports browser-side IVF search over static indexes.

SPANN [1] reduces local SSD reads with IVF posting lists and evaluates a variant that distributes the search load across machines, while our demo shifts the entire search load to the client. While Tiptoe [4, Section 4] also uses IVF-style client-side cluster selection, it later uses a dedicated ranking service that computes encrypted similarity scores, albeit without learning the selected clusters.

DiskANN [10] searches a graph on SSD. MeMemo [11] keeps its HNSW graph and keys in RAM and vectors in IndexedDB. WebANNS [7] tested a browser-local graph on 480,000 Wikipedia passages. Selective cluster fetching avoids a large import.

More broadly, Pagefind (keyword search) and sql.js-httpvfs (SQL) also process selectively downloaded static data in the browser.

2 Demonstration scenario

Both pages use 35,167,920 passages from Maloyan's December 2022 English Wikipedia snapshot [8], giving visitors a broad choice of topics. A full index download would be impractical. Our method makes client-side search practical at this scale with only free static CDN hosting and no server-side query computation.

Wikipedia search. Visitors enter any text or questions of their choice and get ranked passages linked to Wikipedia (Figure 1). Defaults are 32k clusters, SQ6 centroids, four probes and ten results. Controls offer three cluster counts, six centroid formats and 1–100 probes. The page reports stage timings. At the poster, visitors can try the photosynthesis question at one and four probes to compare results, passages checked and vector bytes.

Clustering lab. The lab (Figure 2) compares browser top-1 IDs with exhaustive Faiss reference IDs computed offline. Visitors can vary noise, cluster count, probes and centroid format. Runs share a uniform sample of 1–10,000 perturbed-passage queries (default 10). Lab checks take longer than a single search; Figure 4 shows how probes affect agreement and download size.

Public access. The presenter preloads the required resources on a validated laptop. The poster provides a QR code and URL. Saved screenshots and plots support a narrated fallback for connection or browser failures. The author will keep the demo URL available for at least three years after the conference.

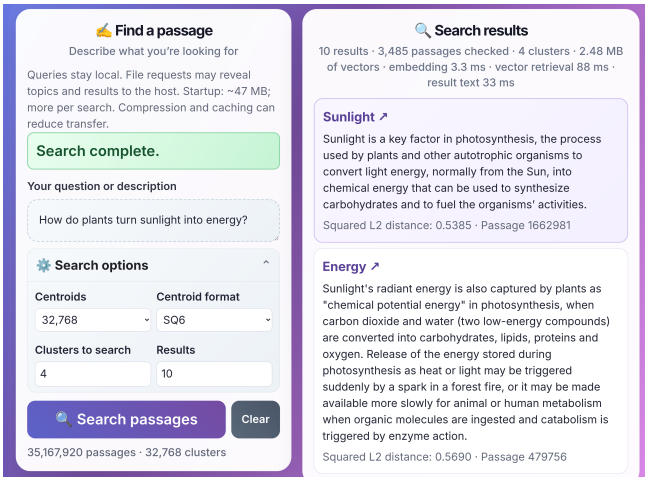


Figure 1: Search with probe controls and ranked passages. Capture timings are illustrative; Section 4.4 estimates costs from component means. Text enlarged for clarity.

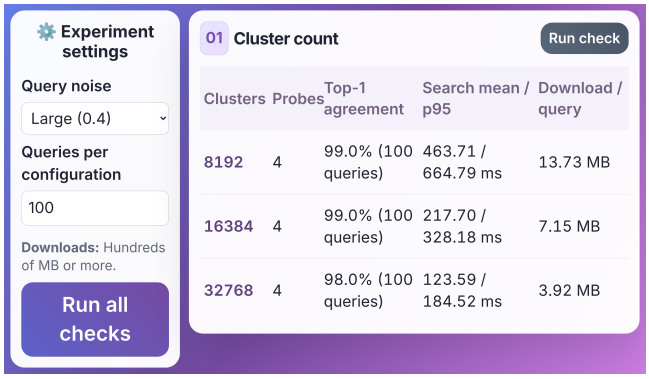


Figure 2: Lab cluster-count check with FP16 centroids: four probes and 100 queries per setting. Text enlarged for clarity.

3 Method outline

Figure 3 traces local computation and the static files downloaded at startup and during search. The probe count sets how many clusters the browser fetches and searches.

We use the Wikipedia passages and precomputed embeddings in Maloyan's dataset [8]. The `all-MiniLM-L6-v2` encoder [9] produces these 384-dimensional embeddings. We chose MiniLM to balance semantic search quality, model size and inference cost. Its Xenova ONNX conversion [14] lets Transformers.js [3] embed queries locally in the same vector space as the stored passages. The browser uses the q8 model and truncates inputs to 256 tokens.

Index preparation. We train C centroids with Faiss k-means [2], using 20 iterations on about 2.1 million uniformly sampled passages. We assign each passage to its nearest centroid and store its ID and FP16 vector in that centroid's gzipped file. Centroids are published in FP16 and compressed formats. Passage vectors remain FP16, occupying about 27 GB per index layout before compression.

Result text. We group text into Brotli files of 500 consecutive passage IDs, except for the final file. Larger batches make text requests less specific by covering more possible result IDs, at the cost of more unused text per download. These batches are shared across cluster counts.

Static hosting. On the Cloudflare Pages Free plan, the 70,336 text files use 71 branch deployments. Vectors and centroids use 59 more in a second project. Manifests map files to URLs. Our 1,000-file upload batches are a packaging choice, below the provider's 20,000-file ceiling.

4 Supporting evaluation

We measure top-1 agreement with exhaustive search on perturbed passage embeddings and time ten-passage text loads.

Query setup. Configurations share 10,000 uniformly sampled distinct source passages. For each sampled passage, we draw a Gaussian vector $v \in \mathbb{R}^{384}$, rescale it to noise magnitude $\|v\|_2 = \alpha$, add it to the passage's unit embedding, and renormalise to obtain the query. Routing tests use large noise ($\alpha = 0.4$). The lab also offers medium (0.15) and small (0.05) noise.

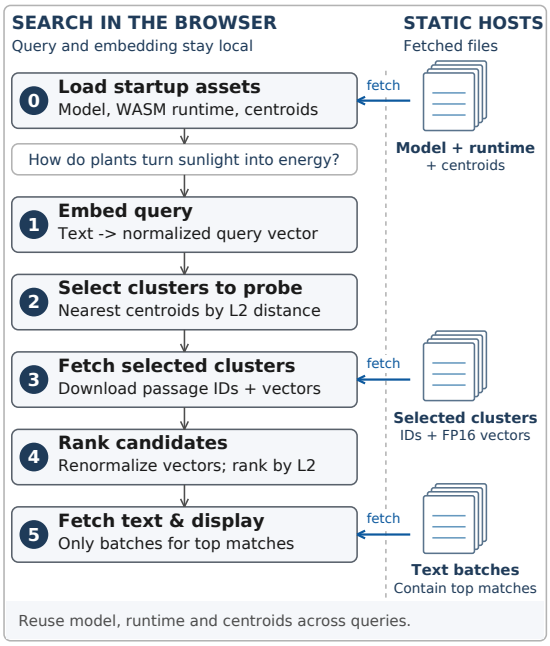


Figure 3: Local query embedding and ranking, with model, runtime and centroid downloads at startup and selective vector and text downloads per query.

Noise scale. At $\alpha = 0.4$, mean L2 query displacement across 1,000 uniformly sampled passages was 55.5% of the mean exact nearest-neighbour distance (excluding self-matches). Of the three scales tested, probe count affected top-1 agreement most at 0.4.

Metric. **Top-1 agreement** is the fraction of queries whose first browser result has the same passage ID as the top result from an exhaustive Faiss L2 scan over the same renormalised FP16 passage vectors, including each query's source passage. For the 10,000 large-noise queries, 32k/SQ6 and four probes agree on 98.89%, with a 95% Wilson interval of 98.67% to 99.08% [13]. Exact search returned the source passage for 98.92% of these queries.

Test environment. Experiments use Ubuntu 22.04 on an Intel Core i5-12400F PC with 32 GB RAM and a GTX 1660 SUPER GPU. GPU Faiss prepared the indexes. Browser experiments use Chromium 155; inference uses Transformers.js 4.3.1 with CPU-only WebAssembly and four threads. Separate FAST.com checks reported about 300 Mbit/s download; CDN throughput was uncontrolled.

Embedding compatibility. Re-embedding 1,000 uniformly sampled passages with the q8 browser encoder yields mean and 5th-percentile cosine similarities of 0.9924 and 0.9892 to the stored vectors. These values show that the browser embeddings remain compatible despite small differences.

Configurations. FP16 sweeps use 2–5 probes at 8k and 2, 3, 4, 6, 8, 10 at 16k/32k. At 32k/four probes we test FP16, 4/6/8-bit min–max scalar quantisation (SQ4/6/8), zero-centred INT8 [2] and PQ4 (4 bits per eight-component block) [5].

Hosting and timing. We prefetch vector and text files to prime CDN caches, with residency and connections uncontrolled. Timed searches return one passage, fetch up to ten clusters in parallel and bypass browser caches. Untimed checks allow cached clusters. Table 1 pairs time and payload with agreement on timed queries.

Retrieval time includes routing, vector download, decompression, decoding and ranking; Sections 4.3–4.5 report text retrieval, estimated query latency and startup. Centroids load once per configuration. Download and decode benchmarks use 1,000 trials per file. Decode time includes gzip decompression. Tables give mean and 95th-percentile (p95) times, and gzipped vector payload in decimal MB (10^6 bytes). Configuration order was randomised; the original seed and supplement order are recorded.

4.1 Vector retrieval

With FP16 centroids, four probes agree with exact search on at least 98.96% of queries at all three cluster counts (Table 1). More clusters reduce vector downloads and latency but increase centroid loading.

Table 1: FP16 four-probe retrieval. Top-1 agreement, retrieval time, and vector payload per query. 10,000 **queries per setting.**

Clusters	Probes	Agree (%)	Time (ms) Mean / p95	Payload (MB) Mean / p95
8192	4	99.29	462 / 662	13.65 / 18.38
16384	4	99.02	215 / 326	7.11 / 9.92
32768	4	98.96	135 / 182	3.98 / 5.85

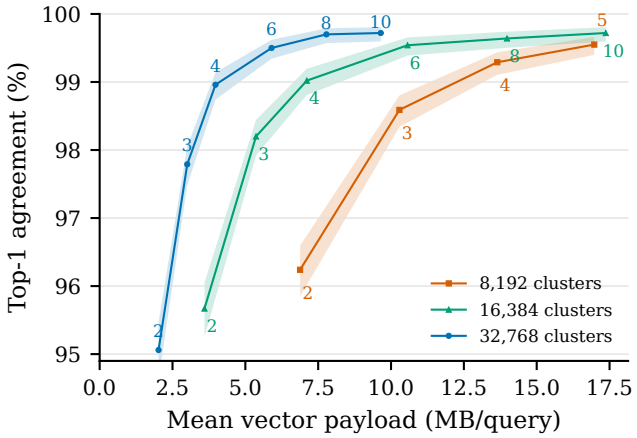


Figure 4: Top-1 agreement with FP16 centroids (10,000 **synthetic queries/setting;** $\alpha = 0.4$**) versus gzipped vector payload (startup/text excluded). Labels: probes; shading: pointwise** 95% **Wilson intervals, clipped below** 94.9%**.**

Payload size in Figure 4 is independent of network conditions, which can vary during runs. Observed retrieval time scaled approximately linearly with payload across probe settings.

4.2 Centroid loading costs

At 32k/four probes (Table 2), **SQ6 cuts centroid bytes by** 61.4%, from 23.24 to 8.98 MB. Mean loading falls from 929 ms (FP16) to 324 ms (SQ6), with minor effect on top-1 agreement.

Table 2: Centroid formats at 32k clusters and four probes. Top-1 agreement on 10,000 **queries, file size, and loading mean / p95 over 1,000 trials per file.**

Format	Agree (%)	Size (MB)	Fetch (ms)	Decode (ms)
FP16	98.96	23.24	675 / 692	254 / 260
SQ8	98.99	11.23	300 / 339	113 / 115
SQ6	98.89	8.98	224 / 261	100 / 102
SQ4	98.23	4.86	83 / 102	88 / 91
INT8	98.94	10.99	290 / 342	103 / 106
PQ4	68.73	0.81	23 / 33	30 / 31

FP16, SQ8, SQ6, and INT8 differ by at most 0.10 percentage points. SQ4 and PQ4 reduce agreement at the tested code sizes.

4.3 Text retrieval

We measure 1,000 groups of ten passages, using 10,000 uniformly sampled distinct passage IDs. Text retrieval takes 34.9/54.9 ms (mean/p95), covering parallel batch downloads, Brotli decompression and text decoding. We prefetch files and bypass browser and decoded-text caches. DOM rendering is excluded.

4.4 Estimated query latency

At 32k/SQ6 and four probes, top-1 vector retrieval on perturbed passage embeddings averages 122.4 ms. Text loading for randomly sampled ten-passage groups averages 34.9 ms. Embedding averages 9.1, 16.9 and 33.8 ms for 64, 128 and 256 tokens, giving estimated totals of 166.4, 174.1 and 191.1 ms, respectively. The estimates sum the means from separate runs and exclude startup, rendering, messaging and extra ranking.

4.5 Client setup

With the page open, startup takes 2.46/2.53 s (mean/p95) across 100 fresh Chromium contexts. Startup assets total about 47 MB before HTTP compression. Separate tests measured the main downloads (size, mean time) for model weights (23.0 MB, 1.44 s), WebAssembly (14.3 MB, 324 ms) and 32k/SQ6 centroids (9.0 MB, 224 ms). Library import, model initialization and centroid decoding averaged 371, 642 and 100 ms. Some loads and components run in parallel, so startup takes less than the sum of the separate timings.

4.6 Trade-offs and limitations

SQ8/PQ passage codes with optional rescoring could reduce vector transfer, but their ranking quality is untested.

The timings cover controlled workloads and one live question. Real-question relevance and latency across diverse queries, mobile devices and throttled networks remain unmeasured.

Privacy threat model. The open-source client processes query text and embeddings locally. Model and runtime assets load from Hugging Face and jsDelivr. A host or CDN can link IP addresses and timing to requested cluster and text-batch IDs. Network observers may infer the IDs from encrypted traffic sizes and timing. Browser caches can hide requests. With the decoded centroids and the full set of selected clusters, rearranging the distance comparisons gives linear inequalities defining the possible query embeddings. On our test machine, construction took under a second for one query with 32k clusters and four probes, excluding centroid decoding and norm computation. Intersecting passage IDs from requested clusters and text batches may allow reconstruction of some or all of the displayed results. How much can be recovered remains an open question. The same unordered file IDs can be consistent with different result sets. Co-location would avoid result-specific text requests but require one text layout per count, while selected clusters remain visible. PIR, as in Tiptoe [4], requires a different serving protocol.

5 Conclusion

Most ANN work focuses on minimising the local search load. Even systems that reduce SSD reads, such as SPANN [1], or bring search to the Web, such as WebANNS [7], keep the index data on the same machines that search it. Our demo shifts the entire IVF search load to the client that submits the query, while a static CDN hosts the data separately. We show the trade-offs between agreement with exact search and latency/bandwidth. We hope this approach will be useful for RAG systems and for server deployments, where network speeds can be significantly higher than in our setup.

6 Ethical use of data

We downloaded Maloyan's precomputed embeddings of 35,167,920 English Wikipedia passages (wikipedia-22-12-en) [8]. They were generated by applying the MiniLM encoder [9] to these passages. The encoder and its Xenova ONNX conversion [14] for browser queries are Apache-2.0 licensed. Result links credit Wikipedia contributors through source articles [12]. The supplied client and text exporters include a CC BY-SA 3.0 notice and `DATA-NOTICE.txt`, recording attribution and extraction/packaging changes. The embedding dataset specifies no separate licence. Archived passages may be outdated or biased, and linked articles may change or disappear. No human participants were involved.

References

[1] Qi Chen, Bing Zhao, Haidong Wang, Mingqin Li, Chuanjie Liu, Zengzhong Li, Mao Yang, and Jingdong Wang. 2021. SPANN: Highly-efficient Billion-scale Approximate Nearest Neighborhood Search. In *Advances in Neural Information Processing Systems*, M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan (Eds.), Vol. 34. Curran Associates, Inc., Red Hook, NY, USA, 5199–5212. https://proceedings.neurips.cc/paper_files/paper/2021/file/299dc35e747eb77177d9cea10a802da2-Paper.pdf

[2] Matthijs Douze, Alexandr Guzhva, Chengqi Deng, Jeff Johnson, Gergely Szilvasy, Pierre-Emmanuel Mazaré, Maria Lomeli, Lucas Hosseini, and Hervé Jégou. 2026. The Faiss Library. *IEEE Transactions on Big Data* 12, 2 (2026), 346–361. doi:10.1109/TBDATA.2025.3618474

[3] Hugging Face. 2024. Transformers.js: State-of-the-art Machine Learning for the Web. GitHub repository. https://github.com/huggingface/transformers.js Accessed October 24, 2026.

[4] Alexandra Henzinger, Emma Dauterman, Henry Corrigan-Gibbs, and Nickolai Zeldovich. 2023. Private Web Search with Tiptoe. In *Proceedings of the 29th Symposium on Operating Systems Principles (SOSP '23)*. ACM, New York, NY, USA, 396–416. doi:10.1145/3600006.3613134

[5] Hervé Jégou, Matthijs Douze, and Cordelia Schmid. 2011. Product Quantization for Nearest Neighbor Search. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 33, 1 (2011), 117–128. doi:10.1109/TPAMI.2010.57

[6] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020. Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks. In *Advances in Neural Information Processing Systems*, Vol. 33. Curran Associates, Inc., Red Hook, NY, USA, 9459–9474. https://proceedings.neurips.cc/paper/2020/hash/6b493230-Abstract.html

[7] Mugeng Liu, Siqi Zhong, Qi Yang, Yudong Han, Xuanzhe Liu, and Yun Ma. 2025. WebANNS: Fast and Efficient Approximate Nearest Neighbor Search in Web Browsers. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '25)*. Association for Computing Machinery, New York, NY, USA, 2483–2492. doi:10.1145/3726302.3730115

[8] Narek Maloyan. 2023. Wikipedia-22-12-en embeddings with all-MiniLM-L6-v2. Hugging Face dataset. https://huggingface.co/datasets/maloyan/wikipedia-22-12-en-embeddings-all-MiniLM-L6-v2 Accessed October 24, 2026.

[9] sentence-transformers. n.d. all-MiniLM-L6-v2. Hugging Face model card. https://huggingface.co/sentence-transformers/all-MiniLM-L6-v2 Accessed October 30, 2026.

[10] Suhas Jayaram Subramanya, Devvrit, Rohan Kadekodi, Ravishankar Krishnaswamy, and Harsha Vardhan Simhadri. 2019. DiskANN: fast accurate billion-point nearest neighbor search on a single node. In *Advances in Neural Information Processing Systems (NeurIPS)*, Vol. 32. Curran Associates, Inc., Red Hook, NY, USA, 11 pages.

[11] Zijie J. Wang and Duen Horng Chau. 2024. MeMemo: On-device Retrieval Augmentation for Private and Personalized Text Generation. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '24)*. Association for Computing Machinery, New York, NY, USA, 2765–2770. doi:10.1145/3626772.3657662

[12] Wikipedia contributors. n.d. Wikipedia:Copyrights. https://en.wikipedia.org/wiki/Wikipedia:Copyrights Accessed October 30, 2026.

[13] Edwin B. Wilson. 1927. Probable Inference, the Law of Succession, and Statistical Inference. *J. Amer. Statist. Assoc.* 22, 158 (June 1927), 209–212. doi:10.1080/01621459.1927.10502953

[14] Xenova. n.d. Xenova/all-MiniLM-L6-v2. Hugging Face model card. https://huggingface.co/Xenova/all-MiniLM-L6-v2 Accessed October 30, 2026.