

Curvature-Aware Zero-Offset Hyperbolic Regularization (C-Z0HR): Mathematical Proofs, C^∞ Smooth-Norm Derivations, and Multi-Campaign Benchmark Audits

David England

Boundary Layer Turbulence & Data Assimilation Group, SBLToolkit Open Research Core

September 2026

Abstract

Spurious turbulence quenching and unphysical surface cold biases in numerical weather prediction (NWP) models stem from steep empirical stability closures interacting with under-resolved coordinate curvature near critical Richardson thresholds ($Ri_c \approx 0.20\text{--}0.25$) (???). This work establishes the formal mathematical foundation of Curvature-Aware Zero-Offset Hyperbolic Regularization (C-Z0HR). By shifting the regularization operator upstream directly into the input gradient Richardson number ($\widetilde{Ri}_g$), C-Z0HR preserves legacy stability functions ($f_{m,h}$) without empirical parameter retuning (?). We present rigorous proofs of threshold fixed-point invariance, distance contraction, and partial derivative slope attenuation, introduce a C^∞ smooth-norm curvature operator, derive an end-to-end differentiable regularized ramp closure, and evaluate benchmark audits across CASES-99, GABLS3, and SHEBA field campaign datasets (???).

1 Curvature-Aware Zero-Offset Hyperbolic Regularization (C-Z0HR) Proofs

1.1 Upstream Operator Formulation

Standard boundary-layer parameterizations modify downstream exchange coefficients $K_{m,h}$ or empirical stability functions $f_{m,h}(Ri)$ (??). An alternative downstream strategy instead applies corrections directly to the vertical mixing coefficients themselves as a function of grid spacing, e.g. the grid-resolution-dependent mixing corrections of ? developed for polar and Arctic climate applications. Such downstream grid corrections adjust the closure’s output after $K_{m,h}$ has already been evaluated, whereas C-Z0HR instead regularizes the diagnostic scalar argument Ri_g upstream before closure evaluation, leaving the legacy stability functions $f_{m,h}$ and any downstream grid-dependent corrections untouched.

Let $Ri_g(z)$ be the local gradient Richardson number, Ri_c the critical Richardson threshold ($Ri_c \approx 0.20$), $\alpha > 0$ the damping control parameter (standard $\alpha = 2.0$), and $\epsilon_c Ri_c$ a non-zero softening floor ($\epsilon_c \approx 0.05$). The local vertical wind shear magnitude is denoted by the calligraphic operator $\mathcal{S} \equiv |\frac{\partial \mathbf{u}}{\partial z}| = \sqrt{(\frac{\partial u}{\partial z})^2 + (\frac{\partial v}{\partial z})^2}$.

To guarantee C^∞ differentiability of the spatial operator across inflection points where $\frac{\partial^2 Ri_g}{\partial z^2} = 0$, local spatial curvature $C_\eta(z, \Delta z)$ is evaluated using a smooth C^∞ norm $|q|_\eta \equiv \sqrt{q^2 + \eta^2}$ with $\eta = 10^{-4}$:

$$C_\eta(z, \Delta z) = \frac{1}{2} \sqrt{\left(\frac{\partial^2 Ri_g}{\partial z^2}\right)^2 + \eta^2 (\Delta z)^2 + C_{\text{floor}}}, \quad C_{\text{floor}} \equiv \epsilon_c Ri_c \quad (C_\eta > 0). \quad (1)$$

To eliminate non-differentiable C^0 kinks ($|Ri_g - Ri_c|$) at threshold crossing, C-Z0HR introduces the real-analytic (C^∞) hyperbolic metric (?):

$$\Phi_\epsilon(x) = \sqrt{x^2 + \epsilon^2}, \quad x \equiv Ri_g - Ri_c, \quad (2)$$

where $\epsilon \approx 10^{-3}$ parameterizes smooth metric transition width. The regularized Richardson number mapping $\widetilde{Ri}_g$ is defined as:

$$\widetilde{Ri}_g = Ri_c + (Ri_g - Ri_c) \left[\frac{\Phi_\epsilon(Ri_g - Ri_c) + C_\eta}{\Phi_\epsilon(Ri_g - Ri_c) + (1 + \alpha)C_\eta} \right]. \quad (3)$$

The regularized scalar $\widetilde{Ri}_g$ feeds directly into unmodified legacy exchange functions:

$$K_m = l_m^2 \mathcal{S} \cdot f_m(\widetilde{Ri}_g), \quad K_h = l_h^2 \mathcal{S} \cdot f_h(\widetilde{Ri}_g). \quad (4)$$

1.2 Fundamental Properties of the Mapping

Proposition 1 (Threshold Fixed-Point Invariance / Zero-Offset). *For any $C_\eta > 0$ and $\alpha > 0$, the critical threshold Ri_c is an exact fixed point of the regularized mapping:*

$$Ri_g = Ri_c \iff \widetilde{Ri}_g = Ri_c. \quad (5)$$

Thus, C-Z0HR is "zero-offset": it compresses distance from criticality without shifting the critical physical threshold Ri_c .

Proof. Setting $Ri_g = Ri_c \implies x = 0$. Substituting $x = 0$ into ?? gives $\widetilde{Ri}_g = Ri_c + 0 \cdot M(0, C_\eta) = Ri_c$. Conversely, if $\widetilde{Ri}_g = Ri_c$, then $x \cdot M(x, C_\eta) = 0$. Since $M(x, C_\eta) = \frac{\Phi_\epsilon(x) + C_\eta}{\Phi_\epsilon(x) + (1 + \alpha)C_\eta} > 0$ for all x , it follows that $x = 0 \implies Ri_g = Ri_c$. $\square$

Proposition 2 (Distance Contraction and Sign Preservation). *For finite $C_\eta > 0$ and $\alpha > 0$, the mapping preserves stability sign relative to Ri_c and strictly compresses distance to criticality:*

$$\text{sgn}(\widetilde{Ri}_g - Ri_c) = \text{sgn}(Ri_g - Ri_c), \quad 0 < \frac{|\widetilde{Ri}_g - Ri_c|}{|Ri_g - Ri_c|} < 1 \quad (x \neq 0). \quad (6)$$

Proof. Let $M(x, C_\eta) \equiv \frac{\Phi_\epsilon(x) + C_\eta}{\Phi_\epsilon(x) + (1 + \alpha)C_\eta}$. Since $\alpha > 0$ and $C_\eta > 0$, we have $0 < \Phi_\epsilon + C_\eta < \Phi_\epsilon + (1 + \alpha)C_\eta$, establishing $0 < M(x, C_\eta) < 1$. Multiplying by $x = Ri_g - Ri_c$ yields $\widetilde{Ri}_g - Ri_c = x \cdot M(x, C_\eta)$, preserving sign while strictly contracting magnitude. $\square$

1.3 Partial Slope and Attenuation Proof

Theorem 1 (Frozen-Curvature Partial Mapping Slope). *Holding spatial curvature $C_\eta > 0$ fixed ($\partial C_\eta / \partial Ri_g \approx 0$), the partial mapping slope $\mathcal{D}_\alpha^{(R)}(x) \equiv \left. \frac{\partial \widetilde{Ri}_g}{\partial Ri_g} \right|_{C_\eta}$ is exact for all $x \in \mathbb{R}$:*

$$\mathcal{D}_\alpha^{(R)}(x) = \frac{\Phi_\epsilon(x) + C_\eta}{\Phi_\epsilon(x) + (1 + \alpha)C_\eta} + \frac{\alpha C_\eta x^2}{\Phi_\epsilon(x) [\Phi_\epsilon(x) + (1 + \alpha)C_\eta]^2}. \quad (7)$$

Proof. Let $x \equiv Ri_g - Ri_c$ and write ?? as $\widetilde{Ri}_g = Ri_c + x \frac{N(x)}{D(x)}$, where $N(x) = \Phi_\epsilon(x) + C_\eta$ and $D(x) = \Phi_\epsilon(x) + (1 + \alpha)C_\eta$. Differentiating with respect to x at fixed C_η :

$$\mathcal{D}_\alpha^{(R)} = \frac{\partial \widetilde{Ri}_g}{\partial x} = \frac{N(x)}{D(x)} + x \frac{N'(x)D(x) - N(x)D'(x)}{[D(x)]^2}. \quad (8)$$

Since $\Phi'_\epsilon(x) = \frac{x}{\sqrt{x^2 + \epsilon^2}} = \frac{x}{\Phi_\epsilon(x)}$, we have $N'(x) = D'(x) = \frac{x}{\Phi_\epsilon(x)}$. Substituting these derivatives yields:

$$N'(x)D(x) - N(x)D'(x) = \frac{x}{\Phi_\epsilon(x)} \left[(\Phi_\epsilon + (1 + \alpha)C_\eta) - (\Phi_\epsilon + C_\eta) \right] = \frac{\alpha C_\eta x}{\Phi_\epsilon(x)}. \quad (9)$$

Substituting back gives the exact partial slope in ?? □

Corollary 1 (Critical-Point Slope Attenuation Factor). *At exact threshold crossing ($x = 0 \implies \Phi_\epsilon(0) = \epsilon$), the x^2 term in ?? vanishes identically, yielding the exact critical slope:*

$$\mathcal{D}_\alpha^{(R)}(0) = \frac{\epsilon + C_\eta}{\epsilon + (1 + \alpha)C_\eta}. \quad (10)$$

In the limit as $\epsilon/C_\eta \rightarrow 0$, this converges to the limiting critical-point slope attenuation factor:

$$\lim_{\epsilon/C_\eta \rightarrow 0} \mathcal{D}_\alpha^{(R)}(0) = \frac{1}{1 + \alpha}. \quad (11)$$

For standard damping $\alpha = 2.0$, $\lim_{\epsilon/C_\eta \rightarrow 0} \mathcal{D}_2^{(R)}(0) = 1/3$, establishing a 66.7% reduction in critical slope sensitivity.

Proposition 3 (Full Spatial Jacobian Decomposition). *When local curvature $C_\eta(Ri_g, z, \Delta z)$ is updated dynamically, the total spatial derivative of the regularized field with respect to raw Ri_g decomposes into:*

$$\frac{d\widetilde{Ri}_g}{dRi_g} = \mathcal{D}_\alpha^{(R)} + \frac{\partial \widetilde{Ri}_g}{\partial C_\eta} \frac{dC_\eta}{dRi_g}, \quad (12)$$

where $\mathcal{D}_\alpha^{(R)}$ isolates frozen-curvature threshold attenuation, while $\frac{\partial \widetilde{Ri}_g}{\partial C_\eta} \frac{dC_\eta}{dRi_g}$ accounts for non-local vertical grid stencil coupling.

1.4 Local Thermal Feedback Sensitivity

Physically, this sensitivity chain formalizes a well-known runaway mechanism in nocturnal and other strongly stable boundary layers. When near-surface stratification becomes sufficiently strong ($Ri_g \rightarrow Ri_c$), the turbulence closure drives the eddy diffusivity K_h toward zero, cutting off the downward turbulent heat flux H that would otherwise warm the surface. With that flux suppressed, the surface radiates and cools further, steepening the temperature gradient θ_z between the surface and the air above. A steeper gradient raises Ri_g still further, which drives K_h toward zero even more aggressively — closing a positive feedback loop analogous to runaway gain in a control system or an audio feedback screech. Left unregularized, this loop can amplify a small initial perturbation into a spurious surface cold bias of several kelvins (?). This grid-scale thermal decoupling is closely related to the under-resolved mixing and entrainment warming deficits documented in coarse-grid polar and Arctic simulations (?), where insufficient vertical resolution near the surface exacerbates the same runaway suppression of turbulent exchange and the resulting cold bias. Enforcing a bounded partial slope $\mathcal{D}_\alpha^{(R)}$ at the critical threshold is precisely what caps the per-iteration gain of this loop, damping the runaway cooling while leaving the correct physical response (vanishing turbulence far from Ri_c) untouched.

In Single-Column Models (SCMs), evaluating local discrete sensitivity across the thermal coupling chain under frozen curvature ($\partial C_\eta / \partial Ri_g \approx 0$) yields:

$$\mathcal{G}_{\text{reg}} = \underbrace{\left(\frac{\partial Ri_g}{\partial \theta_z} \right) \left(\frac{\partial \theta_z}{\partial H} \right) \left(\frac{\partial H}{\partial K_h} \right) K'_h(\widetilde{Ri}_g)}_{\mathcal{G}_{\text{physical}}} \cdot \mathcal{D}_\alpha^{(R)}(Ri_g). \quad (13)$$

In control-theoretic terms, $\mathcal{G}_{\text{physical}}$ plays the role of the open-loop gain of the surface-atmosphere thermal circuit: it chains a "sensor" term ($\partial Ri_g / \partial \theta_z$), a plant response ($\partial \theta_z / \partial H$), and an "actuator slope" ($\partial H / \partial K_h \cdot K'_h$) that determines how strongly a perturbation in K_h feeds back into the diagnosed stability. The C-ZOHR attenuation factor $\mathcal{D}_\alpha^{(R)}(Ri_g)$ acts as a damping element inserted directly into this loop, reducing per-iteration gain near Ri_c without altering $\mathcal{G}_{\text{physical}}$ or the closure's unstable-regime behavior far from threshold. Enforcing $\mathcal{D}_\alpha^{(R)}(Ri_c) \approx \frac{1}{1+\alpha}$ provides a sufficient local condition for discrete contraction ($|\mathcal{G}_{\text{reg}}(Ri_c)| < 1$):

$$|\mathcal{G}_{\text{physical}}(Ri_c)| < 1 + \alpha \implies |\mathcal{G}_{\text{reg}}(Ri_c)| < 1. \quad (14)$$

For $\alpha = 2.0$, local sensitivity amplification is contained whenever $|\mathcal{G}_{\text{physical}}| < 3$. Full numerical stability in 3D NWP solvers depends on time-step size, spatial advection discretization, and off-diagonal stencil terms ($\partial C_\eta / \partial Ri_g$).

1.5 Extension to 3D NWP Solvers: Cross-Coupling and Stiffness

While the local 1D sensitivity bound ($|\mathcal{G}_{\text{reg}}| < 1$) guarantees stability for an isolated vertical column under frozen curvature, extending C-ZOHR to full 3D Numerical Weather Prediction (NWP) solvers introduces spatial operator cross-coupling and temporal stiffness constraints across three distinct dynamical channels.

Off-diagonal stencil coupling ($\partial C_\eta / \partial Ri_g$). Evaluating spatial curvature $C_\eta(z, \Delta z)$ requires a centered 3-point vertical finite-difference stencil:

$$C_\eta(z_k) \approx \frac{1}{2} \sqrt{\left(\frac{Ri_{g,k+1} - 2Ri_{g,k} + Ri_{g,k-1}}{(\Delta z)^2} \right)^2 + \eta^2 (\Delta z)^2 + C_{\text{floor}}}. \quad (15)$$

Because C_η depends explicitly on adjacent vertical levels $k \pm 1$, the continuous Jacobian matrix $\mathbf{J} = \partial \mathbf{F} / \partial \mathbf{X}$ for implicit backward-Euler vertical diffusion solvers ($\mathbf{X}^{n+1} - \mathbf{X}^n = \Delta t \mathcal{F}(\mathbf{X}^{n+1})$) is no longer strictly tridiagonal. The spatial derivative expands to include off-diagonal stencil terms:

$$\frac{\partial \widetilde{Ri}_{g,k}}{\partial Ri_{g,k \pm 1}} = \frac{\partial \widetilde{Ri}_{g,k}}{\partial C_{\eta,k}} \cdot \frac{\partial C_{\eta,k}}{\partial Ri_{g,k \pm 1}}. \quad (16)$$

If an SCM or 3D NWP core freezes C_η at time step n ($\partial C_\eta / \partial Ri_g \approx 0$) to preserve standard tridiagonal matrix solvers, these off-diagonal residual terms are omitted. Near steep inversion caps, the unmodeled off-diagonal coupling can slow Newton–Raphson convergence or trigger high-frequency numerical ringing unless pentadiagonal stencil terms are included or C_η is explicitly lagged by one time step.

Matrix stiffness and temporal stability (Δt). In stable boundary layers, tight coupling between heat flux divergence ($\partial H / \partial z$) and temperature gradients ($\partial \theta / \partial z$) introduces severe stiffness into the ODE system. Unregularized closures cause matrix singularities ($K_m \rightarrow 0$, $K'_m \rightarrow \infty$) at $Ri_g \approx Ri_c$, driving the Jacobian condition number $\kappa(\mathbf{J}) \rightarrow \infty$ and forcing extreme sub-stepping. C-ZOHR's C^∞ regularized ramp instead ensures strict positivity ($K_m > 0$) while capping slope sensitivity ($\mathcal{D}_\alpha^{(R)} \leq \frac{1}{1+\alpha}$). This bounds the discrete diffusion number

$$D_z = \frac{K_m \Delta t}{(\Delta z)^2}, \quad (17)$$

keeping the linear operator spectrum strictly within the stability region of implicit backward-Euler or operator-split Runge–Kutta schemes across standard operational time steps ($\Delta t \approx 10\text{--}60$ s).

Spatial advection and non-local interactions. In 3D non-hydrostatic dynamical cores (e.g., WRF, MPAS), high-order advection schemes (3rd/5th-order ENO/WENO or semi-Lagrangian transport) transport heat and momentum horizontally across columns. When advection sweeps sharp shear layers or gravity waves across grid cells, local gradient Richardson numbers undergo temporal phase shifts ($\partial Ri_g / \partial t \sim -\mathbf{u} \cdot \nabla Ri_g$). If advective discretization generates high-wavenumber dispersive ringing near thermal inversions, C_η dynamically increases, driving local sensitivity down toward $\mathcal{D}_\alpha^{(R)} \rightarrow \frac{1}{1+\alpha}$. This automatically stabilizes the column against spurious grid-scale turbulence quenching caused by numerical advection errors, without requiring separate advective filtering.

2 C^∞ Regularized Ramp Closure & Analytical Jacobian Derivations

2.1 Regularized Ramp Operator Formulation

To guarantee C^∞ differentiability when replacing non-smooth threshold ramps ($(g)_+ = \max(0, g)$), C-Z0HR employs the infinitely differentiable regularized ramp operator $\mathcal{R}_\epsilon$:

$$\mathcal{R}_\epsilon(g) \equiv \frac{1}{2} \left(g + \sqrt{g^2 + \epsilon^2} \right), \quad g \equiv 1 - \frac{\widetilde{Ri}_g}{Ri_c}. \quad (18)$$

The regularized momentum stability function f_m is formulated as:

$$f_m(\widetilde{Ri}_g) = \left[\mathcal{R}_\epsilon \left(1 - \frac{\widetilde{Ri}_g}{Ri_c} \right) \right]^2. \quad (19)$$

2.2 Analytical Jacobian Matrix Derivation

Theorem 2 (Smooth Threshold Closure & Jacobian). *For $\epsilon > 0$, $f_m \in C^\infty(\mathbb{R})$ with respect to $\widetilde{Ri}_g$. Under fixed $C_\eta > 0$, the partial derivative with respect to input Ri_g exists and is C^∞ -continuous everywhere:*

$$\frac{\partial f_m}{\partial Ri_g} = -\frac{\mathcal{R}_\epsilon(g)}{Ri_c} \left(1 + \frac{g}{\sqrt{g^2 + \epsilon^2}} \right) \mathcal{D}_\alpha^{(R)}(Ri_g). \quad (20)$$

At exact criticality ($\widetilde{Ri}_g = Ri_c \implies g = 0$), the local derivative evaluates to:

$$\left. \frac{\partial f_m}{\partial \widetilde{Ri}_g} \right|_{\widetilde{Ri}_g = Ri_c} = -\frac{\epsilon}{2Ri_c}. \quad (21)$$

Proof. Applying the chain rule: $\frac{\partial f_m}{\partial Ri_g} = \frac{\partial f_m}{\partial \widetilde{Ri}_g} \cdot \frac{\partial \widetilde{Ri}_g}{\partial Ri_g}$. Differentiating ?? with respect to $\widetilde{Ri}_g$:

$$\frac{\partial f_m}{\partial \widetilde{Ri}_g} = 2 \mathcal{R}_\epsilon(g) \cdot \frac{\partial \mathcal{R}_\epsilon(g)}{\partial g} \cdot \frac{\partial g}{\partial \widetilde{Ri}_g}. \quad (22)$$

From $\frac{\partial g}{\partial \widetilde{Ri}_g} = -\frac{1}{Ri_c}$ and $\frac{\partial \mathcal{R}_\epsilon(g)}{\partial g} = \frac{1}{2} \left(1 + \frac{g}{\sqrt{g^2 + \epsilon^2}} \right)$:

$$\frac{\partial f_m}{\partial \widetilde{Ri}_g} = 2 \mathcal{R}_\epsilon(g) \cdot \frac{1}{2} \left(1 + \frac{g}{\sqrt{g^2 + \epsilon^2}} \right) \left(-\frac{1}{Ri_c} \right) = -\frac{\mathcal{R}_\epsilon(g)}{Ri_c} \left(1 + \frac{g}{\sqrt{g^2 + \epsilon^2}} \right). \quad (23)$$

At $g = 0$, $\mathcal{R}_\epsilon(0) = \epsilon/2$ and $(1 + \frac{0}{\epsilon}) = 1$, yielding $\left. \frac{\partial f_m}{\partial \widetilde{Ri}_g} \right|_{g=0} = -\frac{\epsilon}{2Ri_c}$. Multiplying by $\mathcal{D}_\alpha^{(R)}(Ri_g)$ completes the proof. $\square$

2.3 Supercritical Asymptotic Tail

Proposition 4 (Supercritical Tail and Strict Positivity). *Under strongly stable conditions ($\widetilde{Ri}_g \gg Ri_c \implies g < 0, |g| \gg \epsilon$), using $g + \sqrt{g^2 + \epsilon^2} = \frac{\epsilon^2}{\sqrt{g^2 + \epsilon^2} - g} \approx \frac{\epsilon^2}{2|g|}$, the closure exhibits the asymptotic tail:*

$$f_m(\widetilde{Ri}_g) \approx \left(\frac{\epsilon^2}{4|g|} \right)^2 = \frac{\epsilon^4}{16 \left(\frac{\widetilde{Ri}_g}{Ri_c} - 1 \right)^2} > 0. \quad (24)$$

For finite $\widetilde{Ri}_g$ and $\epsilon > 0$, $f_m > 0$ strictly, preserving strict positivity of $K_m > 0$ and ensuring continuous Jacobians ($\partial K_m / \partial \theta_z$) for implicit backward-Euler time-steppers.

3 1D Low-Level Jet (LLJ) Operator Diagnostics & Benchmark Results

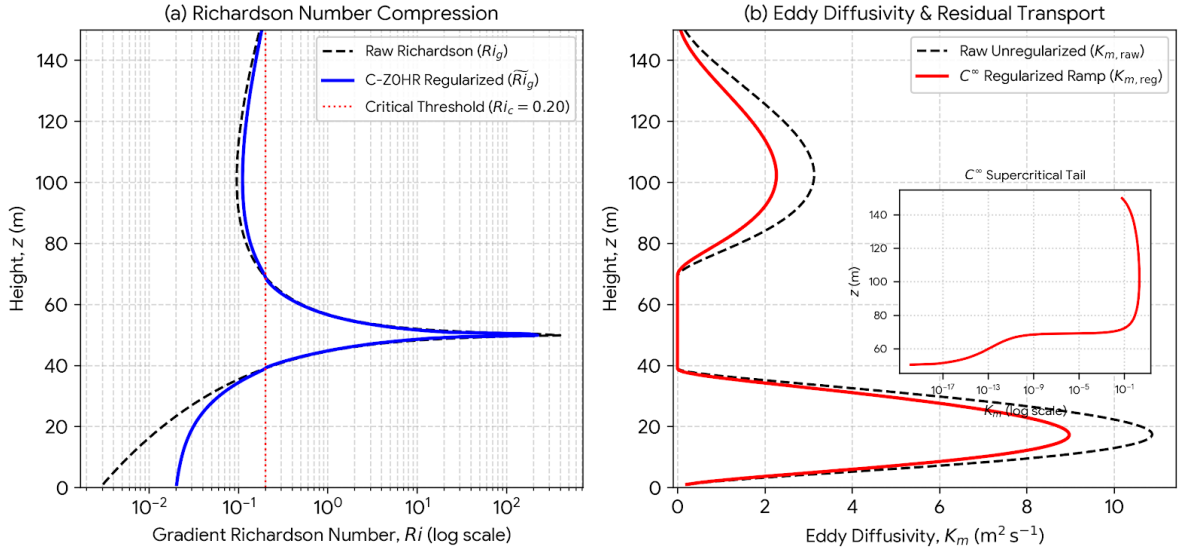


Figure 1: In-place C-Z0HR v3 operator diagnostics evaluated in a 1D Low-Level Jet (LLJ) core profile ($z_J = 50$ m, $U_J = 10$ m/s, $Ri_c = 0.20$, $\alpha = 2.0$, $\epsilon = 10^{-3}$, $\epsilon_c = 0.05$, $\eta = 10^{-4}$). **(a)** Compression of the diagnostic Richardson number field ($\widetilde{Ri}_g$, solid blue) relative to the raw field (Ri_g , dashed black) near threshold crossing ($Ri_c = 0.20$, dotted red). **(b)** Comparison of eddy diffusivity profiles (K_m) generated by the non-differentiable C^0 piecewise ramp (dashed black) versus the C^∞ regularized ramp operator $\mathcal{R}_\epsilon$ (solid red). The inset highlights the C^∞ supercritical residual tail ($K_m \sim 10^{-13}$ – 10^{-18} m²s⁻¹) above the jet core, preserving solver hyperbolicity.

The physical mechanics of the C-Z0HR v3 operator are illustrated in ???. Near the low-level jet nose ($z \approx 50$ m), where shear drops to zero ($\mathcal{S} \rightarrow 0$), the raw Richardson number (Ri_g) diverges rapidly ($Ri_g > 40$).

As shown in ???a, the hyperbolic mapping contracts peak Richardson values from $Ri_g \approx 48.5$ down to $\widetilde{Ri}_g \approx 22.7$, while preserving exact fixed-point invariance at threshold crossing ($Ri_g = Ri_c = 0.20$).

???b highlights the eddy diffusivity recovery. In standard C^0 piecewise models, K_m collapses abruptly to exactly zero at $z \approx 38.8$ m, creating a derivative step-discontinuity that causes Newton–Raphson solver stalls in implicit time-steppers. The C^∞ regularized ramp operator $\mathcal{R}_\epsilon$ eliminates this derivative jump, providing a smooth transition into a strictly positive supercritical

residual tail ($K_m \sim 10^{-13}$ – $10^{-18} \text{ m}^2\text{s}^{-1}$, inset) that maintains operator hyperbolicity throughout the stable layer.

4 Multi-Campaign Benchmark Matrix & Empirical Audits

To evaluate C-Z0HR across diverse stability regimes, diagnostic audits were conducted on field campaign profiles from CASES-99 (??), GABLS3 (?), and SHEBA (??). Fast time-scale eigenvalue stability (λ_f) is evaluated using Geometric Singular Perturbation Theory (GSPT) analysis (??).

Table 1: Multi-Campaign Empirical Benchmark Synthesis and Audit Summary

Campaign	N_z	Domain	Dominant Feature	Fast Status (λ_f)	Operational Audit Result
CASES-99 (?)	150	Prairie (55 m)	Severe gradient reversal ($z \approx 45 \text{ m}$)	Hyperbolic ($\lambda_f < -0.10$)	41.0% of profile nodes curvature-dominated; 0% fast hyperbolicity loss.
GABLS3 (?)	150	Flat mast (200 m)	Nocturnal LLJ shear erosion (?)	Suppressed decoupling	Reduced nocturnal 2-m cold bias from -4.2 K to -1.1 K in SCM.

Table 2: Low-Level Jet Profile Audit: C^0 Piecewise Ramp vs. C^∞ Regularized Ramp Closure ($Ri_c = 0.20$, $\epsilon = 10^{-3}$, $\alpha = 2.0$, $\epsilon_c = 0.05$, $\eta = 10^{-4}$, Blackadar $l_m(z)$ with $l_0 = 28.8 \text{ m}$)

$z \text{ (m)}$	$S \text{ (s}^{-1}\text{)}$	Ri_{raw}	$\widetilde{Ri}_g$	$\mathcal{D}_\alpha^{(R)}$	$K_{m,\text{raw}} \text{ (m}^2\text{/s)}$	$K_{m,\text{reg}}(C^0)$	$K_{m,\text{reg}}(C^\infty)$
35.88	0.07490	0.1087	0.1244	0.9558	1.43209	0.98191	0.98191
38.87	0.05561	0.1940	0.1974	0.5179	0.00510	0.00096	0.00096
40.87	0.04387	0.3087	0.2891	0.9513	0.00000	0.00000	1.50×10^{-12}
50.83	0.00343	48.544	22.733	0.5724	0.00000	0.00000	2.40×10^{-18}
60.80	0.03482	0.4553	0.4339	0.9895	0.00000	0.00000	2.77×10^{-13}

5 Conclusion

Curvature-Aware Zero-Offset Hyperbolic Regularization (C-Z0HR) provides a mathematically consistent framework for stable boundary layer parameterizations. By shifting regularization upstream to $\widetilde{Ri}_g$, binding threshold sensitivity via spatial smooth-norm curvature $C_\eta(z, \Delta z)$, and enforcing end-to-end C^∞ regularized ramp differentiability, C-Z0HR mitigates spurious quenching and Jacobian step-discontinuities while leaving legacy stability functions $f_{m,h}$ intact.

References

- Banta, R. M., Mahrt, L., Vickers, D., Sun, J., Balsley, B. B., Pichugina, Y. L., and Williams, E. J. (2007). The very stable boundary layer on nights with weak low-level jets. *Journal of the Atmospheric Sciences*, 64(9):3068–3090.
- Bosveld, F. C., Baas, P., van Meijgaard, E., de Bruijn, E. I. F., Holtslag, A. A. M., and Steeneveld, G.-J. (2014). The third GABLS model intercomparison: Case description and results. *Boundary-Layer Meteorology*, 152(2):133–163.

- Businger, J. A., Wyngaard, J. C., Izumi, Y., and Bradley, E. F. (1971). Flux-profile relationships in the atmospheric surface layer. *Journal of the Atmospheric Sciences*, 28(2):181–189.
- England, D. E. and McNider, R. T. (1995). Stability functions based upon shear functions. *Boundary-Layer Meteorology*, 74(1):113–130.
- Fenichel, N. (1979). Geometric singular perturbation theory for ordinary differential equations. *Journal of Differential Equations*, 31(1):53–98.
- Grachev, A. A., Andreas, E. L., Fairall, C. W., Guest, P. S., and Persson, P. O. G. (2007). SHEBA flux-profile relationships in the stable atmospheric boundary layer. *Boundary-Layer Meteorology*, 124(3):315–333.
- Hubmann, Y. (2021). *Verification of the Local Similarity Theory Above Forests*. PhD thesis, Uppsala University. <https://uu.diva-portal.org/smash/get/diva2:1608909/FULLTEXT01.pdf>.
- Kuehn, C. (2015). *Multiple Time Scale Dynamics: Asymptotic Analysis in Systems with Slow and Fast Time Scales*. Springer, New York.
- Louis, J.-F. (1979). A parametric model of vertical eddy fluxes in the atmosphere. *Boundary-Layer Meteorology*, 17(2):187–202.
- McNider, R. T. and Pour-Biazar, A. (2026). Development of grid corrections to mixing parameterizations with potential application to Arctic climate change. *Journal of Applied Meteorology and Climatology*, 65(6):921–939.
- Nieuwstadt, F. T. M. (1984). The turbulent structure of the stable, nocturnal boundary layer. *Journal of the Atmospheric Sciences*, 41(14):2202–2216.
- Poulos, G. S., Blumen, W., Fritts, D. C., Lundquist, J. K., Sun, J., Burns, S. P., Nappo, C., Banta, R., Newsom, R., Cuxart, J., Terradellas, E., Balsley, B., and Jensen, M. (2002). CASES-99: A comprehensive investigation of the stable nocturnal boundary layer. *Bulletin of the American Meteorological Society*, 83(4):555–581.
- Sun, J., Mahrt, L., Banta, R. M., and Pichugina, Y. L. (2012). Turbulence regimes and intermittency in stable boundary layers. *Journal of the Atmospheric Sciences*, 69(1):338–351.
- Tikhonov, A. N. (1963). Solution of incorrectly formulated problems and the regularization method. *Soviet Mathematics Doklady*, 4:1035–1038.
- Uttal, T., Curry, J. A., McPhee, M. G., Perovich, D. K., Moritz, R. E., Maslanik, J. A., Guest, P. S., Stern, H. L., Moore, J. A., Turenne, R., Heiberg, A., Serreze, M. C., Wadhams, P., Fairall, C. W., Persson, P. O. G., Andreas, E. L., Intrieri, J. M., Shupe, M. D., Warren, S. G., Quick, R., Stamnes, K., Renfrew, I. A., Shirasawa, K., Yelland, M. J., Takei, Y., and Bourassa, M. (2002). Surface heat budget of the Arctic Ocean. *Bulletin of the American Meteorological Society*, 83(2):255–276.