

Lab 1 Project Report

What kind of website is this?

The intentional idéé of the website of mine is a personal website about myself that can be used as a reference point of who I am.


Design changes under the work of the project

The major problems I found while working on the website was:

- Change 1: Navigation of clarity

One of the problems I had all throughout the project was that while the website layout looked good and worked well when you scrolled normally, the problems came when you pressed the header buttons. The problem was that when you did press one of the navigation buttons, the navigation section hide the part you were going to or was leveled at top. This made it hard to see what section you were really looking at:


here is a picture of the example:

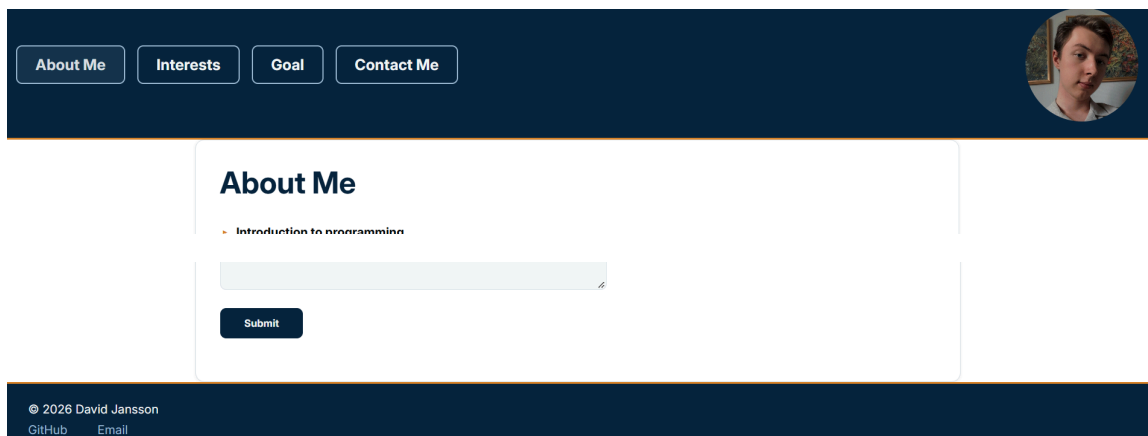

What I did was to add a 1.5 rem padding between the upper and lower section of them inside the main element.

- Change 2: The design of layout

The original thinking of the layout this was the original wireframe of how the website would general work and look like:

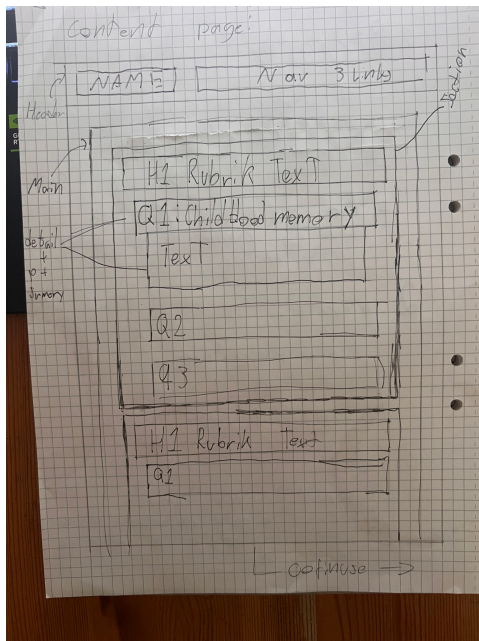

But after looking at the requirements the design changed to the current one we have right now, which is not that different then the original.

The major difference is that the project is more towards a more personal website, with a section of how long I have had my interests for and a section for my personal pictures, rather than a more general looking website with different sections that are not related towards each other.

- Change 3: The Seed for the website “Willow”

When the seed came 2026-09-22, I change a little bit of the website with adding the word as a new part with it saying

“Seed tag: Willow” where willow is changed to a different style to be standing out

Coding problems I had and fixed

The problems I majority had under this project was with the css.

Styling of the detail block

One of the things that was the toughest to work with was working with the detail tag, this is the final css for it. So I will go throw it with each reason of what each part solves.

```
.question-style {
  border: none;
  border-bottom: 1px solid var(--border);
  border-radius: 0;
  padding: 1rem 0;
  margin-bottom: 0;

  &:last-of-type {
    border-bottom: none;
  }

  summary {
    cursor: pointer;
    font-weight: bold;
    color: var(--text-base-dark);
    list-style: none;

    &::marker,
    &::-webkit-details-marker {
      display: none;
    }
  }
}
```

```

    }

    &::before {
        content: "▶";
        display: inline-block;
        margin-right: 0.5rem;
        color: var(--accent);
        transition: transform 0.2s ease;
    }
}

&[open] summary::before {
    transform: rotate(90deg);
}

p {
    margin-top: 0.75rem;
    color: var(--text-muted);
    line-height: 1.6;
}

&:focus-within {
    outline: 2px solid var(--secondary);
    outline-offset: 2px;
}
}

```

When you style the detail tag it originally looks like this:

▼ TEST

lorem 1 2 3

```

<detail>
  <summary> TEST </summary>
  <p> lorem 1 2 3 </p>
</detail>

```

This is the html to make detail work:

- `<summary></summary>` is the header
- `<p></p>` is the text that shows and collapse on

So when it gets clicked on I found that there is no way to animate the ▶ from the original so to make that happen we need to get a bit creative, this is the code that makes the thing more possible:

```
summary {
  cursor: pointer;
  font-weight: bold;
  color: var(--text-base-dark);
  list-style: none;

  &::marker,
  &::-webkit-details-marker {
    display: none;
  }

  &::before {
    content: "▶";
    display: inline-block;
    margin-right: 0.5rem;
    color: var(--accent);
    transition: transform 0.2s ease;
  }
}

&[open] summary::before {
  transform: rotate(90deg);
}
```

To make it possible to make summaries “▶” animated we need to make our own “▶” and animate it.

First thing we need to do is to turn the “▶” off from the text and

make it so the text is something you as a user can click on, we do that by doing this:

```
cursor: pointer;
font-weight: bold;
color: var(--text-base-dark);
list-style: none;
```

After that we make it safe to use to older browsers of safari by using the selector of `::marker` and `::-webkit-details-marker`.

Then when we have done that we now have just a text, to make it so we have an element to animate with we use `::before` to create one, we do that with this:

```
&::before {
  content: "►";
  display: inline-block;
  margin-right: 0.5rem;
  color: var(--accent);
  transition: transform 0.2s ease;
}
```

These all use the `&` selector making the parent of where the style is styling from. This makes it so the selecting before summary creates a `<span>` with the “►” and a transition with it looking at transform.

To animate this we look at the detail tag and looking if its open, if its open we rotate it by 90 degrees

Then to make it easy to differ from each of the questions we make a border at the bottom.

```
border: none;
border-bottom: 1px solid var(--border);
border-radius: 0;
padding: 1rem 0;
margin-bottom: 0;
```

```
&:last-of-type {  
  border-bottom: none;  
}
```

This part makes a border at the bottom and add a bit of spacing between the top and bottom.

Then the last part of the css is to make it more accessible for users, we do this:

```
&:focus-within {  
  outline: 2px solid var(--secondary);  
  outline-offset: 2px;  
}
```

We look if the user is focusing within the detail tag and if we do that. We make an outline over the detail tag for the user.

Personal Reflection

What surprised you most about this assignment? What surprised me was how hard it was to work with the detail tag.

Which CSS property gave you the most trouble and why? That would have been the @media query. Because a lot of stuff needs to be either designed with that in mind or to change the styling of the element entirely.

How did your final design differ from what you originally imagined? The biggest change was that it was less colorful and in the final design it looks more modern and professional then I would have imagined.