




multipers : Multiparameter Persistence for Machine Learning

David Loiseaux¹ and Hannah Schreiber¹

¹ Centre Inria d'Université Côte d'Azur

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

multipers is a Python library for Topological Data Analysis, focused on **Multiparameter Persistence** computation and visualizations for Machine Learning. It features several efficient computational and visualization tools, with integrated, easy to use, auto-differentiable Machine Learning pipelines, that can be seamlessly interfaced with Scikit Learn ([Pedregosa et al., 2011](#)) and PyTorch ([Paszke et al., 2019](#)). This library is meant to be usable for non-experts in Topological or Geometrical Machine Learning. Performance-critical functions are implemented in C++ or in Cython, are parallelizable with TBB, and have Python bindings and interface. It can handle a very diverse range of datasets that can be framed into a (finite) multi-filtered simplicial or cell complex, including, e.g., point clouds, graphs, time series, images, etc.

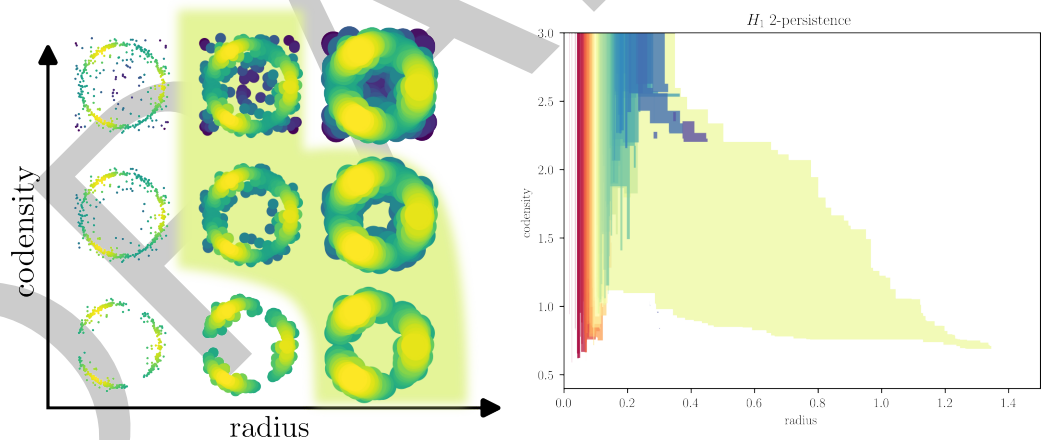


Figure 1: (Left) Topological 2-filtration grid. The color corresponds to the density estimation of the sampling measure of the point cloud. More formally, a point $x \in \mathbb{R}^2$ belongs to the grid cell with coordinates (r, d) iff $d(x, \text{point cloud}) \leq r$ and $\text{density}(x) \geq d$. The green background shape corresponds to the lifetime of the annulus in this 2-parameter grid. (Right) A visualization of the lifetimes of geometric structures given by multipers; here each colored shape corresponds to a cycle appearing in the bi-filtration on the left, and the shape represents its lifetime. The biggest green shape on the right is the same as the one on the left.

Some motivation. In the example of Figure 1, a point cloud is given from sampling a probability measure whose mass is, for the most part, located on an annulus, with some diffuse background noise. The goal here is to recover this information in a topological descriptor. For this, the point cloud can be analyzed at some geometric scale $r > 0$ and density scale d by centering balls of radius r around each point whose density is above d , and looking at the topology induced by the union of balls. However, notice that neither a fixed geometric scale nor density scale alone can retrieve (canonically) meaningful information due to the diffuse noise

in the background; which is the main limitation of the prevalent approach. Nevertheless, by considering *all* possible combinations of geometric or density scales, also called a bi-filtration, it becomes straightforward with multipers to retrieve some of the underlying geometrical structures without relying on any arbitrary scale choice.

Furthermore, multipers seamlessly integrates several Rust and C++ libraries such as Gudhi ([TheGudhiProject, 2023](#)), filtration-domination ([Alonso et al., 2023](#)), mpfree ([Kerber & Rolle, 2020](#)), and function-delaunay ([Alonso et al., 2024](#)), and leverages on state-of-the-art Machine Learning libraries for fast computations, such as Scikit Learn ([Pedregosa et al., 2011](#)), Python Optimal Transport ([Flamary et al., 2021](#)), PyKeops ([Charlier et al., 2021](#)), or PyTorch ([Paszke et al., 2019](#)). This makes multipers a very efficient and feature-full library, showcasing a wide variety of mathematically-grounded multiparameter topological invariants, including, e.g., Multiparameter Module Approximation ([Loiseaux et al., 2022](#)), Euler, Hilbert, and Rectangle Signed Barcodes ([Botnan et al., 2022](#)) ([Oudot & Scoccola, 2024](#)), Multiparameter Persistent Landscapes ([Vipond, 2020](#)); each of them computable from several multi-filtrations, e.g., Rips-Density-like filtrations, Cubical, Degree-Rips, Function-Delaunay, or any k -critical multi-filtration. These topological descriptors can then directly be used in auto-differentiable Machine Learning pipelines, using the differentiability framework developed in ([Scoccola et al., 2024](#)), through several methods, such as, e.g., Decomposable Module Representations ([Loiseaux, Carrière, et al., 2023](#)), Sliced Wasserstein Kernels or Convolutions from Signed Measures ([Loiseaux, Scoccola, et al., 2023](#)). As a result, multipers is capable of handling, within a single minute of computation, datasets of $\sim 50k$ points with only 5 lines of Python code. See Figures 2, 3.

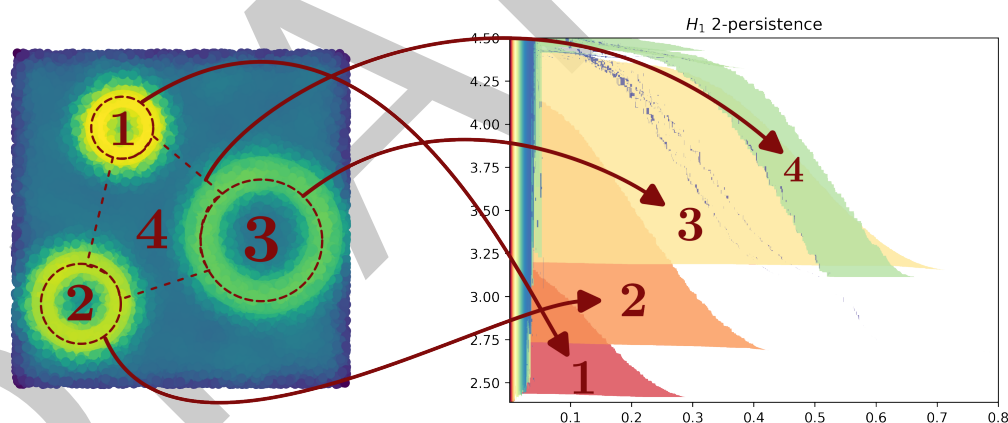


Figure 2: Typical interpretation of a “Geometric & Density” bi-filtration with multipers. **(Left)** Point cloud with color induced by density estimation (same as Figure 1). **(Right)** A visualization of the topological structure lifetimes computed from a Delaunay-Codensity bi-filtration; here the three cycles can be retrieved using their radii (x-axis) and their co-densities (y-axis). The first cycle is the densest, and smallest, and thus corresponds to the one that appears in the bottom(high-density)-left(small-radius) of the bi-filtration. The second is less dense (thus above the first one) and bigger (thus more on the right). The same goes for the last one.

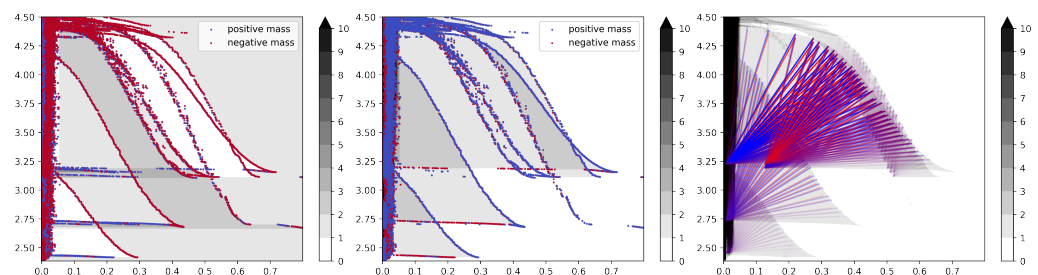


Figure 3: Different Signed Barcodes from the same dataset as Figure 1. **(Left)** Euler Decomposition Signed Barcode, and the Euler Surface in the background. **(Middle)** Hilbert Decomposition Signed Barcode, with its Hilbert Function surface. **(Right)** Rank invariant Signed Barcode, with the Hilbert Function as a background.

44 The core functions of the Python library are automatically tested on Linux and macOS, using
45 pytest alongside GitHub Actions.

46 Related work and statement of need

47 There exists several libraries for computation or pre-processing of very specific tasks related to
48 multiparameter persistence. However, to the best of our knowledge, none of them are able
49 to tackle the challenges that multipers is dealing with, i.e., (1) computing and unifying the
50 computations of multiparameter persistent structures, in a non-expert friendly approach, and
51 (2) provide ready-to-use general tools to use these descriptors for Machine Learning pipelines
52 and projects.

53 **Eulearning.** This library features different approaches for computing and using the Euler
54 Characteristic of a multiparameter filtration (Hacquard & Lebovici, 2023). Although relying
55 on distinct methods, multipers can also be used to compute Machine Learning descriptors
56 from the Euler Characteristic, i.e., the Euler Decomposition Signed Barcode, or Euler Surfaces.
57 Moreover, multipers computations are faster (especially on point cloud datasets), easier to
58 use, and available on a wider range of multi-filtrations.

59 **Multiparameter Persistent Landscape.** Implemented on top of Rivet (Lesnick & Wright,
60 2015), this library computes a multiparameter persistent descriptor by computing 1-parameter
61 persistence landscape vectorizations of slices in multi-filtrations (Vipond, 2020), called Multipa-
62 rameter Persistent Landscape (MPL). This library also features some multiparameter persistence
63 visualizations. However, it is limited to Rivet capabilities and landscapes computations, which
64 on one hand does not leverage on recently developed optimizations, e.g., (Alonso et al., 2023),
65 or (Kerber & Rolle, 2020), and on the other hand can only work with very specific text file
66 inputs.

67 **GRIL.** This library provides code to compute a specific, generalized version of the Multiparameter
68 Persistent Landscapes (Xin et al., 2023), relying on 1-parameter persistence zigzag computations.
69 This library however is limited to this invariant, can only deal with 2-parameter persistence, and
70 is not as much integrated as multipers with other multiparameter persistence and Machine
71 Learning libraries.

72 **Elder Rule Staircode.** This library features a descriptor for 2-parameter, degree-0 homology,
73 rips-density-like filtrations (Cai et al., 2021). Once again, this library is very specific and not
74 linked with other libraries.

75 **Persistable.** is a GUI interactive library for clustering, using degree-0 multiparameter persistence
76 (Scoccola & Rolle, 2023) (Rolle & Scoccola, 2020). Although aiming at distinct goals and
77 using very different approaches, multipers can also be used for clustering, by computing

(differentiable) descriptors that can be used afterward with standard clustering methods, e.g., K-means.

We contribute to this variety of task-specific libraries by providing a **general purpose** library, multipers, with novel and efficient topological invariant computations, integrated state-of-the-art Machine Learning topological pipelines, and interfaces to standard Machine Learning and Deep Learning libraries.

Acknowledgements

David Loiseaux was supported by ANR grant 3IA Côte d'Azur (ANR-19-P3IA-0002). The authors would like to thank Mathieu Carrière, and Luis Scoccola for their help on Sliced Wasserstein, and Möbius inversion code.

References

- Alonso, Á. J., Kerber, M., Lam, T., & Lesnick, M. (2024). Delaunay Bifiltrations of Functions on Point Clouds. In *Proceedings of the 2024 Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)* (pp. 4872–4891). Society for Industrial and Applied Mathematics. <https://doi.org/10.1137/1.9781611977912.173>
- Alonso, Á. J., Kerber, M., & Pritam, S. (2023). Filtration-domination in bifiltered graphs. In *2023 proceedings of the symposium on algorithm engineering and experiments (ALENEX)* (pp. 27–38). <https://doi.org/10.1137/1.9781611977561.ch3>
- Botnan, M. B., Oppermann, S., & Oudot, S. (2022). Signed Barcodes for Multi-Parameter Persistence via Rank Decompositions. In X. Goaoc & M. Kerber (Eds.), *38th International Symposium on Computational Geometry (SoCG 2022)* (Vol. 224, pp. 19:1–19:18). Schloss Dagstuhl – Leibniz-Zentrum für Informatik. <https://doi.org/10.4230/LIPIcs.SocG.2022.19>
- Cai, C., Kim, W., Memoli, F., & Wang, Y. (2021). Elder-Rule-Staircodes for Augmented Metric Spaces. *SIAM Journal on Applied Algebra and Geometry*, 5(3), 417–454. <https://doi.org/10.1137/20M1353605>
- Charlier, B., Feydy, J., Glaunès, J. A., Collin, F.-D., & Durif, G. (2021). Kernel Operations on the GPU, with Autodiff, without Memory Overflows. *Journal of Machine Learning Research*, 22(74), 1–6.
- Flamary, R., Courty, N., Gramfort, A., Alaya, M. Z., Boissunon, A., Chambon, S., Chapel, L., Corenflos, A., Fatras, K., Fournier, N., Gautheron, L., Gayraud, N. T. H., Janati, H., Rakotomamonjy, A., Redko, I., Rolet, A., Schutz, A., Seguy, V., Sutherland, D. J., ... Vayer, T. (2021). POT: Python optimal transport. *The Journal of Machine Learning Research*, 22(1), 78:3571–78:3578.
- Hacquard, O., & Lebovici, V. (2023). Euler Characteristic Tools For Topological Data Analysis. *arXiv.org*. <https://doi.org/10.48550/arxiv.2303.14040>
- Kerber, M., & Rolle, A. (2020). Fast Minimal Presentations of Bi-graded Persistence Modules. *arXiv:2010.15623 [Cs, Math]*. <https://doi.org/10.1137/1.9781611976472.16>
- Lesnick, M., & Wright, M. (2015). Interactive visualization of 2-D persistence modules. *arXiv:1512.00180 [Cs, Math]*. <https://doi.org/10.48550/arXiv.1512.00180>
- Loiseaux, D., Carrière, M., & Blumberg, A. (2023). A Framework for Fast and Stable Representations of Multiparameter Persistent Homology Decompositions. *Advances in Neural Information Processing Systems*, 36, 35774–35798.

- Loiseaux, D., Carrière, M., & Blumberg, A. J. (2022). *Fast, Stable and Efficient Approximation of Multi-parameter Persistence Modules with MMA*. <https://doi.org/10.48550/arXiv.2206.02026>
- Loiseaux, D., Scoccola, L., Carrière, M., Botnan, M. B., & Oudot, S. (2023). Stable Vectorization of Multiparameter Persistent Homology using Signed Barcodes as Measures. *Advances in Neural Information Processing Systems*, 36, 68316–68342.
- Oudot, S., & Scoccola, L. (2024). On the Stability of Multigraded Betti Numbers and Hilbert Functions. *SIAM Journal on Applied Algebra and Geometry*, 8(1), 54–88. <https://doi.org/gtt7dq>
- Paszke, A., Gross, S., Massa, F., Lerer, A., Bradbury, J., Chanan, G., Killeen, T., Lin, Z., Gimelshein, N., Antiga, L., Desmaison, A., Köpf, A., Yang, E., DeVito, Z., Raison, M., Tejani, A., Chilamkurthy, S., Steiner, B., Fang, L., ... Chintala, S. (2019). PyTorch: An imperative style, high-performance deep learning library. In *Proceedings of the 33rd International Conference on Neural Information Processing Systems* (pp. 8026–8037). Curran Associates Inc.
- Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., Vanderplas, J., Passos, A., Cournapeau, D., Brucher, M., Perrot, M., & Duchesnay, É. (2011). Scikit-learn: Machine Learning in Python. *Journal of Machine Learning Research*, 12(85), 2825–2830.
- Rolle, A., & Scoccola, L. (2020). Stable and consistent density-based clustering via multiparameter persistence. *arXiv.org*. <https://doi.org/10.48550/arXiv.2005.09048>
- Scoccola, L., & Rolle, A. (2023). Persistable: Persistent and stable clustering. *Journal of Open Source Software*, 8(83), 5022. <https://doi.org/10.21105/joss.05022>
- Scoccola, L., Setlur, S., Loiseaux, D., Carrière, M., & Oudot, S. (2024, May). Differentiability and Convergence of Filtration Learning with Multiparameter Persistence. *To Appear in Forty-first International Conference on Machine Learning*.
- TheGudhiProject. (2023). *GUDHI*. GUDHI Editorial Board.
- Vipond, O. (2020). Multiparameter persistence landscapes. *Journal of Machine Learning Research*, 21, 61:1–61:38.
- Xin, C., Mukherjee, S., Samaga, S. N., & Dey, T. K. (2023). GRIL: A \mathbb{Z}^2 -parameter Persistence Based Vectorization for Machine Learning. *Proceedings of 2nd Annual Workshop on Topology, Algebra, and Geometry in Machine Learning (TAG-ML)*, 313–333.