

LSEG Quantitative Analytics

Database Schema for Ownership and Global
Insider Data

Version 1.0.3



Contents

1 Introduction.....	4
In This Document.....	4
Intended Readership.....	4
Table Name Conventions	4
Ownership Tables	4
Global Insider Tables	5
Pervasive and Oracle.....	5
Zero Values and Nulls.....	5
Service and Support	5
Feedback	6
Your Personal Information	6
2. Ownership Schema Fundamentals Data.....	7
OwnInvFndmntl: Ownership Investor Fundamentals	7
3 Ownership Schema: Owner Data.....	8
OwnAstAlloc: Owner Asset Allocation.....	9
OwnAstCode: Asset Range Information	9
OwnCode: Owner Codes (Integer).....	9
OwnCtrRegReIn: Country Global Regions	10
OwnData: Historical Owner Statistics	10
OwnDesc: Owner Codes (varchar)	11
OwnEqData: Owner Equity Data.....	11
OwnFundTic: Ownership Mutual Fund Tickers	11
OwnInfo: Owner Information	12
OwnProfCode: Owner Profile Information	13
OwnSecMap: Owner and Security Mapping Information	13
4 Ownership Schema: Security Data.....	14
OwnSecCumAdjFact*: Cumulative Adjustment Factors.....	15
OwnSecCumAdjRatio*: Corporate Actions Cumulative History	15
OwnSecData: Security Numeric Data	16
OwnSecFData: Historical Pricing and Shares Outstanding	17
OwnSecIdent: Industry-Standard Security Identifiers.....	17
OwnSecInfo: Security Information.....	18
OwnSecIssuer: Security Issuer Information	19
OwnSecSectorCode: Security Sector Information	19
5 Ownership Schema: Holdings Data.....	20

OwnHoldCF: Carry Forward and Next Report Dates	20
OwnHoldDet: Owner Holdings Detail	21
6. Ownership Schema: Contacts Data.....	23
OwnCon: Contact Employment Information	23
OwnConAddress: Contact Addresses.....	24
OwnConBio: Contact Employment History.....	24
OwnConInfo: Contact Information	25
OwnConSpCode: Contact Specialty Codes	25
OwnConSpecialty: Contact Specialties	26
7. Ownership Schema: Global Insider Data Tables	27
OwnInsAsiaData: Asia Insider Transaction Data	28
OwnInsAsiaTitle: Asia Insider Title and Rank Information	28
OwnInsCode: Insider Codes (Integer).....	29
OwnInsData: Insider Data	29
OwnInsDesc: Insider Codes (varchar)	30
OwnInsInfo: Insider Investors Information.....	31
8. Ownership Schema: Examples	32
Example 1: Securities by Issuer.....	32
Example 2: Holdings by Owner.....	33
Example 3: Funds and Holdings	34
Example 4: Snapshot of Owners of a Security	36

1 Introduction

In This Document

This document provides schema information about the **Ownership and Global Insider** data tables in Quantitative Analytics.

NOTE

For information about the other Quantitative Analytics tables, refer to the other Database Schema documents posted on the [Quantitative Analytics](#) product page on [MyAccount](#).

The documentation for each table includes these main elements:

- **Vendor Database or License Name** – This element provides the vendor database or license name. Vendor databases generally correspond to vendor licensing options.
- **Table Name: Table Title** – This element provides the table name and title, followed by a description of the table contents.
- **Update Cycle** – This element indicates the frequency of updates from the data vendor. (For specific information about when this update is posted for your use, refer to your update logs. The update log schema description is available in the Database Schema for Quantitative Analytics Core Tables document.)
- **Adjusted** – This element indicates whether the data is stored adjusted, unadjusted, or if adjustment is not applicable (N/A).
- **Indexes, Index Fields** – This element lists the table's index(es) (for example, pkey_CSGCAD) and the index fields. The primary index contains a "pkey_" or "PK_" prefix. Clustered indexes are noted.
- **Field, Type, Nullable, Definition** – This element describes the table's fields, including field names, data types, and whether each field is nullable. The data types in Snowflake have equivalents available. For example, an *int* in SQL Server is a *number* in Snowflake.

Intended Readership

This document is intended for Quantitative Analytics clients licensed to use **Ownership and Global Insider** data through LSEG. Note that the tables described in this document may be covered by several licenses; your access to the data in these tables is dependent on the licenses you have. Readers should have basic knowledge of Microsoft SQL Server 2016.

Table Name Conventions

In Quantitative Analytics, database tables are grouped by name. Generally, the first few letters of the table name refer to the data vendor or licensing group. For example, all tables that begin with **OWN*** are **Ownership and Global Insider** data tables.

Ownership Tables

Use Ownership data to obtain information about large-scale holders of specific securities.

The LSEG Quantitative Analytics schema for Ownership is organized into several categories:

- [Fundamentals data](#)
- [Owner data](#)
- [Security data](#)
- [Holdings data](#)
- [Contacts data](#)

Global Insider Tables

Global Insider data is a subset of Ownership data. Global Insider data is available depending on your license type.

The global Insider tables are described in [Global Insider](#) data tables, as well as the Ownership [OwnInfo](#), and [OwnSecInfo](#) tables.

Pervasive and Oracle

This document is specific to Microsoft SQL Server 2016. If you are accessing the data directly through the Pervasive database, you may encounter slight differences in index names and data types. Please note that references to Pervasive and Actian are synonymous.

If you are accessing the data through Oracle, note that field names that correspond to Oracle reserved words are appended with an underscore. For example, field names “Number”, “Synonym”, and “UID” become “Number_”, “Synonym_”, and “UID_” in Oracle.

Zero Values and Nulls

Null values are usually recorded as “NULL”. Occasionally, a table may contain a value of “-99999” or “-9999”; in these cases, there is no recorded data for that period. (It is null.) If the table contains a “0” value, the data was reported as having a “0” value.

Service and Support

[MyAccount](#) is the LSEG portal that provides a single access point for timesaving support services, along with billing, user management, and information.

Statement of Service

The [Quantitative Analytics Service Description](#) is available on the [Quantitative Analytics](#) product page at MyAccount.

Subscribe to Support Channels

You are encouraged to [subscribe](#) to the following support channels to keep informed of changes to products and data, and to be notified of any service issues or change. Please see the *Alerts and Notifications* section in the *Quantitative Analytics Service Description* available on the [Quantitative Analytics](#) product page at MyAccount for detailed instructions.

– Change Notifications

- **Product Change Notifications (PCNs)** detail new, enhanced, or changed functionality, which may require your action, in products that you use.
- **Data Notifications (DNs)** alert you to upcoming changes to real-time and historical data across all asset classes that are relevant to you.
- **RIC Change Events** inform you of planned changes to RICs. RIC is the market level identifier key unique to LSEG used to identify securities.

– Service Alerts

Alert you about planned maintenance and unplanned service issues affecting your products and services, and be notified via SMS or email.

Documentation

You can access product documentation on the [Quantitative Analytics](#) product page at MyAccount.

Get Support

For support using Quantitative Analytics, please use one of the following methods:

Online

Access [Get Support](#) either via the blue [Get Support](#) button at the top right of each page or by selecting *Get Support* located under *Help and Support* on the left navigation pane at MyAccount.

From the *Get Support* page, choose *Get Product and Content Support* and then select the appropriate category from the next page. Complete the request making sure to include the following:

- Under Product, select Quantitative Analytics from the dropdown list.
- In the **How can we help you?** text box, include the following information:
 - Content set name (i.e. Worldscope)
 - Date applicable to a content inquiry
 - Table names and relevant fields
 - Security code (i.e. QA-ID, PermID, Sedol, InfoCode, etc.)
 - Script used to generate the output
 - Any other supporting detail

Telephone

Region	Telephone	Options
AMERS	+01 866 427 8390	Option 1 – Product Support Option 2 – Technical Support
EMEA	+44 203 341 1036	
APAC	+65 6403 7436	

Feedback

We invite your comments, corrections, and suggestions about this document: access the [Feedback](#) option under [Get Support](#) at MyAccount. Your feedback helps us continue to improve our user assistance.

Your Personal Information

LSEG is committed to the responsible handling and protection of personal information. We invite you to review our [Privacy Statement](#), which describes how we collect, use, disclose, transfer, and store personal information when needed to provide our services and for our operational and business purposes.

2. Ownership Schema

Fundamentals Data

OwnInvFndmntl: Ownership Investor Fundamentals

This table contains fundamental consolidated portfolio information based on owner holdings.

Update Cycle: Daily


Adjusted: No

Indexes		Index Fields	
pkey_OwnInvFndmntl (Clustered)		OwnerCode	

Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
PortfolioValue	float	Y	PortfolioValue is the investor aggregate holdings value.
EPS3yrGrowth	float	Y	EPS3yrGrowth is the three-year EPS growth.
Sales3yrGrowth	float	Y	Sales3yrGrowth is the three-year sales growth.
EPS5yrProjected	float	Y	EPS5yrProjected is the five-year projected EPS growth.
GrossMargin	float	Y	GrossMargin is the gross margin of the owner's portfolio.
LTDebtEquity	float	Y	LTDebtEquity is the long-term debt or equity.
LTDebtCapital	float	Y	LTDebtCapital is the long term debt or capital.
NetIncome	float	Y	NetIncome is the net income of the portfolio.
NetMargin	float	Y	NetMargin is the net margin of the portfolio.
OperatingMargin	float	Y	OperatingMargin is the operating margin of the portfolio.
PEForward	float	Y	PEForward is the P/E ratio, forward 12 months.
PETrailing	float	Y	PETrailing is the P/E ratio, trailing 12 months.
PayoutRatio	float	Y	PayoutRatio is the payout ratio.
PEGRatio	float	Y	PEGRatio is the PEG (price/earnings to growth) ratio.
PriceToBook	float	Y	PriceToBook is the price-to-book ratio.
PricetoSales	float	Y	PricetoSales is the price-to-sales ratio.
Revenue	float	Y	Revenue is the collective income.
ROA	float	Y	ROA is the return on assets.
ROE	float	Y	ROE is the return on equity.
Yield	float	Y	Yield is the dividend yield.
ModifiedDate	datetime	Y	ModifiedDate is the date the table record was last updated with LSEG.

3 Ownership Schema: Owner Data

This diagram illustrates the relationship between the Ownership Owner tables.

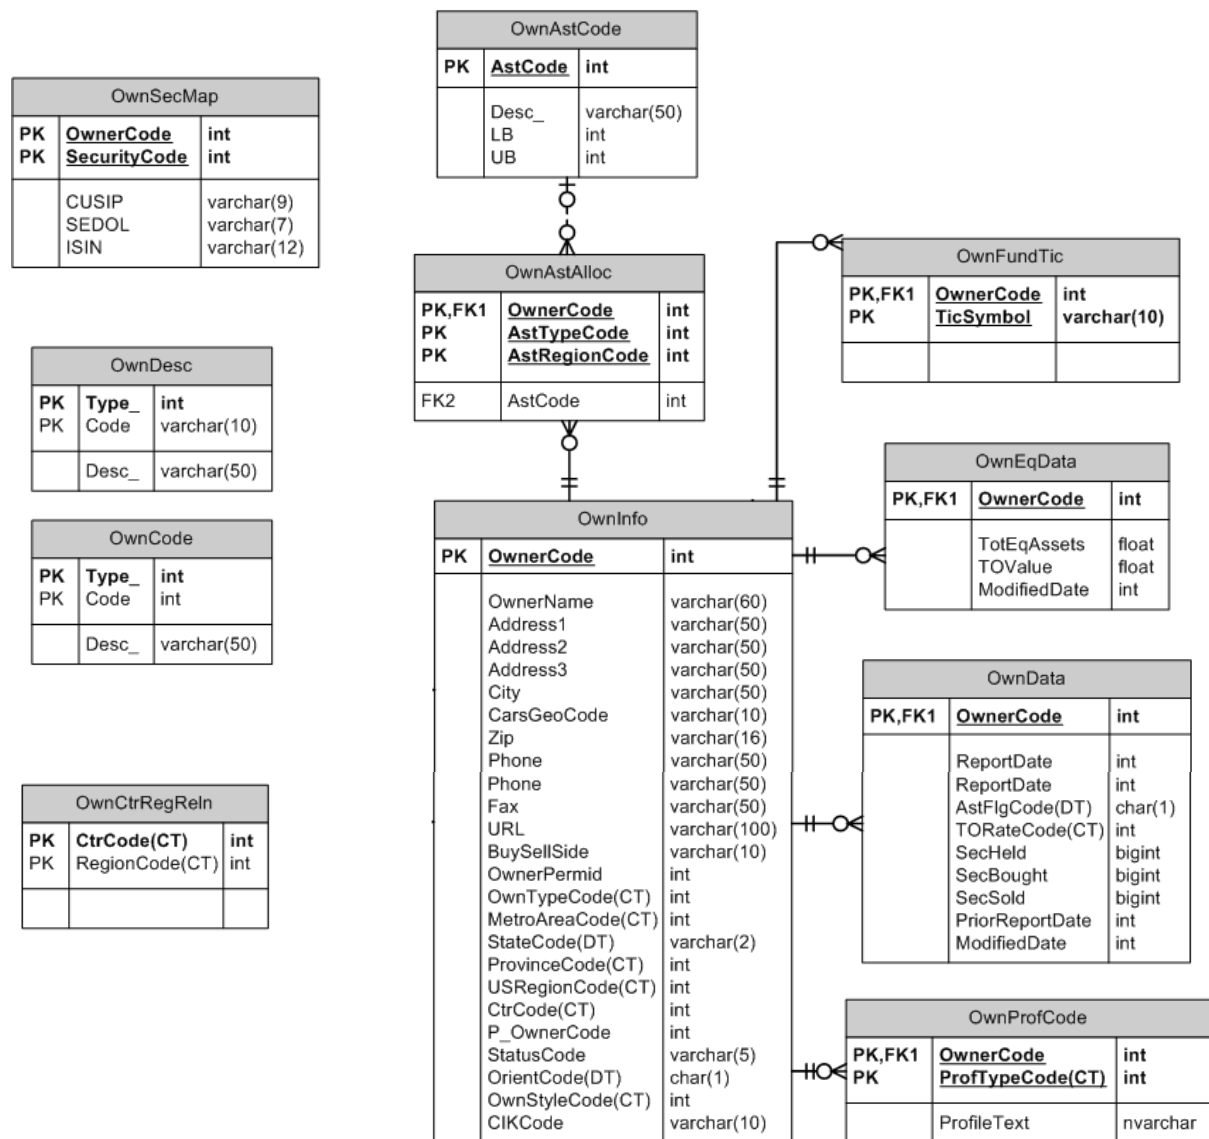

OwnAstAlloc: Owner Asset Allocation

Use the asset allocation file to retrieve data describing the amount of assets an owner holds in selected regions and in various asset classes. Assets are indicated by range, not by specific values.

Update Cycle: Daily and Quarterly

Adjusted: No

Indexes		Index Fields	
pkey_OwnAstAlloc (Clustered)		OwnerCode, AstTypeCode, AstRegionCode	
Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
AstTypeCode	int	N	AstTypeCode is the code that identifies the asset type. This field cross-references OwnCode where OwnCode.Type_ = 8 and OwnCode.Code = OwnAstAlloc.AstTypeCode.
AstRegionCode	int	N	AstRegionCode indicates the region for which asset allocation is reported. This field cross-references OwnCode where OwnCode.Type_ = 7 and OwnCode.Code = OwnAstAlloc.AstRegionCode.
AstCode	int	Y	AstCode is the asset code identifier. This field cross-references OwnAstCode .

OwnAstCode: Asset Range Information

The OwnAstCode table provides the lower and upper bounds associated with an asset. Assets are indicated by range, not by specific values.

Update Cycle: Daily

Adjusted: No

Indexes		Index Fields	
pkey_OwnAstCode (Clustered)		AstCode	
Field	Type	Nullable	Description
AstCode	int	N	AstCode is the asset code identifier. This field cross-references OwnAstAlloc .
Desc_	varchar(51)	Y	Desc_ describes the asset range.
LB	int	Y	LB is the lower boundary indicator. It describes the lower boundary of the asset allocation range. LB is stated in millions.
UB	int	Y	UB is the upper boundary indicator. It describes the upper boundary of the asset allocation range. UB is stated in millions.

OwnCode: Owner Codes (Integer)

This table contains translations for Codes of an integer datatype.

Update Cycle: Daily and Quarterly

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnCode (Clustered)		Type_, Code	
Field	Type	Nullable	Description
Type_	int	N	Type_ is a numeric code for a type of data.
Code	int	N	Code is a coded value for an element of Type_. When Type_ = 0, Code is the numeric code for each Type_ other than 0 and Desc_ is a description of each Type_.
Desc_	varchar(51)	Y	Desc_ is a plain-language description of the element defined by Type_ and Code.

NOTESee [OwnDesc](#) on page 11.

OwnCtrRegReIn: Country Global Regions

This table maps countries to global regions. Note that a single country may map to multiple regions.

Update Cycle: Daily and Quarterly

Adjusted: N/A

Indexes	Index Fields
pkey_OwnCtrRegReIn (Clustered)	CtrCode, RegionCode

Field	Type	Nullable	Description
CtrCode	int	N	CtrCode is the country identifier. This field cross-references OwnCode where OwnCode.Type_ = 6 and OwnCode.Code = OwnCtrRegReIn.CtrCode.
RegionCode	int	N	RegionCode is the identifier for the global region. This field cross-references OwnCode where OwnCode.Type_ = 10 and OwnCode.Code = OwnCtrRegReIn.RegionCode.

OwnData: Historical Owner Statistics

Use this table to retrieve profile information about an owner's portfolio, trading, and turnover.

Update Cycle: Daily and Quarterly

Adjusted: N/A

Indexes	Index Fields
pkey_OwnData (Clustered)	OwnerCode

Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
ReportDate	datetime	Y	ReportDate is the most recent date of all reported holdings, formatted as YYYYMMDD. Note that report dates at the holdings level may differ from this date because data in this table is collected from multiple sources.
AstFlgCode	char(1)	Y	AstFlgCode is the Asset flag. AstFlgCode indicates whether the Total Equity Assets value is calculated (C) or surveyed (S). AstFlgCode cross-references OwnDesc where OwnDesc.Type_ = 3 and OwnDesc.Code = OwnData.AstFlgCode.
TORateCode	int	Y	TORateCode is the turnover rating code which is a qualitative indicator of turnover value. This field cross-references OwnCode where OwnCode.Type_ = 4 and OwnCode.Code = OwnData.TORateCode.
SecHeld	bigint	Y	SecHeld indicates the number of securities held by an owner as of the report date.
SecBought	bigint	Y	SecBought indicates the number of securities purchased, when compared to the previous portfolio.
SecSold	bigint	Y	SecSold indicates the number of securities sold, when compared to the previous portfolio.
PriorReportDate	datetime	Y	PriorReportDate is the most recent prior holdings report date, formatted as YYYYMMDD. Note that report dates at the holdings level may differ from this date because data in this table is collected from multiple sources.
ModifiedDate	datetime	Y	ModifiedDate is the date the record was last updated with LSEG.

OwnDesc: Owner Codes (varchar)

This table contains translations for Codes of varchar datatype.

Update Cycle: Daily and Quarterly

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnDesc (Clustered)		Type_, Code	
Field	Type	Nullable	Description
Type_	int	N	Type_ is a numeric code for a type of data.
Code	varchar(11)	N	Code is a coded value for an element of Type_. When Type_ = 0, Code is the numeric code for each Type_ other than 0 and Desc_ is a description of each Type_.
Desc_	varchar(51)	Y	Desc_ is a plain-language description of the element defined by Type_ and Code.

NOTE

See [OwnCode](#) on page 9 and [Examples](#) on page 32.

OwnEqData: Owner Equity Data

This table contains the numeric profile information about an owner's portfolio, trading, equity assets, and turnover.

Update Cycle: Daily and Quarterly

Adjusted: No

Indexes		Index Fields	
pkey_OwnEqData (Clustered)		OwnerCode	
Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
TotEqAssets	float	Y	TotEqAssets is the total equity value of the owner, if available. If the total equity value of the owner is not available, then this field reports surveyed assets.
ToValue	float	Y	ToValue is the turnover value. Turnover value is the measure of an owner's trading activity relative to its assets.
ModifiedDate	datetime	Y	ModifiedDate is the date the table record was last updated with LSEG.

OwnFundTic: Ownership Mutual Fund Tickers

Use this table to identify mutual fund ticker symbols. A single mutual fund may have multiple fund tickers representing various share classes.

Update Cycle: Daily and Quarterly

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnFundTic (Clustered)		OwnerCode, TicSymbol	
Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
TicSymbol	varchar(11)	N	TicSymbol is the ticker symbol for the mutual fund.

OwnInfo: Owner Information

This table contains owner information such as address, phone, region, and status. This table is also part of the Insider schema.

Update Cycle: Daily and Quarterly

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnInfo (Clustered)		OwnerCode	

Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. This field links to all Owner data tables.
OwnerName	varchar(61)	Y	OwnerName is the name of the owner.
Address1	varchar(51)	Y	Address1 is the first line of the owner's address.
Address2	varchar(51)	Y	Address2 is the second line of the owner's address.
Address3	varchar(51)	Y	Address3 is the third line of the owner's address.
City	varchar(51)	Y	City is the city of the owner's address.
CarsGeoCode	varchar(11)	Y	CarsGeoCode is the Carson Code (Geo ID) of the owner. This code is a unique identifier that comes from the legacy GEO (Global Equity Online) database. This code is not produced by Ownership.
Zip	varchar(17)	Y	Zip is the postal code of the owner's address.
Phone	varchar(51)	Y	Phone is the main phone number of the owner.
Fax	varchar(51)	Y	Fax is the main fax number of the owner.
URL	varchar(101)	Y	URL is URL for the owner's Web site.
BuySellSide	varchar(11)	Y	(Reserved for future use.)
OwnerPermid	int	Y	(Reserved for future use.)
OwnTypeCode	int	Y	OwnTypeCode is the owner type identifier. This field cross-references OwnCode where OwnCode.Type_ = 16 and OwnCode.Code = OwnInfo.OwnTypeCode.
MetroAreaCode	int	Y	MetroAreaCode is the identifier for the metropolitan area of an owner. This field cross-references OwnCode where OwnCode.Type_ = 14 and OwnCode.Code = OwnInfo.MetroAreaCode.
StateCode	varchar(3)	Y	StateCode is the state identifier for the owner. This field cross-references OwnDesc where OwnDesc.Type_ = 2 and OwnDesc.Code = OwnInfo.StateCode.
ProvinceCode	int	Y	ProvinceCode is the province identifier for the owner. This field cross-references OwnCode where OwnCode.Type_ = 12 and OwnCode.Code = OwnInfo.ProvinceCode.
USRegionCode	int	Y	USRegionCode is the identifier of the U.S. geographic region for the owner. This field cross-references OwnCode where OwnCode.Type_ = 9 and OwnCode.Code = OwnInfo.USRegionCode.
CtrCode	int	Y	CtrCode is the country identifier of the owner. This field cross-references OwnCode where OwnCode.Type_ = 6 and OwnCode.Code = OwnInfo.CtrCode.
P_OwnerCode	int	Y	P_OwnerCode is the OwnerCode of the parent owner or institution.
StatusCode	varchar(6)	Y	StatusCode describes the current status of the owner. Y indicates that the owner is currently tracked and researched, and N indicates that the owner is not currently tracked.
OrientCode	char(1)	Y	OrientCode describes the investment orientation. The orientation may be Active (A) or Passive (P). OrientCode cross-references OwnDesc where OwnDesc.Type_ = 1 and OwnDesc.Code = OwnInfo.OrientCode.
OwnStyleCode	int	Y	OwnStyleCode is the unique investment style identifier of the owner. This field cross-references OwnCode where OwnCode.Type_ = 18 and OwnCode.Code = OwnInfo.OwnStyleCode.
CIKCode	varchar(11)	Y	CIKCode is the Central Index Key. (This field is not currently populated.)

NOTESee [Examples](#) on page 32.

OwnProfCode: Owner Profile Information

This table contains owner profile information about institutional owners, including investment approach and affiliations. An individual owner may have several rows of data.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnProfCode (Clustered)		OwnerCode, ProfTypeCode	
Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
ProfTypeCode	int	N	ProfTypeCode identifies the owner profile section type, such as Affiliations or Investment Approach. This field cross-references OwnCode where OwnCode.Type_ = 5 and OwnCode.Code = OwnProfCode.ProfTypeCode.
ProfileText	varchar(max)	Y	ProfileText is the text from the owner Profile section. Carriage returns are indicated by the caret (^) character.

OwnSecMap: Owner and Security Mapping Information

This table contains owner and security mapping information.


Update Cycle: Daily and Quarterly

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnSecMap (Clustered)		OwnerCode, SecurityCode	
OwnSecMap_1		SecurityCode	
Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
SecurityCode	int	N	SecurityCode is the unique identifier for a security. This field links to all Security data tables.
CUSIP	varchar(9)	Y	CUSIP is the security CUSIP.
Sedol	varchar(7)	Y	Sedol is the security SEDOL.
ISIN	varchar(12)	Y	ISIN is the security ISIN.

4 Ownership Schema: Security Data

This diagram illustrates the relationship between the Ownership Security tables.

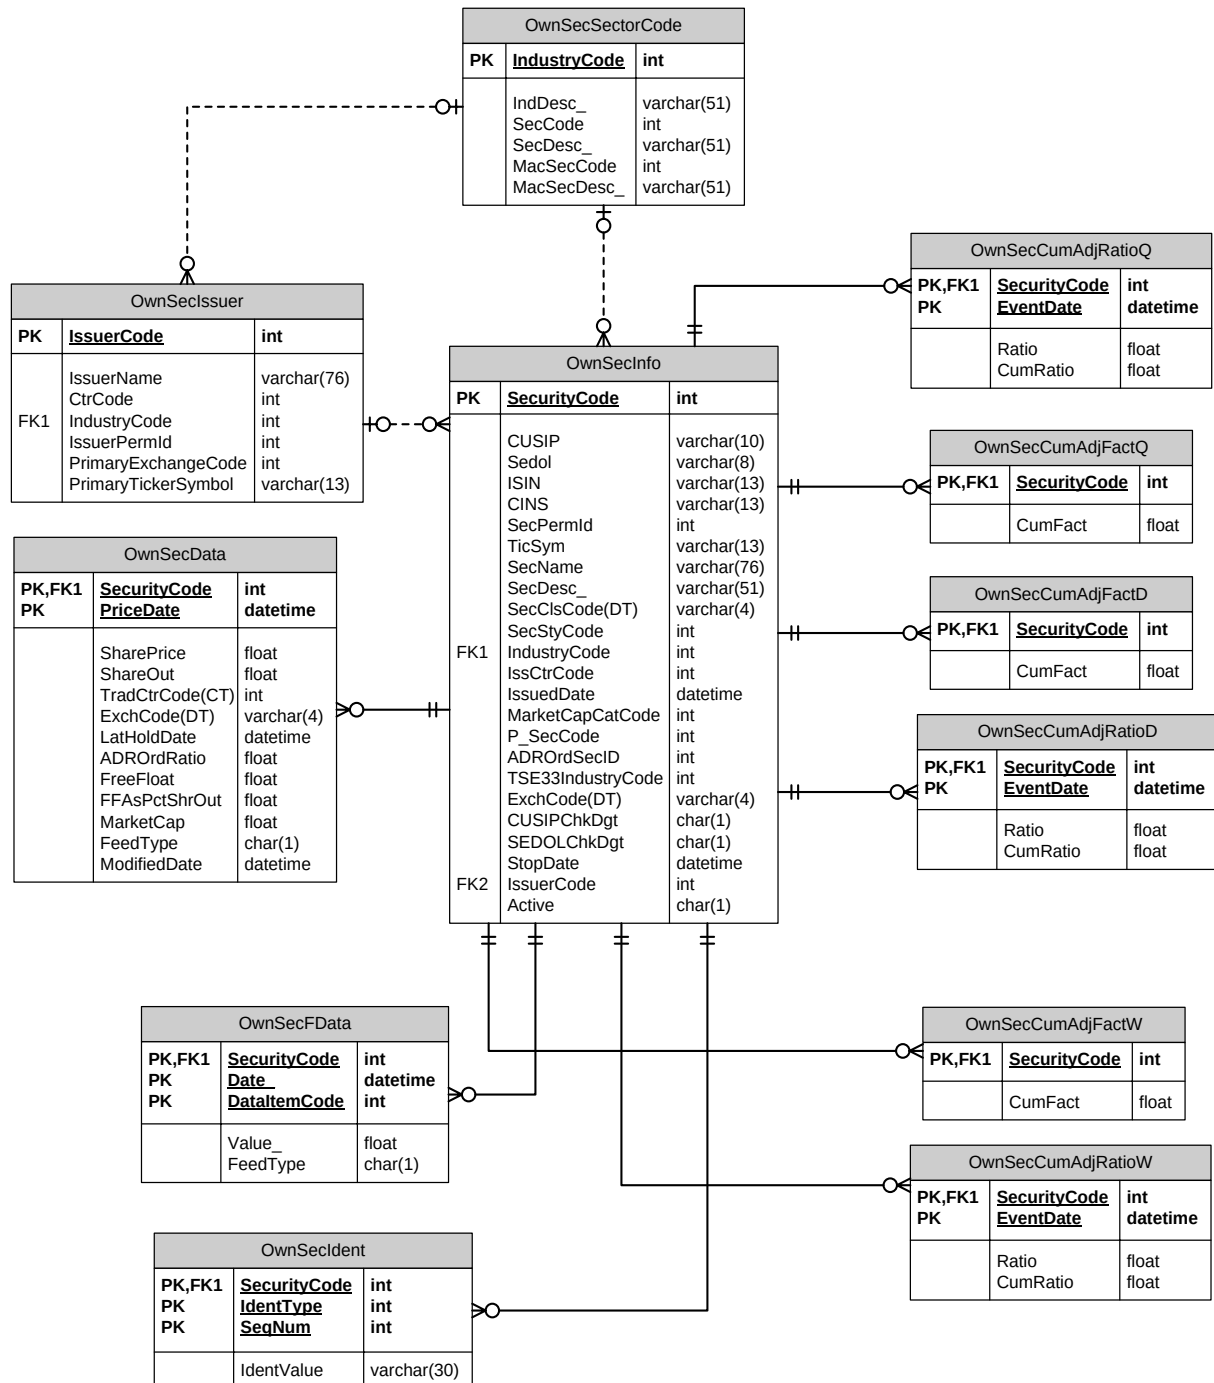

OwnSecCumAdjFact*: Cumulative Adjustment Factors

Use factor tables to make split-related adjustments to the data in the OwnSecData and OwnHoldDet tables. There are three cumulative adjustment factor tables:

- OwnSecCumAdjFactD (Daily)
- OwnSecCumAdjFactQ (Quarterly)
- OwnSecCumAdjFactW (Weekly)

The factor table you should use is indicated by FeedType. For example, if OwnHoldDet.FeedType = D, this indicates the record references the cumulative factor from the Daily factor table, OwnSecCumAdjFactD.

Update Cycle: OwnSecCumAdjFactD: Daily
OwnSecCumAdjFactQ: Quarterly
OwnSecCumAdjFactW: Weekly

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnSecCumAdjFact[D, Q, or W] (Clustered)		SecurityCode	

Field	Type	Nullable	Description
SecurityCode	int	N	SecurityCode is the unique identifier for a security. It is defined by OwnSecInfo . This field links to all Security data tables.
CumFact	float	Y	CumFact is the cumulative factor to apply to the security based on all historical splits and corporate actions. Because the factor value takes into account the differences in the frequency of the feeds, this figure may be different depending on whether you are viewing the daily, weekly, or quarterly data.

NOTE

See [OwnSecData](#) on page 16 and [OwnHoldDet](#) on page 21.

OwnSecCumAdjRatio*: Corporate Actions Cumulative History

These tables capture the cumulative history of the corporate actions for one or more securities described in OwnSecData and OwnHoldDet. There are three corporate actions cumulative history tables:

- OwnSecCumAdjRatioD (Daily)
- OwnSecCumAdjRatioQ (Quarterly)
- OwnSecCumAdjRatioW (Weekly)

The ratio table you should refer to is indicated by FeedType. For example, if OwnSecData.FeedType = D, this indicates that the record was last updated by the daily feed and, as a result, you should refer to the Daily ratio table (OwnSecCumAdjRatioD) for the latest cumulative ratio value.

Ratio tables are provided for your convenience and are intended only for your reference. They are used primarily to compute the factor values in the factor tables.

Update Cycle: OwnSecCumAdjRatioD: Daily
OwnSecCumAdjRatioQ: Quarterly
OwnSecCumAdjRatioW: Weekly

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnSecCumAdjRatio[D, Q, or W] (Clustered)		SecurityCode, EventDate	

Field	Type	Nullable	Description
SecurityCode	int	N	SecurityCode is the unique identifier for a security. It is defined by OwnSecInfo . This field links to all Security data tables.
EventDate	datetime	N	EventDate is the date of the split or the corporate action.

Field	Type	Nullable	Description
Ratio	float	Y	Ratio is the split factor.
CumRatio	float	Y	CumRatio is the cumulative value of all splits for a given security. It is calculated in chronological order by event date.

NOTE

See [OwnSecData](#) on page 16 and [OwnHoldDet](#) on page 21.

OwnSecData: Security Numeric Data

This table contains security-related numeric and time series data. The data in this table is adjusted for corporate actions.

Update Cycle: Daily and Quarterly

Adjusted: Yes

Indexes	Index Fields
pkey_OwnSecData (Clustered)	SecurityCode, PriceDate

Field	Type	Nullable	Description
SecurityCode	int	N	SecurityCode is the unique identifier for a security. It is defined by OwnSecInfo . This field links to all Security data tables.
PriceDate	datetime	N	PriceDate is the date of the reported share price for a given security, formatted as YYYYMMDD.
SharePrice	float	Y	SharePrice is the price per share. Prices are split adjusted. Note: This field is no longer populated. Instead of this field, use the OwnSecFData table where DataItemCode = 1 (share price).
ShareOut	float	Y	ShareOut is the number of shares outstanding for the security, as of the share pricing date or corporate actions date.
TradCtrCode	int	Y	TradCtrCode is the primary trading country identifier for the security. This field cross-references OwnCode where OwnCode.Type_ = 6 and OwnCode.Code = OwnSecData.TradCtrCode.
ExchCode	varchar(4)	Y	ExchCode indicates the primary exchange for a security, on the share price date. This field cross-references OwnDesc where OwnDesc.Type_ = 6 and OwnDesc.Code = OwnSecData.ExchCode.
LatHoldDat	datetime	Y	LatHoldDat is the latest date for which this security has a portfolio holding.
ADROrdRatio	float	Y	ADROrdRatio is the number of shares represented by one ADR (American Depository Receipt) of its underlying security. For example, a value of 10 means that one ADR share represents 10 shares of the underlying security.
FreeFloat	float	Y	(Reserved for future use.)
FFAsPctShrOut	float	Y	FFAsPctShrOut is the FreeFloat as a percent of shares outstanding. (This field is not currently populated.)
MarketCap	float	Y	MarketCap is the market capitalization of the security, stated in USD as of the share pricing or corporate action date. Market capitalization is price multiplied by shares outstanding.
FeedType	char(1)	Y	FeedType identifies the last feed that updated this record. Feeds may be Daily (D), Weekly (W), or Quarterly (Q).
ModifiedDate	datetime	Y	ModifiedDate is the date the table record was last updated with LSEG.

OwnSecFData: Historical Pricing and Shares Outstanding

This table contains end-of-month price history and end-of-quarter shares outstanding history for securities.

Update Cycle: Weekly and Quarterly

Adjusted: To split adjust the record, use the adjustment factor from [OwnSecCumAdjFact](#)* (*W or Q, as indicated by the value in the FeedType column). If FeedType = Q, divide (or multiply) the shares outstanding (or price) by CumFact (the cumulative factor) from the OwnSecCumAdjFactQ table. If FeedType = W, use the cumulative factor from the OwnSecCumAdjFactW table.

Indexes		Index Fields	
pkey_OwnSecFData (Clustered)		SecurityCode, DataItemCode, Date_	
Field	Type	Nullable	Description
SecurityCode	int	N	SecurityCode is the unique identifier for a security. This field links to all Security data tables.
DataItemCode	int	N	DataItemCode is the data item code: – 1 = share price (monthly price per share) – 2 = shares outstanding (quarterly shares outstanding for the security) This field cross-references OwnCode.Code where OwnCode.Type_ = 25.
Date_	datetime	N	Date is the date for which the value is applicable.
Value	float	Y	Value is the value of the item on the date specified in the Date_ field.
FeedType	char(1)	Y	FeedType determines which adjustment factor is used to retrieve adjusted data: – Q = quarterly – W = weekly

OwnSecIdent: Industry-Standard Security Identifiers

This table contains industry-standard security identifiers, including CINS/CUSIP, SEDOL, and ISIN.

Update Cycle: Daily and Quarterly

Adjusted: Split-adjusted

Indexes		Index Fields	
pkey_OwnSecIdent (Clustered)		SecurityCode, IdentType, SeqNum	
Field	Type	Nullable	Description
SecurityCode	int	N	SecurityCode is the unique identifier for a security. This field links to all Security data tables.
IdentType	int	N	IdentType indicates the type of identifier contained in the IdentValue field. – 1 = CINS/CUSIP – 2 = SEDOL – 3 = ISIN This field cross-references with OwnCode.Code where OwnCode.Type_ = 26.
SeqNum	int	N	SeqNum is used to incorporate multiple values for a given identifier and a given security. For example, if TRDW receives multiple SEDOLs for a single security, TRDW stores the SEDOLs with a sequence number (SeqNum 1, 2, 3, and so on).
IdentValue	varchar(30)	Y	IdentValue is the industry security ID. The type of identifier (CUSIP, SEDOL, or ISIN) is indicated by the IdentType field. This is the alternative ID for security search.

OwnSecInfo: Security Information

This table contains descriptive data associated with a given security. This table is also part of the [Insider schema](#).

Update Cycle: Daily and Quarterly

Adjusted: No

Indexes		Index Fields	
pkey_OwnSecInfo (Clustered)		SecurityCode	

Field	Type	Nullable	Description
SecurityCode	int	N	SecurityCode is the unique identifier for a security. This field links to all Security data tables.
CUSIP	varchar(10)	Y	CUSIP is the security CUSIP.
Sedol	varchar(8)	Y	Sedol is the security SEDOL.
ISIN	varchar(13)	Y	ISIN is the security ISIN.
CINS	varchar(13)	Y	CINS is the unique identifier for foreign securities.
SecPerMId	int	Y	SecPerMId is the GEM PerMId. This field is not currently populated.
TicSym	varchar(13)	Y	TicSym is the security ticker symbol.
SecName	varchar(76)	Y	SecName is the name of the security including the name of the issuing company.
SecDesc_	varchar(51)	Y	SecDesc_ indicates whether the security is described as common (Com), or whether the security has a different description.
SecClsCode	varchar(4)	Y	SecClsCode is the broad class of the security. This field cross-references OwnDesc.Code where OwnDesc.Type_ = 5.
SecStyCode	int	Y	(Reserved for future use.)
IndustryCode	int	Y	IndustryCode is the primary industry identifier for the security. This field cross-references OwnSecSectorCode .
IssCtrCode	int	Y	IssCtrCode is the issuer country code. It indicates the country from which the security was issued. This field cross-references OwnCode.Code where OwnCode.Type_ = 6.
IssuedDate	datetime	Y	IssuedDate is the date the security was issued, in the format YYYYMMDD.
MarketCapCatCode	int	Y	MarketCapCatCode is the market capitalization of the security, stated in USD as of the share pricing or corporate action date. Market capitalization is price multiplied by shares outstanding.
P_SecCode	int	Y	P_SecCode is the Parent of the SecurityCode. This field is not currently populated.
ADROrdSecID	int	Y	ADROrdSecID is the identifier of the ADR's underlying security.
TSE33IndustryCode	int	Y	(Reserved for future use.)
ExchCode	varchar(4)	Y	ExchCode indicates the recent primary exchange for a security. This field cross-references OwnDesc.Code where OwnDesc.Type_ = 6.
CUSIPChkDgt	char(1)	Y	CUSIPChkDgt is the ninth character of the CUSIP field. This character serves as a check digit for the first eight characters.
SEDOLChkDgt	char(1)	Y	SEDOLChkDgt is the seventh character of a SEDOL field. This character serves as a check digit for the first six characters.
StopDate	datetime	Y	StopDate is the date on which the security stopped trading, in the format YYYYMMDD.
IssuerCode	int	Y	IssuerCode is the identifier for the issuing company. IssuerCode cross-references OwnSecIssuer .
Active	char(1)	Y	Active is a flag identifying whether the security is active (Y) or inactive (N).

NOTE

See [Examples](#) on page 32.

OwnSecIssuer: Security Issuer Information

Use this table to retrieve information about the issuer of a security.

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
pkey_OwnSecIssuer (Clustered)	IssuerCode

Field	Type	Nullable	Description
IssuerCode	int	N	IssuerCode is the identifier for the issuing company.
IssuerName	varchar(76)	Y	IssuerName is the name of the issuer of the security. This field translates IssuerCode.
CtrCode	int	Y	CtrCode is the country identifier. This field cross-references OwnCode.Code where OwnCode.Type_ = 6.
IndustryCode	int	Y	IndustryCode is the primary industry identifier for the security. This field cross-references OwnSecSectorCode .
IssuerPermlId	int	Y	(Reserved for future use.)
PrimaryExchangeCode	int	Y	(Reserved for future use.)
PrimaryTickerSymbol	varchar(13)	Y	(Reserved for future use.)

NOTE

See [Examples](#) on page 32.

OwnSecSectorCode: Security Sector Information

Use this table to retrieve security industry, sector, and macro sector information.

Update Cycle: Daily and Quarterly


Adjusted: No

Indexes	Index Fields
pkey_OwnSecSectorCode (Clustered)	IndustryCode

Field	Type	Nullable	Description
IndustryCode	int	N	IndustryCode is the primary industry identifier for the security.
IndDesc_	varchar(51)	Y	IndDesc_ is the description of the industry. This field translates IndustryCode.
SecCode	int	Y	SecCode is the sector code. This field is translated by SecDesc_.
SecDesc_	varchar(51)	Y	SecDesc_ is the description of the business sector. This field translates SecCode.
MacSecCode	int	Y	MacSecCode is the unique identifier for the macro sector. This field is translated by MacSecDesc_.
MacSecDesc_	varchar(51)	Y	MacSecDesc_ translates MacSecCode. It is the description of the macro sector.

5 Ownership Schema: Holdings Data

This diagram illustrates how the Ownership Holdings table, OwnHoldDet, relates to OwnInfo and OwnSecInfo.

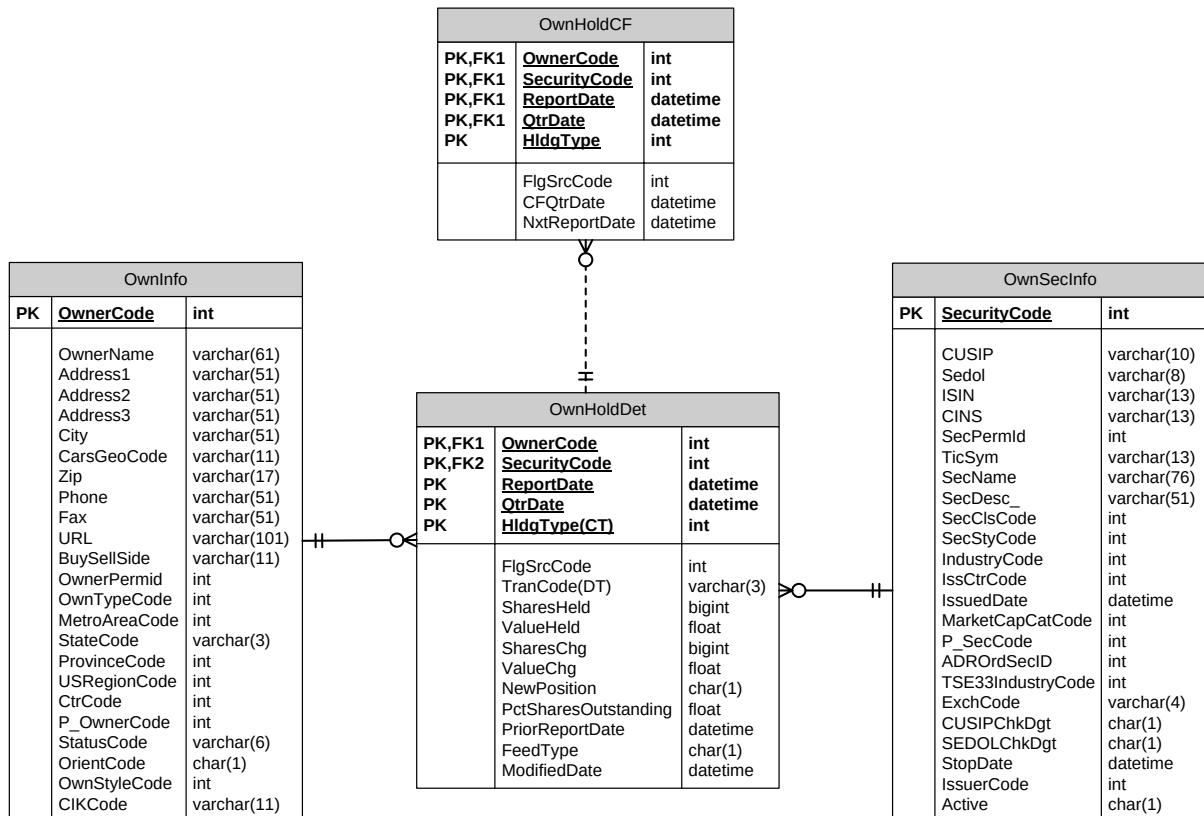

OwnHoldCF: Carry Forward and Next Report Dates

This table contains quarter-end carry forward and next report dates.

Update Cycle: Daily/Weekly/Quarterly

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnHoldCF (Clustered)		OwnerCode, SecurityCode, ReportDate, QtrDate, HldgType	
Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
SecurityCode	int	N	SecurityCode is the unique identifier for a security. It is defined by OwnSecInfo . This field links to all Security data tables.
ReportDate	datetime	N	ReportDate is the date on which holdings were reported.
QtrDate	datetime	N	QtrDate is the end date of the reporting quarter.

Field	Type	Nullable	Description
HldgType	int	N	HldgType is the category of the holding: – 1 = CONS (consolidated) – 2 = Inst (institutional) – 3 = MF (mutual fund) This field cross-references OwnCode .Code where OwnCode.Type_ = 20.
FlgSrcCode	int	Y	FlgSrcCode indicates the reporting source. This field cross-references OwnCode .Code where OwnCode.Type_ = 11.
CFQtrDate	datetime	Y	CFQtrDate is the quarter-end date to which the position can carry forward.
NxtReportDate	datetime	Y	NxtReportDate is the quarter-end of the next reported filing date. For the latest available record, NxtReportDate will be 2079-01-01.

OwnHoldDet: Owner Holdings Detail

This table contains an owner's security-level holdings data. The data in this table is compiled from a variety of filing sources and is adjusted for corporate actions.

NOTE

In the event that a security stops trading (indicated by [OwnSecInfo.StopDate](#)), any holdings reported up to the end of the quarter are included.

Update Cycle: Daily, Weekly and Quarterly

Adjusted: To split adjust the record, use the adjustment factor from [OwnSecCumAdjFact](#)* (*D, W, or Q, as indicated by the value in the FeedType column). If FeedType = Q, divide (or multiply) the shares outstanding (or price) by CumFact (the cumulative factor) from the OwnSecCumAdjFactQ table. If FeedType = W, use the cumulative factor from the OwnSecCumAdjFactW table. If FeedType = D, use the cumulative factor from the OwnSecCumAdjFactD table.

Indexes	Index Fields
pkey_OwnHoldDet (Clustered)	OwnerCode, SecurityCode, ReportDate, QtrDate, HldgType


Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
SecurityCode	int	N	SecurityCode is the unique identifier for a security. It is defined by OwnSecInfo. This field links to all Security Data tables.
ReportDate	datetime	N	ReportDate is the date on which holdings were reported.
QtrDate	datetime	N	QtrDate is the end date of the reporting quarter.
HldgType	int	N	HldgType is the category of the holding: – 1 = CONS (consolidated) – 2 = Inst (institutional) – 3 = MF (mutual fund) This field cross-references OwnCode .Code where OwnCode.Type_ = 20.
FlgSrcCode	int	Y	FlgSrcCode indicates the reporting source. FlgSrcCode cross-references OwnCode where OwnCode.Type_ = 11 and OwnCode.Code = OwnHoldDet.FlgsrCode.
TranCode	varchar(3)	Y	TranCode is the holdings transaction code. TranCode cross-references OwnDesc where OwnDesc.Type_ = 4 and OwnDesc.Code = OwnHoldDet.TranCode.
SharesHeld	bigint	Y	SharesHeld is the number of shares held as of the report date.
ValueHeld	float	Y	ValueHeld is the dollar value of the shares held.
SharesChg	bigint	Y	SharesChg is number of shares changed between the report date and the prior report date.

Field	Type	Nullable	Description
ValueChg	float	Y	ValueChg is the dollar value of the shares changed.
NewPosition	char(1)	Y	NewPosition indicates whether the position is new to the owner's portfolio since the prior report date. New positions are flagged with a Y.
PctShareOutstanding	float	Y	PctShareOutstanding is the number of shares held, represented as a percentage of the issue's total shares outstanding. When this data is unavailable, the value of this field may be blank or null, even if the shares held in the record are non-zero.
PriorReportDate	datetime	Y	PriorReportDate is the date of the prior report in which the holdings were reported, in the format YYYYMMDD.
FeedType	char(1)	Y	FeedType indicates which table (D = OwnSecCumAdjFactD , W = OwnSecCumAdjFactW , and Q = OwnSecCumAdjFactQ) should be used for adjustment. Additionally, FeedType indicates which type of update last modified this record.
ModifiedDate	datetime	Y	ModifiedDate is the date the table record was last updated with LSEG.

NOTESee [Examples](#) on page 32.

6. Ownership Schema: Contacts Data

This diagram illustrates how the Ownership Contacts tables relate to each other.

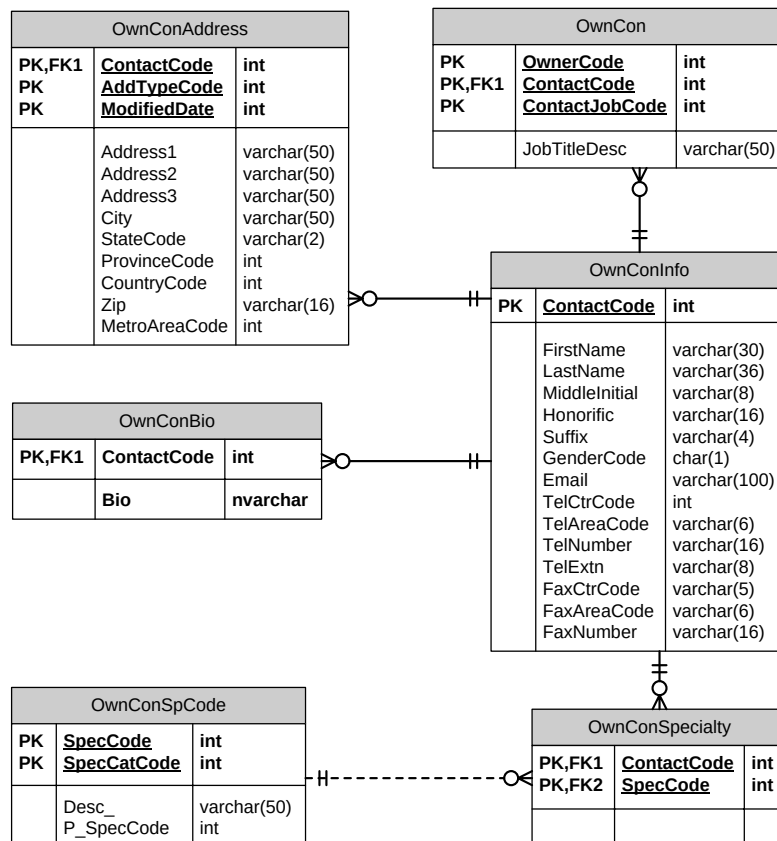

OwnCon: Contact Employment Information

Use this table to retrieve contact employment information. Contact employment information is useful in defining the relationship between a contact and the owner with whom the contact is associated.

Update Cycle: Daily

Adjusted: N/A

Indexes	Index Fields
pkey_OwnCon (Clustered)	OwnerCode, ContactCode, ContactJobCode

Field	Type	Nullable	Description
OwnerCode	int	N	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
ContactCode	int	N	ContactCode is the unique identifier for a contact. It is defined by OwnConInfo . This field links to all Contacts Data tables.

Field	Type	Nullable	Description
ContactJobCode	int	N	ContactJobCode identifies the job or role of a contact. ContactJobCode cross-references OwnCode where OwnCode.Type_ = 2 and OwnCode.Code = OwnCon.ContactJobCode.
JobTitleDesc	varchar(51)	Y	JobTitleDesc is the contact's professional job title.

OwnConAddress: Contact Addresses

Use this table to retrieve a contact's address information. Note that a contact may have more than one address.

Update Cycle: Daily

Adjusted: N/A

Indexes	Index Fields
pkey_OwnConAddress (Clustered)	ContactCode, AddTypeCode, ModifiedDate

Field	Type	Nullable	Description
ContactCode	int	N	ContactCode is the unique identifier for a contact. It is defined by OwnConInfo . This field links to all Contacts Data tables.
AddTypeCode	int	N	AddTypeCode indicates the type of address. AddTypeCode cross-references OwnCode where OwnCode.Type_ = 3 and OwnCode.Code = OwnConAddress.AddTypeCode.
ModifiedDate	datetime	N	ModifiedDate is the date the table record was last updated with LSEG.
Address1	varchar(51)	Y	Address1 is the first line of the address.
Address2	varchar(51)	Y	Address2 is the second line of the address.
Address3	varchar(51)	Y	Address3 is the third line of the address.
City	varchar(51)	Y	City is the city of the contact address.
StateCode	varchar(3)	Y	StateCode is the state of the contact address.
ProvinceCode	int	Y	ProvinceCode is the province code of the address. This field cross-references OwnCode where OwnCode.Type_ = 12 and OwnCode.Code = OwnConAddress.ProvinceCode.
CountryCode	int	Y	CountryCode is the country identifier. This field cross-references OwnCode where OwnCode.Type_ = 6 and OwnCode.Code = OwnConAddress.CountryCode.
Zip	varchar(17)	Y	Zip is the postal code for the contact address.
MetroAreaCode	int	Y	MetroAreaCode is the identifier for the metropolitan area of a contact. This field cross-references OwnCode where OwnCode.Type_ = 14 and OwnCode.Code = OwnConAddress.MetroAreaCode.

OwnConBio: Contact Employment History

Use this table to retrieve the biographical employment history of a contact.

Update Cycle: Daily

Adjusted: N/A

Indexes	Index Fields
pkey_OwnConBio (Clustered)	ContactCode

Field	Type	Nullable	Description
ContactCode	int	N	ContactCode is the unique identifier for a contact. It is defined by OwnConInfo . This field links to all Contacts Data tables.
Bio	varchar(max)	Y	Bio is a description of the contact's employment history.

OwnConInfo: Contact Information

This table contains contact identity information.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnConInfo (Clustered)		ContactCode	

Field	Type	Nullable	Description
ContactCode	int	N	ContactCode is the unique identifier for a contact. This field links to all Contacts Data tables.
FirstName	varchar(31)	Y	FirstName is the first name of the contact.
LastName	varchar(37)	Y	LastName is the last name of the contact.
MiddleInitial	varchar(9)	Y	MiddleInitial is the middle initial of the contact.
Honorific	varchar(17)	Y	Honorific is the title of the contact that precedes the contact name; for example, Mrs., Professor, Dr., etc..
Suffix	varchar(5)	Y	Suffix is the designation that follows the contact name; for example, Jr., III, CFA, etc..
GenderCode	char(1)	Y	GenderCode indicates the gender of the contact. M is male and F is female. A null value in this field indicates the gender of the contact is not available.
Email	varchar(101)	Y	Email is the contact's e-mail address, if available.
TelCtrCode	int	Y	TelCtrCode is the country code for the contact's phone number.
TelAreaCode	varchar(7)	Y	TelAreaCode is the area code for the contact's phone number.
TelNumber	varchar(17)	Y	TelNumber is contact's telephone number. TelCtrCode + TelAreaCode + TelNumber is the full telephone number for the contact, including country code and area code.
TelExtn	varchar(9)	Y	TelExtn is the direct phone extension for the contact.
FaxCtrCode	varchar(6)	Y	FaxCtrCode is the country code for the contact's fax number.
FaxAreaCode	varchar(7)	Y	FaxAreaCode is the area code for the contact's fax number.
FaxNumber	varchar(17)	Y	FaxNumber is the contact's fax number. FaxCtrCode + FaxAreaCode + FaxNumber is the contact's full fax number including the country code and the area code.

OwnConSpCode: Contact Specialty Codes

Use the data in this table to translate contact specialty code information.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnConSpCode (Clustered)		SpecCode, SpecCatCode	

Field	Type	Nullable	Description
SpecCode	int	N	SpecCode is the unique code that identifies the contact's specialty.
Desc_	varchar(51)	Y	Desc_ describes SpecCode.
SpecCatCode	int	N	SpecCatCode identifies the category of the specialty. SpecCatCode cross-references OwnCode where OwnCode.Type_ = 1 and OwnCode.Code = OwnConSpCode.SpecCatCode.
P_SpecCode	int	Y	(Reserved for future use.)

OwnConSpecialty: Contact Specialties

The data in this table identifies areas in which contacts specialize, such as market capitalization, investment styles, and so on.

Update Cycle: Daily


Adjusted: N/A

Indexes		Index Fields	
pkey_OwnConSpecialty (Clustered)		ContactCode, SpecCode	

Field	Type	Nullable	Description
ContactCode	int	N	ContactCode is the unique identifier for a contact. It is defined by OwnConInfo . This field links to all Contacts Data tables.
SpecCode	int	N	SpecCode is the unique code that identifies the contact's specialty. This field cross-references OwnConSpCode where SpecCatCode = 3 and OwnConSpCode.SpecCode = OwnConSpecialty.SpecCode.

7. Ownership Schema: Global Insider Data Tables

The global Insider schema is comprised of the tables described in this chapter, as well as the [OwnInfo](#) and [UserInfo](#) tables.

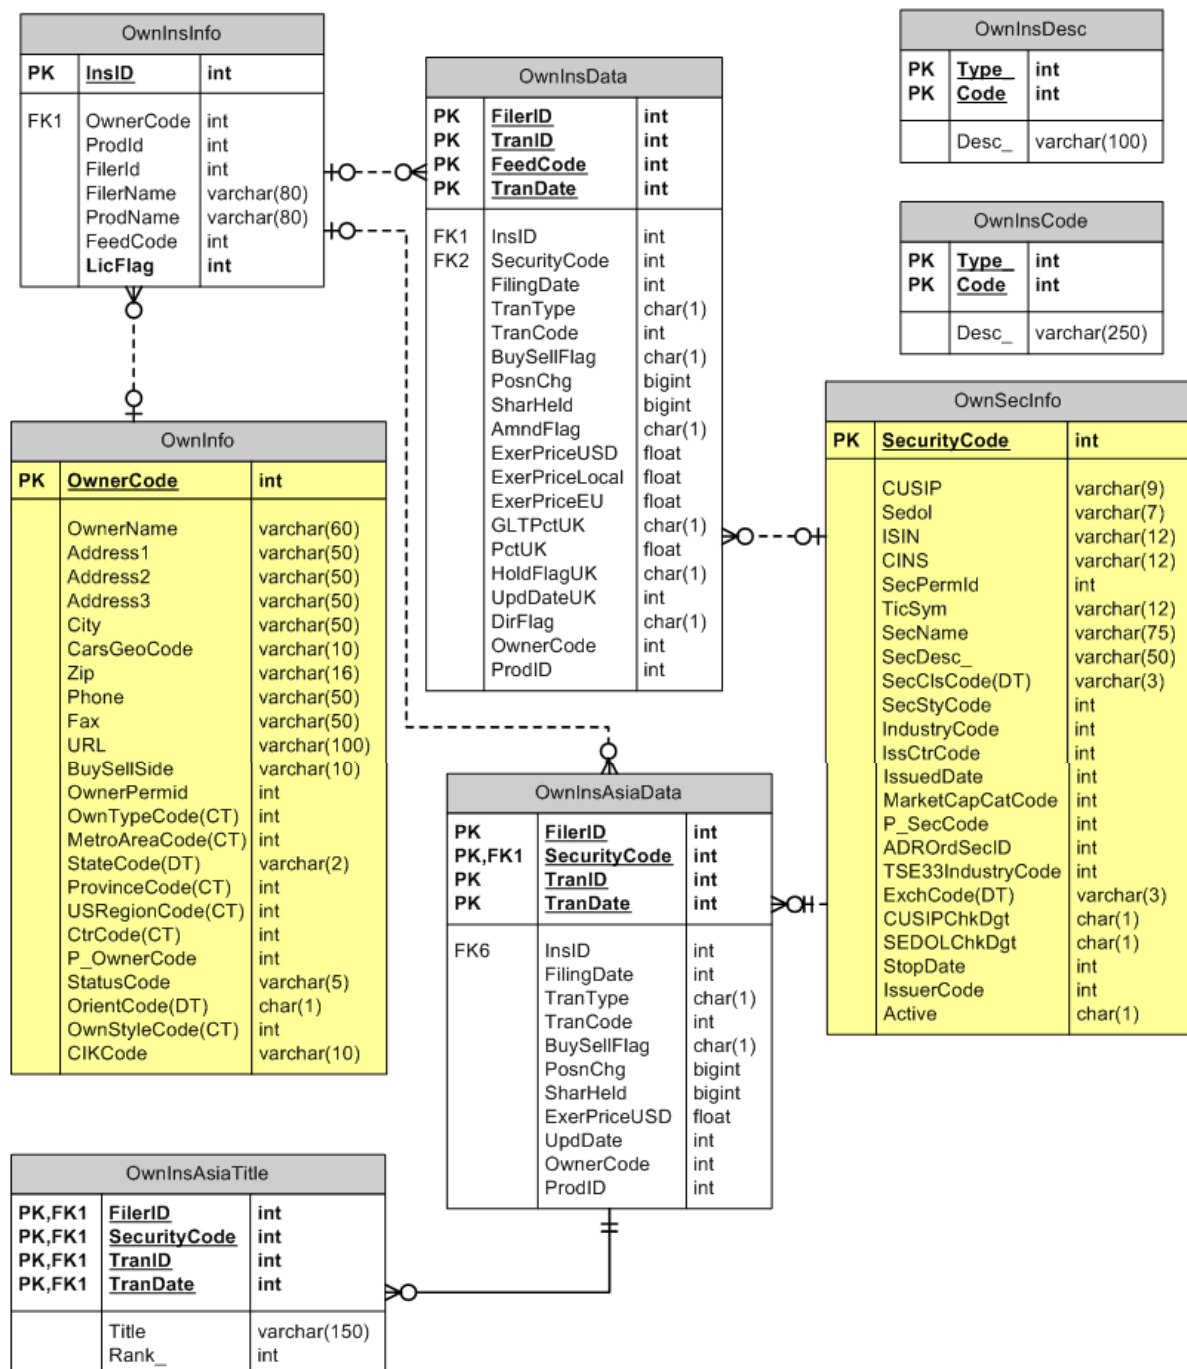

OwnInsAsiaData: Asia Insider Transaction Data

The table contains equity ownership Asia Insider transaction data.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnInsAsiaData (Clustered)		FilerID, SecurityCode, TranID, TranDate	

Field	Type	Nullable	Description
FilerID	int	N	FilerID is the unique identifier for each as-filed Asian insider filer name.
SecurityCode	int	N	SecurityCode is the unique identifier for each issue.
TranID	int	N	TranID is the unique sequence number assigned to each transaction occurring between the same filer for the same issue on the same TranDate.
TranDate	datetime	N	TranDate is the date of the transaction, in the format YYYYMMDD.
InsID	int	Y	InsID is a unique insider identifier generated by LSEG. This field cross-references OwnInsInfo .
FilingDate	datetime	Y	FilingDate is the date of filing, in the format YYYYMMDD.
TranType	char(1)	Y	TranType indicates whether the transaction type is Direct (D) or Indirect (I). This field cross-references OwnInsDesc where OwnInsDesc.Type_ = 1 and OwnInsDesc.Code = OwnInsAsiaData.TranType.
TranCode	int	Y	Trancode indicates the type of transaction. Trancode cross-references OwnInsCode where OwnInsCode.Type_ = 6 and OwnInsCode.Code = OwnInsAsiaData.Trancode.
BuySellFlag	char(1)	Y	BuySellFlag indicates whether the issue was Acquired (A) or Disposed of (D). A null value indicates another type of transaction, such as an opening balance. This field cross-references OwnInsDesc where OwnInsDesc.Type_ = 2 and OwnInsDesc.Code = OwnInsAsiaData.BuySellFlag.
PosnChg	bigint	Y	PosnChg indicates the position change, reported as the number of shares in the transaction. In the case of a disposition, this value is negative. A null value may indicate an opening balance.
SharHeld	bigint	Y	SharHeld is the number of shares held after completion of the given transaction.
ExerPriceUSD	float	Y	ExerPriceUSD is the exercise or transaction price in USD (United States dollars), rounded to a tenth of a cent. If data is unavailable, the field is null.
UpdDate	datetime	Y	UpdDate is the date an update occurred in the LSEG database, in the format YYYYMMDD.
OwnerCode	int	Y	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
ProdID	int	Y	ProdID is the unique LSEG owner identifier.

OwnInsAsiaTitle: Asia Insider Title and Rank Information

This table captures the title and rank information for Asia Insiders.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_OwnInsAsiaTitle (Clustered)		FilerID, SecurityCode, TranID, TranDate	

Field	Type	Nullable	Description
FilerID	int	N	FilerID is the unique identifier for each owner.
SecurityCode	int	N	SecurityCode is the unique identifier for each issue.
TranID	int	N	TranID is the unique sequence number assigned to each transaction occurring between the same filer for the same issue on the same TranDate.

Field	Type	Nullable	Description
TranDate	datetime	N	TranDate is the date of the transaction, in the format YYYYMMDD.
Title	varchar(150)	Y	Title is the insider company title/role relationship description.
Rank	int	Y	Rank is used for Asian Insiders with multiple title or role descriptions, as only one title/role is displayed in products and data feeds. Rank is populated after matching the Title from the OwnInsAsiaTitle table with Title in the OwnInsCode table (Type_ = 4).

OwnInsCode: Insider Codes (Integer)

This table contains translations for codes of an integer datatype.

Update Cycle: Daily

Adjusted: N/A

Indexes	Index Fields
pkey_OwnInsCode (Clustered)	Type_, Code

Field	Type	Nullable	Description
Type_	int	N	Type_ is a numeric code for a type of data.
Code	int	N	Code is a coded value for an element of Type_. When Type_ = 0, Code is the numeric code for each Type_ other than 0 and Desc_ is a description of each Type_.
Desc_	varchar(250)	Y	Desc_ is a plain-language description of the element defined by Type_ and Code.

NOTE

See [OwnInsDesc](#) on page 30.

OwnInsData: Insider Data

This table contains UK Trades and Canadian SEDI insider transaction data. Note that these are not consolidated holdings, but are a record of the transactions. The data in this table is not adjusted for corporate actions.

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
pkey_OwnInsData (Clustered)	FilerID, TranID, FeedCode, TranDate

Field	Type	Nullable	Description
FilerID	int	N	FilerID is a unique identifier for each SEDI (System for Electronic Disclosure by Insiders) filer.
TranID	int	N	TranID is a unique sequence number assigned to each transaction.
FeedCode	int	N	FeedCode indicates the feed source of the data. FeedCode cross-references OwnInsCode where OwnInsCode.Type_ = 1 and OwnInsCode.Code = OwnInsData.FeedCode.
TranDate	datetime	N	TranDate is the date of the transaction, in the format YYYYMMDD.
InsID	int	Y	InsID is a unique insider identifier generated by LSEG. This field cross-references OwnInsInfo .
SecurityCode	int	Y	SecurityCode is the unique identifier for a security. It is defined by OwnSecInfo . This field links to all Security Data tables.
FilingDate	datetime	Y	FilingDate is the date of filing, in the format YYYYMMDD.
TranType	char(1)	Y	TranType indicates whether the transaction type is Direct (D) or Indirect (I). This field cross-references OwnInsDesc where OwnInsDesc.Type_ = 1 and OwnInsDesc.Code = OwnInsData.TranType.
Trancode	int	Y	Trancode indicates the type of transaction. Trancode cross-references OwnInsCode where OwnInsCode.Type_ = 3 and OwnInsCode.Code = OwnInsData.Trancode.

Field	Type	Nullable	Description
BuySellFlag	char(1)	Y	BuySellFlag indicates whether the issue was Acquired (A) or Disposed of (D). A null value indicates another type of transaction, such as an opening balance. This field cross-references OwnInsDesc where OwnInsDesc.Type_ = 2 and OwnInsDesc.Code = OwnInsData.BuySellFlag.
Posnchg	bigint	Y	Posnchg indicates the position change, reported as the number of shares in the transaction. In the case of a disposition, this value is negative. A null value may indicate an opening balance.
SharHeld	bigint	Y	SharHeld is the number of shares held after completion of the given transaction.
AmndFlag	char(1)	Y	AmndFlag is the Amended flag. This flag indicates whether the transaction has been amended (A), or if there has been no amendment (N). This field cross-references OwnInsDesc where OwnInsDesc.Type_ = 3 and OwnInsDesc.Code = OwnInsData.AmndFlag.
ExerPriceUSD	float	Y	ExerPriceUSD is the exercise or transaction price in USD (United States dollars), rounded to a tenth of a cent. If data is unavailable, the field is null.
ExerpriceLocal	float	Y	ExerpriceLocal is the exercise price. If this value is from the UK feed, it is as reported in GBP (Great Britain pounds). If from the SEDI feed, the value is in CAD (Canada dollars), or is as reported and converted to CAD.
ExerpriceEU	float	Y	ExerpriceEU is the exercise price in EUR (Europe Euros), rounded to a tenth of a cent. If data is unavailable, this field is null.
GLTPctUK	char(1)	Y	GLTPctUK describes whether the holder's share holding is less than or more than the percentage specified in the PctUK field. If the PctUK field contains the actual reported value, then this field is null. This applies only to UK data. This field cross-references OwnInsDesc where OwnInsDesc.Type_ = 4 and OwnInsDesc.Code = OwnInsData.GLTPctUK.
PctUK	float	Y	PctUK is the percentage of holdings the transaction represents, as reported by trade announcements.
HoldFlagUK	char(1)	Y	HoldFlagUK indicates whether the trade is the latest, previous, or historical trade announcement for this combination of issue and filer. This field cross-references OwnInsDesc where OwnInsDesc.Type_ = 5 and OwnInsDesc.Code = OwnInsData.HoldFlagUK.
UpdDateUK	datetime	Y	UpdDateUK is the date an update occurred in the LSEG database.
DirFlag	char(1)	Y	DirFlag indicates whether the filer is (Y) or is not (N) a Director. This field cross-references OwnInsDesc where OwnInsDesc.Type_ = 6 and OwnInsDesc.Code = OwnInsData.DirFlag.
OwnerCode	int	Y	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
ProdID	int	Y	ProdID is a unique LSEG identifier. This field is blank or null if the SEDI filer does not have filings on record with the LSEG data source.

OwnInsDesc: Insider Codes (varchar)

This table contains translations for codes of varchar datatype.

Update Cycle: Daily

Adjusted: N/A

Indexes	Index Fields
pkey_OwnInsDesc (Clustered)	Type_, Code

Field	Type	Nullable	Description
Type_	int	N	Type_ is a numeric code for a type of data.
Code	varchar(11)	N	Code is a coded value for an element of Type_. When Type_ = 0, Code is the numeric code for each Type_ other than 0 and Desc_ is a description of each Type_.
Desc_	varchar(101)	Y	Desc_ is a plain-language description of the element defined by Type_ and Code.

NOTE

See [OwnInsCode](#) on page 29.

OwnInsInfo: Insider Investors Information

This table provides information about insider investors.

Update Cycle: Daily

Adjusted: N/A

Indexes	Index Fields
pkey_OwnInsInfo (Clustered)	InsID
OwnInsInfo_1	OwnerCode
OwnInsInfo_2	FilerId
OwnInsInfo_3	FilerName
OwnInsInfo_4	ProdName

Field	Type	Nullable	Description
InsID	int	N	InsID is a unique insider identifier generated by LSEG. This field cross-references OwnInsData .
OwnerCode	int	Y	OwnerCode is the unique identifier for an owner. It is defined by OwnInfo . This field links to all Owner data tables.
ProdId	int	Y	ProdId is a unique LSEG identifier. This field is blank or null if the SEDI (System for Electronic Disclosure by Insiders) filer does not have filings on record with the LSEG data source.
FilerId	int	Y	FilerId is a unique identifier for each filer.
FilerName	varchar(80)	Y	FilerName is the filer name, as filed.
ProdName	varchar(80)	Y	ProdName is the standardized LSEG filer name. This field will be null if the filer does not have filings on record with LSEG.
FeedCode	int	N	FeedCode indicates the feed source of the data. FeedCode cross-references OwnInsCode where OwnInsCode.Type_ = 1 and OwnInsCode.Code = OwnInsInfo.FeedCode.
LicFlag	int	N	LicFlag describes licensing requirements: – LicFlag = 1 for UK and Canada – LicFlag = 2 for Asia

8. Ownership Schema: Examples

This section includes sample queries demonstrating how to return all securities by the same issuer, and how to use an owner ID to return the holdings of the owner on a given date.

These examples reference the TRQA core master tables. For more information about the master tables, see the Database Schema for LSEG Quantitative Analytics Core Tables document, available on the [LSEG Quantitative Analytics](#) product page on [MyAccount](#).

Example 1: Securities by Issuer

This query takes a given domestic ID and returns all securities linked to the given ID by the same Issuer.

```
DECLARE    @ID VARCHAR(20)
SET        @ID = 'IBM' -- IBM

SELECT     T.VENNAME
          , S2.ID
          , O.ISSUERNAME
          , I2.SECNAME
          , I2.CUSIP
          , D.DESC_ AS SECURITY_CLASS

FROM       QAI_MASTER.DBO.SECMSTRX S

          JOIN QAI_MASTER.DBO.SECMAPX M
              ON      M.SECCODE = S.SECCODE
              AND      M.VENTYPE = 21
              AND      M.RANK = 1

          JOIN QAI_MASTER.DBO.OWNSECINFO I
              ON      I.SECURITYCODE = M.VENCODE

          JOIN QAI_MASTER.DBO.OWNSECISSUER O
              ON      O.ISSUERCODE = I.ISSUERCODE

          JOIN QAI_MASTER.DBO.OWNSECINFO I2
              ON      I2.ISSUERCODE = I.ISSUERCODE

          JOIN QAI_MASTER.DBO.SECMAPX M2
              ON      M2.VENCODE = I2.SECURITYCODE
              AND      M2.VENTYPE = 21

          JOIN QAI_MASTER.DBO.SECVENTYPE T
              ON      M.VENTYPE = T.VENTYPE
```



```

JOIN    QAI_MASTER.DBO.SECMSTRX S2
      ON    S2.SECCODE = M2.SECCODE
      AND    S2.TYPE_ = 1
LEFT JOIN    QAI_MASTER.DBO.OWNDESC D
      ON    D.CODE = I2.SECCLSCODE
      AND    D.TYPE_ = 5 -- Security Class Description
WHERE      S.ID = @ID

```

Example 2: Holdings by Owner

This query uses an owner ID and a date to return the holdings of the given owner on the given date. The query links to the TRQA core master tables, SECMSTRX and GSECMSTRX, to return the TRQA ID for each holding of the owner.

```

DECLARE @OWNER    INT
DECLARE @DATE      SMALLDATETIME

SET      @OWNER = 22006187 -- Berkshire Hathaway
SET      @DATE  = '2008-06-30'

SELECT    T.VENNAME
      ,    O.OWNERCODE
      ,    O.OWNERNAME
      ,    H.QTRDATE
      ,    H.REPORTDATE
      ,    ISNULL(S.ID, S2.ID) AS ID
      ,    ISNULL(S.NAME, S2.NAME) AS NAME
      ,    ISNULL(S.CUSIP, S2.SEDOL) AS CUSIP_OR_SEDOL
      ,    H.SHARESHELD
      ,    H.VALUEHELD
      ,    H.SHARESCHG
      ,    H.VALUECHG
FROM      QAI_MASTER.DBO.OWNINFO O
JOIN      QAI_MASTER.DBO.OWNHOLDDDET H
      ON    H.OWNERCODE = O.OWNERCODE
      AND    H.QTRDATE = @DATE
      AND    H.REPORTDATE = ( SELECT MAX(REPORTDATE)
                                FROM    QAI_MASTER.DBO.OWNHOLDDDET
                                WHERE    OWNERCODE = H.OWNERCODE
                                AND SECURITYCODE = H.SECURITYCODE )
JOIN      QAI_MASTER.DBO.OWNSECINFO I
      ON    I.SECURITYCODE = H.SECURITYCODE
LEFT JOIN    QAI_MASTER.DBO.SECMAPX M

```

```

        ON      M.VENCODE = I.SECURITYCODE
        AND      M.VENTYPE = 21
LEFT JOIN      QAI_MASTER.DBO.SECVENTYPE T
        ON      M.VENTYPE = T.VENTYPE
LEFT JOIN      QAI_MASTER.DBO.SECMSTRX S
        ON      S.SECCODE = M.SECCODE
        AND      S.TYPE_ = 1
LEFT JOIN      QAI_MASTER.DBO.GSECMAPX M2
        ON      M2.VENCODE = I.SECURITYCODE
        AND      M2.VENTYPE = 21
LEFT JOIN      QAI_MASTER.DBO.GSECMSTRX S2
        ON      S2.SECCODE = M2.SECCODE
WHERE          O.OWNERCODE = @OWNER
ORDER BY      VALUEHELD DESC

```

Example 3: Funds and Holdings

This query shows how to see a company, the funds it operates, and the holdings of one of its funds.

```

--1)  Name of the Asset Management (Fund) house:
select * from owninfo where ownercode = 22027248

--2)  Funds managed by the "Macquarie" as a Asset Manager.
select a.ownercode, a.ownername, a.address1, a.address2,
a.city, a.url, a.p_ownercode, a.statuscode, a.orientcode,
a.ownstylecode, d.Desc_ as OwnStyleDesc, a.owntypecode, b.Desc_ as OwnTypeDesc

from OwnInfo a

left join OwnCode b
on b.code = a.owntypecode
and b.type_ = 16

left join Owncode d
on d.code = a.ownstylecode
and d.type_ = 18

where a.p_ownercode = 22027248
order by ownername

--3)  Holdings of the particular fund from Macq. Asset Family:

```

```

DECLARE @OWNER          INT
DECLARE @DATE            SMALLDATETIME

SET      @OWNER = 22503079 -- Ownercode of one of the Funds held in #2
SET      @DATE  = '2010-12-31'

SELECT T.VENNAME
      , O.OWNERCODE
      , O.OWNERNAME
      , H.QTRDATE
      , H.REPORTDATE
      , ISNULL(S.ID, S2.ID) AS ID
      , ISNULL(S.NAME, S2.NAME) AS NAME
      , ISNULL(S.CUSIP, S2.SEDOL) AS CUSIP_OR_SEDOL
      , H.SHARESHELD
      , H.VALUEHELD
      , H.SHARESCHG
      , H.VALUECHG
FROM   QAI_MASTER.DBO.OWNINFO O
JOIN   QAI_MASTER.DBO.OWNHOLDDDET H
      ON H.OWNERCODE = O.OWNERCODE
      AND H.QTRDATE = @DATE
      AND H.REPORTDATE = ( SELECT MAX(REPORTDATE)
                           FROM   QAI_MASTER.DBO.OWNHOLDDDET
                           WHERE  OWNERCODE = H.OWNERCODE
                           AND SECURITYCODE = H.SECURITYCODE )

JOIN   QAI_MASTER.DBO.OWNSECINFO I
      ON I.SECURITYCODE = H.SECURITYCODE

LEFT JOIN QAI_MASTER.DBO.SECMAPX M
      ON M.VENCODE = I.SECURITYCODE
      AND M.VENTYPE = 21

LEFT JOIN QAI_MASTER.DBO.SECVENTYPE T
      ON M.VENTYPE = T.VENTYPE

LEFT JOIN QAI_MASTER.DBO.SECMSTRX S
      ON S.SECCODE = M.SECCODE
      AND S.TYPE_ = 1

LEFT JOIN QAI_MASTER.DBO.GSECMAPX M2
      ON M2.VENCODE = I.SECURITYCODE
      AND M2.VENTYPE = 21

LEFT JOIN QAI_MASTER.DBO.GSECMSTRX S2
      ON S2.SECCODE = M2.SECCODE

```

```
WHERE      O.OWNERCODE = @OWNER
ORDER BY  VALUEHELD DESC
```

--4) Contact info of the Fund Manager:

```
select * from owncon a
join ownconinfo b
on a.contactcode = b.contactcode
where a.ownercode = '22503079'
```

Example 4: Snapshot of Owners of a Security

This query returns a snapshot of the owners of a particular security.

```
DECLARE @DATE SMALLDATETIME
SET @DATE = '8/17/09'

;
WITH OWNDATA AS
(
SELECT
    ROW_NUMBER () OVER (PARTITION BY H.OWNERCODE, H.SECURITYCODE ORDER BY
REPORTDATE DESC) AS ROW
,      T.VENNAME
,      M.ID
,      M.CUSIP
,      O.OWNERCODE
,      O.OWNERNAME
,      H.QTRDATE
,      H.REPORTDATE
,      H.SHARESHELD
,      O.STATUSCODE
,      H.FLGSRCCODE
,      D.DESC_ AS RPT_SOURCE

FROM
    QAI_MASTER.DBO.OWNINFO O
JOIN  QAI_MASTER.DBO.OWNHOLDDDET H
    ON H.OWNERCODE = O.OWNERCODE

JOIN  QAI_MASTER.DBO.OWNCODE D
    ON H.FLGSRCCODE = D.CODE
    AND D.TYPE_ = 11
```

```
JOIN    QAI_MASTER.DBO.SECMAPX P
      ON P.VENCODE = H.SECURITYCODE
      AND P.VENTYPE = 21

JOIN    QAI_MASTER.DBO.SECVENTYPE T
      ON P.VENTYPE = T.VENTYPE

JOIN    QAI_MASTER.DBO.SECMSTRX M
      ON M.SECCODE = P.SECCODE
      AND M.TYPE_ = 1

WHERE   H.SECURITYCODE = 25660 -- IBM
      AND H.HLDGTYPE = 1 -- INSTITUTIONS HOLDINGS
      AND QTRDATE = '3/31/09'
      AND STATUSCODE = 'Y' -- OWNER IS CURRENTLY TRACKED AND RESEARCHED (N = OWNER
IS NOT TRACKED)
      AND H.FLGSRCCODE IN (1,6,499,503) -- REPORTING SOURCE
)

SELECT * FROM OWNDATA
WHERE ROW = 1
      AND SHARESHELD > 0
ORDER BY REPORTDATE , OWNERNAME
```

Copyright © 2024 London Stock Exchange Group plc and its group of companies (LSEG) and/or its affiliates. All rights reserved. The LSEG content received through this service is the intellectual property of LSEG or its third party suppliers. Republication or redistribution of content provided by LSEG is expressly prohibited without the prior written consent of LSEG, except where permitted by the terms of the relevant LSEG service agreement. Neither LSEG nor its third party suppliers shall be liable for any errors, omissions or delays in content, or for any actions taken in reliance thereon. LSEG and its logo are trademarks of LSEG.

For more information visit us at www.lseg.com



LSEG DATA &
ANALYTICS