

LSEG Quantitative Analytics – Database Schema for StarMine Data

V1.1.4

August 2022



LSEG DATA &
ANALYTICS

Contents

1. Introduction.....	4
In This Document.....	4
Intended Readership.....	4
Table Name Conventions.....	4
Pervasive and Oracle.....	4
Zero Values and Nulls.....	4
Service and Support	5
Feedback	5
Your Personal Information	6
2. StarMine Information Tables	7
Sm2Code: StarMine Code Descriptions	8
Sm2DInfo: StarMine Securities Information	8
Sm2Item: StarMine Item Identifiers.....	9
Sm2ItemDesc: StarMine Item Description	11
Sm2Region: StarMine Regions.....	11
3. StarMine Regional Data Model Tables	12
Data Models.....	12
Regional Data Categories	12
Regional Daily Data Adjustments.....	12
Regional Data Schematic Diagrams	13
Sm2DArm*: StarMine Daily ARM Data Items.....	14
Sm2DArmA*: StarMine Daily ARM Summary Data.....	15
SM2DCRM*: StarMine Daily Credit Risk Model Data Items.....	16
Sm2DEq*: StarMine Daily EQ Data Items	16
Sm2Div*: StarMine Daily IV Data Items.....	17
Sm2DVMo*: StarMine Daily Val-Mo and Price-Mo Data Items	18
SM2DSH*: Daily Smart Holdings Data.....	19
4. StarMine Historical Data Tables	20
Sm2HArm: StarMine Historical ARM Data.....	21
Sm2HEq: StarMine Historical EQ Data.....	21
Sm2HIdentChg: StarMine Change History.....	22
Sm2HInfo: StarMine Historical Security Information	22
Sm2Hlv: StarMine Historical IV Data	23
Sm2HVMo: StarMine Historical Val-Mo and Price-Mo Data.....	24
SM2HSH: Monthly Smart Holdings Data	24
5. SQL Views.....	25
vw_SM2MappingDaily	25
vw_SM2MappingHist	26

vw_SM2Items	26
vw_SM2HistMulti	28
vw_SM2HistIV.....	29
vw_SM2DARM.....	30
vw_SM2DARMA	31
vw_SM2DCRM	32
vw_SM2DEQ	33
vw_SM2DIV	34
vw_SM2DVMo	36
vw_SM2DSH.....	37
vw_SM2HidentChg.....	37

1. Introduction

In This Document

This document provides schema information about the StarMine data tables in LSEG Quantitative Analytics.

NOTE. For information about the other LSEG Quantitative Analytics tables, refer to the other Database Schema documents posted on the [LSEG Quantitative Analytics](#) product page on [MyAccount](#).

The documentation for each table includes these main elements:

Vendor Database or License Name – This element provides the vendor database or license name. Vendor databases generally correspond to vendor licensing options.

Table Name: Table Title – This element provides the table name and title, followed by a description of the table contents.

Update Cycle – This element indicates the frequency of updates from the data vendor. (For specific information about when this update is posted for your use, refer to your update logs. The update log schema description is available in the Database Schema for LSEG Quantitative Analytics Core Tables document.)

Adjusted – This element indicates whether the data is stored adjusted, unadjusted, or if adjustment is not applicable (N/A).

Indexes, Index Fields – This element lists the table's index(es) (for example, pkey_CSGCAD) and the index fields. The primary index contains a "pkey_" or "PK_" prefix. Clustered indexes are noted.

Field, Type, Nullable, Definition – This element describes the table's fields, including field names, data types, and whether each field is nullable. The data types in Snowflake have equivalents available. For example, an int in SQL Server is a number in Snowflake.

Intended Readership

This document is intended for LSEG Quantitative Analytics clients licensed to use StarMine data through LSEG. Note that the tables described in this document may be covered by several licenses; your access to the data in these tables is dependent on the licenses you have.

Readers should have basic knowledge of Microsoft SQL Server 2016.

Table Name Conventions

In LSEG Quantitative Analytics, database tables are grouped by name. Generally, the first few letters of the table name refer to the data vendor or licensing group. For example, all tables beginning with SM2* are StarMine tables.

Pervasive and Oracle

This document is specific to Microsoft SQL Server 2016.

If you are accessing the data directly through the Pervasive database, you may encounter slight differences in index names and data types. Please note that references to Pervasive and Actian are synonymous.

If you are accessing the data through Oracle, note that field names that correspond to Oracle reserved words are appended with an underscore. For example, field names "Number", "Synonym", and "UID" become "Number_", "Synonym_", and "UID_" in Oracle.

Zero Values and Nulls

Null values are usually recorded as "NULL". A table may contain a value of "-99999" or "-9999"; in these cases, there is no recorded data for that period. (It is null.)

If the table contains a "0" value, the data was reported as having a "0" value.



Service and Support

[MyAccount](#) is the LSEG portal that provides a single access point for timesaving support services, along with billing, user management, and information.

Statement of Service

The LSEG Quantitative Analytics Service Description is available on the [LSEG Quantitative Analytics](#) product page at MyAccount.

Subscribe to Support Channels

You are encouraged to [subscribe](#) to the following support channels to keep informed of changes to products and data, and to be notified of any service issues or change. Please see the Alerts and Notifications section in the LSEG Quantitative Analytics Service Description available on the [LSEG Quantitative Analytics](#) product page at MyAccount for detailed instructions.

Change Notifications

- Product Change Notifications (PCNs) detail new, enhanced, or changed functionality, which may require your action, in products that you use.
- Content Notifications (DNs) alert you to upcoming changes to real-time and historical data across all asset classes that are relevant to you.
- RIC Change Events inform you of planned changes to LSEG Identification Codes.

Service Alerts

- Alert you about planned maintenance and unplanned service issues affecting your products and services, and be notified via SMS or email.

Documentation

You can access product documentation on the [LSEG Quantitative Analytics](#) product page at MyAccount.

Get Support

For support using LSEG Quantitative Analytics, please use one of the following methods:

Online

Access [Get Support](#) either via the blue **Get Support** button at the top right of each page or by selecting Get Support located under Help and Support on the left navigation pane at [MyAccount](#).

From the Get Support page, choose Get Product and Content Support and then select the appropriate category from the next page. Complete the request making sure to include the following:

- Under Product, select LSEG Quantitative Analytics from the dropdown list.
- In the “How can we help you?” text box, include the following information:
 - Content set name (i.e., Worldscope)
 - Date applicable to a content inquiry
 - Table names and relevant fields
 - Security code (i.e. QA-ID, PermID, Sedol, InfoCode, etc.)
 - Script used to generate the output
 - Any other supporting detail

Telephone

QA Support: 1.866.427.8390

- Option 1 – Product Support
- Option 2 – Technical Support.

Feedback


We invite your comments, corrections, and suggestions about this document: access the [Feedback](#) option under [Get Support](#) at [MyAccount](#). Your feedback helps us continue to improve our user assistance.

Your Personal Information

LSEG is committed to the responsible handling and protection of personal information. We invite you to review our [Privacy Statement](#), which describes how we collect, use, disclose, transfer, and store personal information when needed to provide our services and for our operational and business purposes.

2. StarMine Information Tables

These tables are available in all StarMine licenses and contain basic reference information for the StarMine data set. The following diagram shows the relationship between the information tables.

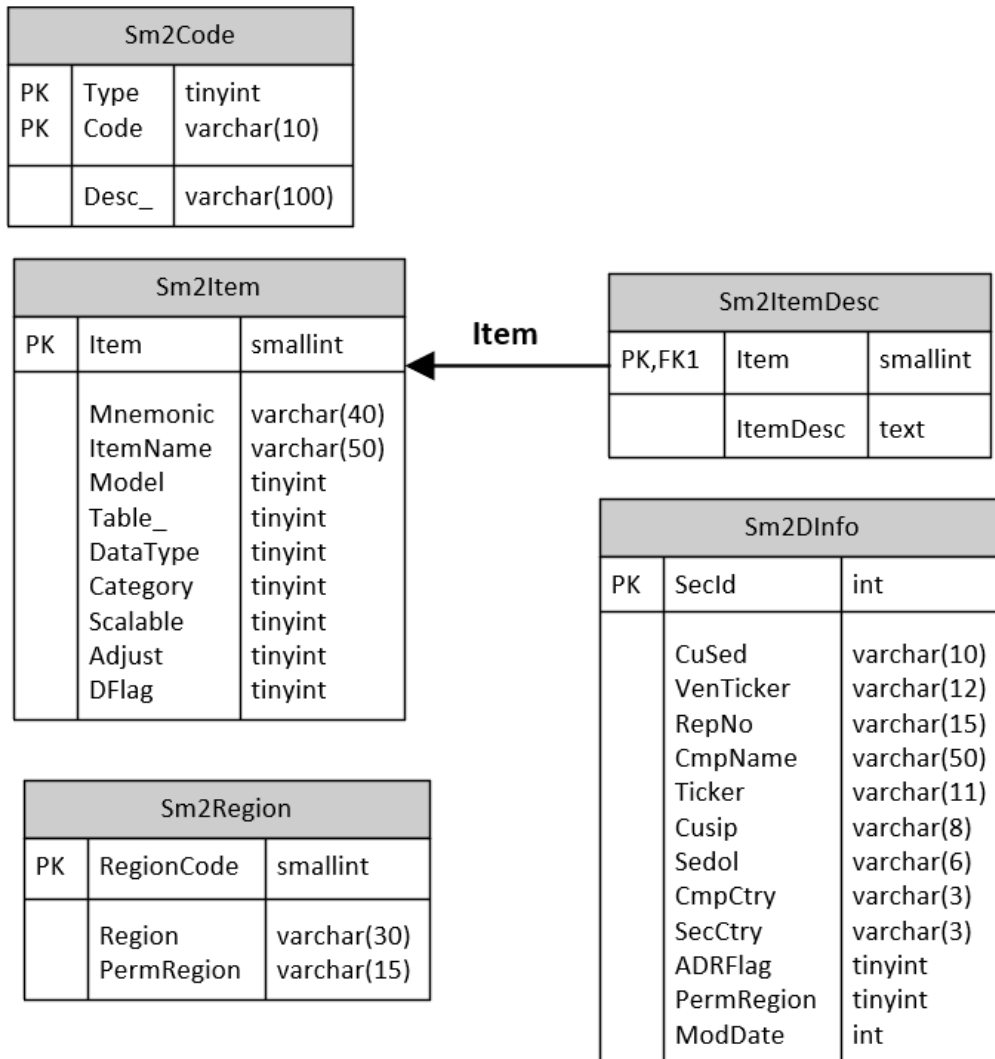

Sm2Code: StarMine Code Descriptions

This table contains Code field descriptions for SM2* tables.

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
PK_Sm2Code (clustered)	Type_, Code

Field	Type	Nullable	Description
Type_	tinyint	N	Type_ is the type identifier. Types are defined where Type_ = 0 and Code identifies the Type.
Code	varchar(10)	N	Code is described by Desc_. Code is cross-referenced from other SM2* tables.
Desc_	varchar(100)	N	Desc_ is the full name of Code.
Adjust	tinyint	N	Adjust identifies which measures and preferred earnings are affected by stock splits.

Sm2DInfo: StarMine Securities Information

This table contains security information for securities included in the daily feed.

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
pkey_sm2dinfo (Clustered)	SecId
sm2dinfo_1	CuSed
sm2dinfo_2	Cusip
sm2dinfo_3	Sedol
sm2dinfo_4	SecCtry
sm2dinfo_5	CmpCtry
sm2dinfo_6	Ticker
sm2dinfo_7	VenTicker
sm2dinfo_8	CmpName, SecId

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
CuSed	varchar(10)	Y	CuSed is the SEDOL or CUSIP, depending on the region.
VenTicker	varchar(12)	Y	VenTicker is the ticker identifier used by LSEG to identify the security.

Field	Type	Nullable	Description
RepNo	varchar(15)	Y	RepNo is the Reuters Fundamental identifier for the security.
CmpName	varchar(50)	Y	CmpName is the company name.
Ticker	varchar(11)	Y	Ticker is the ticker symbol of the security.
Cusip	varchar(8)	Y	Cusip is the CUSIP of the security, if available.
Sedol	varchar(6)	Y	Sedol is the SEDOL of the security, if available.
CmpCtry	char(2)	Y	CmpCtry indicates the country of the company's headquarters. The two- character code cross-references Sm2Code where Sm2Code.Type_ = 1 and Sm2Code.Code = Sm2DInfo.CmpCtry.
SecCtry	char(2)	Y	SecCtry is the country in which the security trades. SecCtry cross-references Sm2Code where Sm2Code.Type_ = 1 and Sm2Code.Code = Sm2DInfo.SecCtry.
ADRFlag	tinyint	Y	ADRFlag indicates a security that trades in the United States as an American Depository Receipt. This applies only to United States securities.
PermRegion	tinyint	Y	PermRegion is the permission region. There are multiple Smart Holdings regions that fit into a single permission
ModDate	datetime	Y	ModDate is the date of the most recent record update.

The table below provides the PermRegion Codes and corresponding PermRegion Names.

Type_	Code	Desc_	Adjust
19	1	Americas	0
19	2	Asia Pacific	0
19	3	EMEA	0

Sm2Item: StarMine Item Identifiers

Use this table to retrieve item identifiers and descriptions.

Update Cycle: Daily

Adjusted: No

Indexes	Index Field
PK_Sm2Item (clustered)	Item

Field	Type	Nullable	Description
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross-references Sm2ItemDesc .
Mnemonic	varchar(40)	Y	Mnemonic is the unique character identifier for the item.
ItemName	varchar(50)	Y	ItemName is the full item name.

Field	Type	Nullable	Description
Model	tinyint	Y	Model identifies the model to which the item belongs. Model cross-references Sm2Code where Sm2Code.Type_ = 3 and Sm2Code.Code = Sm2Item.Model.
Table_	tinyint	Y	Table_ identifies the corresponding table. Table_ cross-references Sm2Code where Sm2Code.Type_ = 13 and Sm2Code.Code = Sm2Item.Table_.
DataType	tinyint	Y	DataType identifies the data type. DataType cross-references Sm2Code where Sm2Code.Type_ = 4 and Sm2Code.Code = Sm2Item.DataType.
Category	tinyint	Y	Category identifies the StarMine category of the item. Category cross-references Sm2Code where Sm2Code.Type_ = 5 and Sm2Code.Code = Sm2Item.Category.
Scalable	tinyint	Y	Scalable is the Million/Billion flag. It identifies whether the data is in whole number terms of millions or billions. A value of 1 indicates that the flag applies.
Adjust	tinyint	Y	Adjust identifies how the item is affected by stock splits. Adjust may be: Not Applicable (0) Split Adjust (1) Dependent on Measure (2) When Sm2Item.Adjust = 2, to refine your results: 1. Cross-reference Sm2Item.Item with Sm2DArm* .Item to identify the appropriate Measure code. 2. Then cross-reference Sm2DArm*.Measure with Sm2Code .Code where Sm2Code.Type_ = 12. Adjust is defined as above. 3. When Sm2Code.Adjust = 2 at Type_ = 12, the adjustment is dependent on the preferred earnings type. Preferred earnings correspond to Sm2DArmA*.Item = 41. 4. Where Sm2DArmA*.Item = 41, cross-reference Sm2DArmA* .Value_ with Sm2Code where Sm2Code.Type_ = 11.
DFlag	smallint	Y	DFlag indicates which fields, or combination of fields, from the data model tables apply to the item. Applicable fields may be: Fiscal Period, Change Period, or Measure. DFlag cross-references with Sm2Code where Sm2Code.Type_ = 17 and Sm2Code.Code = Sm2Item.DFlag.

Sm2ItemDesc: StarMine Item Description

Use this table to retrieve the full description of the item.

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
PK_Sm2ItemDesc (clustered)	Item

Field	Type	Nullable	Description
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross-references Sm2Item .
ItemDesc	varchar(max)	Y	ItemDesc is the detailed description of the item.

Sm2Region: StarMine Regions

Use this table to retrieve entitlement and model-specific regions and their relationships.

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
PK_Sm2Region	RegionCode

Field	Type	Nullable	Description
RegionCode	smallint	N	RegionCode is the numeric code that corresponds to Region. This can be cross-referenced with StarMine item 181 – Region Code.
Region	varchar(30)	Y	Region is the name of the geographical region.
PermRegion	varchar(15)	Y	PermRegion is the permission region. There are multiple ARM, EQ, and IV regions that fit into a single permission

3. StarMine Regional Data Model Tables

StarMine data is organized first by data model, and then by region. Availability of data depends on your data license.

Data Models

The StarMine data models are:

- ARM (Analyst Revision Models): table names begin with Sm2DArm*
- CRM (Credit Risk Models): table names begin with Sm2DCRM*
- EQ (Earnings Quality): table names begin with Sm2DEq*
- IV (Intrinsic Value): table names begin with Sm2DIv*
- Smart Holdings: table names begin with Sm2DSH*
- Val-Mo (Value Momentum) and Price-Mo (Price Momentum): table names begin with Sm2DVMo*.
The Val-Mo model combines the StarMine ARM and IV Regional Models with the Price-Mo factor.

NOTE. To access Daily Val-Mo Model data you must be licensed for StarMine ARM and IV daily regional Models. The Daily Val-Mo model license includes Price-Mo Daily data; however, Price- Mo may also be licensed separately.

Regional Data Categories

StarMine regional data is divided into these categories:

- Americas: table names end in *AM
- Asia Pacific: table names end in *AP
- Europe, Middle East, and Africa: table names end in *EA


Regional tables are organized identically and differ only by name and content. For this reason, regional tables share common descriptions. For example, the description for Sm2DArm* applies to the regional ARM tables Sm2DArmAM, Sm2DArmAP, and Sm2DArmEA.

Regional Daily Data Adjustments

Regional data is updated daily, and the data is unadjusted. StarMine Daily data is provided "as was," so it is not adjusted for any corporate actions. Any historical data items which require split adjustments are applied by StarMine and are refreshed with each monthly update.

Regional Data Schematic Diagrams

The following diagram shows how the regional tables relate to each other and to the information tables [Sm2Item](#) and [Sm2DInfo](#).

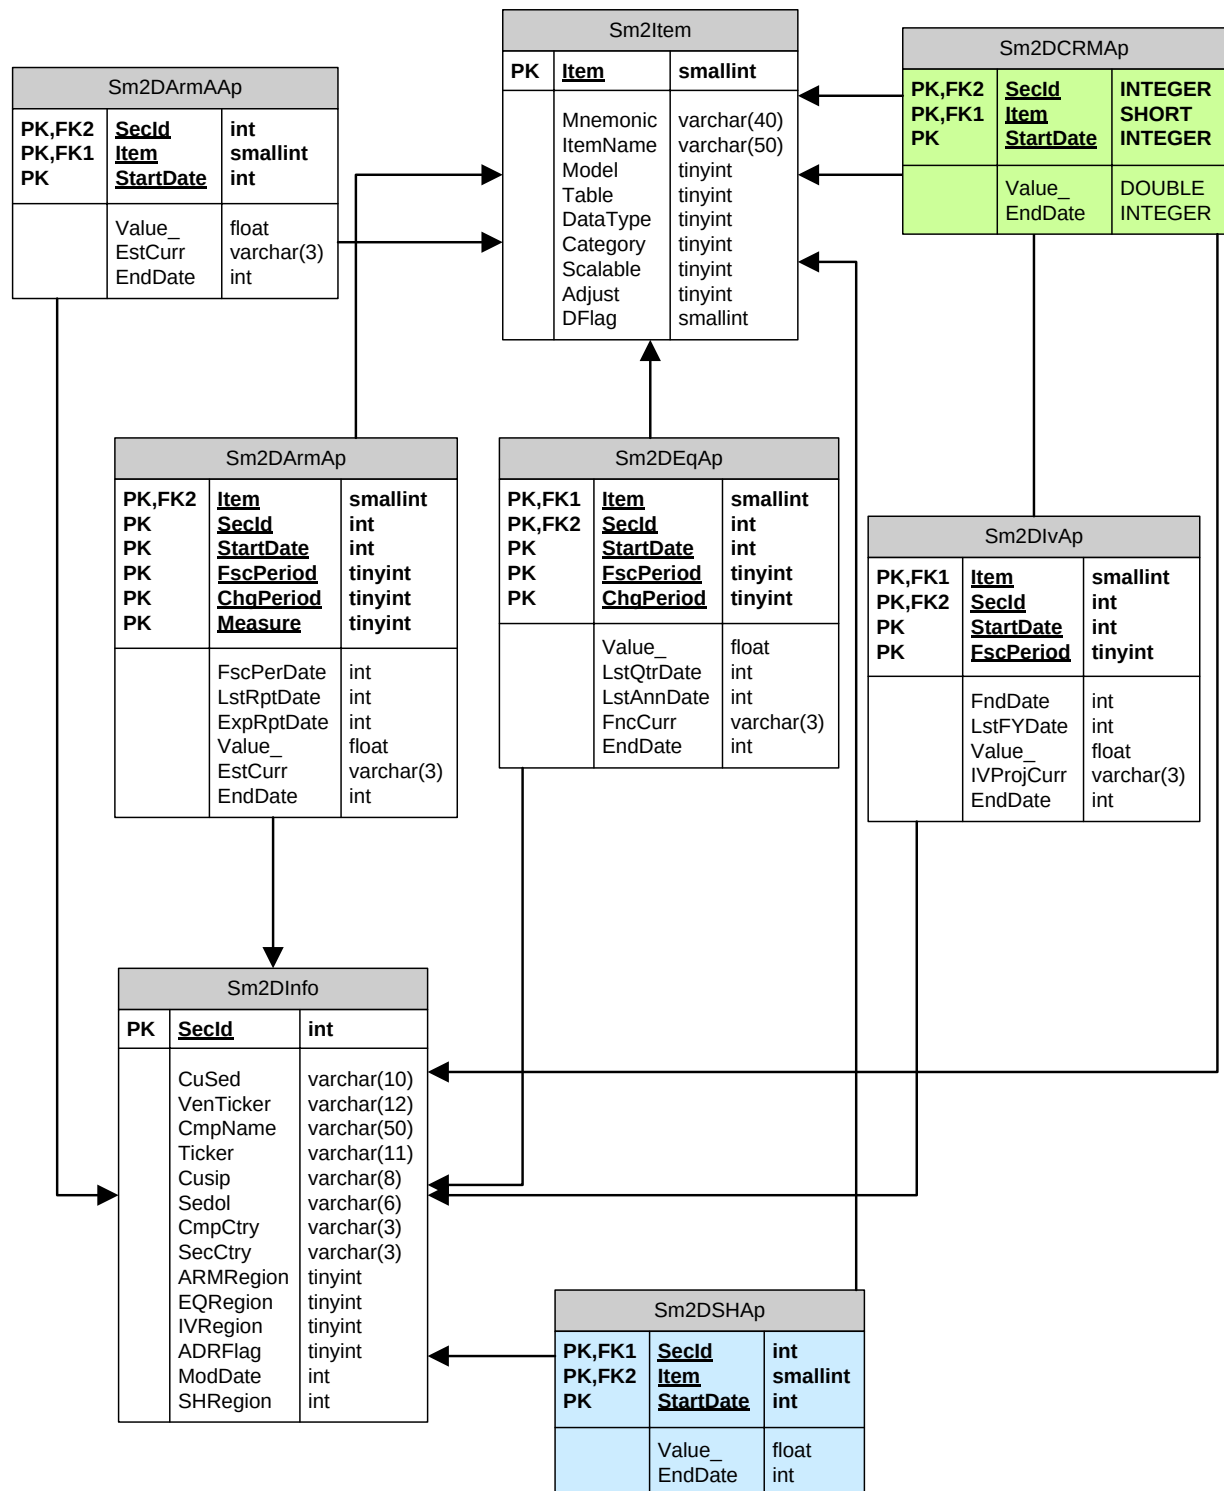

StarMine Regional v1.0 (2017-07-25)

Sm2DArm*: StarMine Daily ARM Data Items

These tables contain daily ARM (Analyst Revision Model) data for models in specific periods. This description includes:

- Sm2DArmAm – StarMine daily ARM Americas data
- Sm2DArmAp – StarMine daily ARM Asia Pacific data
- Sm2DArmEa – StarMine daily ARM Europe, Middle East, and Africa data

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
pkey_Sm2DArm* (clustered)	Item, SecId, StartDate, FscPeriod, ChgPeriod, Measure

Field	Type	Nullable	Description
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross-references Sm2Item and Sm2ItemDesc .
SecId	int	N	SecId is the StarMine security identifier. This field cross-references Sm2DInfo.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
FscPeriod	tinyint	N	FscPeriod is the fiscal period for which the data applies. FscPeriod cross-references Sm2Code where Sm2Code.Type_ = 6 and Sm2Code.Code = Sm2DArm*.FscPeriod.
ChgPeriod	tinyint	N	ChgPeriod is the change period for the given point in time. ChgPeriod cross-references Sm2Code where Sm2Code.Type_ = 7 and Sm2Code.Code = Sm2DArm*.ChgPeriod.
Measure	tinyint	N	Measure is the applicable measure of the item, for example EPS or revenue. Measure cross-references Sm2Code where Sm2Code.Type_ = 12 and Sm2Code.Code = Sm2DArm*.Measure.
FscPerDate	datetime	Y	FscPerDate is the end date of the fiscal period for which the data applies.
LstRptDate	datetime	Y	LstRptDate is the last report date as of the data through date which is reported in StartDate.
ExpRptDate	datetime	Y	ExpRptDate is the expected report date for the fiscal period date which is reported by FscPerDate.
Value_	float	Y	Value_ is the item value.

Sm2DArmA*: StarMine Daily ARM Summary Data

These tables contain a daily historical time series of a subset of ARM (Analyst Revision Model) rankings and components. This description includes:

- Sm2DArmAAm – StarMine daily ARM Americas summary data
- Sm2DArmAAp – StarMine daily ARM Asia Pacific summary data
- Sm2DArmAEa – StarMine daily ARM Europe, Middle East, and Africa summary data

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
pkey_Sm2DArm* (clustered)	Item, SecId, StartDate

Field	Type	Nullable	Description
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross- references Sm2Item and Sm2ItemDesc .
SecId	int	N	SecId is the StarMine security identifier. This field cross- references Sm2DInfo .
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
Value_	float	Y	Value_ is the item value.
EstCurr	char(3)	Y	EstCurr is the company-level currency for estimates. EstCurr corresponds to the per-share measures. EstCurr cross-references Sm2Code where Sm2Code.Type_ = 2 and Sm2Code.Code = Sm2DArmA*.EstCurr. Note: For companies with EstCurr set to BPN, the non-per-share estimates are reported in GBP. This field is not populated from history files.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.

SM2DCRM*: StarMine Daily Credit Risk Model Data Items

These table contain the daily CRM (Credit Risk Model) data. This description includes:

- SM2DCRMAM – StarMine daily CRM Americas data
- SM2DCRMAP – StarMine daily CRM Asia Pacific data
- SM2DCRMEa – StarMine daily CRM Europe, Middle East, and Africa data

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
pkey_SM2DCRM* (clustered)	Item, SecId, StartDate

Field	Type	Nullable	Description
Item	int	N	Item is the unique numeric identifier for the item. This field cross-references Sm2Item and Sm2ItemDesc .
SecId	int	N	SecId is the StarMine security identifier. This field cross- references Sm2DInfo .
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
Value_	float	Y	Value_ is the item value.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.

Sm2DEq*: StarMine Daily EQ Data Items

These tables contain daily EQ (Earnings Quality) data. This description includes:

- Sm2DEqAm – StarMine daily EQ Americas data
- Sm2DEqAp – StarMine daily EQ Asia Pacific data
- Sm2DEqEa – StarMine daily EQ Europe, Middle East, and Africa data

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
PK_Sm2DEq* (clustered)	Item, SecId, StartDate, FscPeriod, ChgPeriod

Field	Type	Nullable	Description
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross-references Sm2Item and Sm2ItemDesc .
SecId	int	N	SecId is the StarMine security identifier. This field cross- references Sm2DInfo .

Field	Type	Nullable	Description
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
FscPeriod	tinyint	N	FscPeriod is the fiscal period for which the data applies. FscPeriod cross- references Sm2Code where Sm2Code.Type_ = 6 and Sm2Code.Code = Sm2DEq*.FscPeriod.
ChgPeriod	tinyint	N	ChgPeriod is the change period for the given point in time. ChgPeriod cross-references Sm2Code where Sm2Code.Type_ = 7 and Sm2Code.Code = Sm2DEq*.ChgPeriod.
Value_	float	Y	Value_ is the item value.
LstQtrDate	datetime	Y	LstQtrDate is the end date of the prior quarter.
LstAnnDate	datetime	Y	LstAnnDate is the end date of the prior annual period.
FncCurr	char(3)	Y	FncCurr is the currency of the item values.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.

Sm2Dlv*: StarMine Daily IV Data Items

These tables contain the daily IV (Intrinsic Value) and Relative Value data. This description includes:

- Sm2DlvAm – StarMine daily IV Americas data
- Sm2DlvEa – StarMine daily IV Europe, Middle East, and Africa data
- Sm2DlvAp – StarMine daily IV Asia Pacific data

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
PK_Sm2Dlv* (clustered)	Item, SecId, StartDate, FscPeriod

Field	Type	Nullable	Description
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross-references Sm2Item and Sm2ItemDesc .
SecId	int	N	SecId is the StarMine security identifier. This field cross- references Sm2DInfo .
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
FscPeriod	tinyint	N	FscPeriod is the fiscal period for which the data applies. FscPeriod cross- references Sm2Code where Sm2Code.Type_ = 6 and Sm2Code.Code = Sm2Dlv*.FscPeriod.
EndDate	datetime	Y	EndDate is the data through date for the fundamentals. This is the date of the most recent update of the financial statement for a security.

Field	Type	Nullable	Description
LstFYDate	datetime	Y	LstFYDate is the date of the previous fiscal year end.
Value_	float	Y	Value_ is the item value.
IVProjCurr	varchar(3)	Y	IVProjCurr is the currency used for intrinsic value projections.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.

Sm2DVMo*: StarMine Daily Val-Mo and Price-Mo Data Items

These tables contain a daily historical time series of items from the Val-Mo and Price-Mo models. This description includes:

- Sm2DVMoAm – StarMine Daily Val-Mo and Price-Mo Data Items – Americas
- Sm2DVMoAp – StarMine Daily Val-Mo and Price-Mo Data Items – Asia Pacific
- Sm2DVMoEa – StarMine Daily Val-Mo and Price-Mo Data Items – Europe, Middle East, and Africa

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
pkey_Sm2DVMo* (Clustered)	Item, SecId, StartDate

Field	Type	Nullable	Description
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross-references Sm2Item and Sm2ItemDesc .
SecId	int	N	SecId is the StarMine security identifier.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Value_	float	Y	Value_ is the item value.
LicFlag	tinyint	N	LicFlag identifies whether the data item is part of the Val-Mo model (1) or the Price-Mo model (2).

SM2DSH*: Daily Smart Holdings Data

These tables contain the daily Smart Holdings rankings data. Each table contains ranking data for a given region. This description includes:

- SM2DSHAm - StarMine Daily Smart Holdings data for Americas region
- SM2DSHAp - StarMine Daily Smart Holdings data for Asia Pacific region
- SM2DSHEa - StarMine Daily Smart Holdings data for Europe, Middle East and Africa region

Update Cycle: 3 times Daily

Adjusted: No

Indexes	Index Fields
pkey_Sm2DSHAm (Clustered)	Item, SecId, StartDate

Field	Type	Nullable	Description
Item	smallint	N	TRDW derived item code for the fields in Smart Holding Model
SecId	int	N	A numeric id to identify a security
StartDate	datetime	N	Date from which the value is valid
Value_	int	N	Value of the field
EndDate	datetime	Y	Date when the value expires. For the latest value EndDate will be null


4. StarMine Historical Data Tables

The historical data tables are common to all StarMine licenses and contain basic historical information.

Update Cycle: Monthly. Updates are maintained on a six-month rolling history. Data older than six months is purged.

Adjusted: No

This diagram illustrates how the StarMine historical tables relate to each other, and to the Sm2Item table.

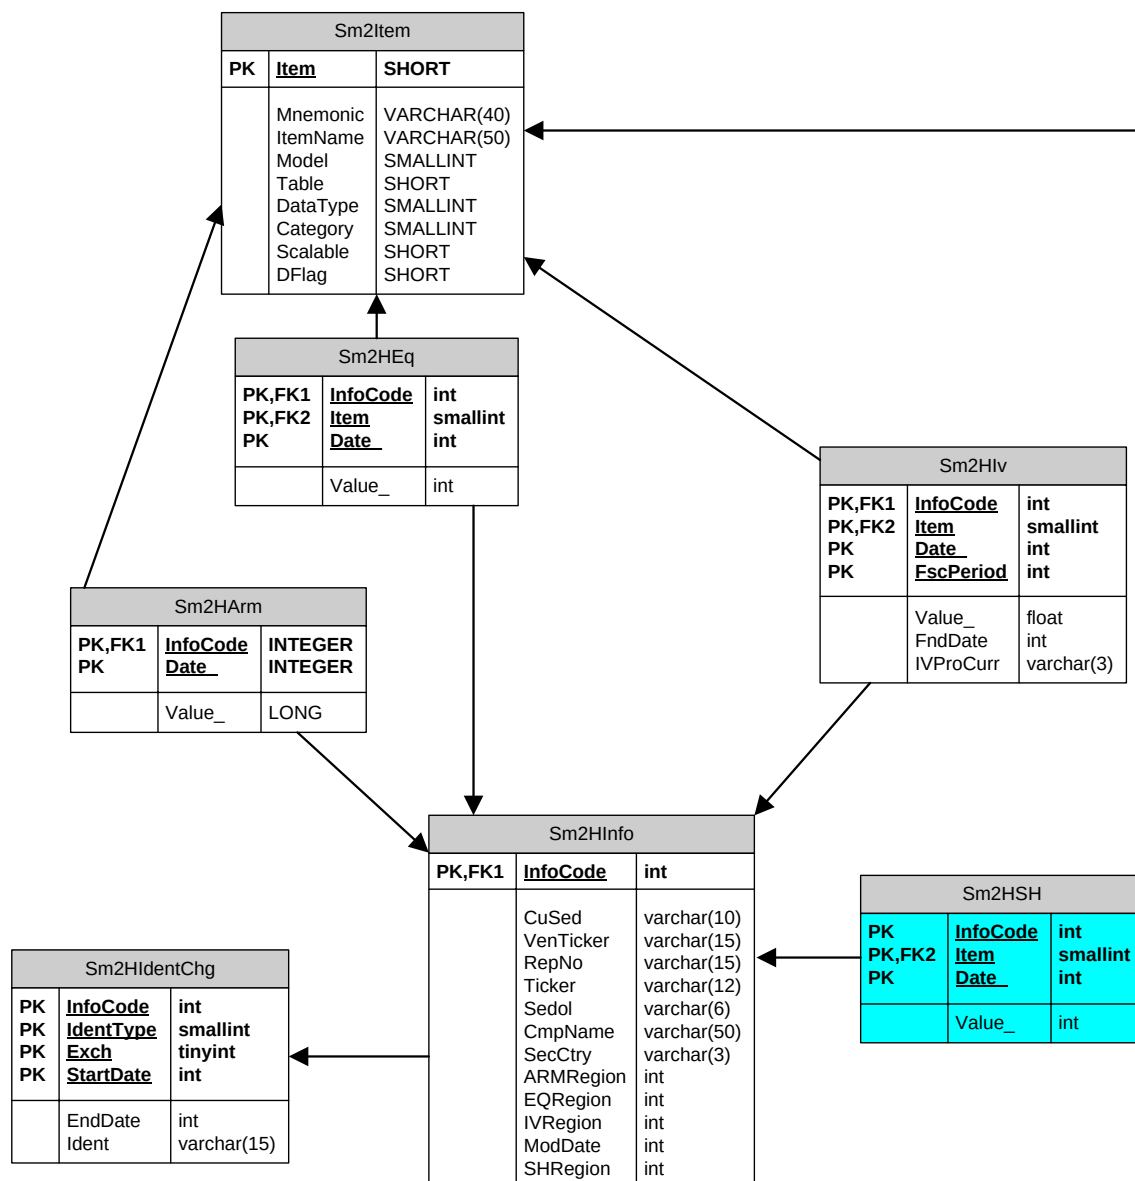

Sm2HArm: StarMine Historical ARM Data

This table contains a subset of ARM (Analyst Revision Model) items on a historical basis.

Update Cycle: Monthly

Adjusted: No

Indexes	Index Fields
PK_Sm2HArm (clustered)	SecId, Item, Date_

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier. This field cross- references Sm2DInfo .
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross- references Sm2Item and Sm2ItemDesc .
Date_	datetime	N	Date_ is the data through date for the analyst.
Value_	int	Y	Value_ is the item value.

Sm2HEq: StarMine Historical EQ Data

This table contains a subset of EQ (Earnings Quality) items on a historical basis.

Update Cycle: Monthly

Adjusted: No

Indexes	Index Fields
PK_Sm2HEq_1 (clustered)	SecId, Item, Date_

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier. This field cross- references Sm2DInfo .
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross- references Sm2Item and Sm2ItemDesc .
Date_	datetime	N	Date_ is the data through date for the analyst.
Value_	int	Y	Value_ is the item value.

Sm2HIdentChg: StarMine Change History

This table contains security change history information.

Update Cycle: Monthly

Adjusted: No

Indexes	Index Fields
PK_Sm2HIdentChg (clustered)	SecId, IdentType, Exch, StartDate

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier. This field cross- references Sm2DInfo .
IdentType	smallint	N	IdentType is a unique number representing the type of identifier for which changes are tracked, for example, CUSIP or SEDOL, Ticker, or name changes. IdentType cross-references with Sm2Code where Sm2Code.Type_ = 15 and Sm2Code.Code = Sm2HIdentChg.IdentType.
Exch	tinyint	N	Exch identifies the exchange. Exch cross-references Sm2Code where Sm2Code.Type_ = 16 and Sm2Code.Code = Sm2HIdentChg.Exch.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Ident	varchar(15)	N	Ident is the value of the identifier during that period. For example, Ident may be the CUSIP, SEDOL, or ticker.

Sm2HInfo: StarMine Historical Security Information

This table contains historical information on securities included in the historical feed.

Update Cycle: Monthly

Adjusted: No

Indexes	Index Fields
PK_Sm2HInfo (clustered)	SecId

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier. This field cross- references Sm2DInfo .
CuSed	varchar(10)	Y	CuSed is the SEDOL or CUSIP, depending on the region.
VenTicker	varchar(15)	Y	VenTicker is the ticker identifier used by Thomson to identify the security.
RepNo	varchar(15)	Y	RepNo is the Reuters Fundamental identifier for the security.

Field	Type	Nullable	Description
Ticker	varchar(12)	Y	Ticker is the ticker symbol of the security.
Sedol	varchar(6)	Y	Sedol is the SEDOL of the item.
CmpName	varchar(50)	Y	CmpName is the company name.
SecCtry	char(2)	Y	SecCtry is the country in which the security trades. SecCtry cross-references Sm2Code where Sm2Code.Type_ = 1 and Sm2Code.Code = Sm2HInfo.SecCtry.
CmpCtry	char(2)	Y	CmpCtry indicates the country of the company's headquarters. The two- character code cross-references Sm2Code where Sm2Code.Type_ = 1 and Sm2Code.Code = Sm2DInfo.CmpCtry.
PermRegion	tinyint	Y	PermRegion is the permission region. There are multiple Smart Holdings regions that fit into a single permission region.
ModDate	datetime	Y	ModDate is the date of the most recent record update.

The table below provides the PermRegion Codes and corresponding PermRegion Names.

Type_	Code	Desc_	Adjust
19	1	Americas	0
19	2	Asia Pacific	0
19	3	EMEA	0

Sm2Hlv: StarMine Historical IV Data

This table contains a subset of IV (Intrinsic Value) and Relative Value items on a historical basis.

Update Cycle: Monthly

Adjusted: No

Indexes	Index Fields
PK_Sm2Hlv (clustered)	SecId, Item, Date_, FscPeriod

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier. This field cross-references Sm2DInfo .
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross-references Sm2Item and Sm2ItemDesc.
Date_	datetime	N	Date_ is the data through date.
FscPeriod	int	N	FscPeriod is the fiscal period for which the data applies. FscPeriod cross-references Sm2Code where Sm2Code.Type_ = 6 and Sm2Code.Code = Sm2Hlv.FscPeriod.
Field	Type	Nullable	Description
Value_	float	Y	Value_ is the item value.
IVProjCurr	varchar(3)	Y	IVProjCurr is the currency used for intrinsic value projections.

Sm2HVMo: StarMine Historical Val-Mo and Price-Mo Data

This table contains the historical data items for both the Val-Mo and Price-Mo models on a monthly basis.

Update Cycle: Daily

Adjusted: No

Indexes	Index Fields
PK_Sm2HVMo (clustered)	SecId, Item, Date_

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier. This field cross- references Sm2DInfo .
Item	smallint	N	Item is the unique numeric identifier for the item. This field cross- references Sm2Item and Sm2ItemDesc .
Date_	datetime	N	Date_ is the data through date.
Value_	float	Y	Value_ is the item value.

SM2HSH: Monthly Smart Holdings Data

This table stores Smart Holdings monthly historic rankings data.

Update Cycle: Monthly

Adjusted: No

Indexes	Index Fields
pkey_Sm2HSH (Clustered)	SecId, Item, Date_

Field	Type	Nullable	Description
SecId	int	N	A numeric id to identify a security
Item	smallint	N	TRDW derived item code for the fields in Smart Holding Model
Date_	datetime	N	Date from which the value is valid
Value_	int	N	Value of the field

5. SQL Views

The SQL Views¹ provide simplified calls that run complex SQL code and address key data nuances and mapping requests in the LSEG Quantitative Analytics database, making it much easier to access data through LSEG Quantitative Analytics.

Customers are able to see the underlying SQL code and modify/customize it as required, as well as being able to save the modified code as their proprietary code.

The LSEG Support Team is available to provide training on the library structure and how to use the SQL Views. Please contact support if you would like the SQL views added to your server.

The SQL Views were introduced in LSEG Quantitative Analytics Release 6.35 in May 2017.

vw_SM2MappingDaily

This view can be used to map to the Daily StarMine Model data (ventype 23).

Index Fields

SecCode, Typ, Exchange

Field	Type	Nullable	Description
seccode	int	N	SecCode links across the master tables.
typ	int	N	6 for Global and 1 for North America.
rank	smallint	N	Rank is the issue rank for issuers with multiple issues.
exchange	smallint	Y	Exchange identifies whether the security is a United States security (1) or a Canadian security (2). A value of 0 indicates that this field is not applicable.
vencode	int	Y	Vencode is the corresponding StarMine Daily unique code.

Example Use Case

```
select aa.SecCode, bb.Exchange, bb.Rank, cc.CmpName, cc.Ticker, cc.SecId
from vw_SecurityMasterX aa join
vw_SM2MappingDaily bb
    on bb.seccode = aa.seccode and
    bb.Typ = aa.typ
join SM2DInfo cc
    on cc.SecId = bb.VenCode where
aa.id = 'TOC'

and bb.exchange = 2 -- Canadian record of Thomson Reuters
```

vw_SM2MappingHist

This view can be used to map to the Monthly Historical StarMine Model data (ventype 24).

Index Fields

SecCode, Typ, Exchange

Field	Type	Nullable	Description
seccode	int	N	SecCode links across the master tables.
typ	int	N	6 for Global and 1 for North America.
rank	smallint	N	Rank is the issue rank for issuers with multiple issues.
exchange	smallint	Y	Exchange identifies whether the security is a United States security (1) or a Canadian security (2). A value of 0 indicates that this field is not applicable.
vencode	int	Y	Vencode is the corresponding StarMine Historical unique code.

Example Use Case:

```
select aa.SecCode, bb.Exchange, bb.Rank, cc.CmpName, cc.Ticker, cc.SecId
from vw_SecurityMasterX aa join
vw_SM2MappingHist bb
    on bb.seccode = aa.seccode and
    bb.Typ = aa.typ
join SM2HInfo cc
    on cc.SecId = bb.VenCode where
aa.id = 'TOC'

and bb.exchange = 2 -- Canadian record of Thomson Reuters
```

vw_SM2Items

This view shows metadata on all StarMine items across all StarMine models.

Index Fields

Item

Field	Type	Nullable	Description
Item	smallint	N	Item is the unique numeric identifier for the item.
Mnemonic	varchar	N	Mnemonic is the unique character identifier for the item.
ItemName	varchar	N	ItemName is the full item name.
ItemDesc	varchar	Y	ItemDesc is the detailed description of the item.
Model	tinyint	N	Model identifies the model to which the item belongs.
ModelDesc	varchar	Y	The description of the Model.

Field	Type	Nullable	Description
Table_	tinyint	N	Table_ identifies the corresponding table.
TableName	varchar	Y	The description of Table.
DataType	tinyint	N	DataType identifies the data type.
DataTypeDesc	varchar	Y	The description of DataType.
Category	tinyint	N	Category identifies the StarMine category of the item.
CategoryDesc	varchar	Y	The description of Category.
Scalable	tinyint	N	Scalable is the Million/Billion flag. It identifies whether the data is in whole number terms of millions or billions. A value of 1 indicates that the flag applies.
Adjust	tinyint	N	Adjust identifies how the item is affected by stock splits. Adjust may be: Not Applicable (0) or Split Adjust (1) or Dependent on Measure (2). When Sm2Item .Adjust = 2, to refine your results: 1. Cross- reference Sm2Item.Item with Sm2DArm* .Item to identify the appropriate Measure code. 2. Then cross- reference Sm2DArm*.Measure with Sm2Code .Code where Sm2Code.Type_ = 12. Adjust is defined as above. 3. When Sm2Code .Adjust = 2 at Type_ = 12, the adjustment is dependent on the preferred earnings type. Preferred earnings correspond to Sm2DArmA*.Item = 41. 4. Where Sm2DArmA* .Item = 41, cross-reference Sm2DArmA*.Value_ with Sm2Code where Sm2Code.Type_ = 11.
AdjustDesc	varchar	Y	The description of Adjust.
DFlag	tinyint	N	DFlag indicates which fields, or combination of fields, from the data model tables apply to the item. Applicable fields may be: Fiscal Period, Change Period, or Measure.
DFlagDesc	varchar	Y	The description of Dflag.

Example Use Case:

Return all items across all models that are "margin" related:

```
select aa.Item, aa.ItemDesc, aa.ModelDesc, aa.DataTypeDesc, aa.CategoryDesc, aa.AdjustDesc, aa.DFlagDesc ,
aa.tableName
from vw_SM2Items aa
where aa.ItemDesc like '%margin%' -- Find all the "margin" items.
```

vw_SM2HistMulti

This view can be used to retrieve monthly data for the StarMine ARM, Earnings Quality, Val-Mo, and Smart Holdings models. This view would be used in conjunction with the vw_SM2MappingHistInfo mapping view.

Index Fields

SecId, Item, Date_, Model

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
Item	smallint	N	Item is the unique numeric identifier for the item.
Date_	datetime	N	Date_ is the data through date for the analyst.
Value_	float	Y	Value_ is the item value.
Model	varchar	N	The StarMine model.
Mnemonic	varchar	N	Mnemonic is the unique character identifier for the item.
ItemName	varchar	N	ItemName is the full item name.

Example Use Case:

This query returns the monthly Analyst Revision Score (ARM Model) for Thomson Reuters:

```
select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.Date_, dd.Value_, dd.ItemName
from vw_SecurityMasterX aa join
vw_SM2MappingHist bb
    on bb.seccode = aa.seccode and
    bb.Typ = aa.typ
join SM2HInfo cc
    on cc.SecId = bb.VenCode join
vw_SM2HistMulti dd
    on dd.SecId = cc.SecId where
aa.id = 'TOC'
    and bb.exchange = 2 -- Canadian record of Thomson Reuters and dd.Item = 44
    and dd.Model = 'arm'
order by dd.Date_
```

vw_SM2HistIV

This view retrieves the monthly historical data for the StarMine Intrinsic Value model. This view would be used in conjunction with the vw_SM2MappingHistInfo mapping view.

Index Fields

SecId, Item, Date_, FscPeriod

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
Item	smallint	N	Item is the unique numeric identifier for the item. This
Date_	datetime	N	Date_ is the data through date for the analyst.
FscPeriod	int	N	FscPeriod is the fiscal period for which the data applies.
Value_	float	Y	Value_ is the item value.
IVProjCurr	char	Y	IVProjCurr is the currency used for intrinsic value projections.
IVProjCurrDesc	varchar	Y	Description of IVProjCurr.
Model	varchar	N	The StarMine model.
Mnemonic	varchar	N	Mnemonic is the unique character identifier for the item.
ItemName	varchar	N	ItemName is the full item name.
Scale	varchar	Y	The scale of the value; present only if required.

Example Use Case:

This query returns the monthly dividend projects for Thomson Reuters:

```
select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.ItemName, dd.Date_, dd.FscPeriod,
dd.IVProjCurrDesc, dd.Value_, dd.Scale, dd.Model
from vw_SecurityMasterX aa join
vw_SM2MappingHist bb
    on bb.seccode = aa.seccode and
    bb.Typ = aa.typ
join SM2HInfo cc
    on cc.SecId = bb.VenCode join
vw_SM2HistIV dd
    on dd.SecId = cc.SecId where aa.id
= 'TOC'
    and bb.exchange = 2 -- Canadian record of Thomson Reuters and dd.Item = 129
order by dd.Date_, dd.FscPeriod
```

vw_SM2DARM

This view retrieves the data for the daily StarMine Analyst Revision Model. This view would be used in conjunction with the vw_SM2MappingDailyInfo mapping view.

Index Fields

Item, SecId, StartDate, FscPeriod, ChgPeriod, Measure

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
Item	smallint	N	Item is the unique numeric identifier for the item. This
Mnemonic	varchar	Y	Mnemonic is the unique character identifier for the item.
ItemName	varchar	Y	ItemName is the full item name.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
FscPeriod	tinyint	N	FscPeriod is the fiscal period for which the data applies.
FscPeriodDesc	varchar	Y	The description of FscPeriod.
ChgPeriod	tinyint	N	ChgPeriod is the change period for the given point in time.
ChgPeriodDesc	varchar	Y	The description of ChgPeriod.
Measure	tinyint	N	Measure is the applicable measure of the item, for example EPS or revenue.
MeasureDesc	varchar	Y	The description of Measure.
FscPerDate	datetime	Y	FscPerDate is the end date of the fiscal period for which the data applies.
LstRptDate	datetime	Y	LstRptDate is the last report date as of the data through date which is reported in StartDate.
ExpRptDate	datetime	Y	ExpRptDate is the expected report date for the fiscal period date which is reported by FscPerDate.
Value_	float	Y	Value_ is the item value.
EstCurr	char	Y	EstCurr is the company-level currency for estimates. EstCurr corresponds to the per-share measures.
EstCurrDesc	varchar	Y	The description of EstCurr.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Reg	varchar	N	The Region of the world. AM for Americas, AP for Asia-Pacific, EA for EMEA.
Scale	varchar	Y	The scale of the value; present only if required.

Example Use Case:

This query returns the average revision % (ARM Model) for various fiscal periods:

```
select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.ItemName, dd.StartDate, dd.EndDate,
dd.FscPeriodDesc, dd.ChgPeriodDesc, dd.MeasureDesc, dd.FscPerDate, dd.LstRptDate, dd.ExpRptDate, dd.Value_,
dd.Scale, dd.EstCurrDesc
from vw_SecurityMasterX aa join
vw_SM2MappingDaily bb
    on bb.seccode = aa.seccode
    and bb.Typ = aa.typ
join SM2DInfo cc
    on cc.SecId = bb.VenCode join
vw_SM2DARM dd
    on dd.SecId = cc.SecId where
aa.id = 'TOC'

    and bb.exchange = 2 -- Canadian record of Thomson Reuters and dd.Item = 1

    and dd.Measure = 1

order by dd.StartDate, dd.FscPeriod, dd.ChgPeriod
```

vw_SM2DARMA

This view retrieves the summary data for the daily StarMine Analyst Revision Model. This view would be used in conjunction with the vw_SM2MappingDailyInfo mapping view.

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
Item	smallint	N	Item is the unique numeric identifier for the item. This
Mnemonic	varchar	N	Mnemonic is the unique character identifier for the item.
ItemName	varchar	N	ItemName is the full item name.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
Value_	float	Y	Value_ is the item value.
EstCurr	char	Y	EstCurr is the company-level currency for estimates. EstCurr corresponds to the per-share measures.
EstCurrDesc	varchar	Y	The Description of EstCurr.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Reg	varchar	N	The Region of the world. AM for Americas, AP for Asia-Pacific, EA for EMEA.
Scale	varchar	Y	The scale of the value; present only if required.

Example Use Case:

This query returns the daily Analyst Revision Score (ARM Model) for Thomson Reuters:

```
select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.ItemName, dd.StartDate, dd.EndDate, dd.Value_,
dd.Scale, dd.EstCurrDesc
from vw_SecurityMasterX aa join
vw_SM2MappingDaily bb
    on bb.seccode = aa.seccode
    and bb.Typ = aa.typ join
SM2DInfo cc
    on cc.SecId = bb.VenCode join
vw_SM2DARMA dd
    on dd.SecId = cc.SecId where aa.id
= 'TOC'
    and bb.exchange = 2 -- Canadian record of Thomson Reuters and dd.Item = 44
order by dd.StartDate
```

vw_SM2DCRM

This view retrieves the data for the daily StarMine Credit Risk Model. This view would be used in conjunction with the vw_SM2MappingDailyInfo mapping view.

Index Fields

Item, SecId, StartDate

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
Item	int	N	Item is the unique numeric identifier for the item.
Mnemonic	varchar	N	Mnemonic is the unique character identifier for the item.
ItemName	varchar	N	ItemName is the full item name.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
Value_	float	Y	Value_ is the item value.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Reg	varchar	N	The Region of the world. AM for Americas, AP for Asia-Pacific, EA for EMEA.

Example Use Case:

This query returns the daily Credit Structural Component Rank (CRM Model) for Thomson Reuters:

```
select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.ItemName, dd.StartDate, dd.EndDate, dd.Value_
from vw_SecurityMasterX aa join
vw_SM2MappingDaily bb
    on bb.seccode = aa.seccode and
    bb.Typ = aa.typ
join SM2DInfo cc
    on cc.SecId = bb.VenCode join
vw_SM2DCRM dd
    on dd.SecId = cc.SecId
where aa.id = 'TOC'
    and bb.exchange = 2 -- Canadian record of Thomson Reuters and dd.Item = 169
order by dd.StartDate
```

vw_SM2DEQ

This view retrieves the data for the daily StarMine Earnings Quality Model. This view would be used in conjunction with the vw_SM2MappingDailyInfo mapping view.

Index Fields

Item, SecId, StartDate, FscPeriod, ChgPeriod

Field	Type	Nullable	Description
SecId	smallint	N	SecId is the StarMine security identifier.
Item	varchar	N	Item is the unique numeric identifier for the item.
Mnemonic	varchar	Y	Mnemonic is the unique character identifier for the item.
ItemName	datetime	Y	ItemName is the full item name.
StartDate	tinyint	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
FscPeriod	varchar	N	FscPeriod is the fiscal period for which the data applies.
FscPeriodDesc	tinyint	Y	The description of FscPeriod.
ChgPeriod	varchar	N	ChgPeriod is the change period for the given point in time.
ChgPeriodDesc	float	Y	The description of ChgPeriod.
Value_	datetime	Y	Value_ is the item value.
LstQtrDate	datetime	Y	LstQtrDate is the end date of the prior quarter.
LstAnnDate	char	Y	LstAnnDate is the end date of the prior annual period.
FncCurr	datetime	Y	FncCurr is the currency of the item values.

Field	Type	Nullable	Description
EndDate	varchar	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Reg	smallint	N	The Region of the world. AM for Americas, AP for Asia-Pacific, EA for EMEA.

Example Use Case:

This query returns the daily % Of Long Term Debt to Total Capital (EQ Model) for

```
select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.ItemName, dd.StartDate, dd.EndDate,
dd.FscPeriodDesc, dd.ChgPeriodDesc, dd.Value_, dd.LstQtrDate, dd.LstAnnDate, dd.FncCurr
```

```
from vw_SecurityMasterX aa
```

```
join vw_SM2MappingDaily bb
```

```
on bb.seccode = aa.seccode and
bb.Typ = aa.typ
```

```
join SM2DInfo cc
```

```
on cc.SecId = bb.VenCode join
```

```
vw_SM2DEQ dd
```

```
on dd.SecId = cc.SecId where aa.id
= 'TOC'
```

```
and bb.exchange = 2 -- Canadian record of Thomson Reuters and dd.Item = 51
```

```
and dd.FscPeriod = 21
```

```
order by dd.StartDate
```

vw_SM2DIV

This view retrieves the data for the daily StarMine Intrinsic Value Model. This view would be used in conjunction with the vw_SM2MappingDailyInfo mapping view.

Index Fields

Item, SecId, StartDate, FscPeriod

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
Item	smallint	N	Item is the unique numeric identifier for the item. This
Mnemonic	varchar	Y	Mnemonic is the unique character identifier for the item.
ItemName	varchar	Y	ItemName is the full item name.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
FscPeriod	tinyint	N	FscPeriod is the fiscal period for which the data applies.
FscPeriodDesc	varchar	Y	The description of FscPeriod.

Field	Type	Nullable	Description
FndDate	datetime	Y	FndDate is the data through date for the fundamentals. This is the date of the most recent update of the financial statement for a security.
LstFYDate	datetime	Y	LstFYDate is the date of the previous fiscal year end.
Value_	float	Y	Value_ is the item value.
IVProjCurr	char	Y	IVProjCurr is the currency used for intrinsic value projections.
IVProjCurrDesc	varchar	Y	The description of IVProjCurr.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Reg	varchar	N	The Region of the world. AM for Americas, AP for Asia-Pacific, EA for EMEA.
Scale	varchar	Y	The scale of the value; present only if required.

Example Use Case:

This query returns the daily Intrinsic Value (IV Model) for Thomson Reuters:

```

select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.ItemName, dd.StartDate, dd.EndDate,
dd.FscPeriodDesc, dd.FndDate, dd.LstFYDate, dd.Value_, dd.Scale, dd.IVProjCurrDesc
from vw_SecurityMasterX aa join
vw_SM2MappingDaily bb
    on bb.seccode = aa.seccode and
    bb.Typ = aa.typ
join SM2DInfo cc
    on cc.SecId = bb.VenCode join
vw_SM2DIV dd
    on dd.SecId = cc.SecId where aa.id
= 'TOC'
    and bb.exchange = 2 -- Canadian record of Thomson Reuters and dd.Item = 126
order by dd.StartDate

```

vw_SM2DVMo

This view retrieves the data for the daily StarMine Val-Mo and Price-Mo Models. This view would be used in conjunction with the vw_SM2MappingDailyInfo mapping view.

Index Fields

Item, SecId, StartDate

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
Item	smallint	N	Item is the unique numeric identifier for the item. This
Mnemonic	varchar	N	Mnemonic is the unique character identifier for the item.
ItemName	varchar	N	ItemName is the full item name.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Value_	float	Y	Value_ is the item value.
LicFlag	tinyint	N	LicFlag identifies whether the data item is part of the Val-Mo model (1) or the Price-Mo model (2).
Reg	varchar	N	The Region of the world. AM for Americas, AP for Asia-Pacific, EA for EMEA.

Example Use Case:

This query returns the daily Val-Mo Region Rank (Val-Mo Model) for Thomson Reuters:

```
select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.ItemName, dd.StartDate, dd.EndDate, dd.Value_
from vw_SecurityMasterX aa join
vw_SM2MappingDaily bb
    on bb.seccode = aa.seccode and
    bb.Typ = aa.typ
join SM2DInfo cc
    on cc.SecId = bb.VenCode join
vw_SM2DVMo dd
    on dd.SecId = cc.SecId where
aa.id = 'TOC'
    and bb.exchange = 2 -- Canadian record of Thomson Reuters and dd.Item = 157
order by dd.StartDate
```

vw_SM2DSH

This view retrieves the data for the daily StarMine Smart Holdings Model. This view would be used in conjunction with the vw_SM2MappingDailyInfo mapping view.

Index Fields

Item, SecId, StartDate

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
Item	smallint	N	Item is the unique numeric identifier for the item. This
Mnemonic	varchar	N	Mnemonic is the unique character identifier for the item.
ItemName	varchar	N	ItemName is the full item name.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
Value_	int	N	Value_ is the item value.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Reg	varchar	N	The Region of the world. AM for Americas, AP for Asia-Pacific, EA for EMEA.

Example Use Case:

This query returns the daily Screening Component Global Rank (Smart Holdings Model) for Thomson Reuters:

```
select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.ItemName, dd.StartDate, dd.EndDate, dd.Value_
from vw_SecurityMasterX aa join
vw_SM2MappingDaily bb
    on bb.seccode = aa.seccode and
    bb.Typ = aa.typ
join SM2DInfo cc
    on cc.SecId = bb.VenCode join
vw_SM2DSH dd
    on dd.SecId = cc.SecId where
aa.id = 'TOC'
    and bb.exchange = 2 -- Canadian record of Thomson Reuters and dd.Item = 170
order by dd.StartDate
```

vw_SM2HIdentChg

This view shows the historical changes in the security identifiers (CUSIP, Ticker, SEDOL, etc.) stored in StarMine. Clients who are not licensed for 3rd party identifiers like CUSIP and SEDOL will not see data for those identifiers in this view.

Index Fields

SecId, IdentType, Exch, StartDate

Field	Type	Nullable	Description
SecId	int	N	SecId is the StarMine security identifier.
IdentType	smallint	N	IdentType is a unique number representing the type of identifier for which changes are tracked, for example, CUSIP or SEDOL, Ticker, or name changes.
Exch	tinyint	N	Exch identifies the exchange. Exch cross-references Sm2Code where Sm2Code.Type_ = 16 and Sm2Code.Code = Sm2HIdentChg.Exch.
StartDate	datetime	N	StartDate, with EndDate, provides the time frame for which the identifier applies.
EndDate	datetime	Y	EndDate, with StartDate, provides the time frame for which the identifier applies.
Ident	varchar	N	Ident is the value of the identifier during that period.
IdentDesc	varchar	Y	The description of the identifier.
CmpName	varchar	Y	CmpName is the company name.
SecCtry	char	Y	SecCtry is the country in which the security trades. SecCtry cross-references Sm2Code where Sm2Code.Type_ = 1 and Sm2Code.Code = Sm2HInfo.SecCtry.
CmpCtry	char	Y	CmpCtry indicates the country of the company's headquarters. The two-character code cross- references Sm2Code where Sm2Code.Type_ = 1 and Sm2Code.Code = Sm2DInfo.CmpCtry.
PermRegionDesc	varchar	Y	PermRegion is the permission region. There are multiple Smart Holdings regions that fit into a single permission region.

Example Use Case:

This query returns the historical exchange ticker for Thomson Reuters:

```

select aa.SecCode, bb.Exchange, cc.CmpName, cc.Ticker, cc.SecId, dd.StartDate, dd.EndDate, dd.IdentDesc, dd.Exch,
dd.Ident
from vw_SecurityMasterX aa join
vw_SM2MappingHist bb
    on bb.seccode = aa.seccode and
    bb.Type = aa.type
join SM2HInfo cc
    on cc.SecId = bb.VenCode join
vw_SM2HIdentChg dd
    on dd.SecId = cc.SecId and
    dd.IdentType = 2
where aa.id = 'TOC'
    and bb.exchange = 2 -- Canadian record of Thomson Reuters
order by dd.StartDate

```

Copyright © 2024 London Stock Exchange Group plc and its group of companies (LSEG) and/or its affiliates. All rights reserved. The LSEG content received through this service is the intellectual property of LSEG or its third party suppliers. Republication or redistribution of content provided by LSEG is expressly prohibited without the prior written consent of LSEG, except where permitted by the terms of the relevant LSEG service agreement. Neither LSEG nor its third party suppliers shall be liable for any errors, omissions or delays in content, or for any actions taken in reliance thereon. LSEG and its logo are trademarks of LSEG.

For more information visit us at www.LSEG.com.

